

**CHANGE  
NOTICE**

THESE ARE SUPERSEDING OR SUPPLEMENTARY PAGES TO SAME PUBLICATION OF PREVIOUS DATE.

Insert these pages into basic publication  
Destroy superseded pages


**A1-F18AC-NFM-200**

**NATOPS FLIGHT MANUAL  
PERFORMANCE CHARTS  
NAVY MODEL**

**F/A-18A/B/C/D**

EQUIPPED WITH F404-GE-400 ENGINES

McDonnell Douglas Corporation

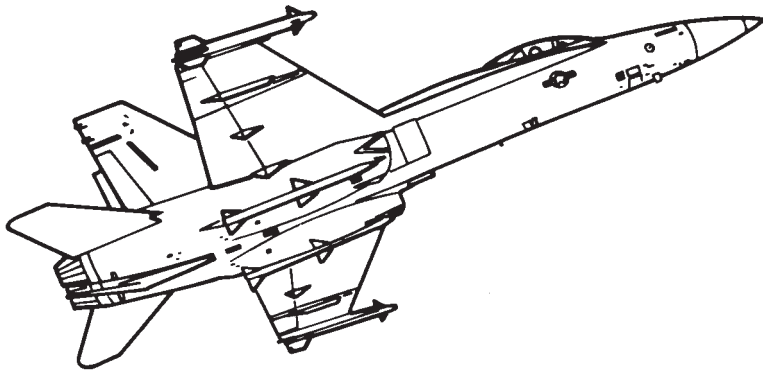

DISTRIBUTION STATEMENT C. Distribution authorized to US Government agencies and their contractors to protect publications required for official use or for administrative or operational purposes determined on 15 May 2000. Other requests for this document shall be referred to Commanding Officer, Naval Air Technical Data and Engineering Service Command, Naval Air Station North Island, P.O. Box 357031, Building 90 Distribution, San Diego CA 92135-7031.

DESTRUCTION NOTICE - For unclassified, limited documents, destroy by any method that will prevent disclosure of the contents or reconstruction of the document.

THIS PUBLICATION SUPPLEMENTS A1-F18AC-NFM-000 NATOPS FLIGHT MANUAL FOR MODEL F/A-18A/B/C/D AIRCRAFT.

ISSUED BY AUTHORITY OF THE CHIEF OF NAVAL OPERATIONS AND  
UNDER THE DIRECTION OF THE COMMANDER,  
NAVAL AIR SYSTEMS COMMAND.

**PERFORMANCE  
DATA**

**11**

**INDEX**

0801LP1039196

**15 JANUARY 1993  
CHANGE 6 - 1 NOVEMBER 2004**

NATEC ELECTRONIC MANUAL

# A1-F18AC-NFM-200

## LIST OF EFFECTIVE PAGES

Insert latest changed pages; dispose of superseded pages in accordance with applicable regulations.

### Dates of issue for original and changed pages:

Original ..... 0 ..... 15 Jan 93    Change..... 2 ..... 15 Jan 97    Change..... 4 ..... 15 May 00    Change..... 6 ..... 1 Nov 04  
 Change..... 1 ..... 15 Jan 94    Change..... 3 ..... 15 Feb 98    Change..... 5 ..... 15 Jul 01

Total number of pages in this publication is 332 consisting of the following:

| Page No.               | #Change No. | Page No.     | #Change No. | Page No.     | #Change No. | Page No. | #Change No. |
|------------------------|-------------|--------------|-------------|--------------|-------------|----------|-------------|
| Title                  | 6           | 11-31        | 0           | 11-77        | 4           | 11-119   | 0           |
| A                      | 6           | 11-32        | 0           | 11-78        | 4           | 11-120   | 0           |
| B                      | 6           | 11-33        | 0           | 11-79        | 4           | 11-121   | 0           |
| C                      | 0           | 11-34        | 1           | 11-80        | 4           | 11-122   | 0           |
| D                      | 0           | 11-35        | 1           | 11-81        | 4           | 11-123   | 0           |
| E blank                | 0           | 11-36        | 1           | 11-82        | 4           | 11-124   | 0           |
| Letter of Promulgation | 0           | 11-37        | 1           | 11-83        | 4           | 11-125   | 0           |
| blank                  | 0           | 11-38        | 4           | 11-84        | 4           | 11-126   | 0           |
| i                      | 0           | 11-39        | 0           | 11-84A       | 4           | 11-127   | 0           |
| ii                     | 0           | 11-40        | 0           | 11-84B       | 4           | 11-128   | 0           |
| iii                    | 0           | 11-41        | 0           | 11-84C       | 4           | 11-129   | 0           |
| iv                     | 0           | 11-42        | 0           | 11-84D blank | 4           | 11-130   | 0           |
| v                      | 0           | 11-43        | 4           | 11-85        | 1           | 11-131   | 0           |
| vi                     | 0           | 11-44        | 4           | 11-86        | 0           | 11-132   | 0           |
| 11-1                   | 0           | 11-44A       | 4           | 11-87        | 0           | 11-133   | 0           |
| 11-2                   | 0           | 11-44B blank | 4           | 11-88        | 0           | 11-134   | 0           |
| 11-3                   | 0           | 11-45        | 0           | 11-89        | 0           | 11-135   | 0           |
| 11-4                   | 0           | 11-46        | 0           | 11-90        | 1           | 11-136   | 0           |
| 11-5                   | 0           | 11-47        | 0           | 11-90A       | 1           | 11-137   | 0           |
| 11-6                   | 0           | 11-48        | 0           | 11-90B blank | 1           | 11-138   | 0           |
| 11-7                   | 0           | 11-49        | 0           | 11-91        | 0           | 11-139   | 0           |
| 11-8                   | 5           | 11-50        | 0           | 11-92        | 0           | 11-140   | 0           |
| 11-9                   | 2           | 11-51        | 0           | 11-93        | 0           | 11-141   | 0           |
| 11-10                  | 2           | 11-52        | 0           | 11-94        | 0           | 11-142   | 0           |
| 11-10A                 | 3           | 11-53        | 0           | 11-95        | 0           | 11-143   | 0           |
| 11-10B                 | 2           | 11-54        | 0           | 11-96        | 0           | 11-144   | 0           |
| 11-10C                 | 5           | 11-55        | 0           | 11-97        | 0           | 11-145   | 0           |
| 11-10D blank           | 5           | 11-56        | 0           | 11-98        | 0           | 11-146   | 0           |
| 11-11                  | 2           | 11-57        | 0           | 11-99        | 0           | 11-147   | 0           |
| 11-12                  | 0           | 11-58        | 0           | 11-100       | 0           | 11-148   | 0           |
| 11-13                  | 0           | 11-59        | 0           | 11-101       | 0           | 11-149   | 0           |
| 11-14                  | 0           | 11-60        | 0           | 11-102       | 0           | 11-150   | 0           |
| 11-15                  | 0           | 11-61        | 0           | 11-103       | 0           | 11-151   | 0           |
| 11-16                  | 0           | 11-62        | 0           | 11-104       | 0           | 11-152   | 0           |
| 11-17                  | 0           | 11-63        | 0           | 11-105       | 0           | 11-153   | 0           |
| 11-18                  | 0           | 11-64        | 0           | 11-106       | 0           | 11-154   | 0           |
| 11-19                  | 0           | 11-65        | 0           | 11-107       | 0           | 11-155   | 0           |
| 11-20                  | 0           | 11-66        | 0           | 11-108       | 0           | 11-156   | 0           |
| 11-21                  | 0           | 11-67        | 0           | 11-109       | 0           | 11-157   | 0           |
| 11-22                  | 0           | 11-68        | 0           | 11-110       | 0           | 11-158   | 0           |
| 11-23                  | 6           | 11-69        | 0           | 11-111       | 0           | 11-159   | 0           |
| 11-24                  | 0           | 11-70        | 0           | 11-112       | 0           | 11-160   | 0           |
| 11-25                  | 0           | 11-71        | 0           | 11-113       | 0           | 11-161   | 0           |
| 11-26                  | 1           | 11-72        | 0           | 11-114       | 0           | 11-162   | 0           |
| 11-27                  | 1           | 11-73        | 0           | 11-115       | 0           | 11-163   | 0           |
| 11-28                  | 0           | 11-74        | 0           | 11-116       | 0           | 11-164   | 0           |
| 11-29                  | 0           | 11-75        | 4           | 11-117       | 0           | 11-165   | 0           |
| 11-30                  | 0           | 11-76        | 4           | 11-118       | 0           | 11-166   | 0           |

#Zero in this column indicates an original page.

**A      Change 6**

# A1-F18AC-NFM-200

| Page No. | #Change No. | Page No. | #Change No. | Page No.      | #Change No. | Page No. | #Change No. |
|----------|-------------|----------|-------------|---------------|-------------|----------|-------------|
| 11-167   | 0           | 11-226   | 2           | 11-287        | 0           |          |             |
| 11-168   | 0           | 11-227   | 2           | 11-288        | 0           |          |             |
| 11-169   | 0           | 11-228   | 2           | 11-289        | 0           |          |             |
| 11-170   | 0           | 11-229   | 0           | 11-290        | 0           |          |             |
| 11-171   | 0           | 11-230   | 0           | 11-291        | 0           |          |             |
| 11-172   | 0           | 11-231   | 0           | 11-292        | 0           |          |             |
| 11-173   | 0           | 11-232   | 0           | 11-293        | 0           |          |             |
| 11-174   | 0           | 11-233   | 0           | 11-294        | 0           |          |             |
| 11-175   | 0           | 11-234   | 0           | 11-295        | 0           |          |             |
| 11-176   | 0           | 11-235   | 0           | 11-296        | 0           |          |             |
| 11-177   | 0           | 11-236   | 0           | 11-297        | 0           |          |             |
| 11-178   | 0           | 11-237   | 0           | 11-298        | 0           |          |             |
| 11-179   | 0           | 11-238   | 0           | Index 1       | 1           |          |             |
| 11-180   | 0           | 11-239   | 0           | Index 2       | 1           |          |             |
| 11-181   | 0           | 11-240   | 0           | Index 3       | 0           |          |             |
| 11-182   | 0           | 11-241   | 0           | Index 4       | 0           |          |             |
| 11-183   | 0           | 11-242   | 0           | Index 5       | 0           |          |             |
| 11-184   | 0           | 11-243   | 0           | Index 6 blank | 0           |          |             |
| 11-185   | 0           | 11-244   | 0           |               |             |          |             |
| 11-186   | 0           | 11-245   | 0           |               |             |          |             |
| 11-187   | 0           | 11-246   | 0           |               |             |          |             |
| 11-188   | 0           | 11-247   | 0           |               |             |          |             |
| 11-189   | 0           | 11-248   | 0           |               |             |          |             |
| 11-190   | 0           | 11-249   | 0           |               |             |          |             |
| 11-191   | 0           | 11-250   | 0           |               |             |          |             |
| 11-192   | 0           | 11-251   | 0           |               |             |          |             |
| 11-193   | 0           | 11-252   | 0           |               |             |          |             |
| 11-194   | 0           | 11-253   | 0           |               |             |          |             |
| 11-195   | 0           | 11-254   | 0           |               |             |          |             |
| 11-196   | 0           | 11-255   | 0           |               |             |          |             |
| 11-197   | 0           | 11-256   | 0           |               |             |          |             |
| 11-198   | 0           | 11-257   | 0           |               |             |          |             |
| 11-199   | 0           | 11-258   | 0           |               |             |          |             |
| 11-200   | 0           | 11-259   | 0           |               |             |          |             |
| 11-201   | 0           | 11-260   | 0           |               |             |          |             |
| 11-202   | 0           | 11-261   | 0           |               |             |          |             |
| 11-203   | 0           | 11-262   | 0           |               |             |          |             |
| 11-204   | 0           | 11-263   | 0           |               |             |          |             |
| 11-205   | 0           | 11-264   | 0           |               |             |          |             |
| 11-206   | 0           | 11-265   | 0           |               |             |          |             |
| 11-207   | 0           | 11-266   | 0           |               |             |          |             |
| 11-208   | 0           | 11-267   | 0           |               |             |          |             |
| 11-209   | 0           | 11-268   | 0           |               |             |          |             |
| 11-210   | 0           | 11-269   | 0           |               |             |          |             |
| 11-210A  | 1           | 11-270   | 0           |               |             |          |             |
| 11-210B  | 1           | 11-271   | 0           |               |             |          |             |
| 11-211   | 2           | 11-272   | 0           |               |             |          |             |
| 11-212   | 2           | 11-273   | 0           |               |             |          |             |
| 11-213   | 2           | 11-274   | 0           |               |             |          |             |
| 11-214   | 2           | 11-275   | 0           |               |             |          |             |
| 11-215   | 2           | 11-276   | 0           |               |             |          |             |
| 11-216   | 2           | 11-277   | 0           |               |             |          |             |
| 11-217   | 2           | 11-278   | 0           |               |             |          |             |
| 11-218   | 2           | 11-279   | 0           |               |             |          |             |
| 11-219   | 2           | 11-280   | 0           |               |             |          |             |
| 11-220   | 2           | 11-281   | 0           |               |             |          |             |
| 11-221   | 2           | 11-282   | 0           |               |             |          |             |
| 11-222   | 2           | 11-283   | 0           |               |             |          |             |
| 11-223   | 2           | 11-284   | 0           |               |             |          |             |
| 11-224   | 2           | 11-285   | 0           |               |             |          |             |
| 11-225   | 2           | 11-286   | 0           |               |             |          |             |

#Zero in this column indicates an original page.







PATUZYUW RULSABU0285 0142008-UUUU--RUENCGU.  
ZNR UUUUU ZUI RUCOMCB5568 0142333  
P R 142008Z JAN 03  
FM COMNAVAIRSYS COM PATUXENT RIVER MD//4.0P//  
TO ALL HORNET AIRCRAFT ACTIVITIES  
AIG 165  
AIG 11183  
RUWFEEA/COMNAVAIRPAC SAN DIEGO CA//N421//  
RHMFIUU/COMNAVAIRSYS COM PATUXENT RIVER MD//5.0D//  
RULSFAN/COMNAVAIRSYS COM PATUXENT RIVER MD//5.0D//  
RHMFIUU/AIRTEVRON TWO THREE PATUXENT RIVER MD//55SA10AFA18/  
55SA08A/55SA05A//  
RULSABU/AIRTEVRON TWO THREE PATUXENT RIVER MD//55SA10AFA18/  
55SA08A/55SA05A//  
RUWDMCP/AIRTEVRON THREE ONE CHINA LAKE CA//56F000D/56CF00D//  
RHMFIUU/AIRTEVRON NINE CHINA LAKE CA//20//  
RUWDHFX/AIRTEVRON NINE CHINA LAKE CA//20//  
RHMFIUU/DCMA BOEING SAINT LOUIS MO//RDOAA/RDDF/RDDP//  
RULSFAA/DCMA BOEING SAINT LOUIS MO//RDOAA/RDDF/RDDP//  
INFO RUENAAA/CNO WASHINGTON DC//N78/N789J/N780D1//  
RHMFIUU/COMNAVAIRSYS COM PATUXENT RIVER MD//4.0P/4.1/4.3/  
4.11.2//  
RULSFAN/COMNAVAIRSYS COM PATUXENT RIVER MD//4.0P/4.1/4.3/  
4.11.2//  
RHMFIUU/PEOTACAIR PATUXENT RIVER MD//PMA265//  
RULSFAP/PEOTACAIR PATUXENT RIVER MD//PMA265//  
RHMFIUU/NAVTESTWINGLANT PATUXENT RIVER MD//55TW3AA//  
RULSABU/NAVTESTWINGLANT PATUXENT RIVER MD//55TW3AA//  
RHMFIUU/NAVTESTWINGPAC PT MUGU CA//56F000D//  
RUWFADK/NAVTESTWINGPAC PT MUGU CA//56F000D//  
RHMFIUU/COMNAVAIRWARCENWPNDIV CHINA LAKE CA//411210D/56F000D//  
RUWDMCK/COMNAVAIRWARCENWPNDIV CHINA LAKE CA//411210D/56F000D//  
RUCTPOH/NAVOPMEDINST PENSACOLA FL//06//  
RHOYMTZ/USS NIMITZ//AIMDQA/CTPL//  
RUCOGAQ/PRECOMUNIT RONALD REAGAN//AIMDQA/CTPL//  
STRKFIGHTWINGPAC//N45//  
RUWFLCM/SFWSPAC LEMOORE CA//CTPL//  
RHOVABE/STRKFITRON ONE ONE FIVE  
RUWFADJ/STRKFITRON ONE TWO TWO  
RUWFADG/STRKFITRON FOURTEEN  
RHOYFUM/STRKFITRON FOUR ONE  
RHMFIUU/DCMA BOEING SAINT LOUIS MO//CTPL//  
RULSFAA/DCMA BOEING SAINT LOUIS MO//CTPL//  
RUCOPAW/COMNAVSAFECEN NORFOLK VA//N53/N11//  
RHMFIUU/NATEC SAN DIEGO CA//TECHLIB/ARCHIVES//  
RUWFTBA/NATEC SAN DIEGO CA//TECHLIB/ARCHIVES//  
RUCOSSA/COMNAVAIRLANT NORFOLK VA//N421/NR83S//  
RHMFIUU/NAVSTKAIRWARCEN FALLON NV  
RUWFADO/NAVSTKAIRWARCEN FALLON NV  
RHFJJBFB/NAVAIRDEPOT JACKSONVILLE FL//3.3.3//  
RHMFIUU/NAVAIRDEPOT NORTH ISLAND CA//6.2//  
RUWFADP/NAVAIRDEPOT NORTH ISLAND CA//6.2//  
BT  
UNCLAS //N03711//  
MSGID/GENADMIN/COMNAVAIRSYS COM/4.0P//  
SUBJ/INTERIM CHANGES TO FA-18ABCD AIRCRAFT NATOPS FLIGHT MANUAL  
/PUBLICATIONS//

REF/A/DOC/CNO/15JUL2001//

REF/B/DOC/CNO/15JUL2001//

NARR/REF A IS NAVAIR A1-F18AC-NFM-200, NATOPS FLIGHT MANUAL PERFORMANCE CHARTS NAVY MODEL F/A-18A/B/C/D EQUIPPED WITH F404-GE-400 ENGINES DATED 15JAN1993 WITH CHANGE 5 OF 15JUL2001.

REF B IS NAVAIR A1-F18AC-NFM-210, NATOPS FLIGHT MANUAL PERFORMANCE CHARTS NAVY MODEL F/A-18A/B/C/D EQUIPPED WITH F404-GE-402 ENGINES DATED 15JAN1993 WITH CHANGE 6 OF 15JUL2001.//

RMKS/1. THIS MESSAGE IS INTERIM CHANGE NUMBER 1 TO REF A AND INTERIM CHANGE NUMBER 1 TO REF B. REQUEST TYPE COMMANDERS READD THIS MESSAGE TO APPROPRIATE SUBORDINATE UNITS UNDER THEIR COGNIZANCE.


2. THIS CHANGE PROVIDES ADDITIONAL DRAG INTERFERENCE CODE NUMBERS FOR INCLUSION INTO THE NFM PERFORMANCE CHARTS.
3. CHANGE REF A (NAVAIR A1-F18AC-NFM-200), CHAPTER 11, FIGURE 11-3 (SHEETS 1 AND 2 OF 2) ON PAGES 11-10C AND 11-11, AS FOLLOWS:
  - A. DELETE FIGURE 11-3 (SHEETS 1 AND 2 OF 2).
  - B. ADD NEW FIGURE 11-3 (SHEETS 1 THROUGH 6 OF 6) AS PAGES 11-10C THROUGH 11-10H, RESPECTIVELY. (PAGE 11-11 INTENTIONALLY LEFT BLANK.)
4. CHANGE REF B (NAVAIR A1-F18AC-NFM-210), CHAPTER 11, FIGURE 11-3 (SHEETS 1 AND 2 OF 2), PAGES 11-10C AND 11-11, AS FOLLOWS:
  - A. DELETE FIGURE 11-3 (SHEETS 1 AND 2 OF 2)
  - B. ADD NEW FIGURE 11-3 (SHEETS 1 THROUGH 6 OF 6) ON PAGES 11-10C THROUGH 11-10H, RESPECTIVELY. (PAGE 11-11 INTENTIONALLY LEFT BLANK.)
5. NEW FIGURES ARE BEING PROVIDED TO USER UNITS VIA EMAIL AND CAN ALSO BE FOUND ON THE NATEC WEBSITE (SEE PARAGRAPH 7 BELOW).
6. POINTS OF CONTACT:
  - A. KRISTIN SWIFT, AIR 4.0P, AIRWORTHINESS OFFICE,  
PHONE: DSN 995-4193, COM (301) 995-4193,  
E-MAIL: SWIFTKO@NAVAIR.NAVY.MIL
  - B. MR. E. HOVANESIAN, AIR-4.1.1, CLASS DESK,  
PHONE: DSN 757-7573, COM (301) 757-7573,  
EMAIL HOVANESIANEL@NAVAIR.NAVY.MIL
  - C. MR. TOM ELLIS, AIR-4.0P, FLIGHT CLEARANCE SUPPORT,  
PHONE: DSN 342-3149, COM (301) 342-3149,  
E-MAIL: ELLISTG@NAVAIR.NAVY.MIL
  - D. MR. STEVE CHURCHILL, AIR-4.0P, FLIGHT CLEARANCE SUPPORT,  
PHONE: DSN 342-0275, COM (301) 342-0275,  
E-MAIL: CHURCHILLSR@NAVAIR.NAVY.MIL
7. THIS MSG WITH RELATED REPLACEMENT PAGES APPENDED WILL BE POSTED ON THE NATEC WEBSITE, WWW.NATEC.NAVY.MIL, WITHIN 15 DAYS OF RELEASE. NEW NATOPS IC MSGS MAY BE FOUND IN TWO PLACES ON THIS WEBSITE; (1) IN THE NATOPS IC DATABASE FOUND UNDER THE TMAPS OPTION, AND (2) IN THE AFFECTED PUBLICATION(S) JUST AFTER THE INTERIM CHANGE SUMMARY PAGE. THEY ARE NORMALLY POSTED IN THE DATABASE BEFORE APPEARING IN THE PUBLICATION. IF UNABLE TO VIEW THIS MESSAGE ON THE NATEC WEBSITE, INFORM THE CNO NATOPS OFFICE AT DSN 664-7763/7741 OR COMM (703) 604-7763/7741.//

BT

NAVAIR A1-F18AC-NFM-200  
NATOPS FLIGHT MANUAL  
PERFORMANCE CHARTS  
F/A-18A/B/C/D AIRCRAFT EQUIPPED WITH F404-GE-400 ENGINES  
INTERIM CHANGE 1  
REPLACEMENT PAGES  
-----

1. New and replacement pages for Interim Change Number 1 to the F/A-18A/B/C/D Supplemental NFM NAVAIR A1-F18AC-NFM-200 are provided as follows:

Pages 11-10C through 11-10G, containing Figure 11-3 Interference Code Numbers (Sheets 1 of 6 through 6 of 6).

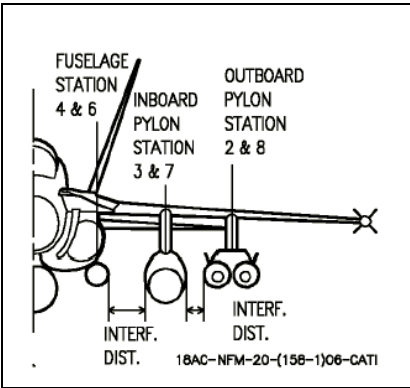

**OUTBOARD PYLON**

|                            |
|----------------------------|
| AIM-7 LAU-115C/A           |
| AIM-9 on LAU-115C & -127   |
| AIM-120 on LAU-115C & -127 |
| AGM-65 Maverick on LAU-117 |
| AGM-84D Harpoon            |
| AGM-84 SLAM                |
| AGM-84 SLAM ER             |
| AGM-88 HARM                |
| AGM-154 JSOW               |
| AN/ALQ-167 ECM POD         |
| AN/AWW-13 Data Link POD    |
| CBU-78/-99/-100 & Mk20 CBU |
| CNU-188 Baggage Pod        |
| FPU-8, 330 gal fuel tank   |
| GBU-10 (MK-84) LGB         |
| GBU-12 (MK-82) LGB         |
| GBU-16 (MK 83) LGB         |
| GBU-24 (BLU-109) LLLGB     |
| GBU-31(v)2 (MK84 JDAM)     |
| GBU-31(v)4 (BLU-109 JDAM)  |
| Mk77 fire bomb             |
| Mk82, BDU-45 or BLU-111    |

| INBOARD PYLON            |                |                            |                            |                 |                 |                        |              |                         |                             |                     |                    |                    |                        |                           |                 |                          |                  |             |       |                               |                               |                          |                                  |
|--------------------------|----------------|----------------------------|----------------------------|-----------------|-----------------|------------------------|--------------|-------------------------|-----------------------------|---------------------|--------------------|--------------------|------------------------|---------------------------|-----------------|--------------------------|------------------|-------------|-------|-------------------------------|-------------------------------|--------------------------|----------------------------------|
| FPU-8, 330 gal fuel tank | AIM-7 LAU-115C | AIM-120 on LAU-115C & -127 | AGM-65 Maverick on LAU-117 | AGM-84D Harpoon | AGM-84E SLAM ER | AGM-88 HARM on LAU-118 | AGM-154 JSOW | AN/AWW-13 Data Link Pod | CBU-78/-99/-100 & Mk 20 CBU | CNU-188 Baggage Pod | GBU-12 (Mk-82) LGB | GBU-16 (MK 83 LGB) | GBU-31(v)2 (MK84 JDAM) | GBU-31(v)4 (BLU-109 JDAM) | MK-77 Fire Bomb | Mk-82, BDU-45 or BLU-111 | Mk-83 or BLU-110 | MK-84 PYLON | PDU-5 | BRU-33/A VER or BRU-33A/C VER | CBU-78/99/100 & MK 20 on CVER | MK-77 Fire Bombs on CVER | MK-82, BDU-45 or BLU-111 on CVER |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 0.0                      | 0.0                              |
| 3.8                      | 0.0            | 5.4                        | 0.0                        | 4.2             | 4.2             | 0.0                    | 2.8          | 0.0                     | 0.0                         | 2.9                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 6.9                           | 10.6                     | 5.9                              |
| 4.1                      | 0.0            | 5.7                        | 0.0                        | 4.5             | 4.5             | 0.0                    | 3.1          | 0.0                     | 0.0                         | 3.2                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 7.2                           | 10.9                     | 6.2                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 0.0                      | 0.0                              |
| 3.0                      | 0.0            | 4.5                        | 0.0                        | 3.4             | 3.4             | 0.0                    | 2.0          | 0.0                     | 0.0                         | 2.1                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 6.1                           | 9.8                      | 5.1                              |
| 3.0                      | 0.0            | 4.5                        | 0.0                        | 3.4             | 3.4             | 0.0                    | 2.0          | 0.0                     | 0.0                         | 2.1                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 6.1                           | 9.8                      | 5.1                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 0.0                      | 0.0                              |
| 1.5                      | 0.0            | 3.1                        | 0.0                        | 2.0             | 2.0             | 0.0                    | 0.5          | 0.0                     | 0.0                         | 0.6                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 4.6                           | 8.3                      | 3.6                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 0.0                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 2.4                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 1.5                      | 0.0                              |
| 1.6                      | 0.0            | 3.2                        | 0.0                        | 2.1             | 2.1             | 0.0                    | 0.6          | 0.0                     | 0.0                         | 0.7                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 4.7                           | 8.4                      | 3.7                              |
| 2.5                      | 0.0            | 4.1                        | 0.0                        | 3.0             | 3.0             | 0.0                    | 1.5          | 0.0                     | 0.0                         | 1.6                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 5.6                           | 9.3                      | 4.6                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.2                           | 3.9                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 0.0                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.2                           | 3.9                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.4                           | 4.1                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 2.9                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.5                           | 4.2                      | 0.0                              |
| 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                           | 0.0                           | 0.0                      | 0.0                              |


Figure 11-3. Interference Code Numbers (Sheet 1 of 6)

Interim Change 1 11-10C

A1-F18AC-NFM-200

Figure 11-3. Interference Code Numbers  
(Sheet 2 of 6)

|                                  |  | A1-F18AC-NFM-200         |                |                            |                            |                 |                 |                        |              |                         |                             |                     |                    |                    |                        |                           |                 |                          |                  |             |       |                                |                               |                          |                                  |     |     |
|----------------------------------|--|--------------------------|----------------|----------------------------|----------------------------|-----------------|-----------------|------------------------|--------------|-------------------------|-----------------------------|---------------------|--------------------|--------------------|------------------------|---------------------------|-----------------|--------------------------|------------------|-------------|-------|--------------------------------|-------------------------------|--------------------------|----------------------------------|-----|-----|
|                                  |  | INBOARD PYLON            |                |                            |                            |                 |                 |                        |              |                         |                             |                     |                    | OUTBOARD PYLON     |                        |                           |                 |                          |                  |             |       |                                |                               |                          |                                  |     |     |
|                                  |  | FPU-8, 330 gal fuel tank | AIM-7 LAU-115C | AIM-120 on LAU-115C & -127 | AGM-65 Maverick on LAU-117 | AGM-84D Harpoon | AGM-84E SLAM ER | AGM-88 HARM on LAU-118 | AGM-154 JSOW | AN/AWW-13 Data Link Pod | CBU-78/-99/-100 & Mk 20 CBU | CNU-188 Baggage Pod | GBU-12 (Mk-82) LGB | GBU-16 (MK 83 LGB) | GBU-31(v)2 (MK84 JDAM) | GBU-31(v)4 (BLU-109 JDAM) | MK-77 Fire Bomb | Mk-82, BDU-45 or BLU-111 | Mk-83 or BLU-110 | MK-84 PYLON | PDU-5 | BRU-33/A VER or BRU-33A/A CVER | CBU-78/99/100 & MK 20 on CVER | MK-77 Fire Bombs on CVER | MK-82, BDU-45 or BLU-111 on CVER |     |     |
| Mk83 or BLU-110                  |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              | 0.0 | 0.0 |
| MK-84                            |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.2                      | 3.9                              | 0.0 |     |
| PDU-5                            |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 1.5                      | 0.0                              |     |     |
| BRU-33/A VER or BRU-33A/A CVER   |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              | 0.0 |     |
| CBU-78/99/100 & MK-20 on CVER    |  | 5.6                      | 0.0            | 7.2                        | 0.0                        | 6.1             | 6.1             | 0.0                    | 4.6          | 0.0                     | 0.0                         | 4.7                 | 0.0                | 0.0                | 0.4                    | 0.0                       | 0.5             | 0.0                      | 0.0              | 0.2         | 0.0   | 0.0                            | 5.6                           | 12.4                     | 5.3                              |     |     |
| LAU-10 5" pods on CVER           |  | 6.3                      | 0.0            | 7.9                        | 0.0                        | 6.8             | 6.8             | 0.0                    | 5.3          | 0.0                     | 0.0                         | 5.4                 | 0.0                | 0.0                | 1.1                    | 0.0                       | 1.2             | 0.0                      | 0.0              | 0.9         | 0.0   | 0.0                            | 5.9                           | 13.1                     | 5.6                              |     |     |
| LAU-61 2.57" pods on CVER        |  | 7.1                      | 0.0            | 8.7                        | 0.0                        | 7.6             | 7.6             | 0.0                    | 6.1          | 0.0                     | 0.0                         | 6.2                 | 0.0                | 0.0                | 1.9                    | 0.7                       | 2.0             | 0.0                      | 0.0              | 1.7         | 0.0   | 0.0                            | 7.2                           | 13.9                     | 6.9                              |     |     |
| LAU-68 2.75" pods on CVER        |  | 3.7                      | 0.0            | 5.3                        | 0.0                        | 4.2             | 4.2             | 0.0                    | 2.7          | 0.0                     | 0.0                         | 2.8                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.3                           | 10.5                     | 5.0                              |     |     |
| MK-82, BDU-45 or BLU-111 on CVER |  | 4.6                      | 0.0            | 6.2                        | 0.0                        | 5.1             | 5.1             | 0.0                    | 3.6          | 0.0                     | 0.0                         | 3.7                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.3                           | 11.4                     | 5.1                              |     |     |
| MK-83 or BLU-110 on CVER         |  | 5.3                      | 0.0            | 6.9                        | 0.0                        | 5.8             | 5.8             | 0.0                    | 4.3          | 0.0                     | 0.0                         | 4.4                 | 0.0                | 0.0                | 0.1                    | 0.0                       | 0.2             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.6                           | 12.1                     | 5.3                              |     |     |
| PDU-5 on CVER                    |  | 5.6                      | 0.0            | 7.2                        | 0.0                        | 6.1             | 6.1             | 0.0                    | 4.6          | 0.0                     | 0.0                         | 4.7                 | 0.0                | 0.0                | 0.4                    | 0.0                       | 0.5             | 0.0                      | 0.0              | 0.2         | 0.0   | 0.0                            | 5.6                           | 12.4                     | 5.3                              |     |     |
| LAU-10 5" pods on VER            |  | 4.0                      | 0.0            | 5.6                        | 0.0                        | 4.5             | 4.5             | 0.0                    | 3.0          | 0.0                     | 0.0                         | 3.1                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 4.0                           | 10.8                     | 4.5                              |     |     |
| LAU-61 2.75" pods on VER         |  | 4.7                      | 0.0            | 6.3                        | 0.0                        | 5.2             | 5.2             | 0.0                    | 3.7          | 0.0                     | 0.0                         | 3.8                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 4.7                           | 11.5                     | 5.2                              |     |     |
| LAU-68 2.75" pods on VER         |  | 1.7                      | 0.0            | 3.3                        | 0.0                        | 2.2             | 2.2             | 0.0                    | 0.7          | 0.0                     | 0.0                         | 0.8                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 1.7                           | 8.5                      | 2.2                              |     |     |
| MK-82, BDU-45 or BLU-111 on VER  |  | 2.2                      | 0.0            | 3.8                        | 0.0                        | 2.7             | 2.7             | 0.0                    | 1.2          | 0.0                     | 0.0                         | 1.3                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 2.2                           | 9.0                      | 2.7                              |     |     |
| MK-83 or BLU-110 on VER          |  | 3.9                      | 0.0            | 5.5                        | 0.0                        | 4.4             | 4.4             | 0.0                    | 2.9          | 0.0                     | 0.0                         | 3.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 3.9                           | 10.7                     | 4.4                              |     |     |
| BRU-42 ITER                      |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              |     |     |
| ADM-141 TADL on ITER             |  | 4.2                      | 0.0            | 5.8                        | 0.0                        | 4.7             | 4.7             | 0.0                    | 3.2          | 0.0                     | 0.0                         | 3.3                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.8                           | 11.0                     | 5.5                              |     |     |
| BRU-41 IMER                      |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              |     |     |
| BDU-33 or Mk76 on IMER           |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 2.8                      | 0.0                              |     |     |
| BDU-48 or MK106 on IMER          |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 2.7                      | 0.0                              |     |     |
| BDU-57, -59 & -60 LGTR on IMER   |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 2.8                      | 0.0                              |     |     |

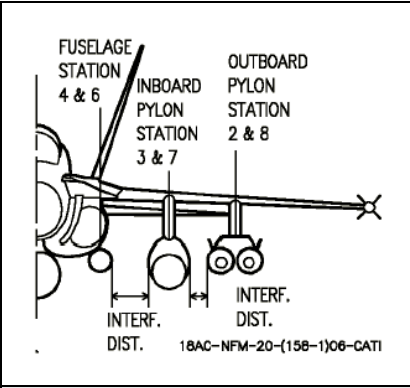




|                            |  | INBOARD PYLON            |                       |                                 |                         |             |                      |             |                        |                         |                               |                            |                            |                            |                             |                  |                    |                  |                               |                                |                                  |                           |                         |             |                                 |     |
|----------------------------|--|--------------------------|-----------------------|---------------------------------|-------------------------|-------------|----------------------|-------------|------------------------|-------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|------------------|--------------------|------------------|-------------------------------|--------------------------------|----------------------------------|---------------------------|-------------------------|-------------|---------------------------------|-----|
|                            |  | MK-83 or BLU-110 on CVER | LAU-10 5" pods on VER | MK-82, BDU-45 or BLU-111 on VER | MK-83 or BLU-110 on VER | BRU-42 ITER | ADM-141 TADL on ITER | BRU-41 IMER | BDU-33 or MK76 on IMER | BDU-46 or Mk106 on IMER | BDU-57, -59 &-60 LGTR on IMER | MK-52 1,000-lb bottom mine | MK-55 2,000-lb bottom mine | MK-56 2,000-lb moored mine | Mk62 QS Mk15 or BSU-86 fins | Mk62 QS Mk16 fin | Mk63 QS MAU-91 fin | Mk63 QS Mk12 fin | Mk 65 QS 2,000-lb bottom mine | BRU-33/A VER or BRU-33A/A CVER | Mk-62 QS Mk15/BSU-86 fin on CVER | MK-62 QS Mk16 fin on CVER | MK-62 QS any fin on VER | BRU-41 IMER | BDU-48 as practice mine on IMER |     |
| OUTBOARD PYLON             |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| AIM-7 LAU-115C/A           |  | 6.6                      | 5.3                   | 3.5                             | 5.2                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 3.2                        | 5.6                        | 5.6                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.0                           | 0.0                            | 5.9                              | 5.9                       | 3.5                     | 0.0         | 0.0                             |     |
| AIM-9 on LAU-115C & -127   |  | 6.9                      | 5.6                   | 3.8                             | 5.5                     | 0.0         | 5.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 3.5                        | 5.9                        | 5.9                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.3                           | 0.0                            | 6.2                              | 6.2                       | 3.8                     | 0.0         | 0.0                             |     |
| AIM-120 on LAU-115C & -127 |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AGM-65 Maverick on LAU-117 |  | 5.8                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 4.7                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.4                        | 4.8                        | 4.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 3.2                           | 0.0                            | 5.1                              | 5.1                       | 2.7                     | 0.0         | 0.0                             |     |
| AGM-84D Harpoon            |  | 5.8                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 4.7                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.4                        | 4.8                        | 4.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 3.2                           | 0.0                            | 5.1                              | 5.1                       | 2.7                     | 0.0         | 0.0                             |     |
| AGM-84 SLAM                |  | 5.8                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 4.7                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.4                        | 4.8                        | 4.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 3.2                           | 0.0                            | 5.1                              | 5.1                       | 2.7                     | 0.0         | 0.0                             |     |
| AGM-84 SLAM ER             |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AGM-88 HARM                |  | 4.3                      | 3.0                   | 1.2                             | 2.9                     | 0.0         | 3.2                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 1.1                        | 3.4                        | 3.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 1.8                           | 0.0                            | 3.6                              | 3.6                       | 1.2                     | 0.0         | 0.0                             |     |
| AGM-154 JSOW               |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AN/ALQ-167 ECM POD         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AN/AWW-13 Data Link POD    |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| CBU-78/-99/-100 & Mk20 CBU |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| CNU-188 Baggage Pod        |  | 4.4                      | 3.1                   | 1.3                             | 3.0                     | 0.0         | 3.3                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 1.1                        | 3.5                        | 3.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 1.9                           | 0.0                            | 3.7                              | 3.7                       | 1.3                     | 0.0         | 0.0                             |     |
| FPU-8, 330 gal fuel tank   |  | 5.3                      | 4.0                   | 2.2                             | 3.9                     | 0.0         | 4.2                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.0                        | 4.4                        | 4.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 2.8                           | 0.0                            | 4.6                              | 4.6                       | 2.2                     | 0.0         | 0.0                             |     |
| GBU-10 (MK-84) LGB         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-12 (MK-82) LGB         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-16 (MK 83) LGB         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-24 (BLU-109) LLLGB     |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-31(v)2 (MK84 JDAM)     |  | 0.1                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-31(v)4 (BLU-109 JDAM)  |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| Mk77 fire bomb             |  | 0.2                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| Mk82, BDU-45 or BLU-111    |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |

Interim Change 1 11-10F

Figure 11-3. Interference Code Numbers  
(Sheet 4 of 6)

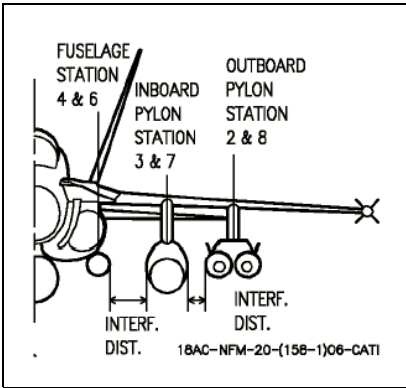

**INBOARD PYLON**

|                          |                         |                                 |                         |             |                      |             |                        |                         |                                |                            |                            |                            |                             |                  |                    |                  |                               |                               |                                  |                           |                         |             |                                 |
|--------------------------|-------------------------|---------------------------------|-------------------------|-------------|----------------------|-------------|------------------------|-------------------------|--------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|------------------|--------------------|------------------|-------------------------------|-------------------------------|----------------------------------|---------------------------|-------------------------|-------------|---------------------------------|
| Mk-83 or BLU-110 on CVER | Mk-83 or BLU-110 on VER | Mk-82, BDU-45 or BLU-111 on VER | Mk-83 or BLU-110 on VER | BRU-42 ITER | ADM-141 TADL on ITER | BRU-41 IMER | BDU-33 or Mk76 on IMER | BDU-46 or Mk106 on IMER | BDU-57, -59 & -60 LGTR on IMER | Mk-52 1,000-lb bottom mine | Mk-55 2,000-lb bottom mine | Mk-56 2,000-lb moored mine | Mk62 QS Mk15 or BSU-86 fins | Mk62 QS Mk16 fin | Mk63 QS MAU-91 fin | Mk63 QS Mk12 fin | Mk 65 QS 2,000-lb bottom mine | BRU-33/A VER or BRU-33/A CVER | Mk-62 QS Mk15/BSU-86 fin on CVER | Mk-62 QS Mk16 fin on CVER | Mk-62 QS any fin on VER | BRU-41 IMER | BDU-48 as practice mine on IMER |
|--------------------------|-------------------------|---------------------------------|-------------------------|-------------|----------------------|-------------|------------------------|-------------------------|--------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|------------------|--------------------|------------------|-------------------------------|-------------------------------|----------------------------------|---------------------------|-------------------------|-------------|---------------------------------|

**OUTBOARD PYLON**

|                                  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Mk83 or BLU-110                  | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| MK-84                            | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| PDU-5                            | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| BRU-33/A VER or BRU-33/A CVER    | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| CBU-78/99/100 & MK-20 on CVER    | 5.6 | 4.0 | 2.2 | 3.9 | 0.0 | 5.8 | 0.0 | 0.0 | 0.0 | 0.0 | 5.2 | 7.5 | 7.5 | 0.0 | 0.0 | 0.0 | 0.0 | 5.9 | 0.0 | 5.3 | 5.3 | 2.2 | 0.0 |
| LAU-10 5" pods on CVER           | 5.9 | 4.0 | 2.2 | 3.9 | 0.0 | 6.1 | 0.0 | 0.0 | 0.0 | 0.0 | 5.9 | 8.2 | 8.2 | 0.0 | 0.0 | 0.0 | 0.0 | 6.6 | 0.0 | 5.6 | 5.6 | 2.2 | 0.0 |
| LAU-61 2.57" pods on CVER        | 7.2 | 5.8 | 4.0 | 5.7 | 0.0 | 7.4 | 0.0 | 0.6 | 0.5 | 0.6 | 6.7 | 9.0 | 9.0 | 0.0 | 0.0 | 0.0 | 0.0 | 7.4 | 0.0 | 6.9 | 6.9 | 4.0 | 0.0 |
| LAU-68 2.75" pods on CVER        | 5.3 | 5.3 | 3.5 | 5.2 | 0.0 | 5.5 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | 5.6 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 | 4.0 | 0.0 | 5.0 | 5.0 | 3.5 | 0.0 |
| MK-82, BDU-45 or BLU-111 on CVER | 5.3 | 4.5 | 2.7 | 4.4 | 0.0 | 5.5 | 0.0 | 0.0 | 0.0 | 0.0 | 4.2 | 6.5 | 6.5 | 0.0 | 0.0 | 0.0 | 0.0 | 4.9 | 0.0 | 5.1 | 5.1 | 2.7 | 0.0 |
| Mk-83 or BLU-110 on CVER         | 5.7 | 4.8 | 3.0 | 4.7 | 0.0 | 5.8 | 0.0 | 0.0 | 0.0 | 0.0 | 4.9 | 7.2 | 7.2 | 0.0 | 0.0 | 0.0 | 0.0 | 5.6 | 0.0 | 5.3 | 5.3 | 3.0 | 0.0 |
| PDU-5 on CVER                    | 5.6 | 4.0 | 2.2 | 3.9 | 0.0 | 5.8 | 0.0 | 0.0 | 0.0 | 0.0 | 5.2 | 7.5 | 7.5 | 0.0 | 0.0 | 0.0 | 0.0 | 5.9 | 0.0 | 5.3 | 5.3 | 2.2 | 0.0 |
| LAU-10 5" pods on VER            | 4.8 | 5.5 | 3.7 | 5.4 | 0.0 | 5.7 | 0.0 | 0.0 | 0.0 | 0.0 | 3.6 | 5.9 | 5.9 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 0.0 | 4.5 | 4.5 | 3.7 | 0.0 |
| LAU-61 2.75" pods on VER         | 5.5 | 6.2 | 4.4 | 6.1 | 0.0 | 6.4 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 6.6 | 6.6 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 0.0 | 5.2 | 5.2 | 4.4 | 0.0 |
| LAU-68 2.75" pods on VER         | 2.5 | 3.2 | 1.4 | 3.1 | 0.0 | 3.4 | 0.0 | 0.0 | 0.0 | 0.0 | 1.3 | 3.6 | 3.6 | 0.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 2.2 | 2.2 | 1.4 | 0.0 |
| MK-82, BDU-45 or BLU-111 on VER  | 3.0 | 3.7 | 1.9 | 3.6 | 0.0 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 1.8 | 4.1 | 4.1 | 0.0 | 0.0 | 0.0 | 0.0 | 2.5 | 0.0 | 2.7 | 2.7 | 1.9 | 0.0 |
| Mk-83 or BLU-110 on VER          | 4.7 | 5.4 | 3.6 | 5.3 | 0.0 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 | 3.5 | 5.8 | 5.8 | 0.0 | 0.0 | 0.0 | 0.0 | 4.2 | 0.0 | 4.4 | 4.4 | 3.6 | 0.0 |
| BRU-42 ITER                      | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| ADM-141 TADL on ITER             | 5.8 | 5.7 | 3.9 | 5.6 | 0.0 | 5.9 | 0.0 | 0.0 | 0.0 | 0.0 | 3.8 | 6.1 | 6.1 | 0.0 | 0.0 | 0.0 | 0.0 | 4.5 | 0.0 | 5.5 | 5.5 | 3.9 | 0.0 |
| BRU-41 IMER                      | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| BDU-33 or Mk76 on IMER           | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| BDU-48 or Mk106 on IMER          | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| BDU-57, -59 & -60 LGTR on IMER   | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Figure 11-3. Interference Code Numbers  
 (Sheet 5 of 6)

Interim Change 1 11-10G

A1-F18AC-NFM-200



|                                      |  | INBOARD PYLON            |                       |                                 |                         |             |                      |             |                        |                         |                                |                            |                            |                            |                             |                  |                    |                  |                               |                               |                                  |                           |                         |             |                                 |     |
|--------------------------------------|--|--------------------------|-----------------------|---------------------------------|-------------------------|-------------|----------------------|-------------|------------------------|-------------------------|--------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|------------------|--------------------|------------------|-------------------------------|-------------------------------|----------------------------------|---------------------------|-------------------------|-------------|---------------------------------|-----|
|                                      |  | MK-83 or BLU-110 on CVER | LAU-10 5" pods on VER | MK-82, BDU-45 or BLU-111 on VER | MK-83 or BLU-110 on VER | BRU-42 ITER | ADM-141 TADL on ITER | BRU-41 IMER | BDU-33 or MK76 on IMER | BDU-46 or Mk106 on IMER | BDU-57, -59 & -60 LGTR on IMER | MK-52 1,000-lb bottom mine | MK-55 2,000-lb bottom mine | MK-56 2,000-lb moored mine | Mk62 QS MK15 or BSU-86 fins | Mk62 QS Mk16 fin | Mk63 QS MAU-91 fin | Mk63 QS Mk12 fin | Mk 65 QS 2,000-lb bottom mine | BRU-33/A VER or BRU-33/A/CVER | Mk-62 QS MK15/BSU-86 fin on CVER | MK-62 QS Mk16 fin on CVER | MK-62 QS any fin on VER | BRU-41 IMER | BDU-48 as practice mine on IMER |     |
| OUTBOARD PYLON                       |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| LUU-2 on IMER                        |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk58 on IMER                         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| MK-52 1,000-lb bottom mine           |  | 4.9                      | 3.6                   | 1.8                             | 3.5                     | 0.0         | 3.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 1.6                        | 4.0                        | 4.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 2.4                           | 0.0                              | 4.2                       | 4.2                     | 1.8         | 0.0                             | 0.0 |
| MK-55 2,000-lb bottom mine           |  | 7.2                      | 5.9                   | 4.1                             | 5.8                     | 0.0         | 6.1                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.0                        | 5.4                        | 5.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 3.8                           | 0.0                              | 6.5                       | 6.5                     | 4.1         | 0.0                             | 0.0 |
| MK-55 2,000-lb moored mine           |  | 7.2                      | 5.9                   | 4.1                             | 5.8                     | 0.0         | 6.1                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.0                        | 5.4                        | 5.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 3.8                           | 0.0                              | 6.5                       | 6.5                     | 4.1         | 0.0                             | 0.0 |
| Mk62 QS Mk-15 or BSU-86 fin          |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk62 QS Mk16 fin                     |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk63 QS MAU-91 fin                   |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk63 QS Mk12 fin                     |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk65 QS 2,000-lb bottom mine         |  | 5.6                      | 4.3                   | 2.5                             | 4.2                     | 0.0         | 4.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 2.4                        | 3.8                        | 3.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 1.3                           | 0.0                              | 4.9                       | 4.9                     | 2.5         | 0.0                             | 0.0 |
| MK-62 QS MK-15 or BSU-86 fin on CVER |  | 5.3                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.2                        | 6.5                        | 6.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 4.9                           | 0.0                              | 5.1                       | 5.1                     | 2.7         | 0.0                             | 0.0 |
| Mk-62 QS Mk 16 fin on CVER           |  | 5.3                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.2                        | 6.5                        | 6.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 4.9                           | 0.0                              | 5.1                       | 5.1                     | 2.7         | 0.0                             | 0.0 |
| Mk-63 QS Mk 12 fin on CVER           |  | 5.7                      | 4.8                   | 3.0                             | 4.7                     | 0.0         | 5.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.9                        | 7.2                        | 7.2                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 5.6                           | 0.0                              | 5.3                       | 5.3                     | 3.0         | 0.0                             | 0.0 |
| MK-62 QS any fin on VER              |  | 3.0                      | 3.7                   | 1.9                             | 3.6                     | 0.0         | 3.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 1.8                        | 4.1                        | 4.1                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 2.5                           | 0.0                              | 2.7                       | 2.7                     | 1.9         | 0.0                             | 0.0 |
| BDU-48 practice mine on IMER         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Fuselage Station                     |  |                          |                       |                                 |                         |             |                      |             |                        |                         |                                |                            |                            |                            |                             |                  |                    |                  |                               |                               |                                  |                           |                         |             |                                 |     |
| AN/AAR-50 NAVFLIR (sta 6)            |  | 8.9                      | 6.7                   | 4.9                             | 6.5                     | 0.0         | 6.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.2                        | 2.5                        | 2.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 1.2                           | 0.0                           | 7.3                              | 7.3                       | 4.9                     | 0.0         | 0.0                             |     |
| AN/AAS-38 tgt FLIR (sta 4)           |  | 4.1                      | 1.9                   | 0.1                             | 1.7                     | 0.0         | 2.1                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 2.5                       | 2.5                     | 0.1         | 0.0                             | 0.0 |
| AN/ASQ-173 LDT/Cam (sta 6)           |  | 7.9                      | 5.7                   | 3.9                             | 5.5                     | 0.0         | 5.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 1.5                        | 1.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.2                           | 0.0                           | 6.3                              | 6.3                       | 3.9                     | 0.0         | 0.0                             |     |




Figure 11-3. Interference Code Numbers (Sheet 6 of 6)

11-10H/(11-11 blank) Interim Change 1

NAVAIR A1-F18AC-NFM-210  
NATOPS FLIGHT MANUAL  
PERFORMANCE CHARTS  
F/A-18C/D AIRCRAFT EQUIPPED WITH F404-GE-402 ENGINES  
INTERIM CHANGE 1  
REPLACEMENT PAGES  
-----


1. New and replacement pages for Interim Change Number 1 to the F/A-18C/D Supplemental NFM, NAVAIR A1-F18AC-NFM-210, are provided as follows:

Pages 11-10C through 11-10G, containing Figure 11-3 Interference Code Numbers (Sheets 1 of 6 through 6 of 6).



Figure 11-3. Interference Code Numbers  
(Sheet 2 of 6)

|                                  |  | A1-F18AC-NFM-210         |                |                            |                            |                 |                 |                        |              |                         |                             |                     |                    |                    |                        |                           |                 |                          |                  |             |       |                                |                               |                          |                                  |     |     |
|----------------------------------|--|--------------------------|----------------|----------------------------|----------------------------|-----------------|-----------------|------------------------|--------------|-------------------------|-----------------------------|---------------------|--------------------|--------------------|------------------------|---------------------------|-----------------|--------------------------|------------------|-------------|-------|--------------------------------|-------------------------------|--------------------------|----------------------------------|-----|-----|
|                                  |  | INBOARD PYLON            |                |                            |                            |                 |                 |                        |              |                         |                             |                     |                    | OUTBOARD PYLON     |                        |                           |                 |                          |                  |             |       |                                |                               |                          |                                  |     |     |
|                                  |  | FPU-8, 330 gal fuel tank | AIM-7 LAU-115C | AIM-120 on LAU-115C & -127 | AGM-65 Maverick on LAU-117 | AGM-84D Harpoon | AGM-84E SLAM ER | AGM-88 HARM on LAU-118 | AGM-154 JSOW | AN/AWW-13 Data Link Pod | CBU-78/-99/-100 & Mk 20 CBU | CNU-188 Baggage Pod | GBU-12 (Mk-82) LGB | GBU-16 (MK 83 LGB) | GBU-31(v)2 (MK84 JDAM) | GBU-31(v)4 (BLU-109 JDAM) | MK-77 Fire Bomb | Mk-82, BDU-45 or BLU-111 | Mk-83 or BLU-110 | MK-84 PYLON | PDU-5 | BRU-33/A VER or BRU-33A/A CVER | CBU-78/99/100 & MK 20 on CVER | MK-77 Fire Bombs on CVER | MK-82, BDU-45 or BLU-111 on CVER |     |     |
| Mk83 or BLU-110                  |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              | 0.0 | 0.0 |
| MK-84                            |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.2                      | 3.9                              | 0.0 |     |
| PDU-5                            |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 1.5                      | 0.0                              |     |     |
| BRU-33/A VER or BRU-33A/A CVER   |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              |     |     |
| CBU-78/99/100 & MK-20 on CVER    |  | 5.6                      | 0.0            | 7.2                        | 0.0                        | 6.1             | 6.1             | 0.0                    | 4.6          | 0.0                     | 0.0                         | 4.7                 | 0.0                | 0.0                | 0.4                    | 0.0                       | 0.5             | 0.0                      | 0.0              | 0.2         | 0.0   | 0.0                            | 5.6                           | 12.4                     | 5.3                              |     |     |
| LAU-10 5" pods on CVER           |  | 6.3                      | 0.0            | 7.9                        | 0.0                        | 6.8             | 6.8             | 0.0                    | 5.3          | 0.0                     | 0.0                         | 5.4                 | 0.0                | 0.0                | 1.1                    | 0.0                       | 1.2             | 0.0                      | 0.0              | 0.9         | 0.0   | 0.0                            | 5.9                           | 13.1                     | 5.6                              |     |     |
| LAU-61 2.57" pods on CVER        |  | 7.1                      | 0.0            | 8.7                        | 0.0                        | 7.6             | 7.6             | 0.0                    | 6.1          | 0.0                     | 0.0                         | 6.2                 | 0.0                | 0.0                | 1.9                    | 0.7                       | 2.0             | 0.0                      | 0.0              | 1.7         | 0.0   | 0.0                            | 7.2                           | 13.9                     | 6.9                              |     |     |
| LAU-68 2.75" pods on CVER        |  | 3.7                      | 0.0            | 5.3                        | 0.0                        | 4.2             | 4.2             | 0.0                    | 2.7          | 0.0                     | 0.0                         | 2.8                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.3                           | 10.5                     | 5.0                              |     |     |
| MK-82, BDU-45 or BLU-111 on CVER |  | 4.6                      | 0.0            | 6.2                        | 0.0                        | 5.1             | 5.1             | 0.0                    | 3.6          | 0.0                     | 0.0                         | 3.7                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.3                           | 11.4                     | 5.1                              |     |     |
| MK-83 or BLU-110 on CVER         |  | 5.3                      | 0.0            | 6.9                        | 0.0                        | 5.8             | 5.8             | 0.0                    | 4.3          | 0.0                     | 0.0                         | 4.4                 | 0.0                | 0.0                | 0.1                    | 0.0                       | 0.2             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.6                           | 12.1                     | 5.3                              |     |     |
| PDU-5 on CVER                    |  | 5.6                      | 0.0            | 7.2                        | 0.0                        | 6.1             | 6.1             | 0.0                    | 4.6          | 0.0                     | 0.0                         | 4.7                 | 0.0                | 0.0                | 0.4                    | 0.0                       | 0.5             | 0.0                      | 0.0              | 0.2         | 0.0   | 0.0                            | 5.6                           | 12.4                     | 5.3                              |     |     |
| LAU-10 5" pods on VER            |  | 4.0                      | 0.0            | 5.6                        | 0.0                        | 4.5             | 4.5             | 0.0                    | 3.0          | 0.0                     | 0.0                         | 3.1                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 4.0                           | 10.8                     | 4.5                              |     |     |
| LAU-61 2.75" pods on VER         |  | 4.7                      | 0.0            | 6.3                        | 0.0                        | 5.2             | 5.2             | 0.0                    | 3.7          | 0.0                     | 0.0                         | 3.8                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 4.7                           | 11.5                     | 5.2                              |     |     |
| LAU-68 2.75" pods on VER         |  | 1.7                      | 0.0            | 3.3                        | 0.0                        | 2.2             | 2.2             | 0.0                    | 0.7          | 0.0                     | 0.0                         | 0.8                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 1.7                           | 8.5                      | 2.2                              |     |     |
| MK-82, BDU-45 or BLU-111 on VER  |  | 2.2                      | 0.0            | 3.8                        | 0.0                        | 2.7             | 2.7             | 0.0                    | 1.2          | 0.0                     | 0.0                         | 1.3                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 2.2                           | 9.0                      | 2.7                              |     |     |
| MK-83 or BLU-110 on VER          |  | 3.9                      | 0.0            | 5.5                        | 0.0                        | 4.4             | 4.4             | 0.0                    | 2.9          | 0.0                     | 0.0                         | 3.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 3.9                           | 10.7                     | 4.4                              |     |     |
| BRU-42 ITER                      |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              |     |     |
| ADM-141 TADL on ITER             |  | 4.2                      | 0.0            | 5.8                        | 0.0                        | 4.7             | 4.7             | 0.0                    | 3.2          | 0.0                     | 0.0                         | 3.3                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 5.8                           | 11.0                     | 5.5                              |     |     |
| BRU-41 IMER                      |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 0.0                      | 0.0                              |     |     |
| BDU-33 or Mk76 on IMER           |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 2.8                      | 0.0                              |     |     |
| BDU-48 or MK106 on IMER          |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 2.7                      | 0.0                              |     |     |
| BDU-57, -59 & -60 LGTR on IMER   |  | 0.0                      | 0.0            | 0.0                        | 0.0                        | 0.0             | 0.0             | 0.0                    | 0.0          | 0.0                     | 0.0                         | 0.0                 | 0.0                | 0.0                | 0.0                    | 0.0                       | 0.0             | 0.0                      | 0.0              | 0.0         | 0.0   | 0.0                            | 0.0                           | 2.8                      | 0.0                              |     |     |

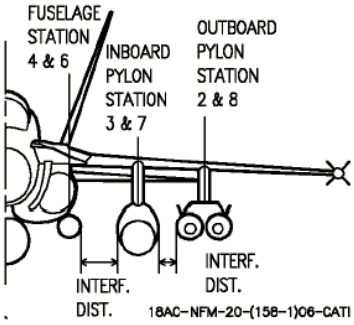



|                            |  | INBOARD PYLON            |                       |                                 |                         |             |                      |             |                        |                         |                               |                            |                            |                            |                             |                  |                    |                  |                               |                                |                                  |                           |                         |             |                                 |     |
|----------------------------|--|--------------------------|-----------------------|---------------------------------|-------------------------|-------------|----------------------|-------------|------------------------|-------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|------------------|--------------------|------------------|-------------------------------|--------------------------------|----------------------------------|---------------------------|-------------------------|-------------|---------------------------------|-----|
|                            |  | MK-83 or BLU-110 on CVER | LAU-10 5" pods on VER | MK-82, BDU-45 or BLU-111 on VER | MK-83 or BLU-110 on VER | BRU-42 ITER | ADM-141 TADL on ITER | BRU-41 IMER | BDU-33 or MK76 on IMER | BDU-46 or Mk106 on IMER | BDU-57, -59 &-60 LGTR on IMER | MK-52 1,000-lb bottom mine | MK-55 2,000-lb bottom mine | MK-56 2,000-lb moored mine | Mk62 QS Mk15 or BSU-86 fins | Mk62 QS Mk16 fin | Mk63 QS MAU-91 fin | Mk63 QS Mk12 fin | Mk 65 QS 2,000-lb bottom mine | BRU-33/A VER or BRU-33A/A CVER | Mk-62 QS Mk15/BSU-86 fin on CVER | MK-62 QS Mk16 fin on CVER | MK-62 QS any fin on VER | BRU-41 IMER | BDU-48 as practice mine on IMER |     |
| OUTBOARD PYLON             |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| AIM-7 LAU-115C/A           |  | 6.6                      | 5.3                   | 3.5                             | 5.2                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 3.2                        | 5.6                        | 5.6                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.0                           | 0.0                            | 5.9                              | 5.9                       | 3.5                     | 0.0         | 0.0                             |     |
| AIM-9 on LAU-115C & -127   |  | 6.9                      | 5.6                   | 3.8                             | 5.5                     | 0.0         | 5.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 3.5                        | 5.9                        | 5.9                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.3                           | 0.0                            | 6.2                              | 6.2                       | 3.8                     | 0.0         | 0.0                             |     |
| AIM-120 on LAU-115C & -127 |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AGM-65 Maverick on LAU-117 |  | 5.8                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 4.7                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.4                        | 4.8                        | 4.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 3.2                           | 0.0                            | 5.1                              | 5.1                       | 2.7                     | 0.0         | 0.0                             |     |
| AGM-84D Harpoon            |  | 5.8                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 4.7                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.4                        | 4.8                        | 4.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 3.2                           | 0.0                            | 5.1                              | 5.1                       | 2.7                     | 0.0         | 0.0                             |     |
| AGM-84 SLAM                |  | 5.8                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 4.7                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.4                        | 4.8                        | 4.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 3.2                           | 0.0                            | 5.1                              | 5.1                       | 2.7                     | 0.0         | 0.0                             |     |
| AGM-84 SLAM ER             |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AGM-88 HARM                |  | 4.3                      | 3.0                   | 1.2                             | 2.9                     | 0.0         | 3.2                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 1.1                        | 3.4                        | 3.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 1.8                           | 0.0                            | 3.6                              | 3.6                       | 1.2                     | 0.0         | 0.0                             |     |
| AGM-154 JSOW               |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AN/ALQ-167 ECM POD         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| AN/AWW-13 Data Link POD    |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| CBU-78/-99/-100 & Mk20 CBU |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| CNU-188 Baggage Pod        |  | 4.4                      | 3.1                   | 1.3                             | 3.0                     | 0.0         | 3.3                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 1.1                        | 3.5                        | 3.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 1.9                           | 0.0                            | 3.7                              | 3.7                       | 1.3                     | 0.0         | 0.0                             |     |
| FPU-8, 330 gal fuel tank   |  | 5.3                      | 4.0                   | 2.2                             | 3.9                     | 0.0         | 4.2                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 2.0                        | 4.4                        | 4.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 2.8                           | 0.0                            | 4.6                              | 4.6                       | 2.2                     | 0.0         | 0.0                             |     |
| GBU-10 (MK-84) LGB         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-12 (MK-82) LGB         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-16 (MK 83) LGB         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-24 (BLU-109) LLLGB     |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-31(v)2 (MK84 JDAM)     |  | 0.1                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| GBU-31(v)4 (BLU-109 JDAM)  |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| Mk77 fire bomb             |  | 0.2                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |
| Mk82, BDU-45 or BLU-111    |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                           | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                            | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             |     |

Figure 11-3. Interference Code Numbers  
(Sheet 4 of 6)

|                                  |  | INBOARD PYLON            |                       |                                 |                         |             |                      |             |                        |                         |                                |                            |                            |                            |                             |                  |                    |                  |                               |                               |                                  |                           |                         |             |                                 |     |
|----------------------------------|--|--------------------------|-----------------------|---------------------------------|-------------------------|-------------|----------------------|-------------|------------------------|-------------------------|--------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|------------------|--------------------|------------------|-------------------------------|-------------------------------|----------------------------------|---------------------------|-------------------------|-------------|---------------------------------|-----|
|                                  |  | Mk-83 or BLU-110 on CVER | LAU-10 5" pods on VER | Mk-82, BDU-45 or BLU-111 on VER | Mk-83 or BLU-110 on VER | BRU-42 ITER | ADM-141 TADL on ITER | BRU-41 IMER | BDU-33 or Mk76 on IMER | BDU-46 or Mk106 on IMER | BDU-57, -59 & -60 LGTR on IMER | Mk-52 1,000-lb bottom mine | Mk-55 2,000-lb bottom mine | Mk-56 2,000-lb moored mine | Mk62 QS Mk15 or BSU-86 fins | Mk62 QS Mk16 fin | Mk63 QS MAU-91 fin | Mk63 QS Mk12 fin | Mk 65 QS 2,000-lb bottom mine | BRU-33/A VER or BRU-33/A CVER | Mk-62 QS Mk15/BSU-86 fin on CVER | Mk-62 QS Mk16 fin on CVER | Mk-62 QS any fin on VER | BRU-41 IMER | BDU-48 as practice mine on IMER |     |
| OUTBOARD PYLON                   |  |                          |                       |                                 |                         |             |                      |             |                        |                         |                                |                            |                            |                            |                             |                  |                    |                  |                               |                               |                                  |                           |                         |             |                                 |     |
| Mk83 or BLU-110                  |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk-84                            |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| PDU-5                            |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| BRU-33/A VER or BRU-33/A CVER    |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| CBU-78/99/100 & MK-20 on CVER    |  | 5.6                      | 4.0                   | 2.2                             | 3.9                     | 0.0         | 5.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 5.2                        | 7.5                        | 7.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 5.9                           | 0.0                           | 5.3                              | 5.3                       | 2.2                     | 0.0         | 0.0                             | 0.0 |
| LAU-10 5" pods on CVER           |  | 5.9                      | 4.0                   | 2.2                             | 3.9                     | 0.0         | 6.1                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 5.9                        | 8.2                        | 8.2                        | 0.0                         | 0.0              | 0.0                | 0.0              | 6.6                           | 0.0                           | 5.6                              | 5.6                       | 2.2                     | 0.0         | 0.0                             | 0.0 |
| LAU-61 2.57" pods on CVER        |  | 7.2                      | 5.8                   | 4.0                             | 5.7                     | 0.0         | 7.4                  | 0.0         | 0.6                    | 0.5                     | 0.6                            | 6.7                        | 9.0                        | 9.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 7.4                           | 0.0                           | 6.9                              | 6.9                       | 4.0                     | 0.0         | 0.0                             | 0.0 |
| LAU-68 2.75" pods on CVER        |  | 5.3                      | 5.3                   | 3.5                             | 5.2                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 3.3                        | 5.6                        | 5.6                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.0                           | 0.0                           | 5.0                              | 5.0                       | 3.5                     | 0.0         | 0.0                             | 0.0 |
| Mk-82, BDU-45 or BLU-111 on CVER |  | 5.3                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.2                        | 6.5                        | 6.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.9                           | 0.0                           | 5.1                              | 5.1                       | 2.7                     | 0.0         | 0.0                             | 0.0 |
| Mk-83 or BLU-110 on CVER         |  | 5.7                      | 4.8                   | 3.0                             | 4.7                     | 0.0         | 5.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.9                        | 7.2                        | 7.2                        | 0.0                         | 0.0              | 0.0                | 0.0              | 5.6                           | 0.0                           | 5.3                              | 5.3                       | 3.0                     | 0.0         | 0.0                             | 0.0 |
| PDU-5 on CVER                    |  | 5.6                      | 4.0                   | 2.2                             | 3.9                     | 0.0         | 5.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 5.2                        | 7.5                        | 7.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 5.9                           | 0.0                           | 5.3                              | 5.3                       | 2.2                     | 0.0         | 0.0                             | 0.0 |
| LAU-10 5" pods on VER            |  | 4.8                      | 5.5                   | 3.7                             | 5.4                     | 0.0         | 5.7                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 3.6                        | 5.9                        | 5.9                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.3                           | 0.0                           | 4.5                              | 4.5                       | 3.7                     | 0.0         | 0.0                             | 0.0 |
| LAU-61 2.75" pods on VER         |  | 5.5                      | 6.2                   | 4.4                             | 6.1                     | 0.0         | 6.4                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.3                        | 6.6                        | 6.6                        | 0.0                         | 0.0              | 0.0                | 0.0              | 5.0                           | 0.0                           | 5.2                              | 5.2                       | 4.4                     | 0.0         | 0.0                             | 0.0 |
| LAU-68 2.75" pods on VER         |  | 2.5                      | 3.2                   | 1.4                             | 3.1                     | 0.0         | 3.4                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 1.3                        | 3.6                        | 3.6                        | 0.0                         | 0.0              | 0.0                | 0.0              | 2.0                           | 0.0                           | 2.2                              | 2.2                       | 1.4                     | 0.0         | 0.0                             | 0.0 |
| Mk-82, BDU-45 or BLU-111 on VER  |  | 3.0                      | 3.7                   | 1.9                             | 3.6                     | 0.0         | 3.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 1.8                        | 4.1                        | 4.1                        | 0.0                         | 0.0              | 0.0                | 0.0              | 2.5                           | 0.0                           | 2.7                              | 2.7                       | 1.9                     | 0.0         | 0.0                             | 0.0 |
| Mk-83 or BLU-110 on VER          |  | 4.7                      | 5.4                   | 3.6                             | 5.3                     | 0.0         | 5.6                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 3.5                        | 5.8                        | 5.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.2                           | 0.0                           | 4.4                              | 4.4                       | 3.6                     | 0.0         | 0.0                             | 0.0 |
| BRU-42 ITER                      |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| ADM-141 TADL on ITER             |  | 5.8                      | 5.7                   | 3.9                             | 5.6                     | 0.0         | 5.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 3.8                        | 6.1                        | 6.1                        | 0.0                         | 0.0              | 0.0                | 0.0              | 4.5                           | 0.0                           | 5.5                              | 5.5                       | 3.9                     | 0.0         | 0.0                             | 0.0 |
| BRU-41 IMER                      |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| BDU-33 or Mk76 on IMER           |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| BDU-48 or Mk106 on IMER          |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| BDU-57, -59 & -60 LGTR on IMER   |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |

Figure 11-3. Interference Code Numbers  
(Sheet 5 of 6)

Interim Change 1 11-10G

|                                      |  | INBOARD PYLON            |                       |                                 |                         |             |                      |             |                        |                         |                                |                            |                            |                            |                             |                  |                    |                  |                               |                               |                                  |                           |                         |             |                                 |     |
|--------------------------------------|--|--------------------------|-----------------------|---------------------------------|-------------------------|-------------|----------------------|-------------|------------------------|-------------------------|--------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|------------------|--------------------|------------------|-------------------------------|-------------------------------|----------------------------------|---------------------------|-------------------------|-------------|---------------------------------|-----|
|                                      |  | MK-83 or BLU-110 on CVER | LAU-10 5" pods on VER | MK-82, BDU-45 or BLU-111 on VER | MK-83 or BLU-110 on VER | BRU-42 ITER | ADM-141 TADL on ITER | BRU-41 IMER | BDU-33 or MK76 on IMER | BDU-46 or Mk106 on IMER | BDU-57, -59 & -60 LGTR on IMER | MK-52 1,000-lb bottom mine | MK-55 2,000-lb bottom mine | MK-56 2,000-lb moored mine | Mk62 QS MK15 or BSU-86 fins | Mk62 QS Mk16 fin | Mk63 QS MAU-91 fin | Mk63 QS Mk12 fin | Mk 65 QS 2,000-lb bottom mine | BRU-33/A VER or BRU-33/A/CVER | Mk-62 QS MK15/BSU-86 fin on CVER | MK-62 QS Mk16 fin on CVER | MK-62 QS any fin on VER | BRU-41 IMER | BDU-48 as practice mine on IMER |     |
| OUTBOARD PYLON                       |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| LUU-2 on IMER                        |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk58 on IMER                         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| MK-52 1,000-lb bottom mine           |  | 4.9                      | 3.6                   | 1.8                             | 3.5                     | 0.0         | 3.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 1.6                        | 4.0                        | 4.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 2.4                           | 0.0                              | 4.2                       | 4.2                     | 1.8         | 0.0                             | 0.0 |
| MK-55 2,000-lb bottom mine           |  | 7.2                      | 5.9                   | 4.1                             | 5.8                     | 0.0         | 6.1                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.0                        | 5.4                        | 5.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 3.8                           | 0.0                              | 6.5                       | 6.5                     | 4.1         | 0.0                             | 0.0 |
| MK-55 2,000-lb moored mine           |  | 7.2                      | 5.9                   | 4.1                             | 5.8                     | 0.0         | 6.1                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.0                        | 5.4                        | 5.4                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 3.8                           | 0.0                              | 6.5                       | 6.5                     | 4.1         | 0.0                             | 0.0 |
| Mk62 QS Mk-15 or BSU-86 fin          |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk62 QS Mk16 fin                     |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk63 QS MAU-91 fin                   |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk63 QS Mk12 fin                     |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Mk65 QS 2,000-lb bottom mine         |  | 5.6                      | 4.3                   | 2.5                             | 4.2                     | 0.0         | 4.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 2.4                        | 3.8                        | 3.8                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 1.3                           | 0.0                              | 4.9                       | 4.9                     | 2.5         | 0.0                             | 0.0 |
| MK-62 QS MK-15 or BSU-86 fin on CVER |  | 5.3                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.2                        | 6.5                        | 6.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 4.9                           | 0.0                              | 5.1                       | 5.1                     | 2.7         | 0.0                             | 0.0 |
| Mk-62 QS Mk 16 fin on CVER           |  | 5.3                      | 4.5                   | 2.7                             | 4.4                     | 0.0         | 5.5                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.2                        | 6.5                        | 6.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 4.9                           | 0.0                              | 5.1                       | 5.1                     | 2.7         | 0.0                             | 0.0 |
| Mk-63 QS Mk 12 fin on CVER           |  | 5.7                      | 4.8                   | 3.0                             | 4.7                     | 0.0         | 5.8                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 4.9                        | 7.2                        | 7.2                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 5.6                           | 0.0                              | 5.3                       | 5.3                     | 3.0         | 0.0                             | 0.0 |
| MK-62 QS any fin on VER              |  | 3.0                      | 3.7                   | 1.9                             | 3.6                     | 0.0         | 3.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 1.8                        | 4.1                        | 4.1                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 2.5                           | 0.0                              | 2.7                       | 2.7                     | 1.9         | 0.0                             | 0.0 |
| BDU-48 practice mine on IMER         |  | 0.0                      | 0.0                   | 0.0                             | 0.0                     | 0.0         | 0.0                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 0.0                       | 0.0                     | 0.0         | 0.0                             | 0.0 |
| Fuselage Station                     |  |                          |                       |                                 |                         |             |                      |             |                        |                         |                                |                            |                            |                            |                             |                  |                    |                  |                               |                               |                                  |                           |                         |             |                                 |     |
| AN/AAR-50 NAVFLIR (sta 6)            |  | 8.9                      | 6.7                   | 4.9                             | 6.5                     | 0.0         | 6.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.2                        | 2.5                        | 2.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 1.2                           | 0.0                           | 7.3                              | 7.3                       | 4.9                     | 0.0         | 0.0                             |     |
| AN/AAS-38 Tgt FLIR (sta 4)           |  | 4.1                      | 1.9                   | 0.1                             | 1.7                     | 0.0         | 2.1                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 0.0                        | 0.0                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.0                           | 0.0                           | 0.0                              | 2.5                       | 2.5                     | 0.1         | 0.0                             | 0.0 |
| AN/ASQ-173 LDT/Cam (sta 6)           |  | 7.9                      | 5.7                   | 3.9                             | 5.5                     | 0.0         | 5.9                  | 0.0         | 0.0                    | 0.0                     | 0.0                            | 0.0                        | 1.5                        | 1.5                        | 0.0                         | 0.0              | 0.0                | 0.0              | 0.2                           | 0.0                           | 6.3                              | 6.3                       | 3.9                     | 0.0         | 0.0                             |     |




Figure 11-3. Interference Code Numbers (Sheet 6 of 6)

11-10H/(11-11 blank) Interim Change 1



## SUMMARY OF APPLICABLE TECHNICAL DIRECTIVES

Information relating to the following technical directives has been incorporated in this manual.

| Change Number | ECP Number | Description            | Visual Identification | Effectivity                                     |
|---------------|------------|------------------------|-----------------------|---|
| AFC 102       | 00300      | LEX Fence Installation | LEX Fence             | (R)161353<br>thru 161924<br>(P)161925 and<br>up |
|               | 00285      | BRU-33/A Design Change | Canted VER            |   |

Information relating to the following recent technical directives will be incorporated in a future change

| Change Number | ECP Number | Description | Visual Identification | Effectivity |
|---------------|------------|-------------|-----------------------|-------------|
|               |            |             |                       |             |



# TABLE OF CONTENTS

| SECTION                                    | TITLE  | PAGE     |
|--|--|----------|
| SECTION I                                  | THE AIRCRAFT.....  | 1-1*     |
| SECTION II                                 | INDOCTRINATION.....  | 2-1*     |
| SECTION III                                | NORMAL PROCEDURES .....                                    | 3-1*     |
| SECTION IV                                 | FLIGHT CHARACTERISTICS.....                                | 4-1*     |
| SECTION V                                  | EMERGENCY PROCEDURES.....                                  | 5-1*     |
| SECTION VI                                 | ALL WEATHER OPERATION.....                                 | 6-1*     |
| SECTION VII                                | COMMUNICATION-NAVIGATION EQUIPMENT AND<br>PROCEDURES ..... | 7-1*     |
| SECTION VIII                               | WEAPONS SYSTEMS.....                                       | 8-1*     |
| SECTION IX                                 | FLIGHT CREW COORDINATION .....                             | 9-1*     |
| SECTION X                                  | NATOPS EVALUATION .....                                    | 10-1*    |
| SECTION XI                                 | PERFORMANCE DATA.....                                      | 11-1     |
| APPENDIX .....                             |  | A-1*     |
| ALPHABETICAL INDEX.....                    |  | Index-1* |
| ALPHABETICAL INDEX (SECTION XI ONLY) ..... |  | Index-1  |
| FOLDOUTS.....                              |  | FO-1*    |

\* Refer to NATOPS Flight Manual, A1-F18AC-NFM-000.

# FOREWORD

---

## SCOPE

The NATOPS Flight Manual Performance Charts are issued by the authority of the Chief of Naval Operations and under the direction of Commander, Naval Air Systems Command in conjunction with the Naval Air Training and Operating Procedures Standardization (NATOPS) Program. This manual contains information on performance data and effective operations. However, it is not a substitute for sound judgment. Compound emergencies, adverse weather or terrain, or considerations affecting the lives and property of others may require modification of the procedures contained herein. Read this manual from cover to cover. It's your responsibility to have a complete knowledge of its contents.

## APPLICABLE PUBLICATIONS

The following applicable publications complement this manual:

- A1-F18AC-NFM-000 (NATOPS Flight Manual)
- A1-F18AC-NFM-210 (Performance Data Charts for aircraft with F404-GE-402 engines)
- A1-F18AC-NFM-500 (Pocket Checklist for aircraft with F404-GE-400 engines)
- A1-F18AC-NFM-510 (Pocket Checklist for aircraft with F404-GE-402 engines)
- A1-F18AC-NFM-600 (Servicing Checklist)
- A1-F18AC-NFM-700 (Functional Checkflight Checklist)
- A1-F18AC-TAC-000/A1-F18AE-TAC-000 (Volume I Tactical Manual)
- A1-F18AC-TAC-010/A1-F18AE-TAC-010 (Volume II Tactical Manual)
- A1-F18AC-TAC-100 (Volume III Tactical Manual)
- A1-F18AC-TAC-020 (Volume IV Tactical Manual)
- A1-F18AC-TAC-300 (Tactical Manual Pocket Guide)

## HOW TO GET COPIES

Each flight crewmember is entitled to personal copies of the NATOPS Flight Manual and appropriate applicable publications.

## One Time Orders

If this publication is needed on a one time basis (without future updates), order it from stock by sending an electronic DD 1348 requisition IAW NPFC pub 2002D.

## Automatic Distribution (with updates)

This publication and changes to it are automatically sent to activities who are established on the Automatic Distribution Requirements List (ADRL) maintained by Naval Air Technical Services Facility (NAVAIRTECHSERVFAC), Philadelphia, PA. If you have a continuing need for this publication, have your Central Technical Publication Librarian send a revised ADRL report on floppy disk to NAVAIRTECHSERVFAC. If your activity does not have a library, then send a letter to Commanding Officer, NAVAIRTECHSERVFAC, Attn: Code 32, 700 Robbins Avenue, Philadelphia, PA 19111 requesting assignment of a distribution account number (if necessary) and automatic mailing of future issues of the publication(s) needed.

## NOTE

The ADRL floppy disk can be used only to place an activity on the mailing list for automatic distribution of future issues of the publications. It can not be used to make one time orders of publications from current stock. To get publications from stock, see ONE TIME ORDERS above.

Once established on automatic distribution for this or any other NAVAIR technical publication, your activity must submit an ADRL report on floppy disk at least once every 12 months to update or confirm their automatic distribution requirements.

## NOTE

Activities not submitting an ADRL report on floppy disk for more than 12 months may be dropped from distribution of all NAVAIR technical publications.

## **UPDATING THE MANUAL**

To ensure that the manual contains the latest procedures and information, NATOPS review conferences are held in accordance with OPNAVINST 3710.7 series.

## **CHANGE RECOMMENDATIONS**

Recommended changes to this manual or other NATOPS publications may be submitted by anyone in accordance with OPNAVINST 3710.7 series.

Routine change recommendations are submitted directly to the Model Manager on OPNAV Form 3710/6 shown on the next page. The address of the Model Manager of this aircraft is:

Commanding Officer  
VFA-125  
U. S. Naval Air Station  
Lemoore, CA 93245-0125  
Attn: F/A-18 Model Manager  
Autovon: 949-1727  
Commercial: (209) 998-1727

Change recommendations of an URGENT nature (safety of flight, etc.) should be submitted directly to the NATOPS Advisory Group Member in the chain of command by priority message.



## YOUR RESPONSIBILITY

NATOPS Flight Manuals are kept current through an active manual change program. Any corrections, additions, or constructive suggestions for improvement of its content should be submitted by routine or urgent change recommendation, as appropriate, at once.

## NATOPS FLIGHT MANUAL INTERIM CHANGES

NATOPS Flight Manual Interim Changes are changes or corrections to the NATOPS Flight Manuals promulgated by CNO or NAVAIRSYSCOM. Interim Changes are issued either as printed pages, or as a naval message. The Interim Change Summary page is provided as a record of all interim changes. Upon receipt of a change or revision, the custodian of the manual should check the updated Interim Change Summary to ascertain that all outstanding interim changes have been either incorporated or canceled; those not incorporated shall be recorded as outstanding in the section provided.

## CHANGE SYMBOLS

Revised text is indicated by a black vertical line in either margin of the page, adjacent to the affected text, like the one printed next to this paragraph. The change symbol identifies the addition of either new information, a changed procedure, the correction of an error, or a rephrasing of the previous material.

## WARNING, CAUTIONS, AND NOTES

The following definitions apply to “WARNINGS”, “CAUTIONS”, and “NOTES” found throughout the manual.

### WARNING

An operating procedure, practice, or condition, etc., which may result in injury or death, if not carefully observed or followed.



An operating procedure, practice, or condition, etc., which may result in damage to equipment if not carefully observed or followed.

### NOTE

An operating procedure, practice, or condition, etc., which is essential to emphasize.

## WORDING

The concept of word usage and intended meaning which has been adhered to in preparing this Manual is as follows:

“Shall” has been used only when application of a procedure is mandatory.

“Should” has been used only when application of a procedure is recommended.

“May” and “need not” have been used only when application of a procedure is optional.

“Will” has been used only to indicate futurity, never to indicate any degree of requirement for application of a procedure.

## AIRSPEED

All airspeeds in this manual are in knots calibrated airspeeds unless stated in other terms.

## MANUAL DEVELOPMENT

This NATOPS Flight Manual was prepared using a concept that provides the aircrew with information for operation of the aircraft, but detailed operation and interaction is not provided. This concept was selected for a number of reasons: reader interest increases as the size of a technical publication decreases, comprehension increases as the technical complexity decreases, and accidents decrease as reader interest and comprehension increase.

## A1-F18AC-NFM-200

To implement this streamlined concept, observance of the following rules was attempted:

a. The pilot shall be considered to have above-average intelligence and normal (average) common sense.

b. No values (pressure, temperature, quantity, etc.) which cannot be read in the cockpit are stated, except where such use provides the pilot with a value judgement.

c. Only the information required to fly the airplane is provided.

d. Notes, Cautions, and Warnings are held to an absolute minimum, since, almost everything in the manual could be considered a subject for a Note, Caution, or Warning.

e. No Cautions or Warnings or procedural data are contained in the Descriptive Section, and no abnormal procedures (Hot Starts, etc.) are contained in the Normal Procedures Section.

f. Notes, Cautions and Warnings will not be used to emphasize new data.

g. Multiple failures (emergencies) are not covered.

h. Simple words in preference to more complex or quasi-technical words are used and unnecessary and/or confusing word modifiers are avoided.

A careful study of the NATOPS Flight Manual will probably disclose a violation of each rule stated. In some cases this is the result of a conscious decision to make an exception to the rule. In many cases, it only demonstrates the constant attention and skill level that must be maintained to prevent slipping back into the old way of doing things.

In other words, the “Streamlined” look is not an accident, it takes constant attention for the NATOPS Flight Manual to keep its lean and simple concept to provide the pilot with the information required.



## SECTION XI

**PERFORMANCE DATA**

---

---

**F404-GE-400 Engines**

|         |                           |        |
|---------|---------------------------|--------|
| PART 1  | STANDARD DATA .....       | 11-3   |
| PART 2  | TAKEOFF .....             | 11-23  |
| PART 3  | CLIMB .....               | 11-38  |
| PART 4  | RANGE .....               | 11-85  |
| PART 5  | ENDURANCE .....           | 11-229 |
| PART 6  | IN-FLIGHT REFUELING ..... | 11-238 |
| PART 7  | DESCENT .....             | 11-239 |
| PART 8  | LANDING.....              | 11-258 |
| PART 9  | MISSION PLANNING.....     | 11-262 |
| PART 10 | EMERGENCY OPERATION ..... | 11-298 |

## INTRODUCTION

This section is divided into parts 1 thru 10 to present performance data in proper sequence for preflight planning. All data are based on flight test or the contractor's estimate, U.S. standard day, 1962 conditions and/or provisions to correct for non-standard temperatures, and using JP-5 fuel. Unless noted otherwise, there is no significant difference between using JP-5 or JP-8. When using JP-4 fuel, fuel flows and fuel used quantities will be approximately 1 % lower. All reference to gallons is U.S. gallons.

### GLOSSARY OF TERMS

#### Indicated Airspeed

Indicated airspeed (IAS) is the pitot static airspeed indicator reading, as installed in the aircraft, without correction for system errors.

#### Calibrated Airspeed

Calibrated airspeed (CAS) is indicated airspeed corrected for static source error.

#### Equivalent Airspeed

Equivalent airspeed (EAS) is calibrated airspeed corrected for adiabatic compressible flow for the particular altitude. EAS is equal to CAS at sea level in standard air.

#### True Airspeed

True Airspeed (TAS) is the aircraft speed over the ground in no-wind conditions. True airspeed is EAS corrected for density altitude.

#### Takeoff Speed

Takeoff speed is the speed at which the main gear lifts off the ground.

#### Nosewheel Lift-Off Speed

Nosewheel Lift-off speed is the speed at which the nosewheel lifts off the ground.

#### Pressure Altitude

Pressure Altitude is the vertical distance from the standard datum. This is a theoretical plane where air pressure (corrected to 15°C) is equal to 29.92 inches of mercury (Hg). The indicated pressure altitude may not be the actual height above sea level due to variations in temperature, lapse rate, atmospheric pressure, and errors on the sensed pressure.

#### Density Altitude

Density altitude is pressure altitude corrected for temperature. When conditions are standard, pressure altitude and density altitude are the same. Consequently, if the temperature is above standard, the density altitude will be higher than the pressure altitude. If the temperature is below standard, the density altitude will be lower than the pressure altitude.

#### Density Ratio

Density ratio is a single factor representation of a combination of temperature and pressure altitude.

#### Combat Ceiling

Combat ceiling is the altitude where the rate of climb is 500 feet per minute at either military (MIL) or maximum afterburner (MAX AB) rated power.

**PART 1 - STANDARD DATA F404-GE-400**

**TABLE OF CONTENTS**

**Charts**

Sample Drag Computation..... 11-7  
 Summary of Store Drag Index Numbers.. 11-8  
 Interference Code Numbers..... 11-10  
 Interference Code Number To Interference Drag Index Number Conversion... 11-12  
 Standard Atmosphere Table..... 11-13  
 Temperature Conversion..... 11-14  
 Airspeed Conversion ..... 11-15  
 Airspeed Position Error Correction..... 11-17  
 Altimeter Position Error Correction..... 11-19  
 Stall Speeds..... 11-21  
 Angle of Attack Conversion ..... 11-22

**DRAG INDEX SYSTEM**

Cruise, climb, range, endurance, and descent charts contained in this section are presented in a drag index format. Before using the charts a total drag index figure (drag count) for the specific aircraft configuration must be determined. The basic aircraft is defined as an F/A 18 configured with wingtip AIM-9 missiles and has a Drag Index equal to zero (DI=0). The basic aircraft configured with LEX fences has a Drag Index equal to six (DI=6.0) for the F/A 18A/C and one (DI=1.0) for the F/A 18B/D. Two types of drag must be accounted for when determining the total drag index with external stores, the basic store drag and the interference drag. Basic store drag is the drag count assigned to specific stores and their associated suspension equipment. Interference drag develops between stores on adjacent wing and fuselage stations. The magnitude of this drag is a function of the distance between stores, airspeed, and aircraft

angle of attack. In general, interference drag increases as the distance between stores decreases, as airspeed increases above 0.6 Mach, and as angle of attack decreases.

**SAMPLE PROBLEM**

The following sample problem is presented to demonstrate the method of computing both types of drag. Total drag at various Mach numbers and dash angle of attack is calculated for the following interdiction mission store loading. As drag information is obtained it is entered on a Drag Computation Form (figure 11-1).

| Station | Store Load                  |
|---------|-----------------------------|
| 1       | Wingtip AIM-9               |
| 2       | (2) VER mounted<br>Mk-83 LD |
| 3       | 330 gallon fuel tank        |
| 4       | FLIR                        |
| 5       | 330 gallon fuel tank        |
| 6       | LDT                         |
| 7       | 330 gallon fuel tank        |
| 8       | (2) VER mounted<br>Mk-83 LD |
| 9       | Wingtip AIM-9               |

**Determining the Basic Store Drag**

Basic store drag is the additional drag imposed when external stores are carried. The drag index values for selected stores in the inventory are presented in figure 11-2. Using the example station 2 load (pylon, VER, and (2) MK-83 LD), the basic store drag index is 28.5. The drag for each of the other stations (including fuselage stations) is similarly found and recorded in the Drag Computation Form (figure 11-1). The total of the drag on all stations is the basic store drag index (for the interdiction load example, DI = 132.5).

**Determining Interference Drag**

Because of the large combination of stores which can be carried, a table of interference drag code numbers (figure 11-3) has been devised to aid in computing interference drag while carrying any combination of external stores. These code numbers are used to compute an approximate interference drag index. The interference drag index is presented as a function of total interference code number and dash angle of attack or cruise angle of attack (figure 11-4). Only the loadings that generate interference drag are given an interference code. Wing tip mounted missiles and stores on the centerline station do not produce interference drag.


To calculate an interference DI number it is first necessary to obtain the interference code number corresponding to loadings which produce interference drag. For example, using the sample configuration, the two VER mounted MK-83 LD on the outboard station pylon produce interference drag with the 330 gallon fuel tank on the inboard pylon station. The interference code number representing this drag equals 3.9. The interference code numbers for the other stations producing interference drag can also be found in the table. The individual code numbers are then summed to obtain a total interference code number for the configuration (for the interdiction load example, total interference code = 12.4).

The interference DI charts (figure 11-4) are used to convert the configuration total interference code number to a DI number. The interference DI is a function of Mach number and either cruise AOA (greater than approximately 2.5°) or dash AOA (approximately 2.5° or lower). For the sample problem considered, the dash angle of attack chart is used. The total interference code number of 12.4 gives the interference drag indexes shown on the drag computation form (figure 11-1).

**Sample Problem**

- A. Interference code number 14
- B. Cruise AOA Mach number .85
- C. Cruise AOA Interference DI number 30
- D. Interference code number 14
- E. Dash AOA Mach number .85
- F. Dash AOA Interference DI number 41

**SAMPLE INTERFERENCE CODE NUMBER TO INTERFERENCE DRAG INDEX NUMBER CONVERSION**

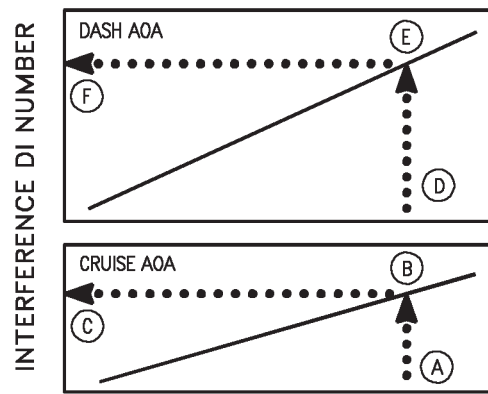

INTERFERENCE CODE NUMBER

18AC-NFM-20-(300-1)11-CAT1

**AIRSPPEED CONVERSION CHART**

The Airspeed Conversion chart (figure 11-7) provides a means of converting calibrated airspeed to true Mach number and true airspeed.

## AIRSPEED POSITION ERROR CORRECTION CHARTS

Under normal conditions, airspeed position error is automatically compensated for by the air data computer system (ADC). However, if a malfunction of the ADC occurs, position error must be applied to the cockpit standby indication. These charts (figure 11-8, sheets 1 and 2 ) provides a direct-reading conversion from indicated airspeed to calibrated airspeed and from indicated Mach number to true Mach number.

### Sample Problem


Indicated Airspeed (sheet 1)

- A. Indicated airspeed 500 Kt.
- B. Altitude 20,000 Ft.
- C. Calibrated airspeed 510 Kt.

Mach Number (sheet 2)

- A. Indicated Mach number 1.0
- B. Altitude reflector
- C. True Mach Number 1.07

### SAMPLE AIRSPEED POSITION ERROR CORRECTION

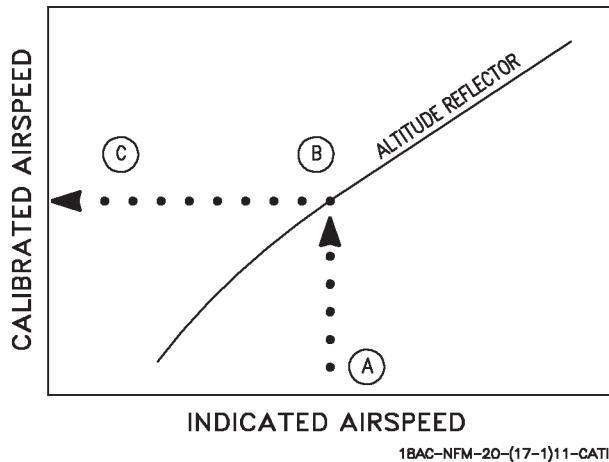

## ALTIMETER POSITION ERROR CORRECTION CHARTS

Under normal operating conditions, the air data computer (ADC) compensates for the static source position error. If the ADC fails in flight, the standby altimeter can be used. However, these readings must be corrected by means of the Altimeter Position Error Correction chart (figure 11-9, sheets 1 and 2). These charts provides altitude correction ( $\Delta H$ ) for indicated airspeeds up to 220 knots below 10,000 feet and for indicated Mach numbers up to 1.7 Mach at altitudes of sea level, 20,000 feet and 40,000 feet.


### USE

Enter the applicable chart with the indicated Mach number or indicated airspeed. Project vertically upward to intercept the applicable altitude curve, then horizontally left to read the altitude correction ( $\Delta H$ ). Apply  $\Delta H$  to the assigned altitude and fly assigned altitude  $+\Delta H$ .

### Sample Problem

- A. Indicated Mach number 1.1
- B. Assigned altitude 20,000 Ft.
- C. Altitude correction ( $\Delta H$ ) -510 Ft.
- D. Assigned altitude  $+\Delta H(B+C)$  19,490 Ft.

### SAMPLE ALTIMETER POSITION ERROR CORRECTION

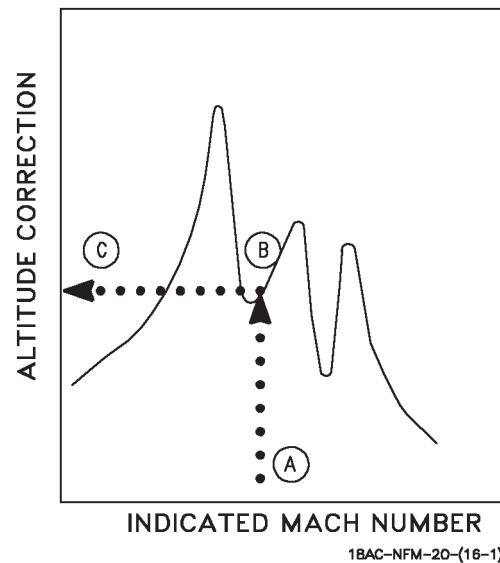

## STALL SPEEDS CHART

The Stall Speeds chart (figure 11-10) presents stall speeds for various combinations of gross weight, bank angle and power setting at maximum lift. The data are based on catapult, approach, and maneuvering configurations.


### USE

Enter the chart with the applicable gross weight and project vertically up to intersect the 0° bank angle. From this intersection, project horizontally right to the appropriate bank angle. From this point, project vertically up to the appropriate power setting curve, then horizontally left to read stall speed.

### Sample Problem

- A. Gross weight 35,000 Lb.
- B. Stall speed curve (MIL)
- C. Stall speed 106 Kt.
- D. Bank angle 45°
- E. Stall speed 133 Kt.

### SAMPLE STALL SPEEDS

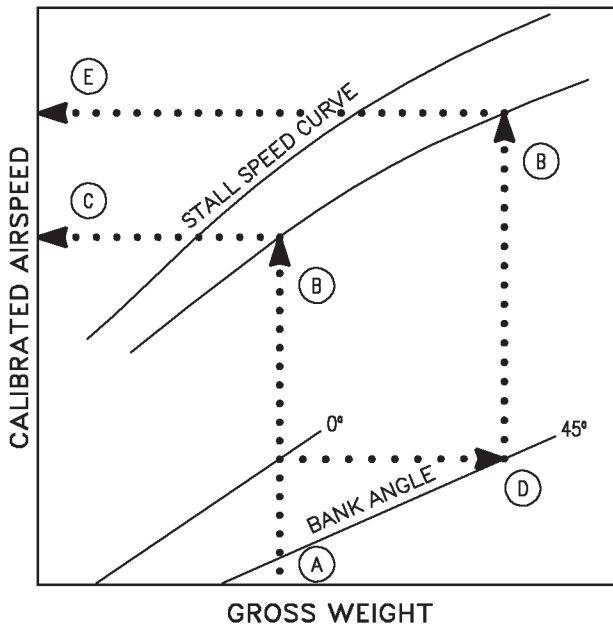

1BAC-NFM-20-(15-1)11-CATI

## ANGLE OF ATTACK CONVERSION CHART

This chart (figure 11-11) presents the corresponding angle of attack in degrees for various combinations of calibrated airspeed and gross weight. The data are based on stabilized 1 G level flight conditions with separate plots for 30° and 45° flap settings both with landing gear down.


### USE

Enter the applicable plot at the airspeed scale and project vertically up to intersect the appropriate aircraft gross weight curve. From this intersection, project horizontally left to read the corresponding angle of attack for the specified flight condition/configuration.

### Sample Problem

- Configuration: Gear Down, Flaps 30°
- A. Calibrated airspeed 160 Kt.
  - B. Gross weight 35,000 Lb.
  - C. Corresponding angle of attack 6.5°

### SAMPLE ANGLE OF ATTACK CONVERSION

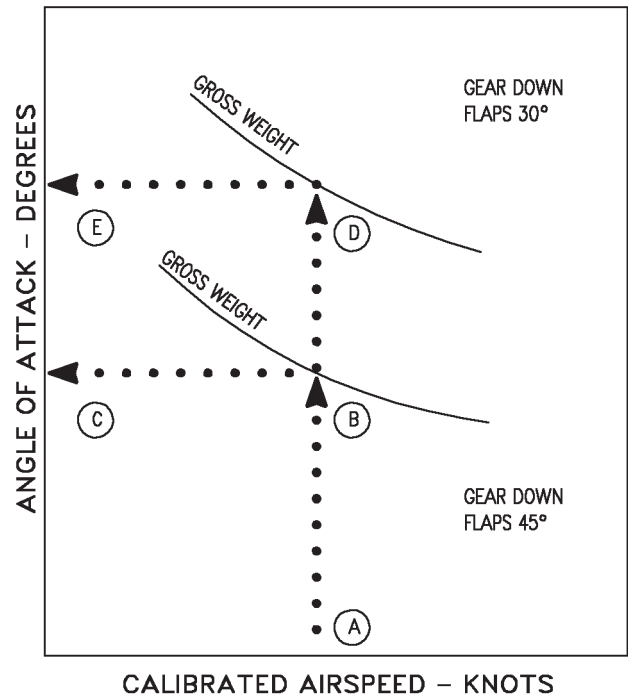

1BAC-NFM-20-(14-1)11-CATI

# SAMPLE DRAG COMPUTATION

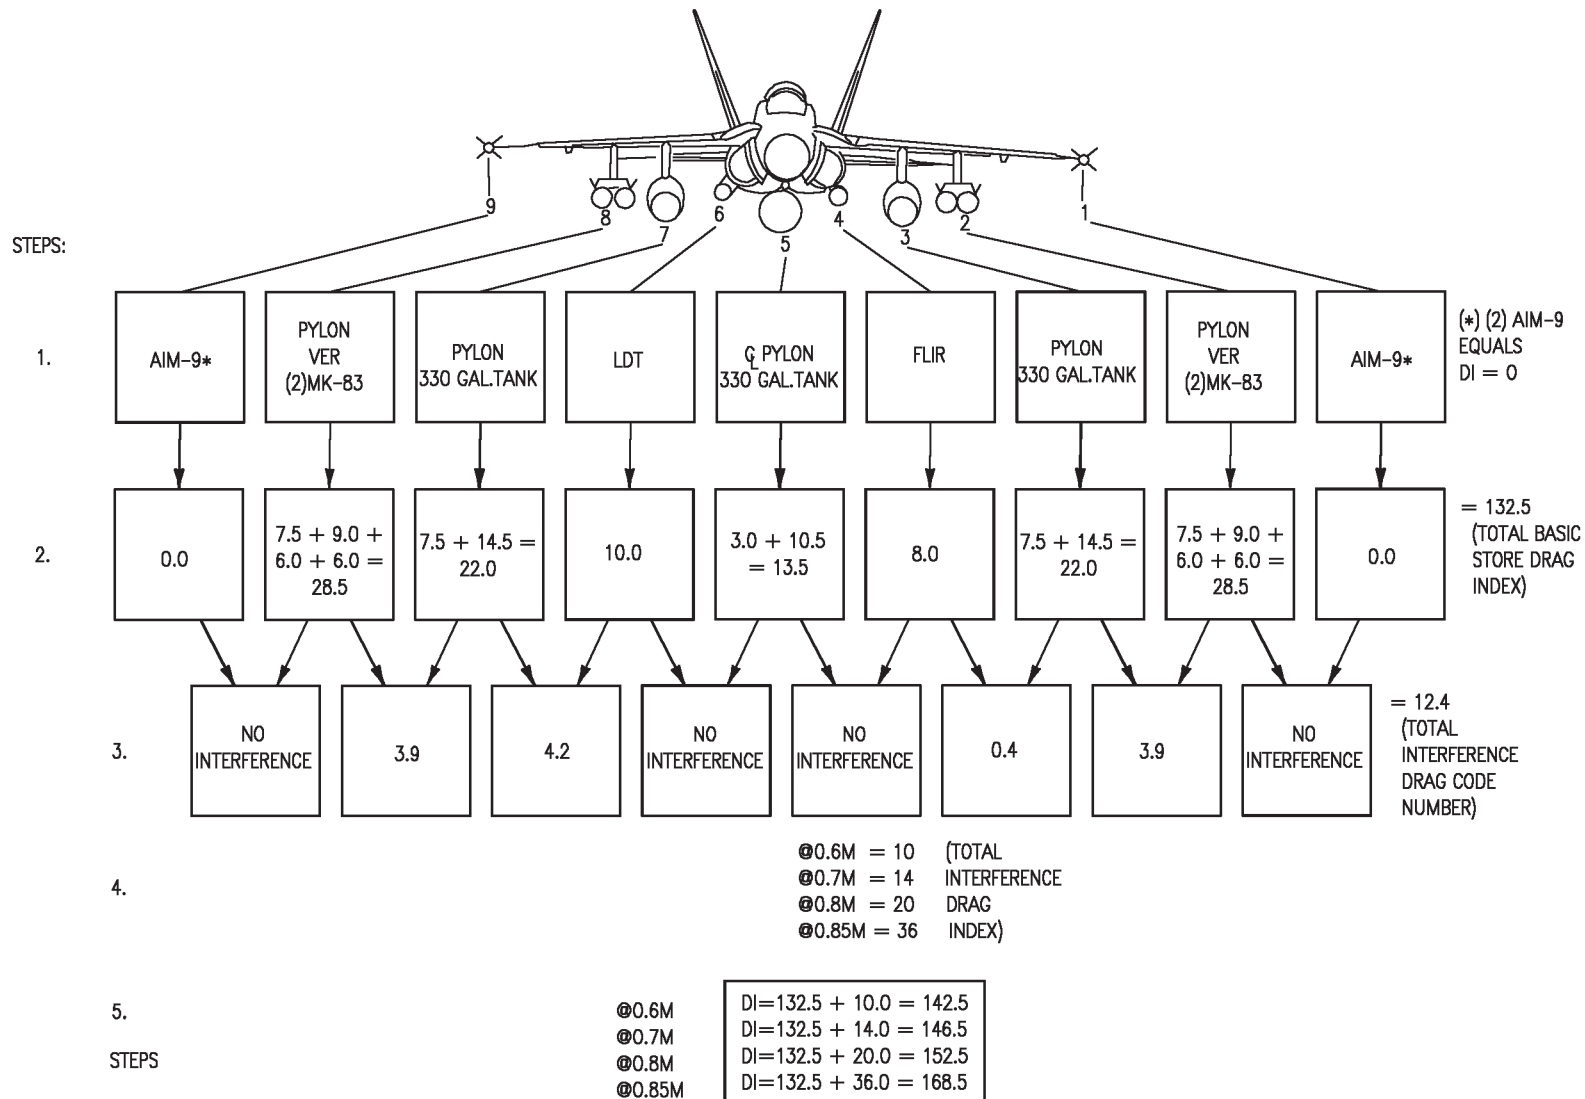


Figure 11-1. Sample Drag Computation



## SUMMARY OF STORE DRAG INDEX NUMBERS

| STORE                                 | VERSION  | WEIGHT PER STORE LB | CARRIAGE/DRAG  |
|---------------------------------------|--|---------------------|--|
| <b>INTERNAL CANNON</b>                |  |                     |  |
| <b>M61</b><br>Internal Cannon         | M61A1 (to BuNo 164724)   | 530                 | 0  |
|                                       | M61A2 light cannon (from BuNo 164725)                                  | 475                 |  |
| <b>MISSILES</b>                       |  |                     |  |
| <b>AIM-7</b><br>Sparrow III           | AIM-7M: monopulse seeker   | 509                 | fuselage: 4.0<br>LAU-115: 6.0  |
|                                       | AIM-7M (H-build): improved GCS   | 510                 |  |
|                                       | AIM-7P: improved low altitude capability                               | 509                 |  |
|                                       | ATM-7M: live trainer--telemetry 'warhead'                              | 509                 |  |
|                                       | ATM-7P: live trainer--telemetry 'warhead'                              | 509                 |  |
|                                       | CATM-7F-3: captive trainer   | 510                 |  |
| <b>AIM-9</b><br>Sidewinder            | AIM-9L-1: all-aspect   | 196                 | 2 on wingtips: 0.0<br>1 on wingtips: -2.3 dash, 7.5 cruise<br>0 on wingtips: -4.5 dash, 15.0 cruise<br>2 under wing on LAU-7 or LAU-127: 6.0 each<br>(Wingtip drag also applies to TACTS pods) |
|                                       | AIM-9M-1, -3, -4, -6, -8: improved IRCCM                               | 196                 |  |
|                                       | NATM-9L/M-1: live trainer--smoke/flash                                 | 200                 |  |
|                                       | NATM-9L/M-2: live trainer--telemetry                                   | 196                 |  |
|                                       | CATM-9L/M-2,-4,-6,-8: captive trainer                                  | 195                 |  |
|                                       | CATM-9L/M-2,-4,-6,-8, without fins/wings                               | 163                 |  |
| <b>AIM-120</b><br>AMRAAM              | AIM-120A, Adv. Med. Rng. Air-to-Air Msl.                               | 347                 | fuselage: 4.0, LAU-127: 5.0  |
|                                       | AIM-120B   | 347                 |  |
|                                       | JAIM-120A or B Air Vehicle, Inst'd (AAVI)                              | 330                 |  |
| <b>AGM-65</b><br>Maverick             | AGM-65E: Laser Guided  | 642                 | LAU-117: 10.0  |
|                                       | A/A37A-T9: TGM-65E: captive laser trainer                              | 642                 |  |
|                                       | AGM-65F: imaging infrared guided                                       | 669                 |  |
|                                       | CATM-65F: captive IIR trainer  | 669                 |  |
| <b>AGM-84</b><br>Harpoon              | AGM-84C-1: Block 1B  | 1,169 <sup>1</sup>  | pylon: 10.5  |
|                                       | AGM-84D-1: Block 1C  | 1,221 <sup>2</sup>  |  |
|                                       | ATM-84C-1: exercise--telemetry 'warhead'                               | 1,164 <sup>1</sup>  |  |
|                                       | ATM-84D-1: exercise--telemetry 'warhead'                               | 1,213 <sup>2</sup>  |  |
|                                       | ATM-84C-1A: exercise--inert warhead                                    | 1,169 <sup>1</sup>  |  |
|                                       | ATM-84D-1A: exercise--inert warhead                                    | 1,221 <sup>2</sup>  |  |
| <b>AGM-84E</b><br>SLAM                | ATM-84A-1C: inert captive trainer                                      | 1,151               | pylon: 11.5  |
|                                       | CATM-84D-1: inert captive trainer                                      | 1,151               |  |
|                                       | AGM-84E-1C Standoff Land Attack Missile                                | 1,366               |  |
|                                       | ATM-84E-1C: exercise--telemetry 'warhead'                              | 1,360               |  |
|                                       | CATM-84E-1C: captive trainers  | 1,360               |  |
| <b>AGM-88</b><br>HARM                 | AGM-88A: Block I & II seekers  | 800                 | LAU-118:<br>9.4  |
|                                       | AGM-88B: Block II & III seekers  | 800                 |  |
|                                       | AGM-88C: Block IV seekers <sup>3</sup>                                 | 800                 |  |
|                                       | CATM-88A/B/C: captive trainers   | 800                 |  |
| <b>AGM-154</b><br>JSOW                | AGM-154A: 145 X BLU-97A/B CEM  | 1,043               | pylon: 8.2   |
|                                       | CATM-154A: Captive Flight Vehicle (CFV)                                | 1,055               |  |
| <b>FUEL TANKS</b>                     |  |                     |  |
| <b>FPU-6/A</b><br>External Fuel Tank  | 315-gal elliptical, P/N suffix 1019 or 1021                            | 2,448 JP5           | CL: 10.0   |
|                                       |  | 308 empty           |  |
| <b>FPU-8/A</b><br>External Fuel Tank  | 330-gal circular, P/N suffix 1005<br>(For empty ferry on stations 2/8) | 2,530 JP5           | CL: 10.5<br>wing: 14.5   |
|                                       |  | 290 empty           |  |
| <b>BOMBS</b>                          |  |                     |  |
| <b>BLU-110A/B</b><br>1,000-lb TP Bomb | Mk 83 CFA, M904 or blunt nose  | 995 <sup>4</sup>    | pylon: 5.0<br>(C)VER: 6.0  |
|                                       | Mk 83 CFA, TDD or ogive nose   | 989 <sup>4</sup>    |  |
|                                       | MAU-91 Retard  | 1,056               |  |
|                                       | BSU-85 Retard, pilot option LD/HD                                      | 1,031 <sup>4</sup>  | pylon: 11.0  |
| <b>BLU-111A/B</b><br>500-lb TP Bomb   | MAU-93 CFA, M904 or blunt nose   | 515 <sup>4</sup>    | pylon: 6.0<br>(C)VER: 7.0  |
|                                       | MAU-93 CFA, TDD or ogive nose  | 509 <sup>4</sup>    |  |
|                                       | Mk 15 Mod 6A Snakeye, LD/HD  | 560 <sup>4</sup>    |  |
|                                       | BSU-86 Retard, pilot option LD/HD                                      | 560 <sup>4</sup>    |  |
|                                       | BSU-33 CFA, M904 or blunt nose   | 516 <sup>4</sup>    |  |
|                                       | BSU-33 CFA, TDD or ogive nose  | 510 <sup>4</sup>    | pylon: 3.0<br>(C)VER: 4.0  |
| <b>CBU-78</b><br>TP Gator             | CBU-78/B & CBU-78B/B: Mk 339   | 491                 | pylon: 7.5<br>CVER: 9.0  |
|                                       | CBU-78A/B: FMU-140   | 494                 |  |
| <b>CBU-99</b><br>TP Rockeye II        | CBU-99/B: Mk 339   | 506                 | pylon: 7.5<br>CVER: 9.0  |
|                                       | CBU-99A/B: FMU-140   | 509                 |  |
| <b>CBU-100</b><br>NTP Rockeye II      | CBU-100/B: Mk 339  | 490                 | pylon: 7.5<br>CVER: 9.0  |
|                                       | CBU-100A/B: FMU-140  | 493                 |  |

Figure 11-2. Summary of Store Drag Index Numbers  
(Sheet 1 of 5)



## SUMMARY OF STORE DRAG INDEX NUMBERS (Continued)

| STORE  | VERSION   | WEIGHT<br>PER<br>STORE<br>LB | CARRIAGE/DRAG             |
|--|---|------------------------------|---------------------------|
| <b>GBU-10</b><br>(Mk 84) LGB   | NTP GBU-10D/B & E/B   | 2,114 <sup>5</sup>           | pylon: 15.0               |
|  | TP GBU-10D/B & E/B  | 2,153 <sup>5</sup>           |                           |
| <b>GBU-12</b><br>(Mk 82) LGB   | NTP GBU-12C/B & D/B   | 610 <sup>5</sup>             | pylon: 5.5                |
|  | TP GBU-12C/B & D/B  | 619 <sup>5</sup>             |                           |
| <b>GBU-16</b><br>(Mk 83) LGB   | NTP GBU-16A/B & B/B   | 1,112 <sup>5</sup>           | pylon: 9.5                |
|  | TP GBU-16A/B & B/B  | 1,131 <sup>5</sup>           |                           |
| <b>GBU-24</b><br>(BLU-109) LLLGB                                     | Low Level Laser Guided Bomb<br>TP GBU-24B/B                       | 2,396                        | pylon: 16.0               |
| <b>Mk 20</b><br>Rockeye II   | Mk 20 Mod 11: Mk 339 fuze TP                                      | 506                          | pylon: 7.5<br>CVER: 9.0   |
|  | Mk 20 Mod 9: FMU-140 fuze, TP                                     | 509                          |                           |
|  | Mk 20 Mod 12: Mk 339 fuze, NTP                                    | 490                          |                           |
| <b>Mk 82</b><br>500-lb Bomb<br>(Mod 1: NTP<br>Mod 2: TP)             | MAU-93 CFA, NTP, M904 or blunt nose                               | 513 <sup>4</sup>             | pylon: 3.0<br>(C)VER: 4.0 |
|  | MAU-93 CFA, NTP, TDD or ogive nose                                | 507 <sup>4</sup>             |                           |
|  | MAU-93 CFA, TP, M904 or blunt nose                                | 522 <sup>4</sup>             |                           |
|  | MAU-93 CFA, TP, TDD or ogive nose                                 | 516 <sup>4</sup>             |                           |
|  | Mk 15 Mod 6 Snakeye, NTP, LD/HD                                   | 558 <sup>4</sup>             | pylon: 5.0<br>(C)VER: 6.0 |
|  | Mk 15 Mod 6A Snakeye, TP, LD/HD                                   | 567 <sup>4</sup>             |                           |
|  | BSU-86 retard NTP, pilot option LD/HD                             | 558 <sup>4</sup>             |                           |
|  | BSU-86 retard, TP, pilot option LD/HD                             | 567 <sup>4</sup>             |                           |
|  | BSU-33 CFA, NTP, M904 or blunt nose                               | 514 <sup>4</sup>             | pylon: 3.0<br>(C)VER: 4.0 |
| BSU-33 CFA, NTP, TDD or ogive nose                                   | 508 <sup>4</sup>  |                              |                           |
| BSU-33 CFA, TP, M904 or blunt nose                                   | 523 <sup>4</sup>  |                              |                           |
| BSU-33 CFA, TP TDD or ogive nose                                     | 517 <sup>4</sup>  |                              |                           |
| <b>Mk 83</b><br>1,000-lb Bomb<br>(Mod 4: NTP<br>Mod 5: TP)           | Mk 83 CFA, NTP, M904 or blunt nose                                | 986 <sup>4</sup>             | pylon: 5.0<br>(C)VER: 6.0 |
|  | Mk 83 CFA, NTP, TDD or ogive nose                                 | 980 <sup>4</sup>             |                           |
|  | Mk 83 CFA, TP, M904 or blunt nose                                 | 1,005 <sup>4</sup>           |                           |
|  | Mk 83 CFA, TP, TDD or ogive nose                                  | 999 <sup>4</sup>             |                           |
|  | MAU-91 retard, NTP, HD only                                       | 1,043                        | pylon: 11.0               |
|  | MAU-91 retard, TP, HD only  | 1,062                        |                           |
| <b>Mk 84</b><br>2,000-lb Bomb  | BSU-85 retard, NTP, pilot option LD/HD                            | 1,022 <sup>4</sup>           | pylon: 6.0<br>(C)VER: 7.0 |
|  | BSU-85 retard, TP, pilot option LD/HD                             | 1,041 <sup>4</sup>           |                           |
| <b>Mk 84</b><br>2,000-lb Bomb  | Mk 84 Mods 4/7, NTP, CFA  | 1,992 <sup>4</sup>           | pylon: 7.0                |
|  | Mk 84 Mods 3/5/6, TP, CFA   | 2,031 <sup>4</sup>           |                           |
| <b>PRACTICE STORES</b>   |   |                              |                           |
| <b>BDU-33</b><br>Practice Bomb                                       | BDU-33D/B: LD practice bomb<br>carried on (I) MERs                | 25                           | fwd: 1.1<br>aft: 0.6      |
| <b>BDU-45/B</b><br>Inert Mk 82<br>w/side-mounted<br>spotting charges | MAU-93 CFA, NTP, M904 or blunt nose                               | 502 <sup>4</sup>             | pylon: 3.0<br>(C)VER: 4.0 |
|  | MAU-93 CFA, NTP, TDD or ogive nose                                | 496 <sup>4</sup>             |                           |
|  | MAU-93 CFA, TP, M904 or blunt nose                                | 511 <sup>4</sup>             |                           |
|  | MAU-93 CFA, TP, TDD or ogive nose                                 | 505 <sup>4</sup>             |                           |
|  | Mk 15 Mod 6 Snakeye, NTP, LD/HD                                   | 547 <sup>4</sup>             | pylon: 5.0<br>(C)VER: 6.0 |
|  | Mk 15 Mod 6A Snakeye, TP, LD/HD                                   | 556 <sup>4</sup>             |                           |
|  | BSU-86 Retard NTP, pilot option LD/HD                             | 547 <sup>4</sup>             |                           |
|  | BSU-86 Retard, TP, pilot option LD/HD                             | 556 <sup>4</sup>             |                           |
|  | BSU-33 CFA, NTP, M904 or blunt nose                               | 503 <sup>4</sup>             | pylon: 3.0<br>(C)VER: 4.0 |
| BSU-33 CFA, NTP, TDD or ogive nose                                   | 497 <sup>4</sup>  |                              |                           |
| BSU-33 CFA, TP, M904 or blunt nose                                   | 512 <sup>4</sup>  |                              |                           |
| BSU-33 CFA, TP, TDD or ogive nose                                    | 506 <sup>4</sup>  |                              |                           |
| <b>BDU-48</b><br>Practice Bomb                                       | BDU-48/B: HD practice bomb carried<br>on (I)MERs                  | 10                           | fwd: 1.3<br>aft: 0.7      |
| <b>Mk 76</b><br>Practice Bomb  | Mk 76 Mod 5: LD practice bomb<br>carried on (I)MERs               | 25                           | fwd: 1.1<br>aft: 0.6      |
| <b>Mk 106</b><br>Practice Bomb                                       | Mk 106 Mod 5: HD practice bomb<br>carried on (I)MERs              | 5                            | fwd: 1.3<br>aft: 0.7      |
| <b>LGTR</b>  | Laser Guided Training Round<br>Carried on bottom (I)MER stations. | 89                           | (I)MER: 3                 |
| <b>FIRE BOMBS</b>  |   |                              |                           |
| <b>Mk 77</b><br>Fire Bomb  | Mod 4: 71 gal. of gelled AVGAS                                    | 520                          | pylon: 8.5<br>CVER: 10.5  |
|  | Mod 5: 43 lb imbiber beads + 63 gal of jet fuel                   | 520                          |                           |

Figure 11-2. Summary of Store Drag Index Numbers  
(Sheet 2)

## SUMMARY OF STORE DRAG INDEX NUMBERS (Continued)

| STORE  | VERSION   | WEIGHT PER STORE LB  | CARRIAGE/DRAG                                    |
|--|---|--|--|
| <b>EO GUIDED WEAPONS</b>   |   |  |  |
| <b>AGM-62A</b><br>Walleye I 1,000-lb<br>EO-Guided Bomb               | Mk 21 ER/DL, Phase I  | 1,224  | pylon: 14.0                                      |
|  | Mk 29 ER/DL, Phase II   | 1,224  |  |
|  | Mk 34 ER/DL, Phase II Haze Penetrator                                     | 1,224  |  |
| <b>Walleye II</b><br>2,000-lb EOGB                                   | Mk 23 ER/DL, Phase I  | 2,415  | pylon: 16.0                                      |
|  | Mk 30 ER/DL, Phase II   | 2,415  |  |
|  | Mk 37 ER/DL, Phase II Haze Penetrator                                     | 2,415  |  |
| <b>Walleye PGW</b><br>(Practice Guided<br>Weapon)<br>(without wings) | Mk 27 captive DL, Phase I   | 1,130  | pylon: 8.0                                       |
|  | Mk 38 captive DL, Phase I Haze Penetrator                                 | 1,130  |  |
|  | Mk 39 captive DL, Phase II Haze Penetrator                                | 1,130  |  |
| <b>ROCKET LAUNCHERS</b>  |   |  |  |
| <b>LAU-10</b><br>4 x 5.0-inch Zuni<br>Rocket Pod                     | LAU-10C/A: NTP  | 107 <sup>6</sup>   | (C)VER:<br>w/fairings: 7.0<br>w/o fairings: 25.0 |
|  | LAU-10D/A: TP   | 136 <sup>6</sup>   |  |
|  | Mk 71 Mod 0 or Mod 1 motors   |  |  |
| <b>LAU-61</b><br>19 x 2.75-inch<br>Rocket Pod                        | LAU-61C/A, TP, Mk 66 motors only<br>(nose fairing adds 5.7 pounds)        | 160 <sup>7</sup>   | (C)VER:<br>w/fairing: 8.0<br>w/o fairing: 31.5   |
|  | <b>LAU-68</b><br>7 x 2.75-inch<br>Rocket Pod                              | LAU-68D/A, TP, Mk 66 motors only<br>(nose fairing adds 2.0 pounds) | 78 <sup>7</sup>                                  |
| <b>MINES</b>   |   |  |  |
| <b>Mk 36</b><br>Destructor<br>(Mods 7/15)                            | OA 48/48K: Mk 15 Mod 6 Snakeye, NTP                                       | 552 <sup>8</sup>   | pylon: 5.0<br>(C)VER: 6.0                        |
|  | OA 48: Mk 15 Mod 6A, Snakeye, TP  | 561 <sup>8</sup>   |  |
|  | OA 51: Mk 16 paratail, NTP  | 536 <sup>8</sup>   |  |
|  | OA 51: Mk 16 paratail, TP   | 545 <sup>8</sup>   |  |
|  | OA 54: BSU-86 retard, NTP   | 552 <sup>8</sup>   |  |
| <b>Mk 40</b><br>Destructor<br>(Mods 7/15)                            | OA 48/48K: MAU-91 retard, NTP   | 1,056 <sup>8</sup>   | pylon: 11.0                                      |
|  | OA 48: MAU-91 retard, TP  | 1,075 <sup>8</sup>   |  |
|  | OA 51/51K: Mk 12 paratail, NTP  | 1,003 <sup>8</sup>   | pylon: 9.0<br>CVER: 10.5                         |
|  | OA 51: Mk 12 paratail, TP   | 1,022 <sup>8</sup>   |  |
|  | <b>Mk 52</b><br>NTP Bottom Mine   | OA 05K: Mod 0: with fairing  | 1,063  |
| <b>Mk 55</b><br>NTP Bottom Mine                                      | OA 04K, Mod 0: with fairing   | 2,059  | pylon: 25.0                                      |
| <b>Mk 56</b><br>NTP Moored Mine                                      | OA 06/06K/10/12, Mod 0: with fairing                                      | 2,210  | pylon: 25.0                                      |
| <b>Mk 60 CAPTOR</b><br>NTP Moored Mine                               | Mods 0/1, OA 01/01K<br>(enCAPsulated Mk 46 TORpedo)                       | 2,354  | pylon: 36.0                                      |
| <b>Mk 62</b><br>Quickstrike Mine<br>(Mod 0)                          | OA 03/03K: Mk 15 Mod 6 Snakeye, NTP                                       | 552 <sup>8</sup>   | pylon: 5.0<br>(C)VER: 6.0                        |
|  | OA 03: Mk 15 Mod 6A Snakeye, TP   | 561 <sup>8</sup>   |  |
|  | OA 06/06K: Mk 16 paratail, NTP  | 536 <sup>8</sup>   |  |
|  | OA 06: Mk 16 paratail, TP   | 545 <sup>8</sup>   |  |
|  | OA 09/09K: BSU-86 retard, NTP   | 552 <sup>8</sup>   |  |
| <b>Mk 63</b><br>Quickstrike Mine<br>(Mod 0)                          | OA 03/03K: MAU-91 retard, NTP   | 1,056 <sup>8</sup>   | pylon: 11.0                                      |
|  | OA 03: MAU-91 retard, TP  | 1,075 <sup>8</sup>   |  |
|  | OA 06/06K: Mk 12 paratail, NTP  | 1,003 <sup>8</sup>   | pylon: 9.0<br>CVER: 10.5                         |
|  | OA 06: Mk 12 paratail, TP   | 1,022 <sup>8</sup>   |  |
|  | <b>Mk 65</b><br>TP Quickstrike Mine                                       | Mod 0/1, OA 01/02, with fairing                                    | 2,309  |
| Mods 0/1, OA 01K, with fairing                                       |   | 2,446  |  |
| <b>MARINE LOCATION MARKER</b>  |   |  |  |
| <b>Mk 58 MLM</b>   | Marine Location Marker: carried on<br>bottom and outboard (I)MER stations | 13   | fwd: 3.0<br>aft: 1.5                             |
| <b>FLARES/MARKERS (EXTERNAL CARRIAGE)</b>                            |   |  |  |
| <b>LUU-2</b> Parafflare  | LUU-2A/B 1.6 Mcp for 5 minutes, <b>No CV ops.</b>                         | 30   | fwd: 3.0<br>aft: 1.5                             |
|  | LUU-2B/B 2.0 Mcp for 4 minutes, <b>CV ops OK.</b>                         | 30   |  |

Figure 11-2. Summary of Store Drag Index Numbers  
(Sheet 3)

## SUMMARY OF STORE DRAG INDEX NUMBERS (Continued)

| STORE   | VERSION   | WEIGHT<br>PER<br>STORE<br>LB   | CARRIAGE/DRAG   |
|---|---|--|---|
| <b>PODS</b>   |   |  |   |
| <b>AAR-50</b><br>Nav FLIR Pod                                       | AN/AAR-50 Thermal Imaging Navigation Set (TINS)   | 214  | station 6: 9.0  |
| <b>AAS-38</b><br>Tgt FLIR Pod                                       | AN/AAS-38 FLIR<br>AN/AAS-38A w/Lsr Tgt Desig/Rngfd (LTD/R)<br>AN/AAS-38B w/Laser Spot Tracker (LST)   | 353<br>370<br>372  | station 4: 8.0  |
| <b>ADM-141</b><br>TALD  | ADM-141A, active/passive RF aug.<br>ADM-141B: chaff dispensing  | 400<br>382   | ITER: 7.0   |
| <b>ALQ-167</b><br>ECM Pod   | ALQ-167(V)-10/14/15/21/25/50/52/ <b>71</b><br>ALQ-167(V)-11/20/ <b>70</b> (70 & 71 are TCPs)<br>ALQ-167(V)-22<br>ALQ-167(V)- <b>30</b> /31/32/40 (30 is CV trainer)<br>ALQ-167(V)-33<br>ALQ-167(V)-61   | 310/ <b>279</b> <sup>9</sup><br>322/ <b>286</b> <sup>9</sup><br>326<br><b>238</b> <sup>9</sup> /274<br>272<br>306  | pylon: 9.0  |
| <b>ASQ-173</b><br>LDT/Cam Pod                                       | AN/ASQ-173 Laser Detector (formerly spot) Tracker/Strike Camera pod   | 165  | Station 6:<br>10.0  |
| <b>ATARS</b><br>Data Link Pod                                       | ATARS production centerline data link pod   | 552  | 8.1   |
| <b>AWW-9B</b><br>Data Link Pod                                      | Phase II AWW-9B for Walleyes & SLAM;<br>Walleye interface only  | 645  | pylon: 2.9  |
| <b>AWW-13</b><br>Adv. Data Link Pod                                 | Phase II AWW-13 for Walleyes & SLAM;<br>both Walleye and MIL-STD-1760 interfaces  | 707  | pylon: 2.9  |
| <b>CNU-188</b><br>Baggage Pod                                       | CNU-188/A: Converted AERO 1D fuel tank;<br>bobtail (no fins) configuration only   | 195 empty<br>545 full  | wing: 12.8  |
| <b>TACTS</b> Pod<br>(Tactical Aircrew<br>Combat Training<br>System) | AN/ASQ T-16: Acft Inst Subsys, Internal <sup>10, 11</sup><br>AN/ASQ T-17: P4A <sup>11</sup><br>AN/ASQ T-20: P4AX<br>AN/ASQ T-25: P4AM <sup>12</sup><br>AN/ASQ T-27: P4B <sup>12</sup><br>AN/ASQ T-27(V)-1: P4BX <sup>12</sup><br>AN/ASQ T-29: P4AW <sup>11, 12</sup><br>AN/ASQ T-31(V): AISI(K) <sup>10</sup> | 32<br>122/188 <sup>13</sup><br>124/190 <sup>13</sup><br>123/189 <sup>13</sup><br>127/193 <sup>13</sup><br>127/193 <sup>13</sup><br>128/178 <sup>14</sup><br>31 | LAU-115 and<br>LAU-7 or<br>LAU-127:<br>5.0 (each)<br><br>(for wingtip, see AIM-9) |
| <b>TOW BANNER</b>   |   |  |   |
| <b>TDU-32</b>   | TDU-32/B Tow Banner (w/ cable)  | 277  | tailhook: 200   |
| <b>PYLONS, RACKS, LAUNCHERS</b>                                     |   |  |   |
| <b>A/A37B-6E</b><br>MER-7   | non-ZRF Multiple Ejector Rack<br>for practice bombs, flares, and MLMs   | 200  | pylon: 15.0   |
| <b>BRU-32/A</b>   | Non-ZRF SUU-62/63 ejector rack  | 76   | n/a   |
| <b>BRU-32A/A</b>  | ZRF SUU-62/63 ejector rack  | 76   | n/a   |
| <b>BRU-33/A VER</b>   | Non-ZRF Vertical Ejector Rack   | 175  | pylon: 9.0  |
| <b>BRU-33A/A CVER</b>   | ZRF Canted Vertical Ejector Rack  | 200  | pylon: 12.0   |
| <b>BRU-41/A IMER</b>  | ZRF Improved Multiple Ejector Rack  | 240  | pylon: 15.0   |
| <b>BRU-42/A ITER</b>  | ZRF Improved Triple Ejector Rack  | 124  | pylon: 12.5   |
| <b>LAU-7</b><br>Launch Rail for<br>AIM-9 or TACTS Pod               | LAU-7/A through 163782 (Lot XI)<br>LAU-7B/A from 163985 (Lot XII)<br>* See AIM-9 for more drag information  | 90<br>90<br>(2 = 180)  | wingtip: *<br>LAU-115: 2.0<br>(2 = 4.0)   |
| <b>LAU-115/A</b><br>Launcher Adapter                                | Wing pylon adapter for two LAU-7s<br>(w/AIM-9s)   | 52   | pylon: 3.0  |
| <b>LAU-115A/A</b><br>Launcher Adapter                               | Wing pylon adapter for two LAU-7s<br>(w/AIM-9s), or LAU-127s (w/AIM-9s/-120s)   | 59   | pylon: 3.0  |
| <b>LAU-115C/A</b><br>Launcher Adapter                               | LAU-115A/A with jettison adapter for AIM-7<br>or two LAU-127s (W/AIM-9s/-120s)  | 97   | pylon: 4.0  |
| <b>LAU-116</b><br>Sta 4/6 AIM Ejector                               | LAU-116/A for AIM-7<br>LAU-116A/A for AIM-7 or AIM-120  | 65<br>65   | 0   |
| <b>LAU-117</b><br>AGM-65 Launcher                                   | LAU-117(V)-2/A wing pylon adapter for one<br>AGM-65 Maverick  | 135  | pylon: 3.0  |
| <b>LAU-118</b><br>AGM-88 Launcher                                   | LAU-118(V)-1/A wing pylon adapter for<br>one AGM-88 HARM  | 100  | pylon: 3.0  |
| <b>LAU-127A/A</b><br>AIM Launcher                                   | Pairs used with LAU-115 for<br>AIM-9, AIM-120, or TACTS pod carriage  | 95<br>(2 = 191)  | LAU-115: 2.4<br>(2 = 4.8)   |

**Figure 11-2. Summary of Store Drag Index Numbers  
(Sheet 4)**

## **SUMMARY OF STORE DRAG INDEX NUMBERS (Continued)**

| STORE   | VERSION   | WEIGHT<br>PER<br>STORE<br>LB | CARRIAGE/DRAG |
|---|---|------------------------------|---------------|
| <b>SUU-62</b><br>Centerline pylon<br>(w/BRU-32) | SUU-62/A through 163782 (Lot XI)<br>SUU-62/A from 163985 (Lot XII)                                | 130<br>139                   | 3.0           |
| <b>SUU-63</b><br>Wing pylon<br>(w/BRU-32)       | SUU-63/A F/A-18A/Bs<br>SUU-63A/A F/A-18C/Ds to 163782 (Lot XI)<br>SUU-63A/A from 163985 (Lot XII) | 273<br>310                   | 7.5           |
| <b>Empty Station</b>                            | No SUU-62 or -63 pylon mounted  | 0                            | 0             |
| <b>Blank-Off Panel</b>                          | Used when no stores are carried on stations 4/6.  | 12                           | 0             |

- <sup>1</sup> Missiles fueled with JP10; those fueled with JP5 weigh 20 pounds less.
- <sup>2</sup> Gray missiles; white missiles weigh 52 pounds less.
- <sup>3</sup> F/A-18C/D
- <sup>4</sup> Weights include nose plug (blunt unless specified), warhead, fin, and 4-lb. tail fuze.
- <sup>5</sup> Weights reflect Mk 80 series warheads including a MXU-735 nose plug and a 4-lb. tail fuze.
- <sup>6</sup> Empty pods without fairings.
- <sup>7</sup> Empty pods with tail fairings.
- <sup>8</sup> Weights reflect Mk 80 series warheads.
- <sup>9</sup> Boldface weight is for carrier qualified training and Tactical Contingency Pods (TCP)
- <sup>10</sup> Mounted in gun bay (no drag). Includes weight of AS-4319 antenna.
- <sup>11</sup> Carrier qualified.
- <sup>12</sup> USAF pods with MIL-STD-1760 data bus interface.
- <sup>13</sup> Weights without and with three external ballast weights (weights required for wingtip carriage).
- <sup>14</sup> Weights without and with only fore and aft external ballast weights (weights required for wingtip carriage).

**Figure 11-2. Summary of Store Drag Index Numbers  
(Sheet 5)**

**INTERFERENCE CODE NUMBERS**

| INBOARD PYLONS  |  | AGM-84 Harpoon | AIM-120 on LAU-115C/A & LAU-127 | AIM-154 | GBU-78/99/100 & Mk 20 on CVER | CNU-188 Baggage Pod | FPU-8 Fuel Tank ONLY | LAU-10 on VER | Mk-36 DST or Mk 62 QS on VER | Mk-36 DST or Mk 62 QS on CVER | Mk-52 1,000 lb bottom mine | Mk-55 2,000 lb bottom mine | Mk-56 2,000 lb moored mine | Mk-60 2,000 lb CAPTOR moored mine | Mk-65 QS 2,000 lb bottom mine | Mk-77 on pylon | Mk-82, BDU-45 or BLU-111 on VER | Mk-82, BDU-45 or BLU-111 on CVER | Mk-83 or BLU-110 on VER | Mk-83 or BLU-110 on CVER | Mk-84 |     |
|---|--|----------------|---------------------------------|---------|-------------------------------|---------------------|----------------------|---------------|------------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------------|-------------------------------|----------------|---------------------------------|----------------------------------|-------------------------|--------------------------|-------|-----|
| <p>FUSELAGE STATION 4 &amp; 6</p> <p>INBOARD PYLON STATION 3 &amp; 7</p> <p>OUTBOARD PYLON STATION 2 &amp; 8</p> <p>INTERF. DIST. (between inboard pylons)</p> <p>INTERF. DIST. (between outboard pylons)</p> <p>DIST. 18AC-NFM-20-(158-1)06-CATI</p> | AIM-9 or TACTS on LAU-115/A or A/A & LAU-7 or -127 | 4.2            | ---                             | ---     | 6.9                           | ●                   | 3.8                  | 5.3           | 3.5                          | 5.9                           | 3.2                        | 5.6                        | 5.6                        | 3.8                               | 4.0                           | 0.0            | 3.5                             | 5.9                              | 5.2                     | 6.6                      | 0.0   |     |
|   | AIM-9 or TACTS on LAU-115A/A & LAU-127             | ---            | ---                             | ---     | ---                           | ●                   | ---                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | ---                      | ---   |     |
|   | AGM-84 Harpoon                                     | 3.4            | ---                             | ---     | 6.1                           | ●                   | 3.0                  | 4.5           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | ---                      | 0.0   |     |
|   | AGM-84E SLAM                                       | ---            | ---                             | ---     | ---                           | ---                 | ---                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | ---                      | ---   |     |
|   | AIM-120 on LAU-115A/A & LAU-127                    | 4.5            | ●                               | ---     | 7.2                           | ●                   | 4.1                  | 5.6           | 3.8                          | 6.2                           | 3.5                        | 3.5                        | 5.9                        | 4.1                               | 4.3                           | ---            | ---                             | 3.8                              | 6.2                     | 5.5                      | 6.9   | 0.0 |
|   | AIM-120 on LAU-115C/A & LAU-127                    | ---            | ---                             | ---     | ---                           | ---                 | ---                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | ---                      | ---   | --- |
|   | AIM-154 JSOW                                       | 2.0            | 3.1                             | 0.5     | 4.6                           | 5.6                 | 0.6                  | 1.5           | 3.0                          | 1.2                           | 3.6                        | 1.1                        | 3.4                        | 3.4                               | 1.6                           | 1.8            | 0.0                             | 1.2                              | 3.6                     | 2.9                      | 4.3   | 0.0 |
|   | CBU-78/99/100 & Mk-20 on CVER                      | 6.1            | ---                             | ---     | 5.6                           | ●                   | 5.6                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | 5.3                     | ---                      | 5.6   | 0.2 |
|   | CNU-188 Baggage Pod                                | ●              | ---                             | ---     | ---                           | ---                 | ---                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | ---                      | ---   | --- |
|   | FPU-8 Fuel Tank ONLY (Empty)                       | ●              | ---                             | ---     | ---                           | ---                 | ---                  | 7.2           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | ---                      | ---   | --- |
|   | GBU-10 (Mk-84) LGB                                 | 0.0            | ---                             | ---     | 0.2                           | ●                   | 0.0                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | 0.0                      | 0.0   | 0.0 |
|   | GBU-24 (BLU-109) LLLGB                             | ---            | ---                             | ---     | ---                           | ---                 | ---                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | ---                      | ---   | --- |
|   | LAU-10 on VER                                      | 4.5            | ---                             | ---     | ---                           | ---                 | ---                  | 4.0           | 5.5                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | 5.4                      | ---   | 0.0 |
|   | LAU-10 on CVER                                     | 6.8            | ---                             | ---     | 5.9                           | ●                   | 6.3                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | 5.6                      | 5.9   | 0.9 |
|   | LAU-61 on VER                                      | 5.2            | ---                             | ---     | ---                           | ---                 | ---                  | 4.7           | 6.2                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | 6.1                      | ---   | --- |
|   | LAU-61 on CVER                                     | 7.6            | ---                             | ---     | 7.2                           | ●                   | 7.1                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | ---                     | 6.9                      | 7.2   | 1.7 |
| LAU-68 on VER   | 2.2  | ---            | ---                             | ---     | ---                           | ---                 | 1.7                  | 3.2           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | 3.1                     | ---                      | ---   |     |
| LAU-68 on CVER  | 4.2  | ---            | ---                             | 5.3     | ●                             | 3.7                 | ---                  | ---           | ---                          | ---                           | ---                        | ---                        | ---                        | ---                               | ---                           | ---            | ---                             | ---                              | 5.0                     | 5.3                      | 0.0   |     |

**NOTE**  
● Unauthorized configuration  
--- TBD

Figure 11-3. Interference Code Numbers (Sheet 1 of 2)



# INTERFERENCE CODE NUMBERS (Continued)



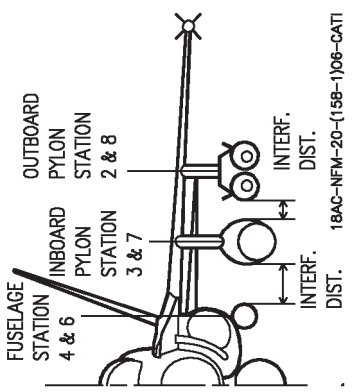
| INBOARD PYLONS  |  | AGM-84 Harpoon | AIM-120 on LAU-115C/A & LAU-127 | CBU-78/99/100 & Mk 20 on CVER | CNU-188 Baggage Pod | FPU-8 Fuel Tank ONLY | LAU-10 on VER | Mk-36 DST or Mk-62 QS on VER | Mk-36 DST or Mk-62 QS on CVER | Mk-52 1,000 lb bottom mine | Mk-55 2,000 lb bottom mine | Mk-56 2,000 lb moored mine | Mk-60 2,000 lb CAPTOR moored mine | Mk-65 QS 2,000 lb bottom mine | Mk-77 on pylon | Mk-82, BDU-45 or BLU-111 on VER | Mk-82, BDU-45 or BLU-111 on CVER | Mk-83 or BLU-110 on VER | Mk-83 or BLU-110 on CVER | Mk-84 |
|---|--|----------------|---------------------------------|-------------------------------|---------------------|----------------------|---------------|------------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------------|-------------------------------|----------------|---------------------------------|----------------------------------|-------------------------|--------------------------|-------|
|  | <b>OUTBOARD PYLONS</b>                               |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-36 DST or Mk-62 QS on VER                         |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-36 DST or Mk-62 QS on CVER (Mk-15 fins)           |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-36 DST or Mk-62 QS on CVER (except Mk-15 fins)    |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-40 DST or Mk-63 QS on CVER only                   |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-52 1,000 lb bottom mine                           |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-55 2,000 lb bottom mine                           |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-56 2,000 lb moored mine                           |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-60 2,000 lb CAPTOR moored mine                    |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-65 QS 2,000 lb bottom mine                        |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-82, BDU-45 or BLU-111 on VER                      |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-82, BDU-45 or BLU-111 on CVER (Mk-15 fins)        |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-82, BDU-45 or BLU-111 on CVER (except Mk-15 fins) |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
|   | Mk-83 or BLU-110 on VER                              |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
| Mk-83 or BLU-110 on CVER  |  |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
| Mk-84   |  |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
| <b>FUSELAGE STATIONS</b>  |  |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
| AN/AAR-50 Nav FLIR Pod (Sta. 6 only)  |  |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
| AN/AAS-38 Tgt FLIR Pod (Sta. 4 only)  |  |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |
| AN/ASQ-173 LDT/Cam Pod (Sta. 6 only)  |  |                |                                 |                               |                     |                      |               |                              |                               |                            |                            |                            |                                   |                               |                |                                 |                                  |                         |                          |       |

Figure 11-3. Interference Code Numbers(Sheet 2 of 2)

**NOTE**  
● Unauthorized configuration  
--- TBD

# INTERFERENCE CODE NUMBER TO INTERFERENCE DRAG INDEX NUMBER CONVERSION

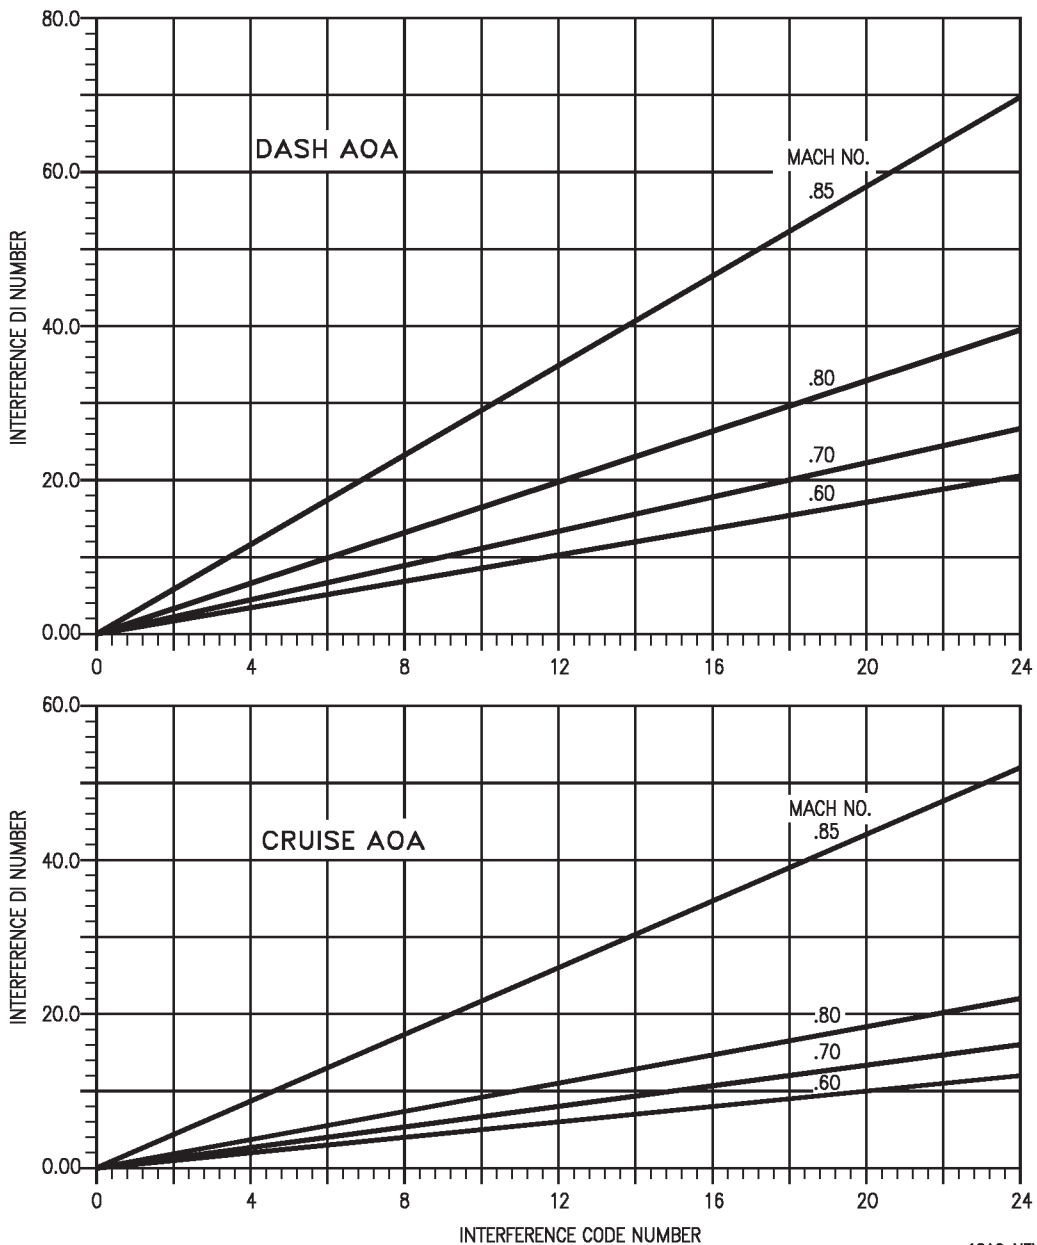

18AC-NFM-20-(270-1)11-CATI

Figure 11-4. Interference Code Number To Interference Drag Index Number Conversion



# STANDARD ATMOSPHERE


STANDARD SEA LEVEL AIR:  
T = 59°F (15°C)  
P = 29.921 IN. HG

W = 0.076475 LB/SQ FT = 0.0023769 SLUGS/CU FT.  
1 IN. HG = 70.732 LB/SQ FT = 0.4912 LB/SQ IN.  
a<sub>0</sub> = 1116.5 FT/SEC = 661.5 KNOTS

| ALTITUDE<br>FEET | DENSITY<br>RATIO<br>$\rho/\rho_0 = \sigma$ | $1/\sqrt{\sigma}$ | AIR TEMPERATURE |         | SPEED OF<br>SOUND<br>a/a <sub>0</sub> | PRESSURE |                           |
|------------------|--|-------------------|-----------------|---------|---------------------------------------|----------|---------------------------|
|                  |  |                   | DEG F           | DEG C   |                                       | IN HG    | RATIO<br>$p/p_0 = \delta$ |
| -2,000           | 1.0598                                     | 0.9714            | 66.132          | 18.962  | 1.0068                                | 32.15    | 1.0745                    |
| -1,000           | 1.0298                                     | 0.9855            | 62.566          | 16.981  | 1.0034                                | 31.02    | 1.0368                    |
| 0                | 1.0000                                     | 1.0000            | 59.000          | 15.000  | 1.0000                                | 29.92    | 1.0000                    |
| 1,000            | 0.9711                                     | 1.0148            | 55.434          | 13.019  | 0.9966                                | 28.86    | 0.9644                    |
| 2,000            | 0.9428                                     | 1.0299            | 51.868          | 11.038  | 0.9931                                | 27.82    | 0.9298                    |
| 3,000            | 0.9151                                     | 1.0454            | 48.302          | 9.057   | 0.9896                                | 26.82    | 0.8962                    |
| 4,000            | 0.8881                                     | 1.0611            | 44.735          | 7.075   | 0.9862                                | 25.84    | 0.8637                    |
| 5,000            | 0.8617                                     | 1.0773            | 41.169          | 5.094   | 0.9827                                | 24.90    | 0.8320                    |
| 6,000            | 0.8359                                     | 1.0938            | 37.603          | 3.113   | 0.9792                                | 23.98    | 0.8014                    |
| 7,000            | 0.8106                                     | 1.1107            | 34.037          | 1.132   | 0.9756                                | 23.09    | 0.7716                    |
| 8,000            | 0.7860                                     | 1.1279            | 30.471          | -0.849  | 0.9721                                | 22.22    | 0.7428                    |
| 9,000            | 0.7620                                     | 1.1456            | 26.905          | -2.831  | 0.9686                                | 21.39    | 0.7148                    |
| 10,000           | 0.7385                                     | 1.1637            | 23.338          | -4.812  | 0.9650                                | 20.58    | 0.6877                    |
| 11,000           | 0.7156                                     | 1.1822            | 19.772          | -6.793  | 0.9614                                | 19.79    | 0.6614                    |
| 12,000           | 0.6932                                     | 1.2011            | 16.206          | -8.774  | 0.9579                                | 19.03    | 0.6360                    |
| 13,000           | 0.6713                                     | 1.2205            | 12.604          | -10.756 | 0.9543                                | 18.29    | 0.6113                    |
| 14,000           | 0.6500                                     | 1.2403            | 9.074           | -12.737 | 0.9507                                | 17.58    | 0.5875                    |
| 15,000           | 0.6292                                     | 1.2606            | 5.508           | -14.718 | 0.9470                                | 16.87    | 0.5643                    |
| 16,000           | 0.6090                                     | 1.2815            | 1.941           | -16.699 | 0.9434                                | 16.22    | 0.5420                    |
| 17,000           | 0.5892                                     | 1.3028            | -1.625          | -18.681 | 0.9397                                | 15.57    | 0.5203                    |
| 18,000           | 0.5699                                     | 1.3246            | -5.191          | -20.662 | 0.9361                                | 14.94    | 0.4994                    |
| 19,000           | 0.5511                                     | 1.2470            | -8.757          | -22.643 | 0.9324                                | 14.34    | 0.4791                    |
| 20,000           | 0.5328                                     | 1.3700            | -12.323         | -24.624 | 0.9287                                | 13.75    | 0.4593                    |
| 21,000           | 0.5150                                     | 1.3935            | -15.889         | -26.605 | 0.9250                                | 13.18    | 0.4406                    |
| 22,000           | 0.4976                                     | 1.4176            | -19.456         | -28.587 | 0.9213                                | 12.64    | 0.4223                    |
| 23,000           | 0.4807                                     | 1.4424            | -23.022         | -30.568 | 0.9175                                | 12.11    | 0.4046                    |
| 24,000           | 0.4642                                     | 1.4678            | -26.588         | -32.549 | 0.9138                                | 11.60    | 0.3876                    |
| 25,000           | 0.4481                                     | 1.4938            | -30.154         | -34.530 | 0.9100                                | 11.10    | 0.3711                    |
| 26,000           | 0.4325                                     | 1.5206            | -33.720         | -36.511 | 0.9062                                | 10.63    | 0.3552                    |
| 27,000           | 0.4173                                     | 1.5480            | -37.286         | -38.492 | 0.9024                                | 10.17    | 0.3398                    |
| 28,000           | 0.4025                                     | 1.5762            | -40.852         | -40.473 | 0.8986                                | 9.725    | 0.3250                    |
| 29,000           | 0.3881                                     | 1.6052            | -44.419         | -42.455 | 0.8948                                | 9.297    | 0.3107                    |
| 30,000           | 0.3741                                     | 1.6349            | -47.985         | -44.436 | 0.8909                                | 8.885    | 0.2970                    |
| 31,000           | 0.3605                                     | 1.6645            | -51.551         | -46.417 | 0.8871                                | 8.488    | 0.2837                    |
| 32,000           | 0.3473                                     | 1.6948            | -55.117         | -48.398 | 0.8832                                | 8.106    | 0.2709                    |
| 33,000           | 0.3345                                     | 1.7291            | -58.683         | -50.379 | 0.8793                                | 7.737    | 0.2586                    |
| 34,000           | 0.3220                                     | 1.7623            | -62.249         | -52.361 | 0.8754                                | 7.382    | 0.2467                    |
| 35,000           | 0.3099                                     | 1.7964            | -65.816         | -54.342 | 0.8714                                | 7.041    | 0.2353                    |
| 36,000           | 0.2981                                     | 1.8315            | -69.382         | -56.323 | 0.8675                                | 6.712    | 0.2243                    |
| 37,000           | 0.2844                                     | 1.8753            | -69.700         | -56.500 | 0.8671                                | 6.397    | 0.2138                    |
| 38,000           | 0.2710                                     | 1.9209            | -69.700         | -56.500 | 0.8671                                | 6.097    | 0.2038                    |
| 39,000           | 0.2583                                     | 1.9677            | -69.700         | -56.500 | 0.8671                                | 5.811    | 0.1942                    |
| 40,000           | 0.2462                                     | 2.0155            | -69.700         | -56.500 | 0.8671                                | 5.538    | 0.1851                    |
| 41,000           | 0.2346                                     | 2.0645            | -69.700         | -56.500 | 0.8671                                | 5.278    | 0.1764                    |
| 42,000           | 0.2236                                     | 2.1148            | -69.700         | -56.500 | 0.8671                                | 5.030    | 0.1681                    |
| 43,000           | 0.2131                                     | 2.1662            | -69.700         | -56.500 | 0.8671                                | 4.794    | 0.1602                    |
| 44,000           | 0.2031                                     | 2.2189            | -69.700         | -56.500 | 0.8671                                | 4.569    | 0.1527                    |
| 45,000           | 0.1936                                     | 2.2728            | -69.700         | -56.500 | 0.8671                                | 4.355    | 0.1455                    |
| 46,000           | 0.1845                                     | 2.3281            | -69.700         | -56.500 | 0.8671                                | 4.151    | 0.1387                    |
| 47,000           | 0.1758                                     | 2.3848            | -69.700         | -56.500 | 0.8671                                | 3.956    | 0.1322                    |
| 48,000           | 0.1676                                     | 2.4428            | -69.700         | -56.500 | 0.8671                                | 3.770    | 0.1260                    |
| 49,000           | 0.1597                                     | 2.5022            | -69.700         | -56.500 | 0.8671                                | 3.593    | 0.1201                    |
| 50,000           | 0.1522                                     | 2.5630            | -69.700         | -56.500 | 0.8671                                | 3.425    | 0.1145                    |
| 51,000           | 0.1451                                     | 2.6254            | -69.700         | -56.500 | 0.8671                                | 3.264    | 0.1091                    |
| 52,000           | 0.1383                                     | 2.6892            | -69.700         | -56.500 | 0.8671                                | 3.111    | 0.1040                    |
| 53,000           | 0.1318                                     | 2.7546            | -69.700         | -56.500 | 0.8671                                | 2.965    | 0.09909                   |
| 54,000           | 0.1256                                     | 2.8216            | -69.700         | -56.500 | 0.8671                                | 2.826    | 0.09444                   |
| 55,000           | 0.1197                                     | 2.8903            | -69.700         | -56.500 | 0.8671                                | 2.693    | 0.09001                   |
| 56,000           | 0.1141                                     | 2.9606            | -69.700         | -56.500 | 0.8671                                | 2.567    | 0.08578                   |
| 57,000           | 0.1087                                     | 3.0326            | -69.700         | -56.500 | 0.8671                                | 2.446    | 0.08176                   |
| 58,000           | 0.1036                                     | 3.1063            | -69.700         | -56.500 | 0.8671                                | 2.331    | 0.07792                   |
| 59,000           | 0.09877                                    | 3.1819            | -69.700         | -56.500 | 0.8671                                | 2.222    | 0.07426                   |
| 60,000           | 0.09414                                    | 3.2593            | -69.700         | -56.500 | 0.8671                                | 2.118    | 0.07078                   |
| 61,000           | 0.08972                                    | 3.3386            | -69.700         | -56.500 | 0.8671                                | 2.018    | 0.06746                   |
| 62,000           | 0.08551                                    | 3.4198            | -69.700         | -56.500 | 0.8671                                | 1.924    | 0.06429                   |
| 63,000           | 0.08150                                    | 3.5029            | -69.700         | -56.500 | 0.8671                                | 1.833    | 0.06127                   |
| 64,000           | 0.07767                                    | 3.5881            | -69.700         | -56.500 | 0.8671                                | 1.747    | 0.05840                   |
| 65,000           | 0.07403                                    | 3.6754            | -69.700         | -56.500 | 0.8671                                | 1.665    | 0.05566                   |

Figure 11-5. Standard Atmosphere Table

# TEMPERATURE CONVERSION

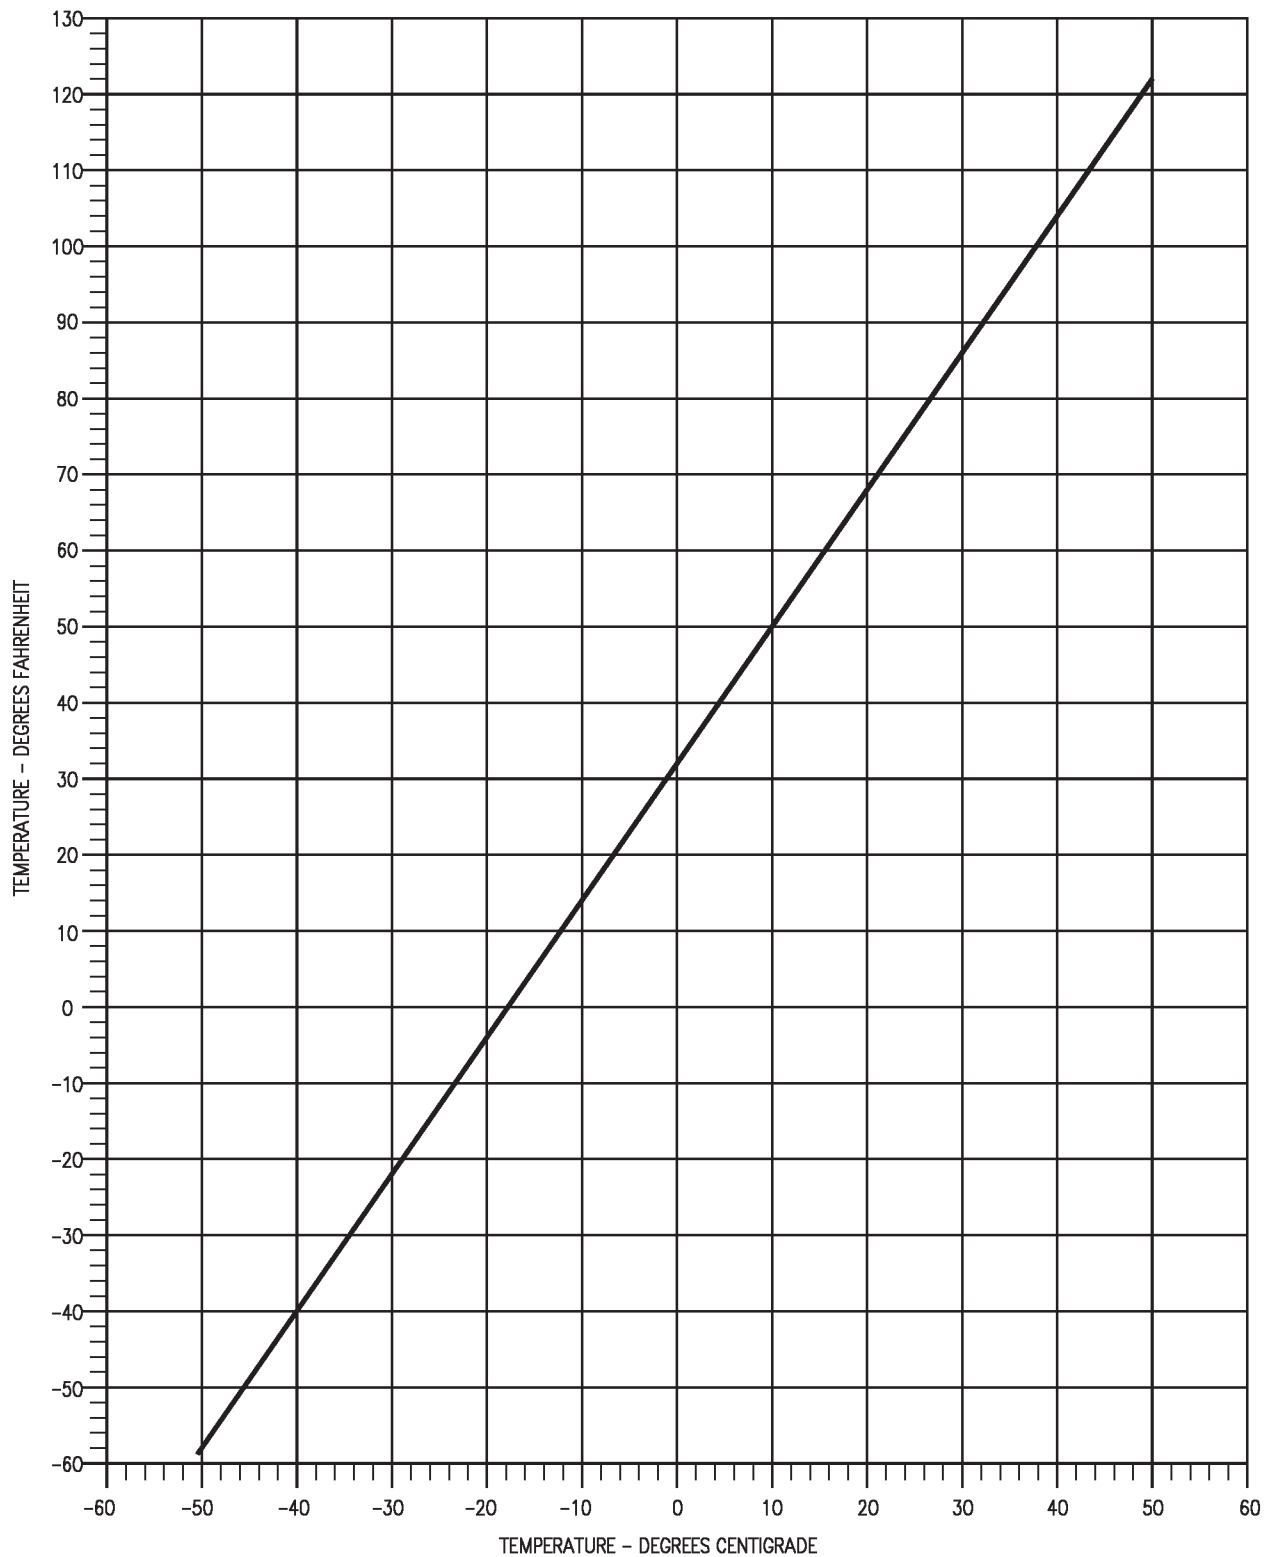


18AC-NFM-20-(31-1)11-CAT1

Figure 11-6. Temperature Conversion

# AIRSPED CONVERSION

LOW MACH

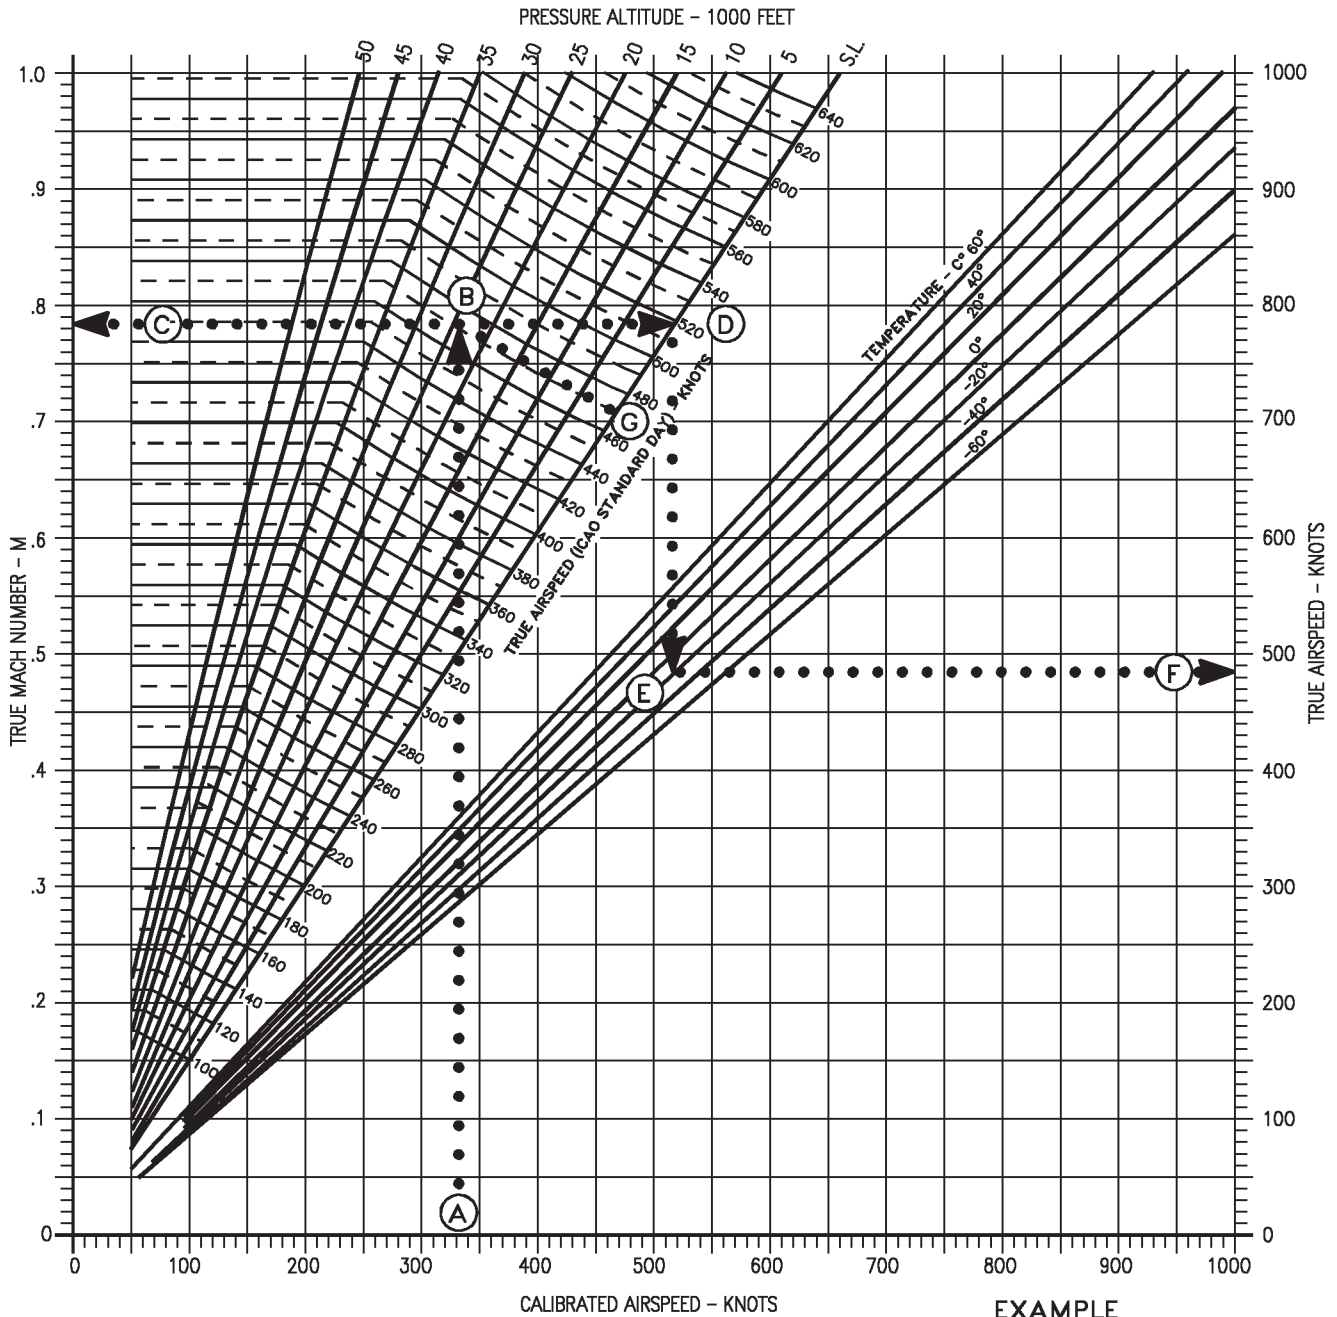

**EXAMPLE**


- A = CAS=330 KNOTS
- B = ALTITUDE=25,000 FEET
- C = MACH=.782
- D = SEA LEVEL LINE
- E = TEMPERATURE=-20°C
- F = TAS=486 KNOTS
- G = TAS (STANDARD DAY)=472 KNOTS

18AC-NFM-20-(29-1)11-CAT1

Figure 11-7. Airspeed Conversion - Low Mach  
(Sheet 1 of 2)

# AIRSPED CONVERSION

HIGH MACH

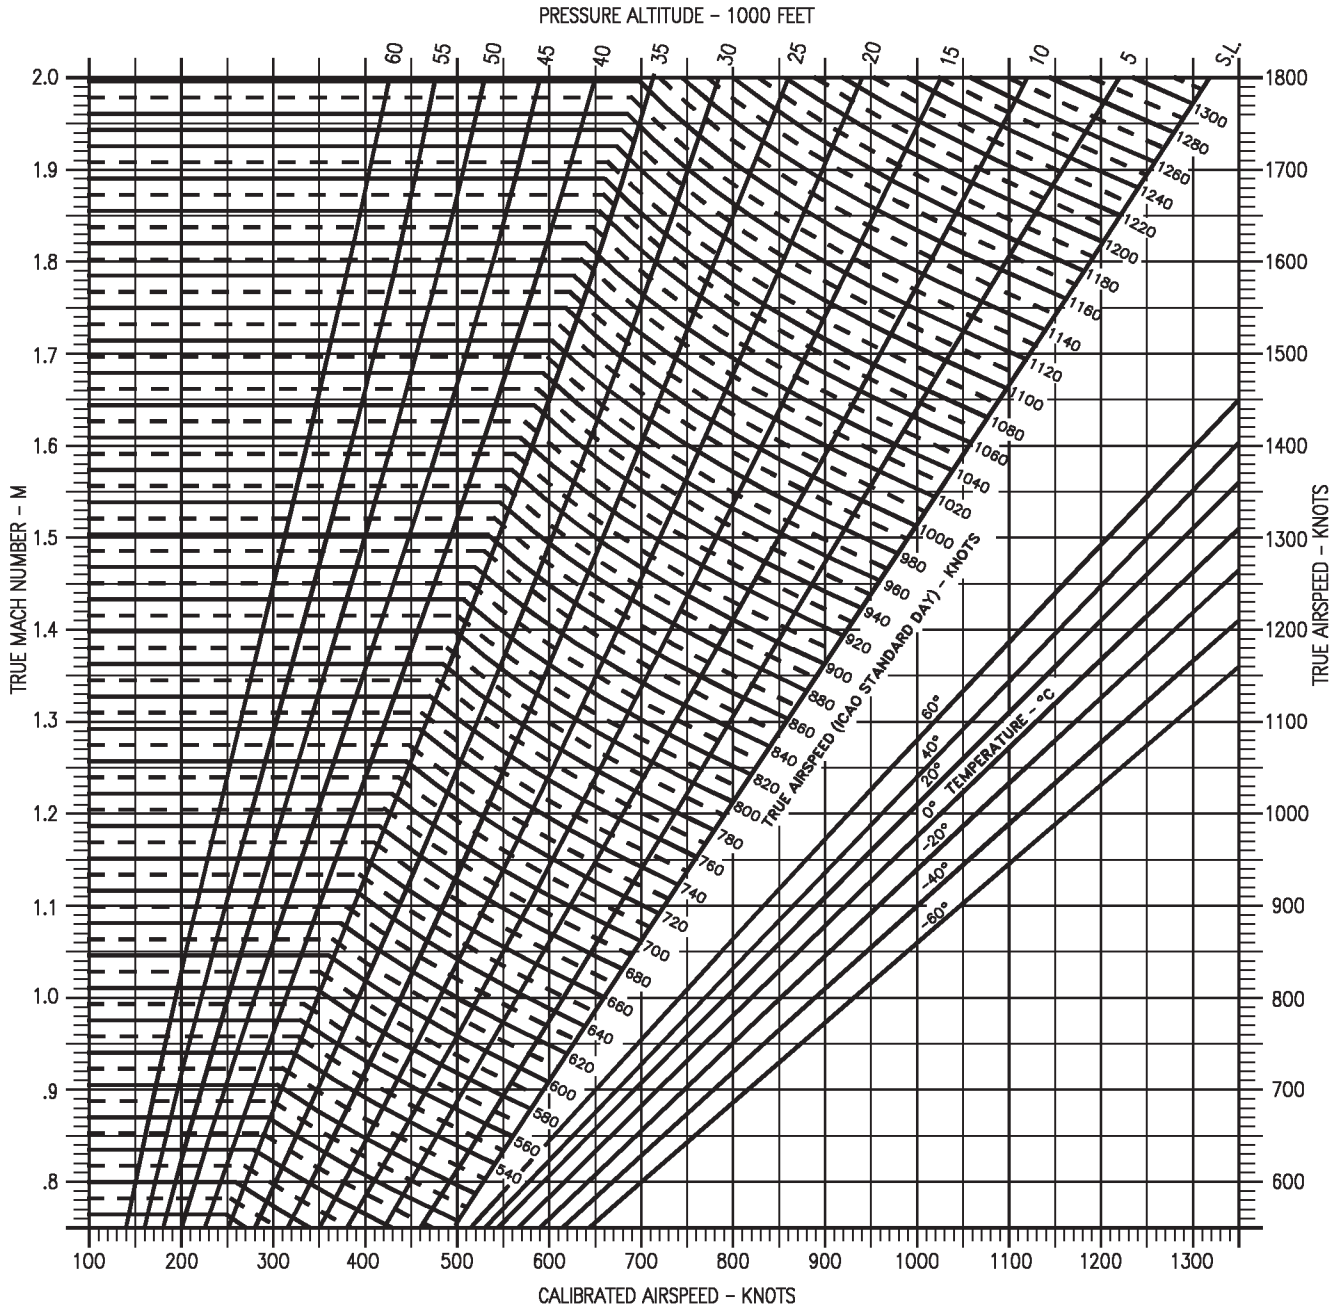


18AC-NFM-20-(29-2)11-CAT1

Figure 11-7. Airspeed Conversion - High Mach  
(Sheet 2 of 2)

# AIRSPED POSITION ERROR CORRECTION

INDICATED AIRSPEED-STANDBY INDICATOR  
ALL CONFIGURATIONS


GUIDE



REMARKS  
U.S. STANDARD DAY, 1962

- SEA LEVEL = ①
- - - - 20,000 FEET = ②
- - - - 40,000 FEET = ③
- - - - 55,000 FEET = ④

DATE: 1 OCTOBER 1980  
DATA BASIS: FLIGHT TEST

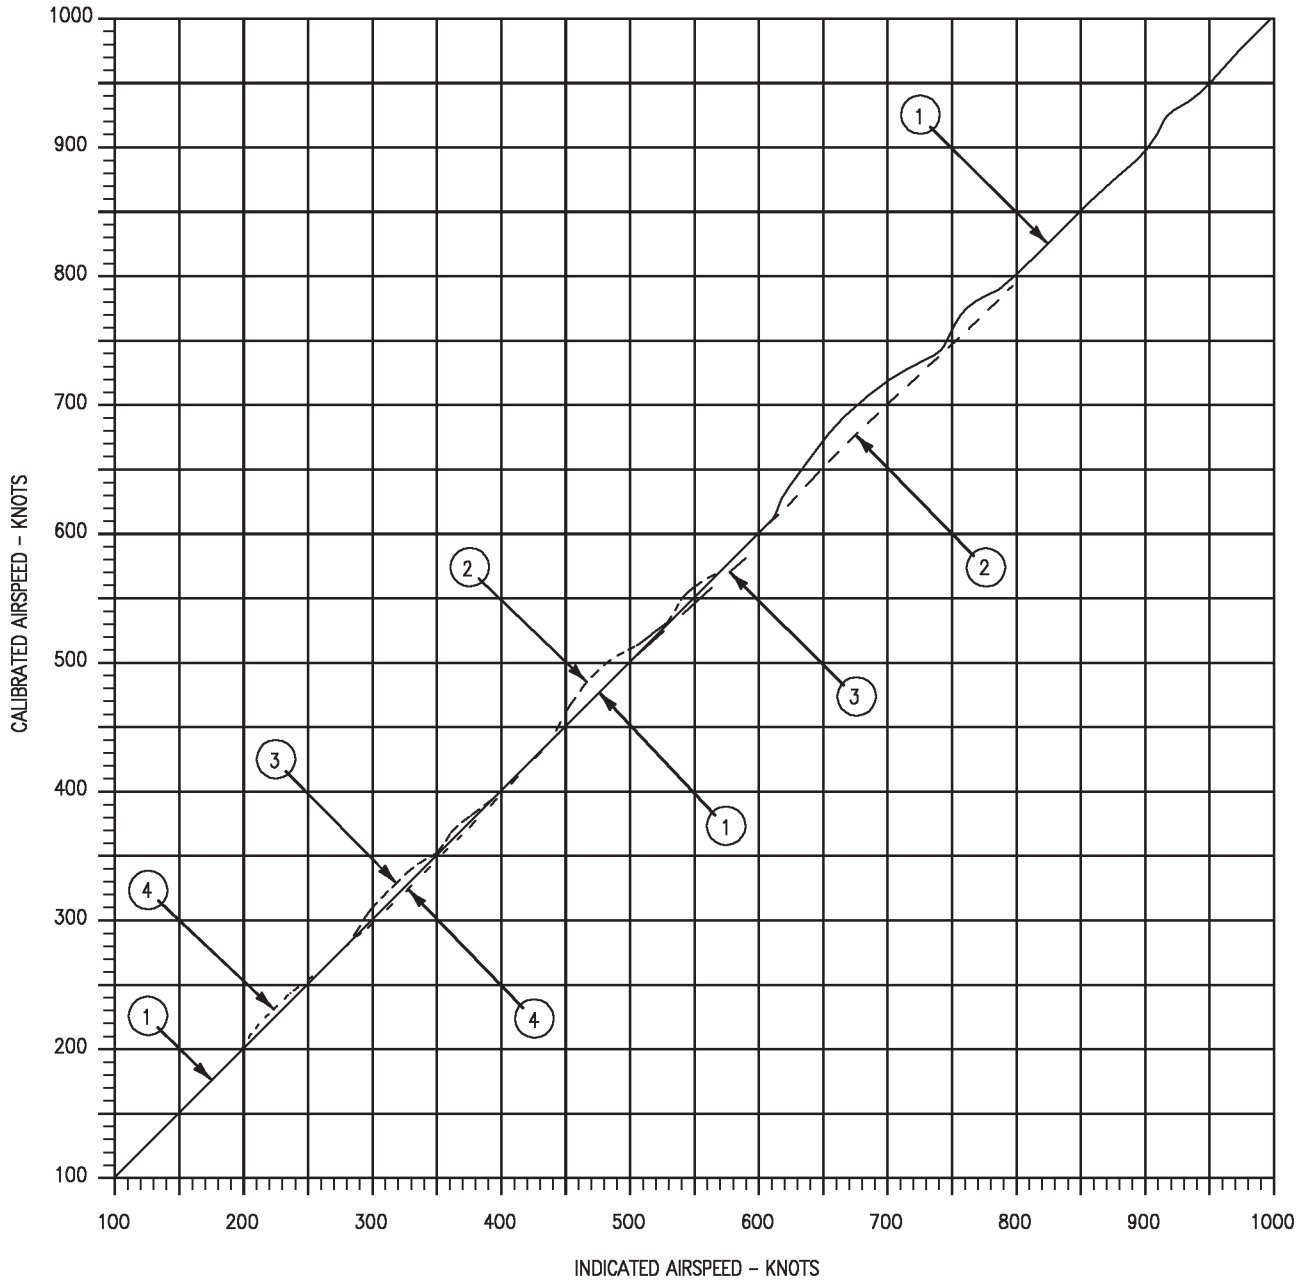


18AC-NFM-20-(23-1)12-CATI

Figure 11-8. Airspeed Position Error Correction - Indicated Airspeed  
(Sheet 1 of 2)


# AIRSPED POSITION ERROR CORRECTION

MACH NUMBER-STANDBY INDICATOR  
ALL CONFIGURATIONS

REMARKS  
U.S. STANDARD DAY, 1962



DATE: 1 OCTOBER 1980  
DATA BASIS: FLIGHT TEST

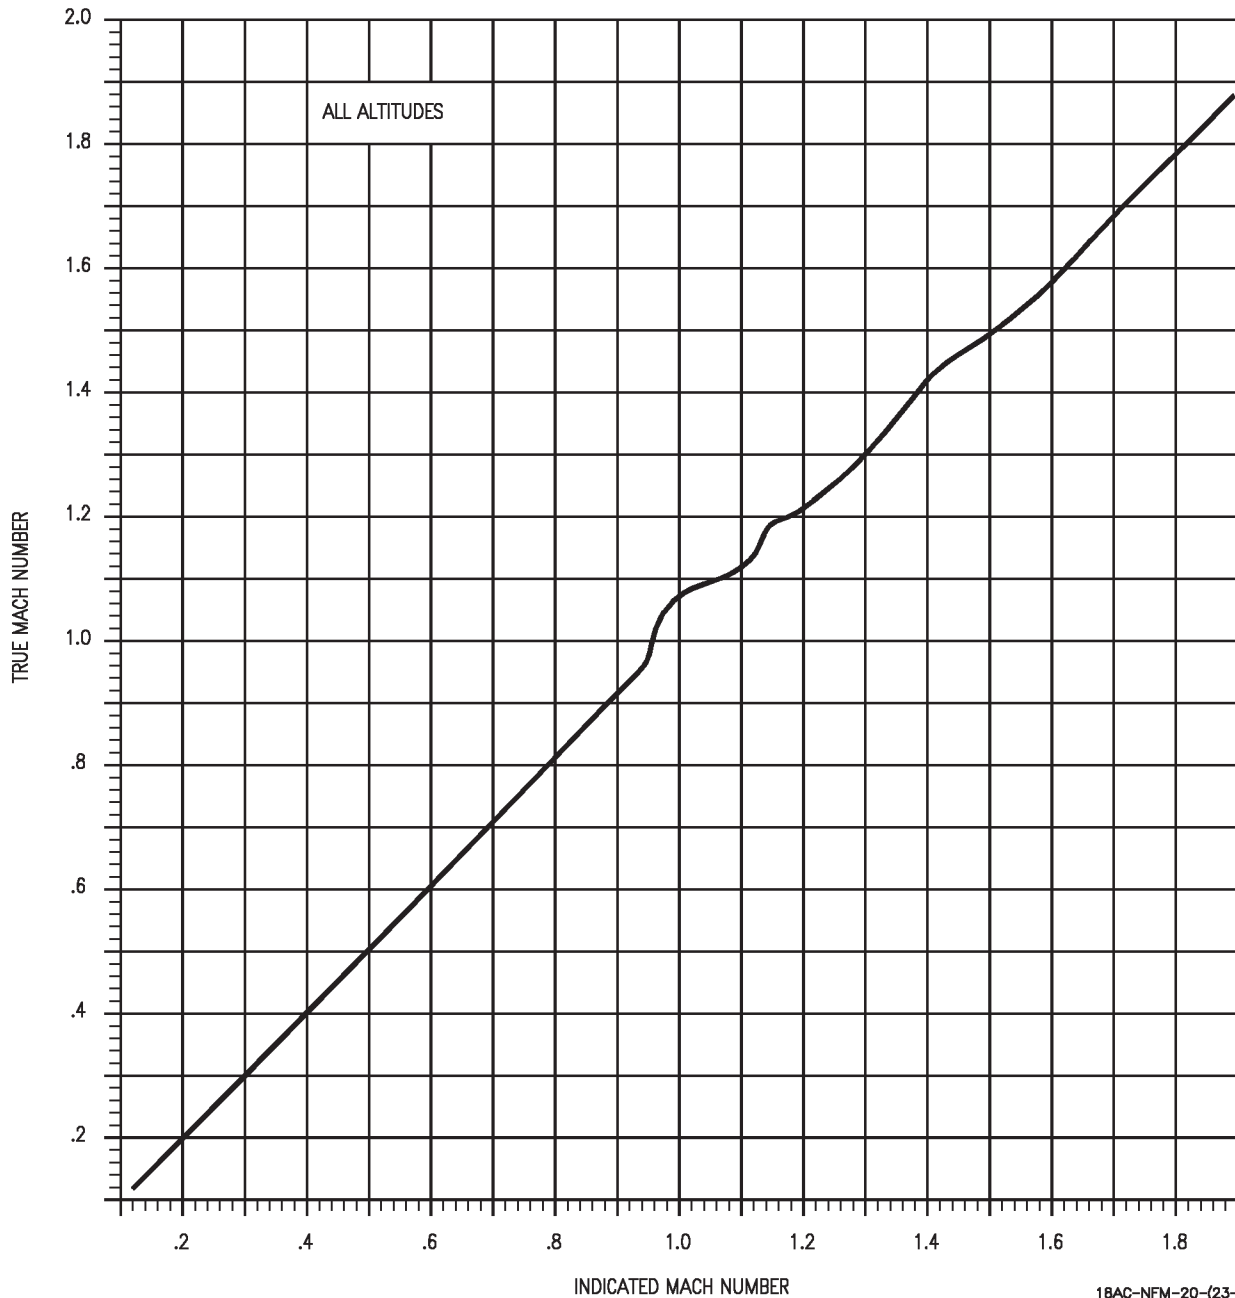


18AC-NFM-20-(23-2)12-CAT1

Figure 11-8. Airspeed Position Error Correction - Mach Number  
(Sheet 2 of 2)


# ALTIMETER POSITION ERROR CORRECTION

F404-GE-400  
INDICATED AIRSPEED-STANDBY INDICATOR  
ALL CONFIGURATIONS

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
NOTE  
FLY ASSIGNED ALTITUDE+  $\Delta H$



DATE: 15 JULY 1986  
DATA BASIS: FLIGHT TEST

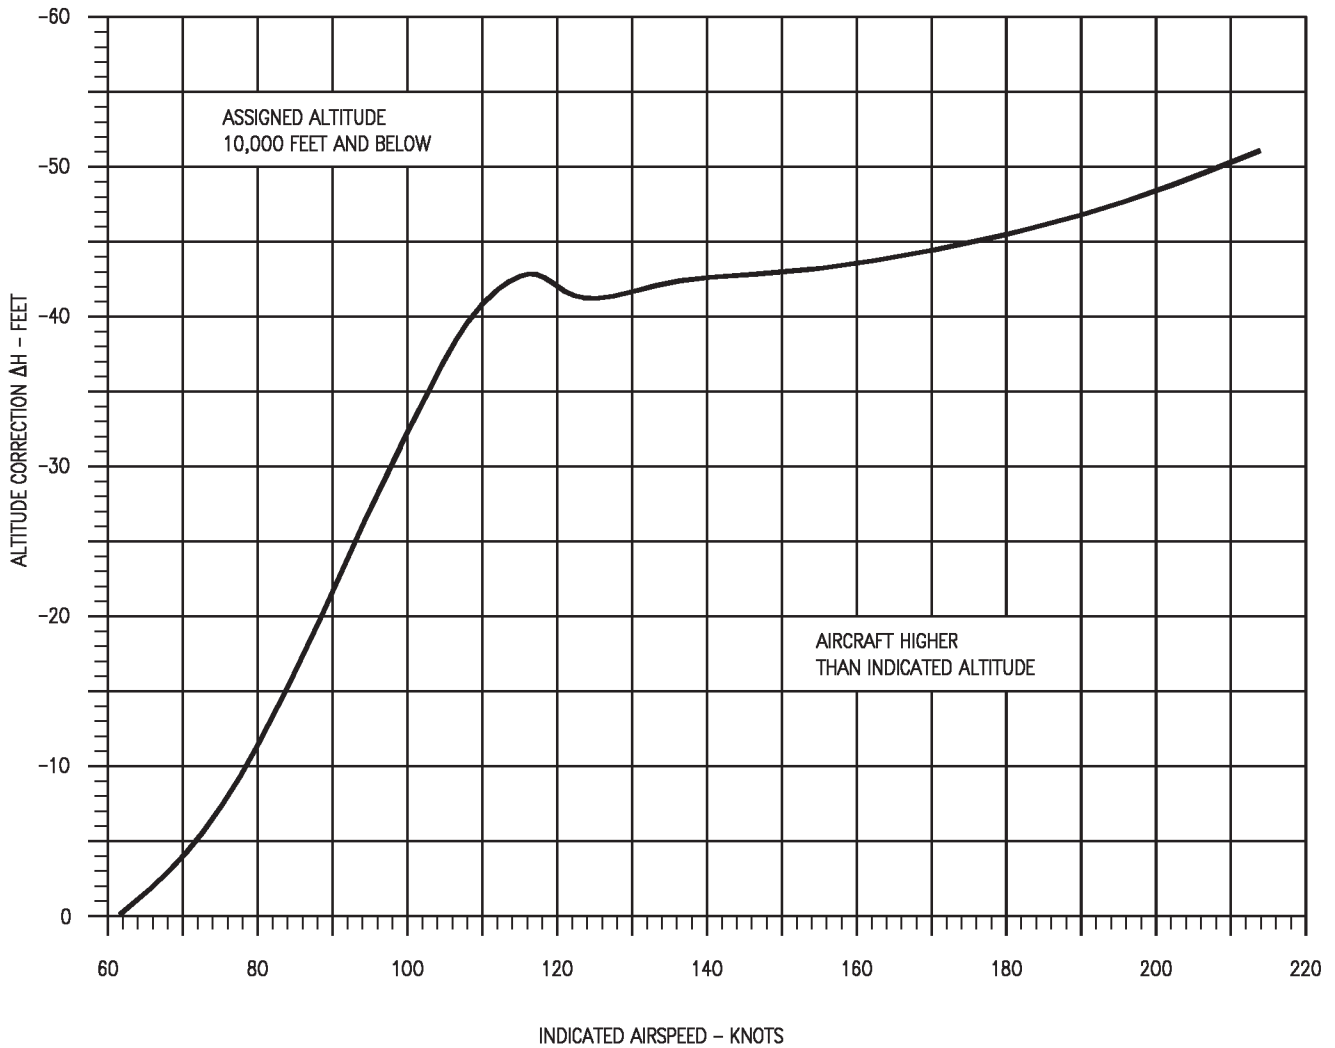


18AC-NFM-20-(24-1)12-CAT1

Figure 11-9. Altimeter Position Error Correction - Indicated Airspeed  
(Sheet 1 of 2)

# ALTIMETER POSITION ERROR CORRECTION


F404-GE-400  
MACH NUMBER-STANDBY INDICATOR  
ALL CONFIGURATIONS

GUIDE



REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
NOTE  
FLY ASSIGNED ALTITUDE+  $\Delta H$

DATE: 15 JULY 1986  
DATA BASIS: FLIGHT TEST

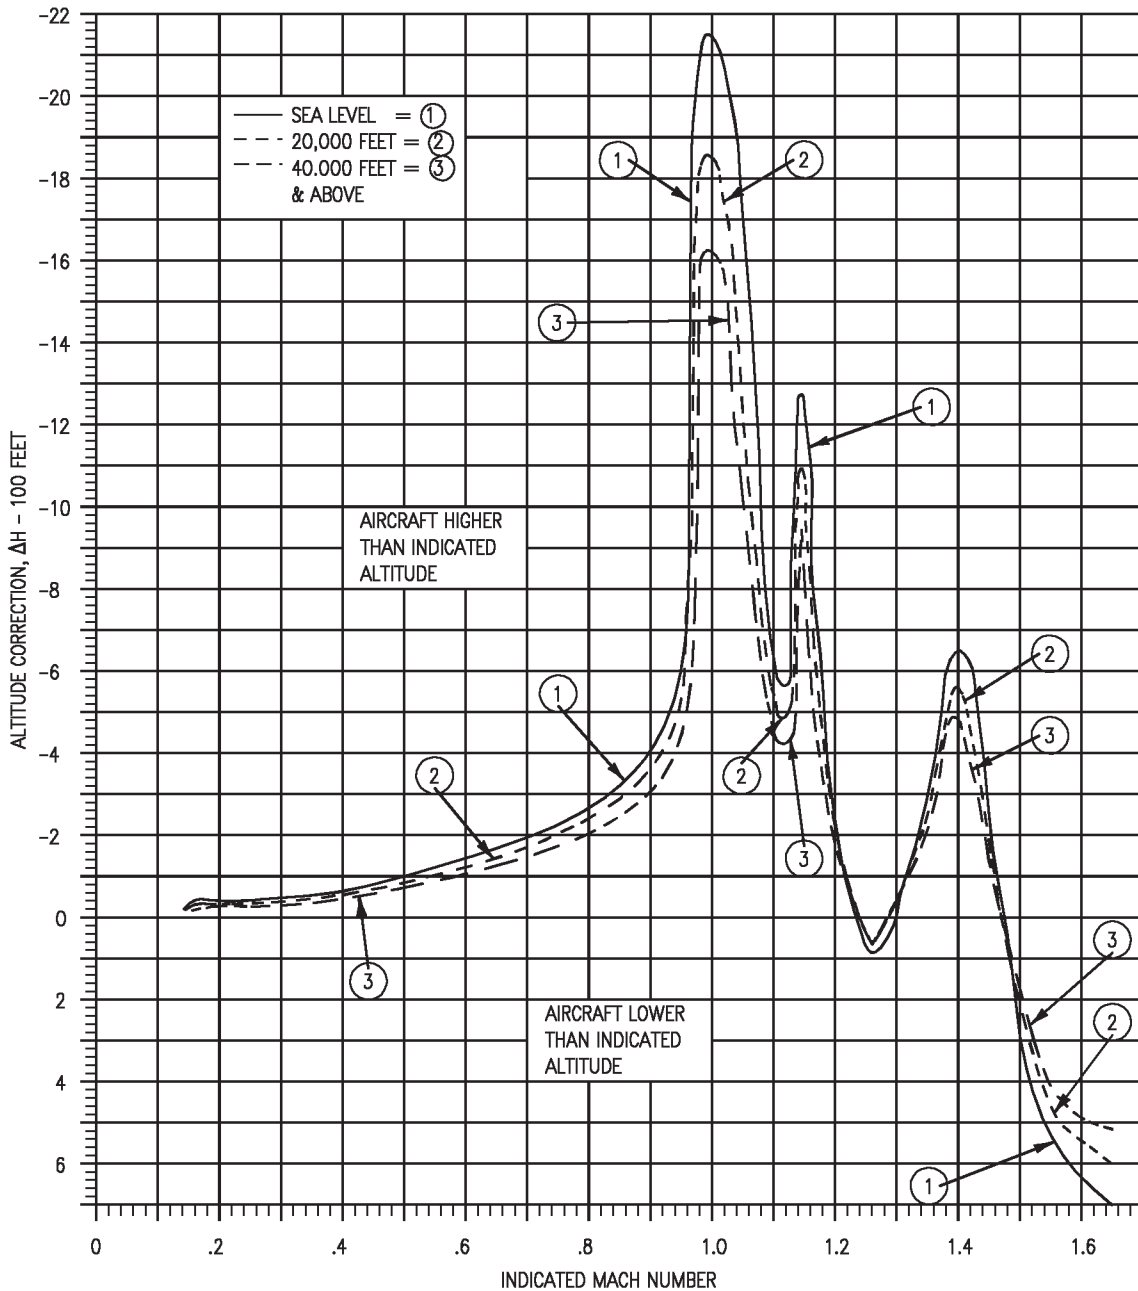

18AC-NFM-20-(24-2)12-CAT1

Figure 11-9. Altimeter Position Error Correction - Mach Number  
(Sheet 2 of 2)



# STALL SPEEDS

F404-GE-400

ALL CONFIGURATIONS

REMARKS


ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE

IF SINGLE ENGINE, DIRECTIONAL CONTROL WILL BE LOST ABOVE STALL SPEED AT HIGHER POWER SETTINGS.

DATE: 3 MARCH 1981  
DATA BASIS: FLIGHT TEST

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

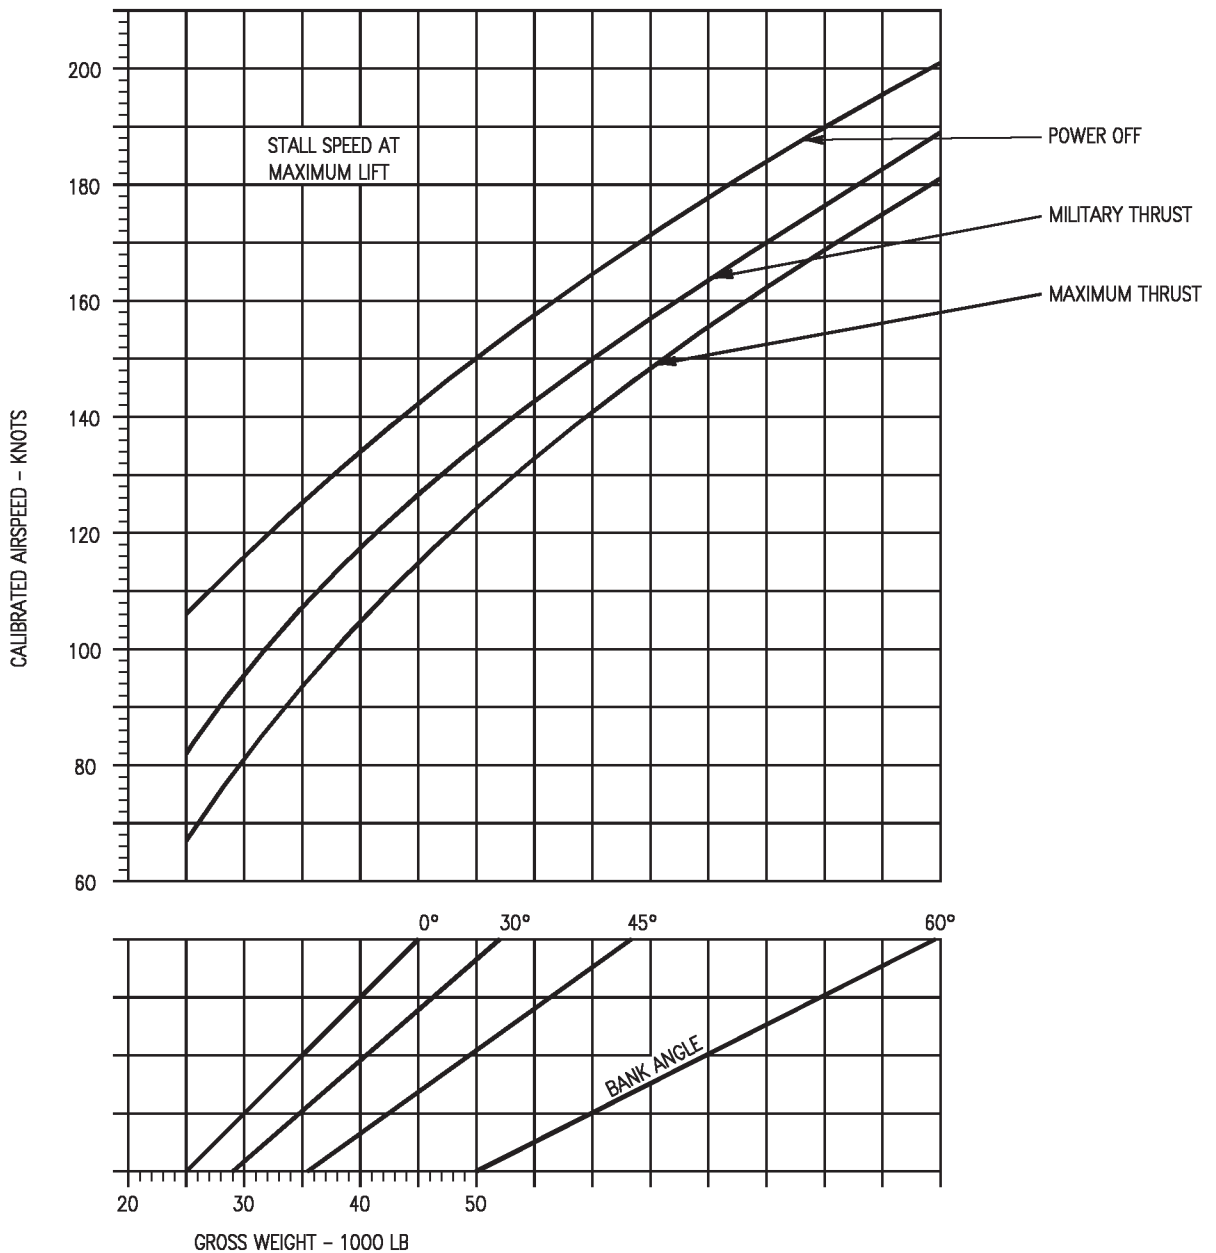


Figure 11-10. Stall Speeds - F404-GE-400

18AC-NFM-20-(25-1)10-CATI

# ANGLE OF ATTACK CONVERSION



F404-GE-400  
STABILIZED 1G LEVEL FLIGHT

AIRCRAFT CONFIGURATION  
GEAR AND FLAPS AS NOTED

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
SEA LEVEL - CG 25% MAC

DATE: 1 MARCH 1983  
DATA BASIS: FLIGHT TEST

GUIDE

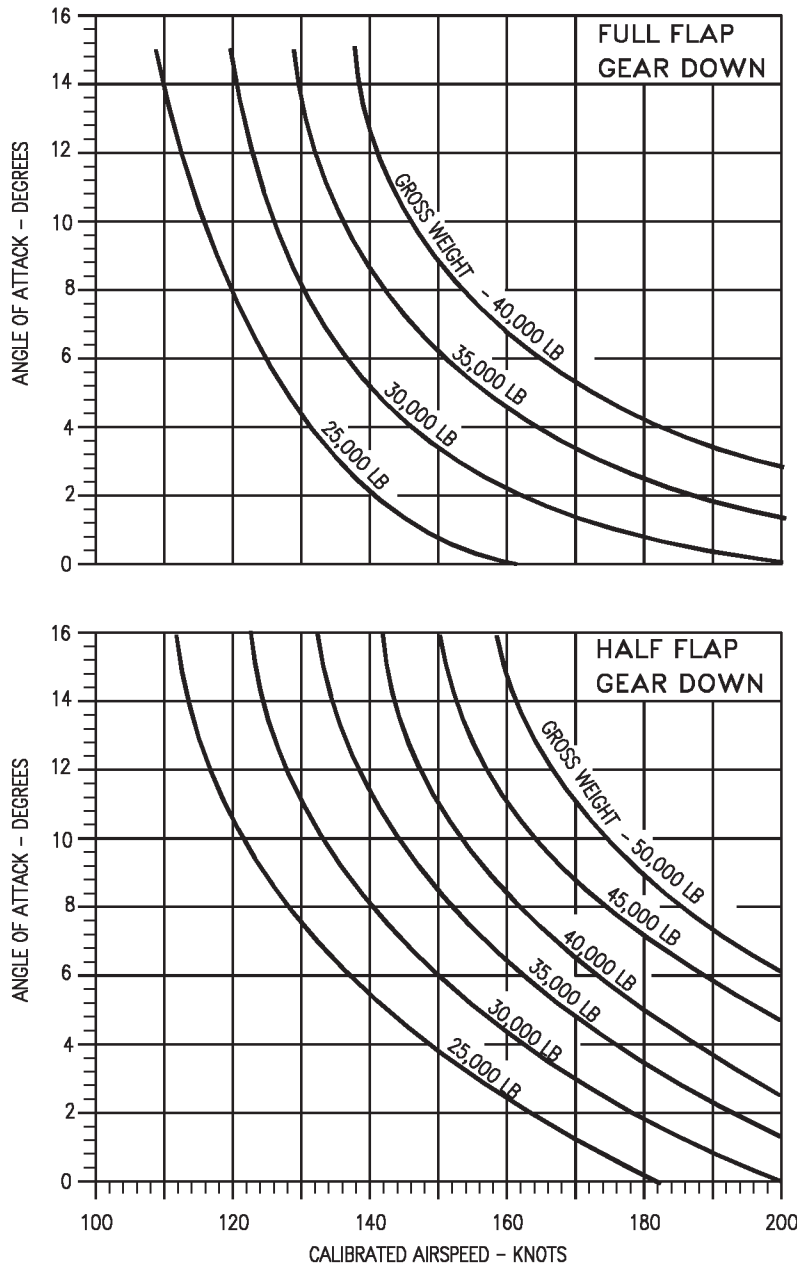

18AC-NFM-20-(26-1)12-CAT1

Figure 11-11. Angle of Attack Conversion



## MINIMUM GO SPEED CHARTS

These charts (figures 11-14 and 11-15) provide the means of determining the minimum speed at which the aircraft can experience an engine failure and still take off under existing conditions of temperature, pressure altitude, gross weight, and the runway length remaining. Separate plots are provided for maximum and military thrust conditions. The data is based on an engine failure occurring at the minimum go speed and allows for a 3-second decision period with one engine operating at its initial thrust setting. In the case of a military thrust takeoff, an additional 2-second period is allowed for advancing the operating engine throttle to maximum thrust.

### WARNING

If an engine is lost above the maximum abort speed but below the minimum go speed or at a condition where insufficient rate of climb capability exists, the pilot can neither abort nor take off safely on the runway length remaining without considering such factors as reducing gross weight or engaging the overrun end arrestment cable.


### USE

To determine the maximum gross weight for 100 fpm single engine rate of climb, enter the applicable chart with the field temperature and project vertically up to the field altitude. From this point project horizontally to read the maximum gross weight. If the takeoff weight is higher than this value and gross weight cannot be safely reduced, the takeoff should be aborted.

### Sample Problem

|                         |                 |
|-------------------------|-----------------|
| A. Temperature          | 60° F (15.6 °C) |
| B. Altitude             | 8000 Ft         |
| C. Maximum Gross Weight | 43,700 Lb.      |

## SAMPLE MAXIMUM GROSS WEIGHT WITH SINGLE ENGINE

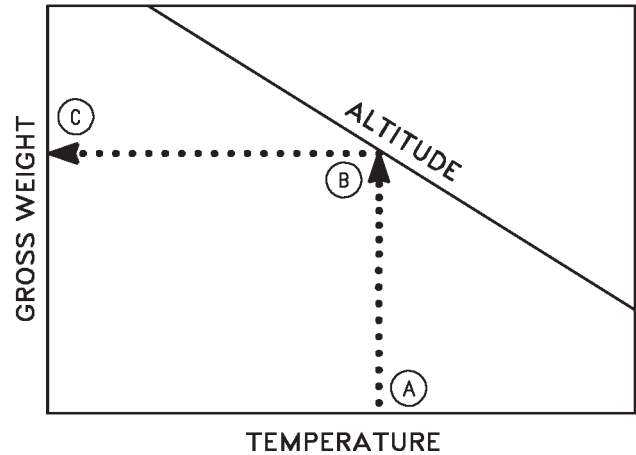

18AC-NFM-20-(4B5-1)12-CATI


### USE

To determine minimum go speed, enter the applicable plot with the prevailing density ratio, and project horizontally to the available runway length grid line. Parallel the nearest guideline up or down to intersect the baseline. From this point descend vertically to intersect the applicable takeoff gross weight curve, then horizontally to read minimum go speed. If this projected line does not intersect the computed takeoff gross weight curve, then there will be no corresponding minimum go speed. If the gross weight curve lies to the right of the projected line, a single-engine takeoff cannot be made under the combined conditions.

### NOTE

This problem assumes maximum thrust on operating engine within 5 seconds after engine failure. The minimum go speed for a maximum thrust takeoff will be less than that for a military thrust takeoff due to the greater acceleration with maximum thrust up to and including the 3-second decision time.

### SAMPLE MINIMUM GO SPEED

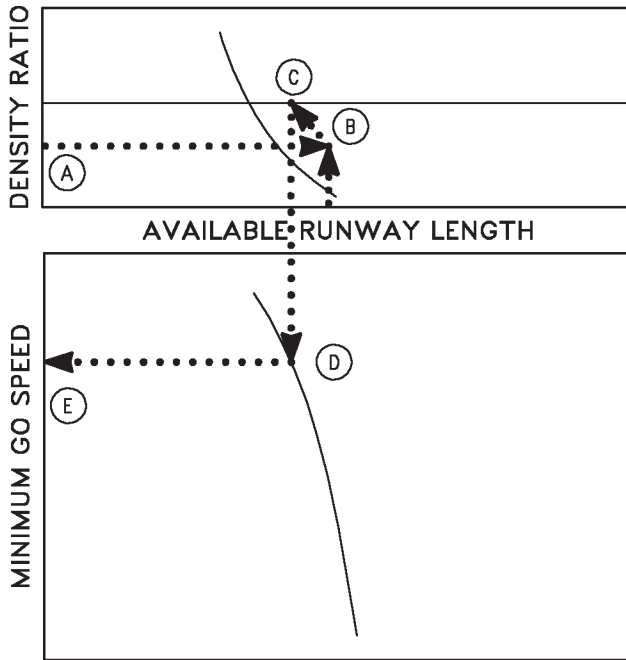

18AC-NFM-20-(103-1)11-CAT1

**Sample Problem**

Maximum Thrust Takeoff

- A. Density ratio 0.90
- B. Available runway length 8,000 Ft.
- C. Parallel guideline to baseline
- D. Takeoff gross weight 50,000 Lb.
- E. Minimum go speed 150 KCAS


### MAXIMUM ABORT SPEED CHARTS

These charts (figures 11-16 and 11-17) provide a means of determining the maximum speed at which an abort may be started and the aircraft stopped within the remaining runway length. Separate charts are provided for maximum and military thrust and various takeoff gross weights on both dry and wet runways. The data are based on a 3-second reaction time after engine failure followed by a 2-second transition time to reach idle thrust and full braking (brake limits applied).

**USE**

Enter the chart with the prevailing density ratio and project horizontally right to intersect the available runway length curve. From this point, project vertically down to the applicable gross weight curve for either dry or wet runway conditions, then horizontally left to read maximum abort speed.

### SAMPLE MAXIMUM ABORT SPEED

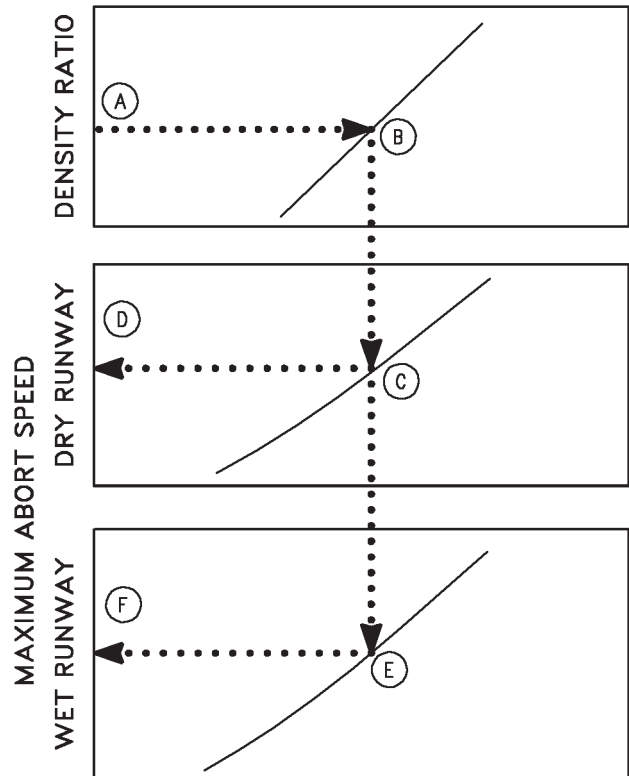

18AC-NFM-20-(98-1)11-CAT1

**Sample Problem**

Maximum Thrust Takeoff,

- A. Density ratio 0.90
- B. Available runway length 8,000 Ft.
- C. Gross weight 45,000 Lb.
- D. Maximum abort speed, Dry Runway 120 KCAS
- E. Maximum abort speed Wet Runway 105 KCAS

## TAKEOFF DISTANCE CHARTS

These charts (figures 11-18 and 11-19) are used to determine the no wind ground run distance, wind adjusted ground run and the total distance to climb to a height of 50 feet. Separate charts are provided for maximum and military thrust. A table has been provided on each chart to show nosewheel liftoff speed with the corresponding aircraft takeoff speed for various gross weight and CG combinations.

### USE

Enter the density ratio plot with the gross weight and project vertically up to intersect the appropriate CG curve. From this intersection, project horizontally to the left to read the minimum allowable density ratio for takeoff at this weight/CG combination.


Enter the chart with the applicable density ratio and project horizontally to the right to intersect the appropriate takeoff gross weight curve. From this intersection, project vertically down to read no wind ground run distance. Parallel the appropriate wind guideline (headwind or tailwind) to intersect the takeoff wind velocity. From this point project vertically down to read ground run adjusted for wind effects. To find the total distance required to climb to a height of 50 feet, continue down to the reflector line and project horizontally to the left scale. These takeoff speeds and distances reflect a CG location of 22% MAC. Use figures 11-20 and 11-21 to adjust for other CG locations.

### Sample Problem


#### Maximum Thrust Takeoff

|   |            |
|---|------------|
| A. Gross weight   | 48,000 Lb. |
| B. CG   | 20% MAC    |
| C. Minimum Density Ratio                                    | 0.83       |
| (Applicable density ratio > Minimum density ratio)          |            |
| D. Applicable Density ratio                                 | 0.90       |
| E. Gross weight   | 48,000 Lb. |
| F. No wind ground run distance                              | 4,300 Ft.  |
| G. Effective headwind                                       | 10 Kt.     |
| H. Ground run (wind corrected)                              | 4,000 Ft.  |
| I. Total distance required to climb to a height of 50 feet  | 5,200 Ft.  |
| J. Nosewheel liftoff speed for a CG of 22% MAC (from table) | 163 KIAS   |
| K. Takeoff speed (from table)                               | 173 KIAS   |


## SAMPLE TAKEOFF DISTANCE





GROSS WEIGHT  
1000 POUNDS



GROUND RUN



ADJUSTED GROUND RUN

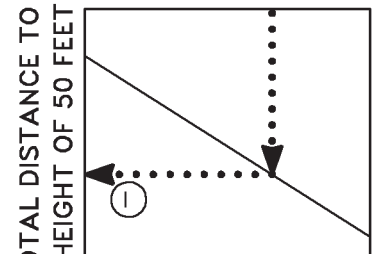

TOTAL DISTANCE TO A  
HEIGHT OF 50 FEET



# WIND COMPONENTS


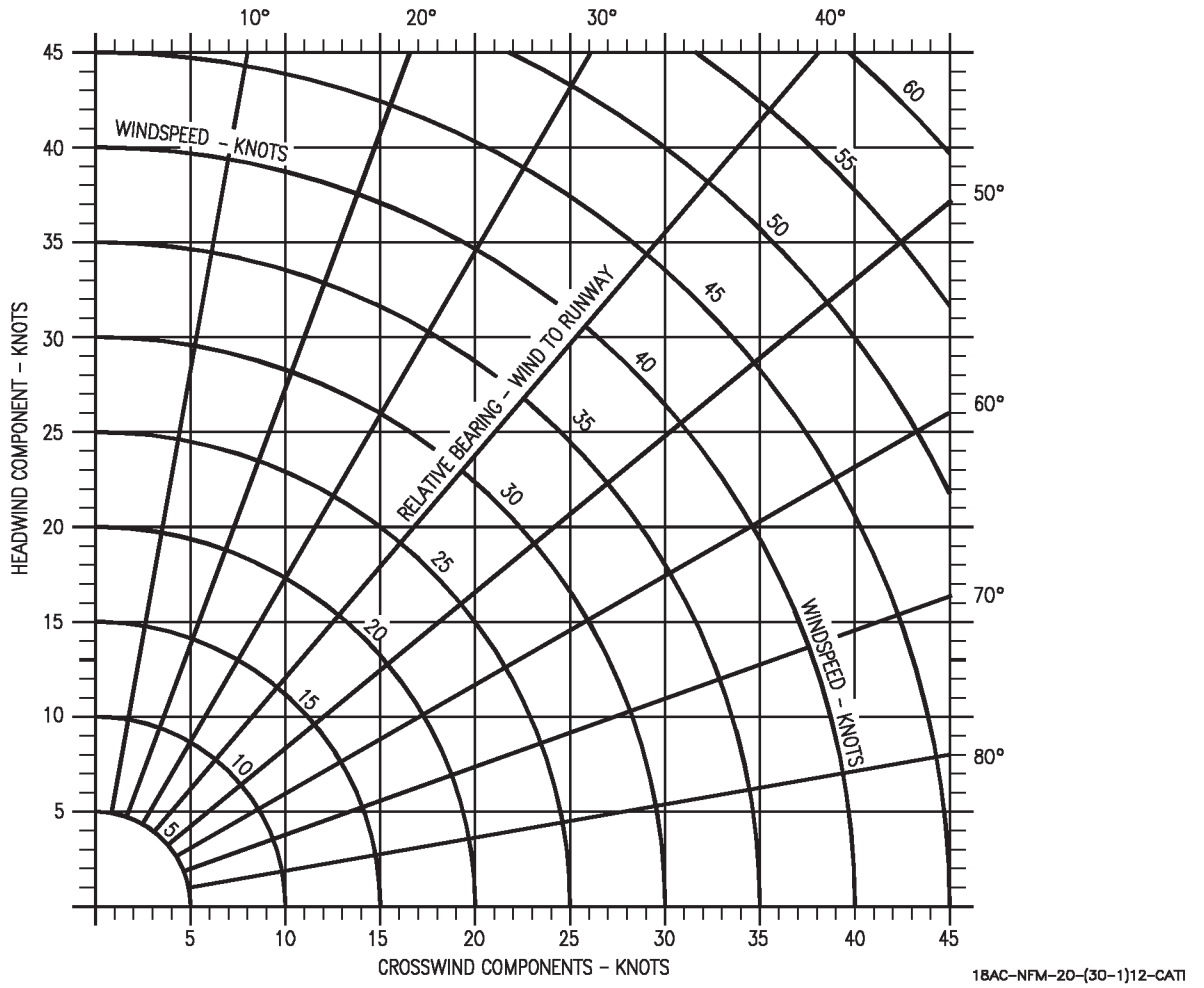



Figure 11-12. Wind Components



# DENSITY RATIO



FUEL GRADE:JP-5  
FUEL DENSITY:6.8 LB/GAL

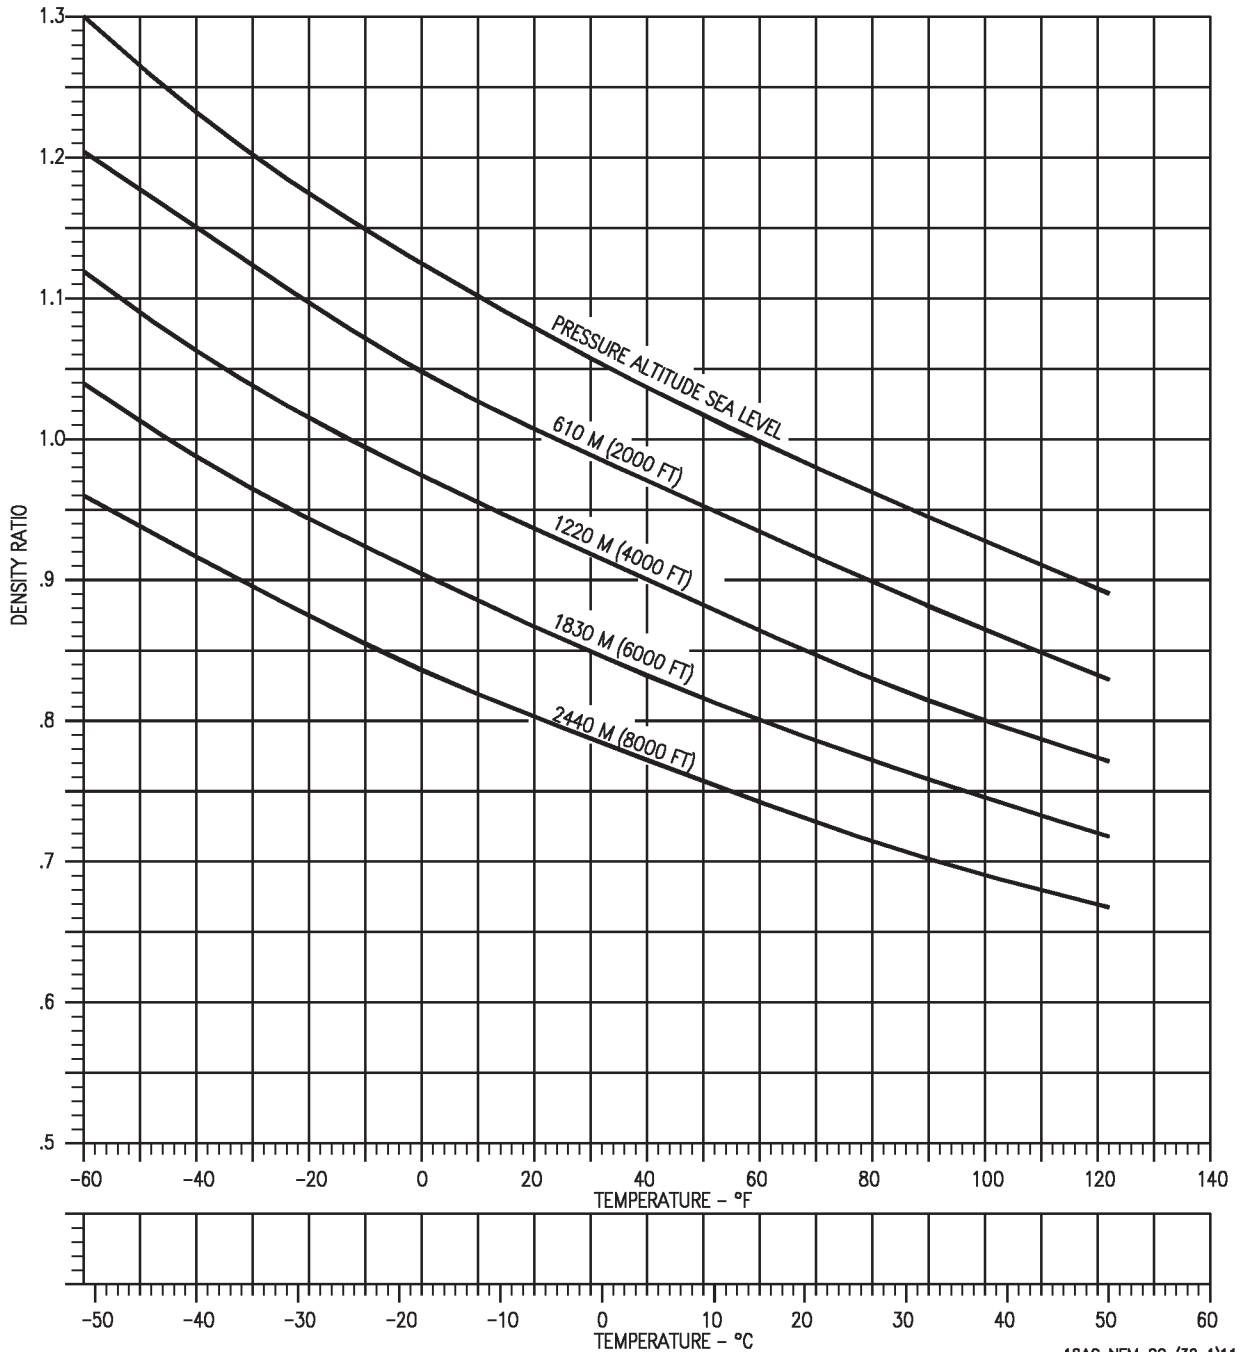

18AC-NFM-20-(32-1)11-CATI

Figure 11-13. Density Ratio


# MINIMUM GO SPEED

F404-GE-400  
MAXIMUM THRUST  
HARD DRY RUNWAY

REMARKS  
ENGINE(S): (2)F404-GE-400

AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN

GUIDE






FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: APRIL 1985  
DATA BASIS: FLIGHT TEST

**WARNING**

WITH ONE ENGINE FAILED, AT HEAVY WEIGHT, HOT DAY CONDITIONS, EVEN THE USE OF MAXIMUM A/B THRUST ON THE OPERATING ENGINE MAY NOT PROVIDE SUFFICIENT RATE OF CLIMB CAPABILITY TO SAFELY CONTINUE THE TAKEOFF. UNLESS EXTERNAL STORES CAN BE SAFELY JETTISONED, TAKEOFFS AT THESE CONDITIONS, AS DETERMINED FROM THE CHART PRESENTED BELOW, SHOULD BE ABORTED.

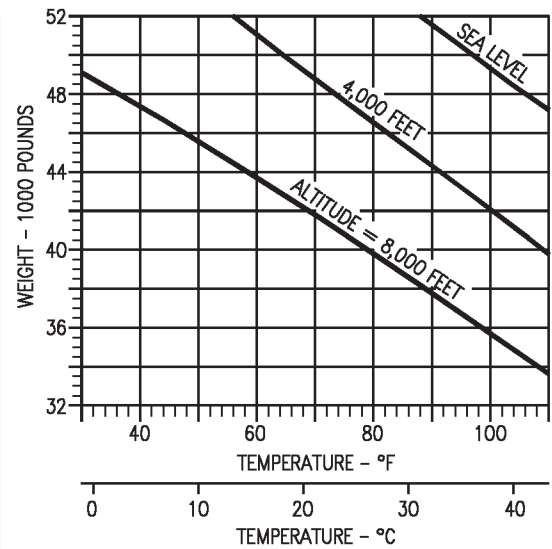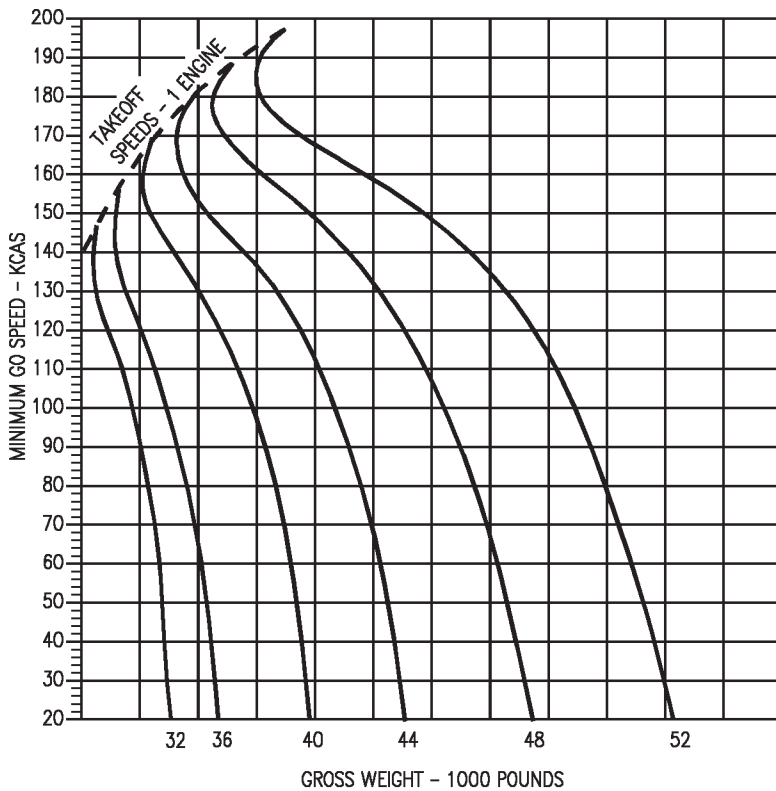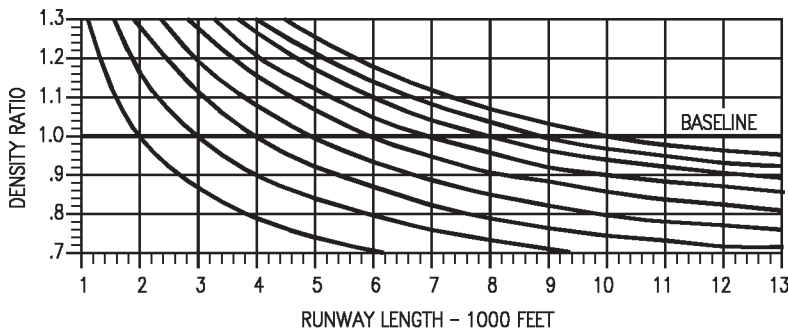

18AC-NFM-20-(102-1)12-CAT1

Figure 11-14. Minimum Go Speed - Maximum Thrust - F404-GE-400


# MINIMUM GO SPEED

F404-GE-400  
MILITARY THRUST  
HARD DRY RUNWAY


AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN

REMARKS  
ENGINE(S): (2)F404-GE-400



NOTE  
REMAINING ENGINE AT  
MAXIMUM THRUST AFTER  
FAILURE RECOGNIZED.



DATE: APRIL 1985  
DATA BASIS: FLIGHT TEST

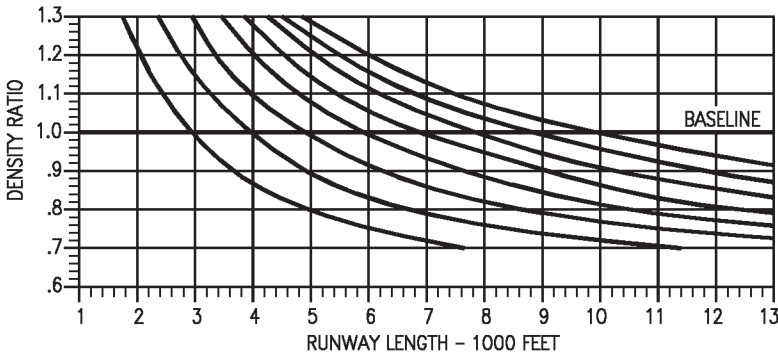

**WARNING**  
WITH ONE ENGINE FAILED, AT HEAVY WEIGHT, HOT DAY CONDITIONS, EVEN THE USE OF MAXIMUM A/B THRUST ON THE OPERATING ENGINE MAY NOT PROVIDE SUFFICIENT RATE OF CLIMB CAPABILITY TO SAFELY CONTINUE THE TAKEOFF. UNLESS EXTERNAL STORES CAN BE SAFELY JETTISONED, TAKEOFFS AT THESE CONDITIONS, AS DETERMINED FROM THE CHART PRESENTED BELOW, SHOULD BE ABORTED.

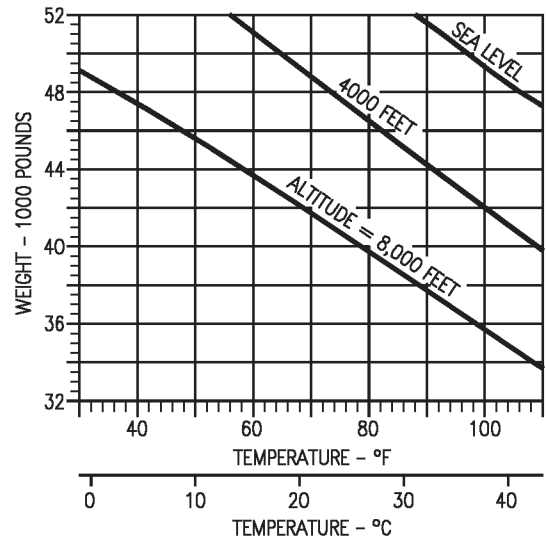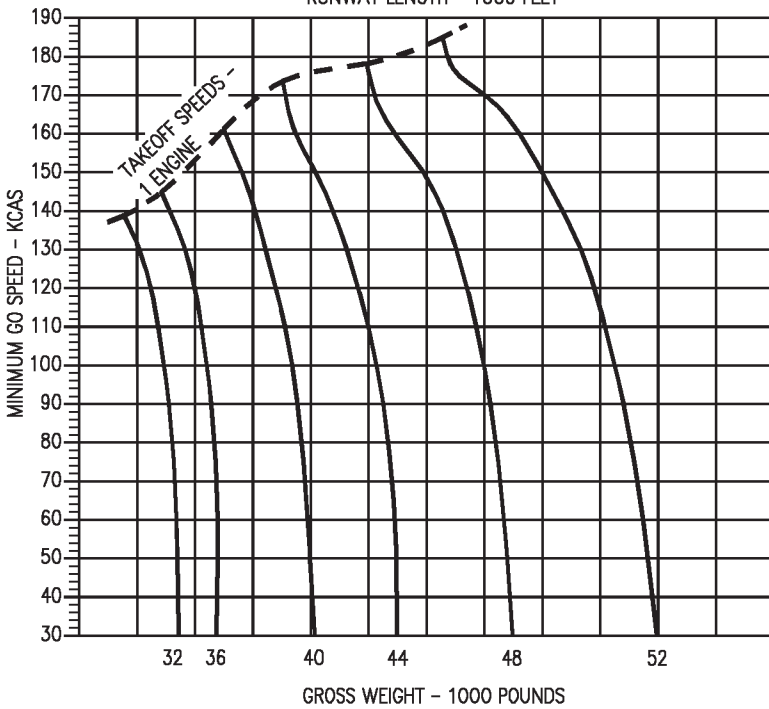

18AC-NFM-20-(101-1)12-CATI

Figure 11-15. Minimum Go Speed - Military Thrust - F404-GE-400


# MAXIMUM ABORT SPEED

F404-GE-400  
MAXIMUM THRUST

AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN




REMARKS  
ENGINE(S): (2)F404-GE-400

NOTE  
REMAINING ENGINE AT GROUND  
IDLE THRUST AFTER FAILURE  
RECOGNIZED.



DATE: APRIL 1985  
DATA BASIS: FLIGHT TEST

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

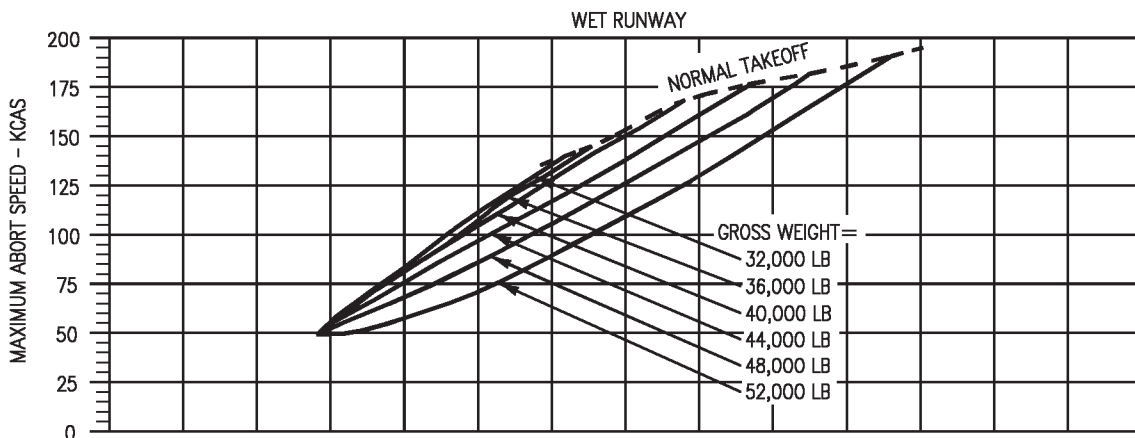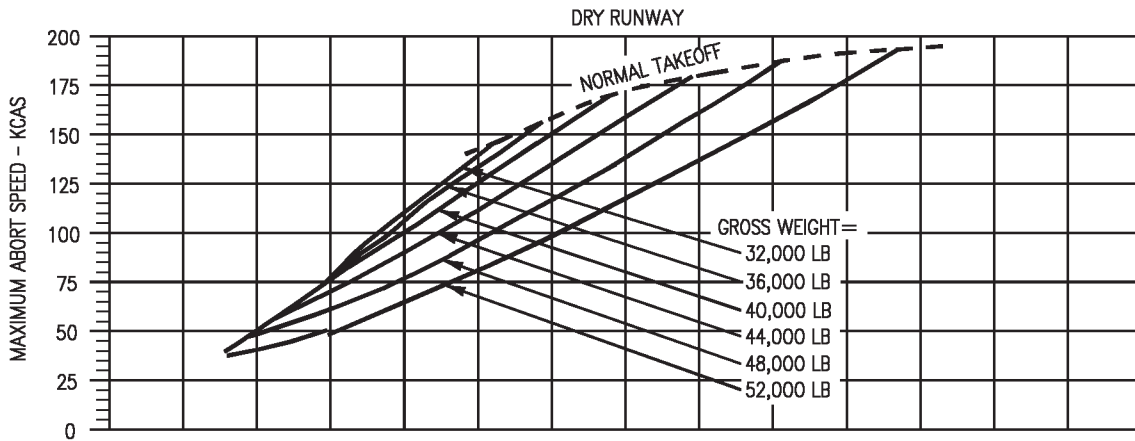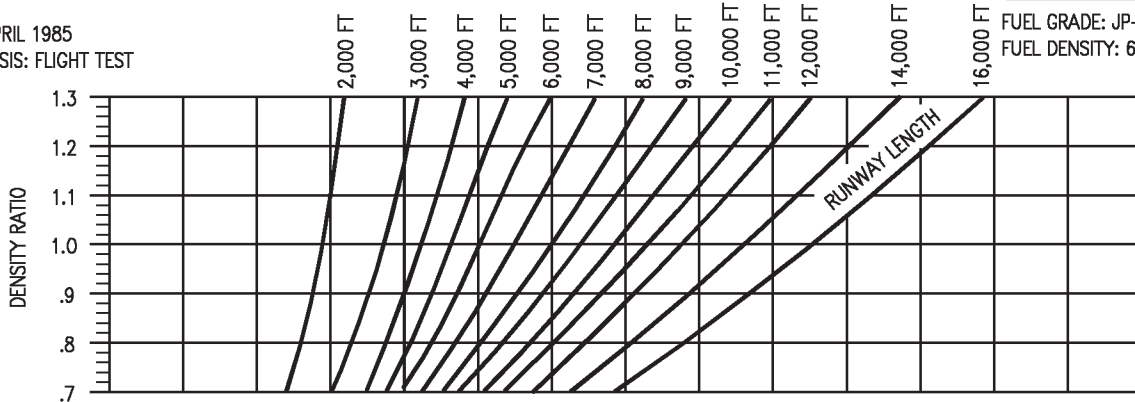

18AC-NFM-20-(99-1)12-CAT1

Figure 11-16. Maximum Abort Speed - Maximum Thrust - F404-GE-400

# MAXIMUM ABORT SPEED

F404-GE-400  
MILITARY THRUST


AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN

REMARKS  
ENGINE(S): (2)F404-GE-400


NOTE  
REMAINING ENGINE AT GROUND  
IDLE THRUST AFTER FAILURE  
RECOGNIZED.

DATE: APRIL 1985  
DATA BASIS: FLIGHT TEST


GUIDE




FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

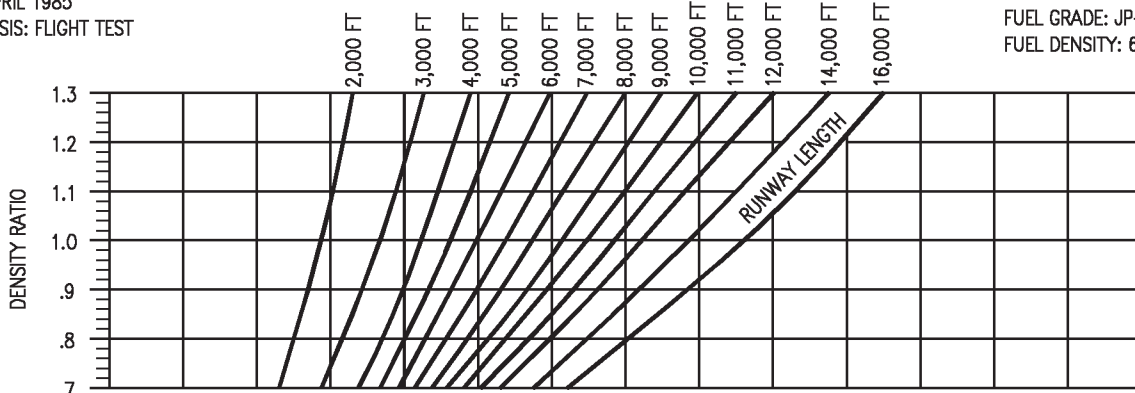

DRY RUNWAY

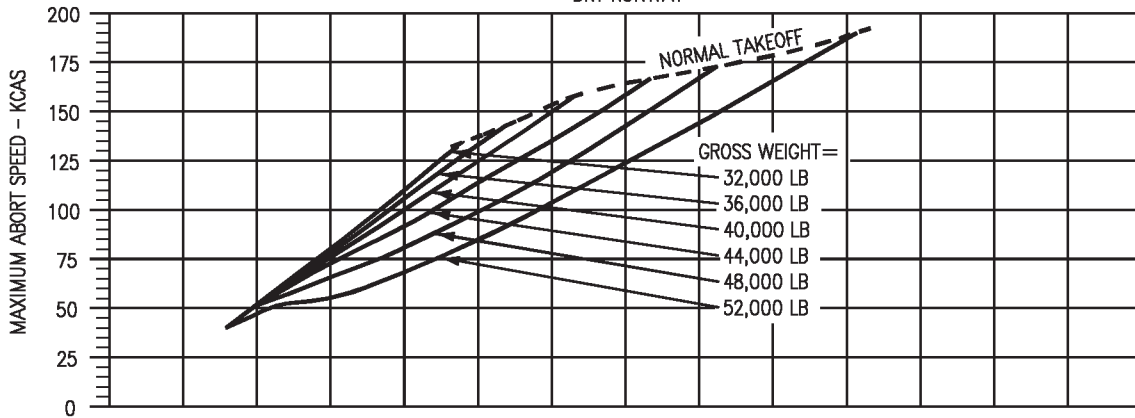

WET RUNWAY

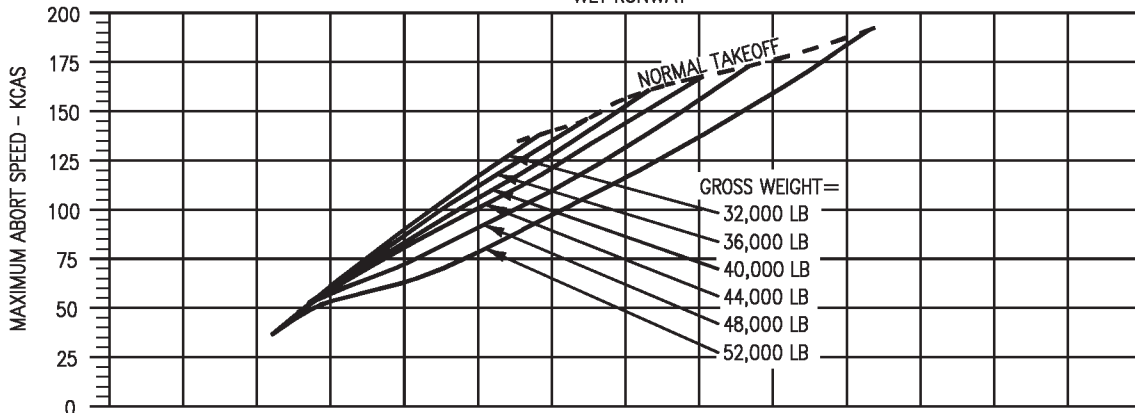

18AC-NFM-20-(100-1)12-CAT1

Figure 11-17. Maximum Abort Speed - Military Thrust - F404-GE-400

# TAKEOFF DISTANCE

F404-GE-400  
MAXIMUM THRUST  
HARD DRY RUNWAY

REMARKS  
ENGINE(S): (2)F404-GE-400

AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN

NOTES



FOR TAKEOFF WEIGHTS GREATER THAN 45,000 POUNDS, 10° NOSE UP INITIAL STABILATOR TRIM IS RECOMMENDED.

GROUND ROLL DISTANCES ARE FOR A TAKEOFF CG OF 22% MAC. FOR GROUND ROLL CORRECTION FOR OTHER CG LOCATIONS, REFER TO TAKEOFF GROUND ROLL CORRECTION FOR CG - MAXIMUM THRUST.

CHECK FOR MINIMUM DENSITY RATIO FOR TAKEOFF WEIGHT AND C.G. LOCATION.



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

GUIDE

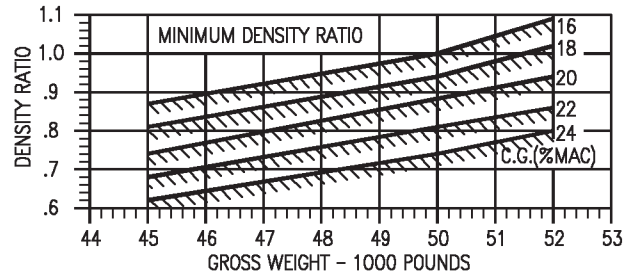


| CG (%C) | GROSS WEIGHT - 1000 POUNDS               |             |             |
|---------|--|-------------|-------------|
|         | 32                                       | 36          | 40          |
|         | NOSEWHEEL LIFTOFF/ TAKEOFF SPEEDS (KIAS) |             |             |
| 16      | 145/<br>159                              | 154/<br>167 | 165/<br>175 |
| 18      | 139/<br>154                              | 148/<br>162 | 159/<br>170 |
| 20      | 134/<br>149                              | 142/<br>157 | 152/<br>164 |
| 22      | 128/<br>144                              | 135/<br>151 | 145/<br>158 |
| 24      | 121/<br>140                              | 129/<br>147 | 138/<br>153 |
| 26      | 114/<br>136                              | 122/<br>142 | 131/<br>148 |

DATE: APRIL 1985  
DATA BASIS: FLIGHT TEST

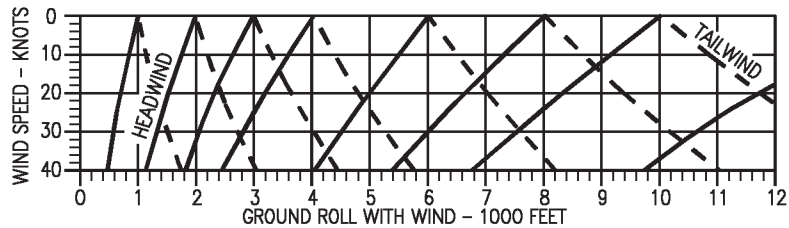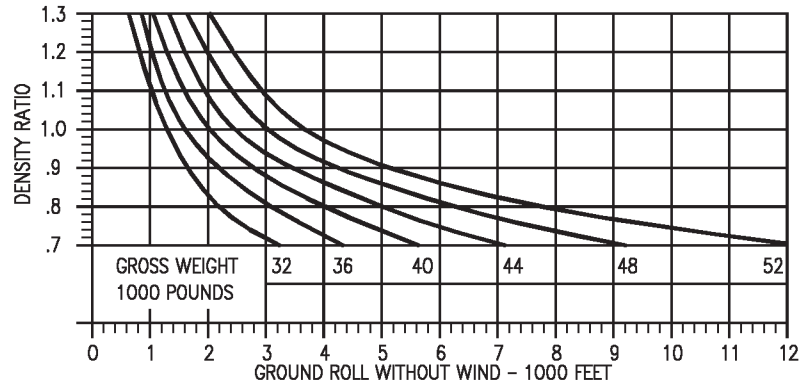

| CG (%C) | GROSS WEIGHT - 1000 POUNDS               |             |             |
|---------|--|-------------|-------------|
|         | 44                                       | 48          | 52          |
|         | NOSEWHEEL LIFTOFF/ TAKEOFF SPEEDS (KIAS) |             |             |
| 16      | 176/<br>185                              | 183/<br>192 | 193/<br>203 |
| 18      | 170/<br>179                              | 177/<br>186 | 186/<br>196 |
| 20      | 162/<br>173                              | 170/<br>180 | 180/<br>189 |
| 22      | 154/<br>167                              | 163/<br>173 | 174/<br>182 |
| 24      | 147/<br>161                              | 156/<br>167 | 167/<br>175 |
| 26      | 140/<br>155                              | 149/<br>160 | 159/<br>168 |

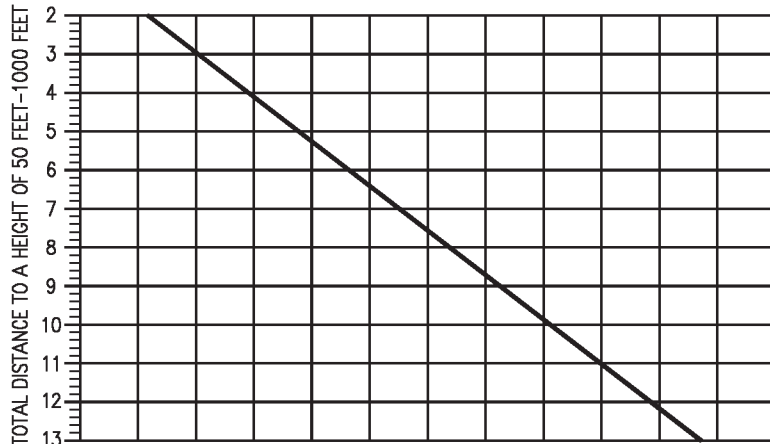

18AC-NFM-20-(487-1)13-CAT1

Figure 11-18. Takeoff Distance - Maximum Thrust - F404-GE-400

# TAKEOFF DISTANCE



AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN

F404-GE-400  
MILITARY THRUST  
HARD DRY RUNWAY  
REMARKS  
ENGINE(S): (2)F404-GE-400

NOTES



- FOR TAKEOFF WEIGHTS GREATER THAN 45,000 POUNDS, 10° NOSE UP INITIAL STABILATOR TRIM IS RECOMMENDED.
- GROUND ROLL DISTANCES ARE FOR A TAKEOFF CG OF 22% MAC. FOR GROUND ROLL CORRECTION FOR OTHER CG LOCATIONS, REFER TO TAKEOFF GROUND ROLL CORRECTION FOR CG - MILITARY THRUST.
- CHECK FOR MINIMUM DENSITY RATIO FOR TAKEOFF WEIGHT AND C.G. LOCATION.
- USE MAXIMUM THRUST FOR C.G. LOCATIONS BETWEEN 16%  $\bar{c}$  AND 18%  $\bar{c}$ .

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

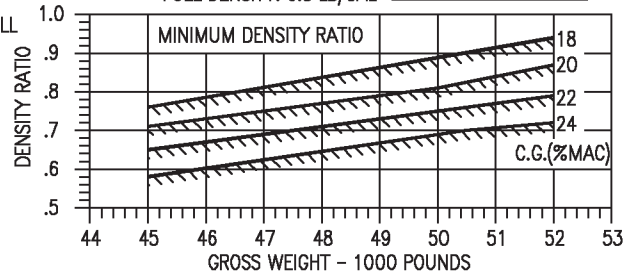


DATE: APRIL 1985  
DATA BASIS: FLIGHT TEST

| CG (% $\bar{c}$ ) | GROSS WEIGHT - 1000 POUNDS              |             |             |
|-------------------|---|-------------|-------------|
|                   | 32                                      | 36          | 40          |
|                   | NOSEWHEEL LIFTOFF/TAKEOFF SPEEDS (KIAS) |             |             |
| 18                | 136/<br>146                             | 145/<br>155 | 154/<br>163 |
| 20                | 131/<br>142                             | 139/<br>150 | 148/<br>158 |
| 22                | 125/<br>138                             | 132/<br>144 | 141/<br>152 |
| 24                | 119/<br>134                             | 126/<br>140 | 134/<br>147 |
| 26                | 112/<br>130                             | 119/<br>135 | 127/<br>141 |

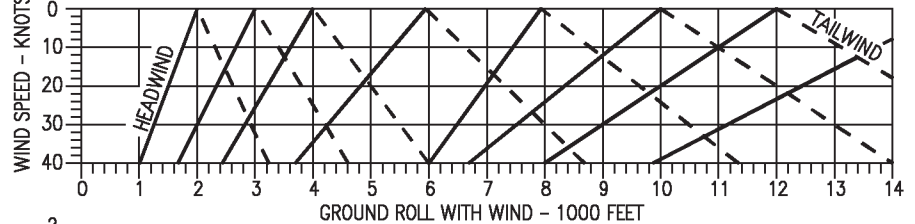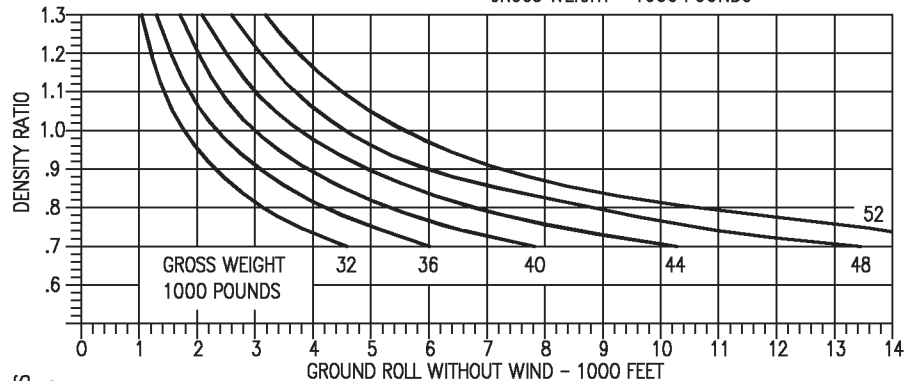

| CG (% $\bar{c}$ ) | GROSS WEIGHT - 1000 POUNDS              |             |             |
|-------------------|---|-------------|-------------|
|                   | 44                                      | 48          | 52          |
|                   | NOSEWHEEL LIFTOFF/TAKEOFF SPEEDS (KIAS) |             |             |
| 18                | 164/<br>174                             | 170/<br>178 | 178/<br>186 |
| 20                | 157/<br>167                             | 164/<br>171 | 172/<br>179 |
| 22                | 149/<br>160                             | 158/<br>164 | 165/<br>171 |
| 24                | 142/<br>154                             | 151/<br>158 | 158/<br>165 |
| 26                | 135/<br>147                             | 143/<br>151 | 150/<br>158 |

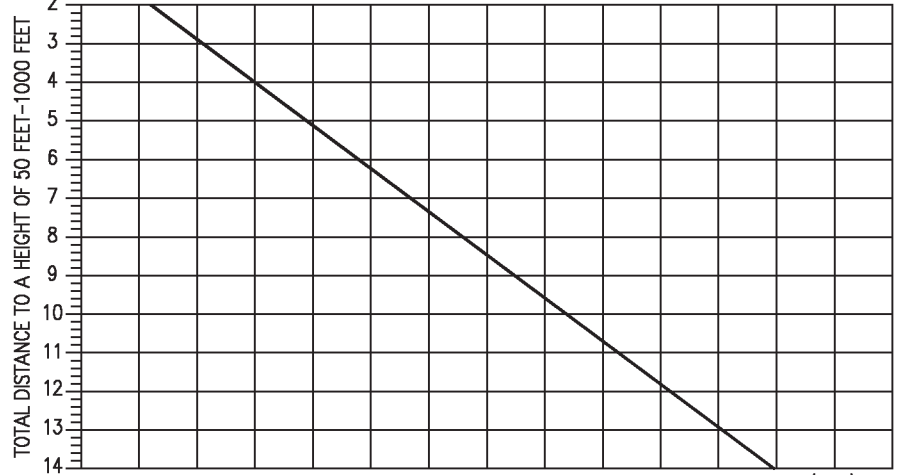

1BAC-NFM-20-(27-1)13-CAT1

Figure 11-19. Takeoff Distance - Military Thrust - F404-GE-400

# TAKEOFF GROUND ROLL CORRECTION FOR CG


AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN

F404-GE-400  
MAXIMUM THRUST



REMARKS  
ENGINE(S): (2)F404-GE-400

⊙ INCREASE GROUND ROLL BY 5% PER %  $\bar{c}$  FORWARD OF 18%  $\bar{c}$   
(FORWARD TO 16%  $\bar{c}$  ONLY).

DATE: JANUARY 1984  
DATA BASIS: FLIGHT TEST



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

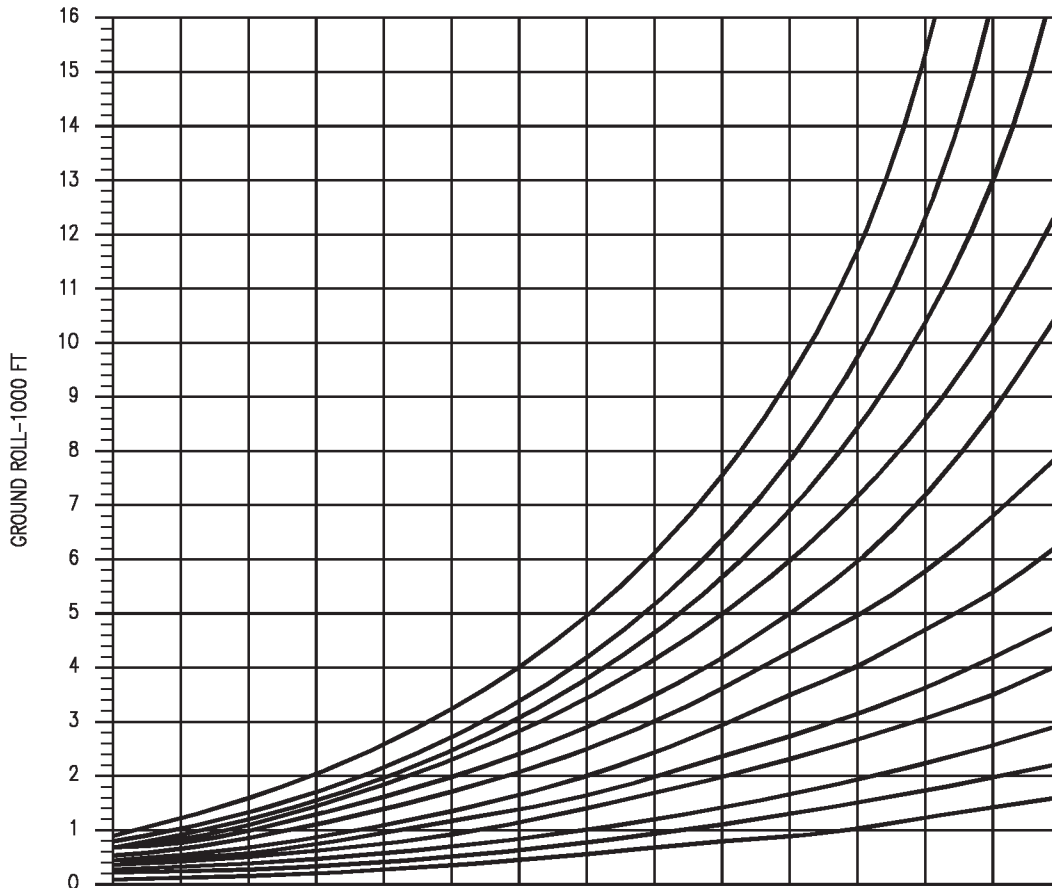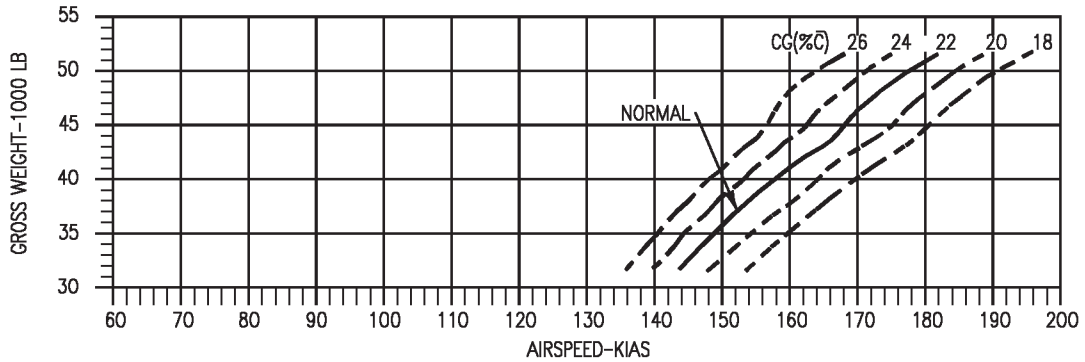

18AC-NFM-20-(105-1)13-CATI

Figure 11-20. Takeoff Ground Roll Correction for CG - Maximum Thrust - F404-GE-400



# TAKEOFF GROUND ROLL CORRECTION FOR CG


AIRCRAFT CONFIGURATION  
T.E. FLAPS 30°  
GEAR DOWN

F404-GE-400  
MILITARY THRUST



REMARKS  
ENGINE(S): (2)F404-GE-400

DATE: JANUARY 1984  
DATA BASIS: FLIGHT TEST

⊙ USE MAXIMUM THRUST FOR C.G. LOCATIONS  
BETWEEN 16%  $\bar{c}$  AND 18%  $\bar{c}$ .



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

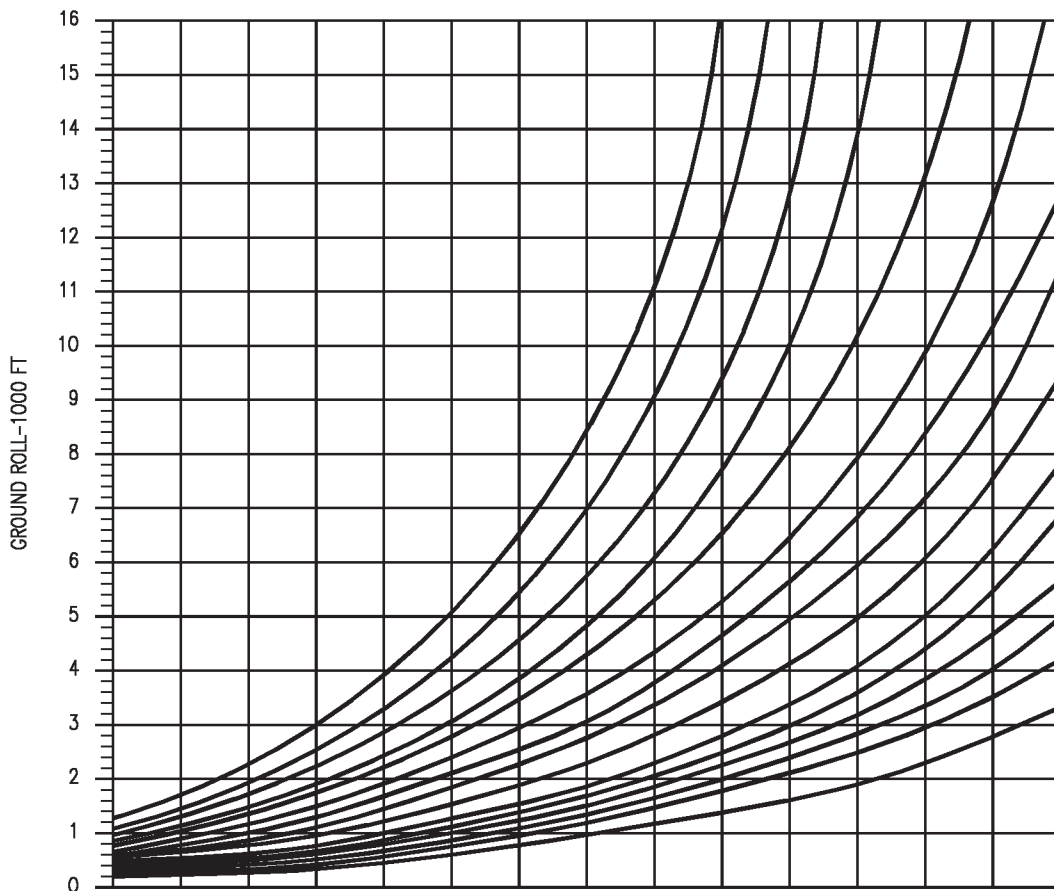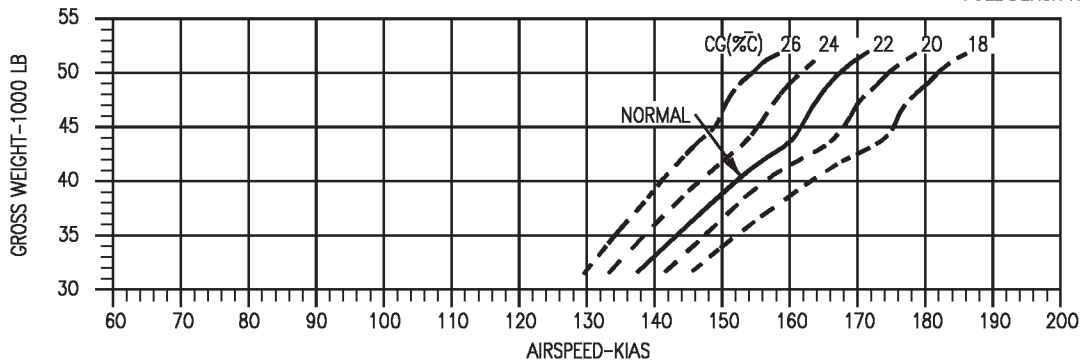

18AC-NFM-20-(106-1)13-CAT1

Figure 11-21. Takeoff Ground Roll Correction for CG - Military Thrust - F404-GE-400

**PART 3 - CLIMB F404-GE-400**

**TABLE OF CONTENTS**

**CHARTS**

|  |        |
|--|--------|
| Takeoff Allowances and Acceleration to Climb Speed ..... | 11-44A |
| Military Thrust Climb .....                              | 11-45  |
| Climb - 350 KCAS -                                       |        |
| Time .....   | 11-51  |
| Fuel.....  | 11-52  |
| Distance .....   | 11-53  |
| Peak Rate of Climb-Military Thrust.....                  | 11-54  |
| Instantaneous Rate of Climb -                            |        |
| Military Thrust.....                                     | 11-58  |
| Peak Rate of Climb-Maximum Thrust .....                  | 11-59  |
| Instantaneous Rate of Climb -                            |        |
| Maximum Thrust .....                                     | 11-64  |
| Military Thrust Climb -                                  |        |
| One Engine Operating .....                               | 11-65  |
| Supersonic Maximum Thrust Climb .....                    | 11-71  |
| Single Engine Rate of Climb .....                        | 11-75  |
| Adjustment to SEROC for Retracting                       |        |
| Landing Gear .....                                       | 11-84C |

**TAKEOFF ALLOWANCES CHART**

The takeoff allowances and acceleration to climb speed chart (figure 11-22) presents fuel usage during start, taxi, engine runup. This chart is used to determine fuel, time and distance data from brake release to 350 KIAS or climb speed.

**CLIMB PERFORMANCE CHARTS**

Climb charts present the military thrust climb performance for two-engine and single engine operation. Climb charts are also included to present the maximum thrust climb performance for two-engine operation. These charts are used to obtain climb data after takeoff to selected altitude in a gear-up and flaps-up configuration.

**MILITARY THRUST CLIMB**

Military thrust climb charts (figure 11-23 for two-engine operation and figure 11-31 for single engine operation) are provided for various drag indexes and gross weights. The data includes climb speed schedule; combat ceiling and service ceiling; optimum cruise altitude; and separate charts for time, fuel, and distance required to climb from sea level to selected altitude at climb speed schedule. Also provided are data for peak rate of climb (figure 11-27) and instantaneous rate of climb (figure 11-28) for two-engine operation at military thrust.

**MAXIMUM THRUST CLIMB**


Maximum thrust climb charts for two-engine operation (figure 11-29) are provided for various drag indexes and gross weights. The data include peak rate of climb Mach number; combat ceiling; and separate charts for time, fuel, and distance required to climb from sea level to selected altitude at peak rate of climb. Also included are data for instantaneous rate of climb (figure 11-30).

**USE**


**CLIMB SPEED SCHEDULE** - From the appropriate drag index column determine the optimum climb speed (calibrated airspeed to constant Mach number) for the selected climb altitude. The preclimb fuel requirements should be noted if the takeoff acceleration phase is to be considered in the climb planning.

**COMBAT CEILING AND SERVICE CEILING** - Enter the chart with the initial climb gross weight and project vertically up to the appropriate drag index curve, then horizontally left to the temperature baseline and parallel the appropriate temperature deviation guideline to the correct temperature deviation. Project horizontally left to find the service ceiling and the combat ceiling for initial climb gross weight.

### SAMPLE COMBAT CEILING AND SERVICE CEILING

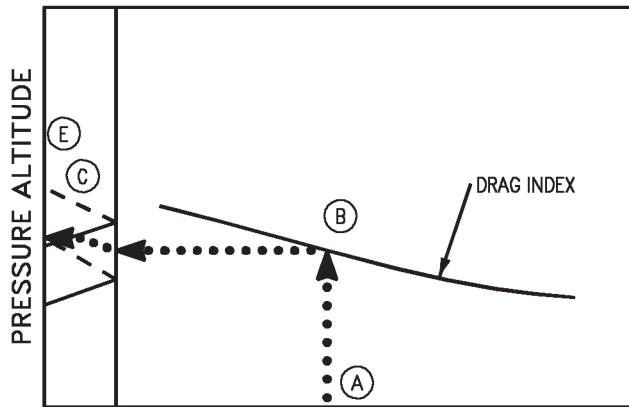

TEMPERATURE DEVIATION INITIAL GROSS WEIGHT

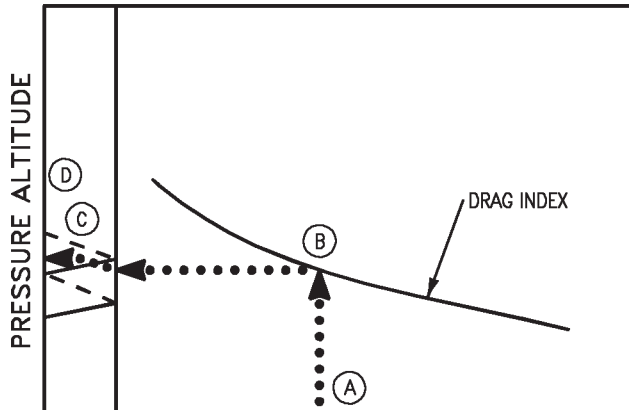

TEMPERATURE DEVIATION INITIAL GROSS WEIGHT

18AC-NFM-20-(159-1)-CATI-34

**Sample Problem**

Combat Ceiling and Service Ceiling (figure 11-23, sheet 2)

- A. Initial gross weight 44,000 Lb.
- B. Drag Index 100
- C. Temperature deviation -10°C from standard day
- D. Service ceiling 41,000 Ft.
- E. Combat ceiling 39,500 Ft.



**OPTIMUM CRUISE ALTITUDE** - Enter the chart with the initial gross weight and project vertically up to the appropriate drag index curve, then horizontally left to the temperature baseline and parallel the appropriate temperature deviation guideline to the correct temperature deviation. Project horizontally left to find the optimum cruise altitude for initial climb gross weight.

Optimum Cruise Altitude (figure 11-23, sheet 3)

- A. Initial gross weight 44,000 Lb.
- B. Drag Index 100
- C. Temperature deviation -10°C from standard day
- D. Optimum cruise altitude 36,450 Ft.

**TIME, FUEL, AND DISTANCE** - Presentations of these charts are identical: therefore, they are used in the same manner. Enter the appropriate chart with the initial gross weight and project horizontally right to intersect the desired altitude then vertically down to the appropriate drag index curve. From this point project horizontally left to the temperature baseline and parallel the appropriate temperature deviation guideline to the correct temperature deviation, project horizontally left to find time, fuel, or distance required.

### SAMPLE TIME-FUEL-DISTANCE TO CLIMB

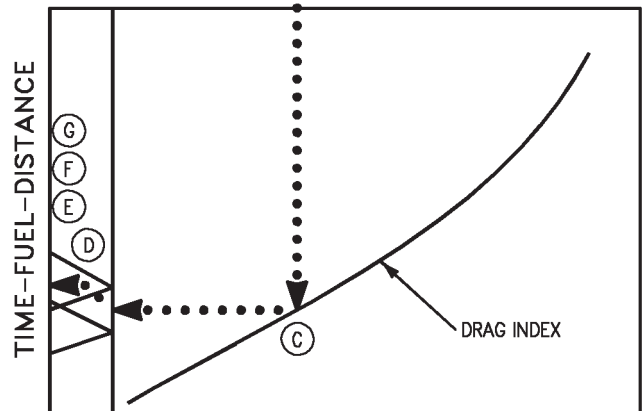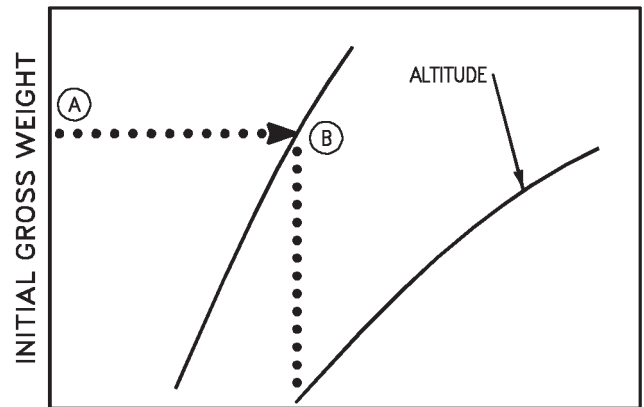

TEMPERATURE DEVIATION

18AC-NFM-20-(160-1)-CATI-35

Time, Fuel, and Distance to Climb (figure 11-23, sheets 4, 5, & 6)

|  |            |
|--|------------|
| A. Initial gross weight                    | 44,000 Lb. |
| B. Selected altitude                       | 35,000 Ft. |
| C. Drag Index                              | 100        |
| D. Temperature deviation from standard day | +10°C      |
| E. Time to climb                           | 7.4 Min.   |
| F. Fuel required                           | 1480 Lb.   |
| G. Distance                                | 60NM       |

**Sample Problem**

|                          |            |
|--------------------------|------------|
| A. Gross Weight          | 35,000 Lb. |
| B. Cruise Altitude       | 30,000 Ft. |
| C. Drag index            | 150        |
| D. Temperature baseline  |            |
| E. Temperature deviation | +5°C       |
| F. Fuel required         | 1000 Lb.   |
| Time to Climb            | 4.8 Min.   |
| Distance nautical miles  | 33 NM      |


**CLIMB CHARTS - 350 KCAS**

These charts (figure 11-24 thru figure 11-26) show time, fuel, and distance for a simplified military thrust climb. These data charts are based on climbing at 350 knots until interception of the constant Mach portion of the military thrust climb speed schedule, then maintaining constant Mach to cruise altitude.

**USE**

Enter the charts with the initial climb gross weight. Project horizontally to the right and intersect the assigned cruise altitude, or the optimum cruise altitude for the computed drag index. Project vertically downward to intersect the applicable drag index line, then project horizontally to the left to the temperature deviation baseline (corresponds to a U.S. Standard day (°C)). Parallel the applicable guideline (hotter or colder) to intersect a vertical grid line corresponding to the degree of deviation between forecast flight temperature and standard day temperature. From this point continue horizontally to the left to read the planning data (fuel, time, or distance).

**SAMPLE  
TIME-FUEL-DISTANCE  
TO CLIMB-350 KCAS**

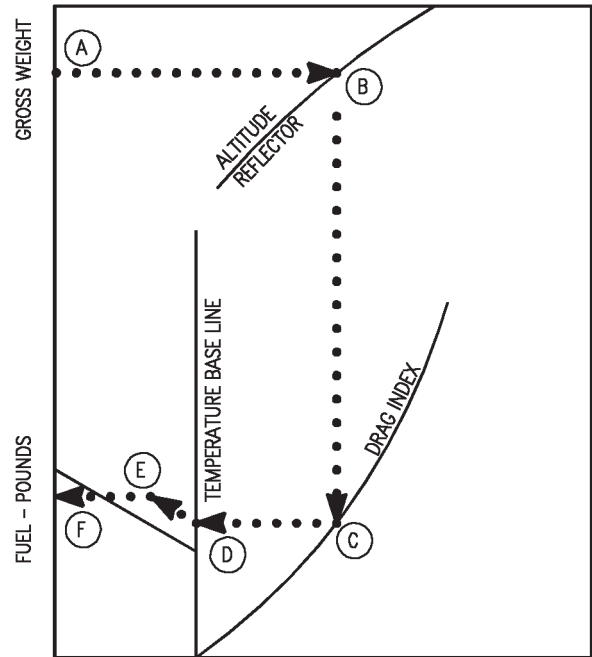

TEMP DEVIATION

18AC-NFM-20-(312-1)11-CATI

### PEAK RATE OF CLIMB CHARTS

These charts provide peak rate of climb data for two-engine operation. The data are based on either military thrust (figure 11-27) or maximum thrust (figure 11-29) at selected altitudes, gross weights, and drag indexes. The charts include a climb schedule (Mach number) and the normal time, fuel, and distance required charts which are used in an identical manner as the military thrust climb charts based on the climb speed schedule. A combat ceiling chart is included for maximum thrust.

#### USE

**MACH NUMBER** - Enter the chart at the selected pressure altitude and project horizontally right to the appropriate drag index curve, then vertically down to find the Mach number for peak rate of climb.


### INSTANTANEOUS RATE OF CLIMB CHARTS

These charts are based on two-engine operation at military thrust (figure 11-28) or maximum thrust (figure 11-30) and provides instantaneous rate of climb for any given altitude gross weight combination with various drag indexes.

#### USE

Enter the chart with the appropriate gross weight and project horizontally right to the selected altitude curve. From this point, project vertically down to the computed drag index curve, then horizontally left to read the instantaneous rate of climb in feet per minute.

### SAMPLE INSTANTANEOUS RATE OF CLIMB

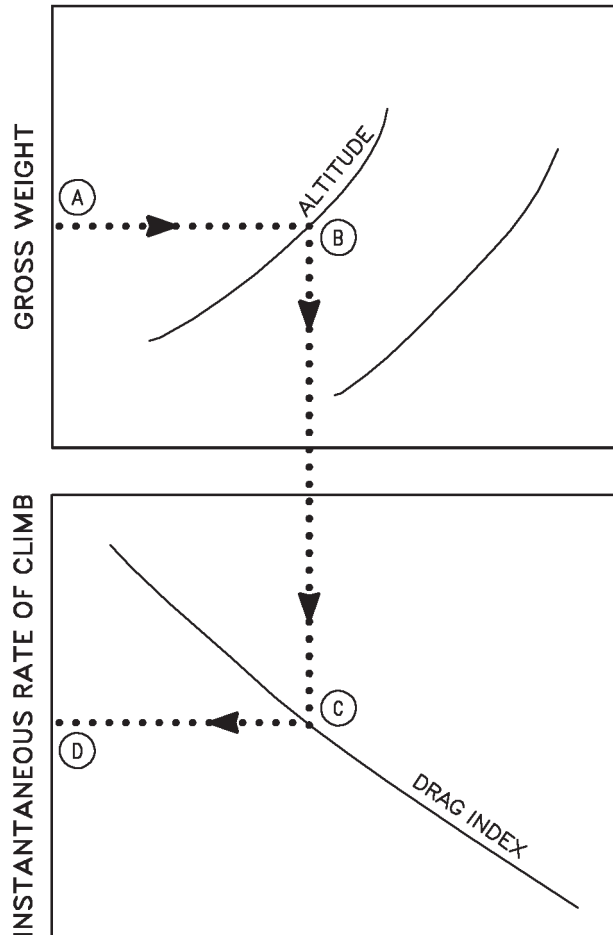

18AC-NFM-20-(161-1)11-CATI

#### Sample Problem

Instantaneous Rate of Climb (figure 11-28)

- |                                |            |
|--------------------------------|------------|
| A. Gross weight                | 40,000 Lb. |
| B. Selected altitude           | 30,000 Ft. |
| C. Drag index                  | 100        |
| D. Instantaneous rate of climb | 4,100 FPM  |

## SUPERSONIC MAXIMUM THRUST CLIMB CHARTS

These charts (figure 11-32, sheets 1 thru 4) are plotted for supersonic maximum thrust climb from 35,000 feet to the supersonic combat ceiling. Distance traveled in the climb is plotted against gross weight, with guidelines provided to show the weight reduction as the climb progresses. The time to distance/altitude relationship is superimposed on the plot. Level flight acceleration data are provided which includes time, fuel used (gross weight change), and distance required to accelerate from the subsonic to the supersonic climb Mach number at 35,000 feet. If supersonic climb is contemplated, acceleration at 35,000 feet followed by the climb is recommended, since acceleration to supersonic Mach numbers at this altitude provides for the optimum performance capability.

### USE

Enter the chart with the gross weight and proceed vertically to the initial Mach number and note the corresponding distance and time. Proceed parallel to the guidelines to the desired supersonic climb Mach number (end of acceleration). Project both vertically downward and horizontally to the left from this point to read gross weight and distance traveled, also note the time. From these values, subtract the distance, weight, and time corresponding to the initial Mach number to determine the distance, fuel, and time required to accelerate. From the climb Mach number gross weight intersection (start of climb), proceed parallel along the guidelines to the desired altitude. Obtain the distance, gross weight, and time for this starting point. Subtract from this data the corresponding values at the start of climb to obtain the distance traveled, the weight change (fuel used), and the time required to complete the climb. If total distance, fuel and time are desired, add the climb and acceleration values together.


### Sample Problem

Configuration: (2)AIM-9 +(2)AIM-7

|  |            |
|--|------------|
| A. Initial gross weight                          | 42,000 Lb. |
| B. Initial Mach number                           | 1.1        |
| C. Time corresponding to initial Mach number     | 0.7 Min.   |
| D. Distance corresponding to initial Mach number | 6.9 NM     |
| E. Climb Mach number                             | 1.24       |
| F. Time at end of acceleration                   | 1.3 Min.   |

|  |            |
|--|------------|
| G. Distance at end of acceleration                       | 13.0 NM    |
| H. Gross weight at end of acceleration                   | 41,500 Lb. |
| I. Time required for acceleration (F-C)                  | 0.6 Min.   |
| J. Fuel required for acceleration (A-H)                  | 500 Lb.    |
| K. Distance required for acceleration (G-D)              | 6.1 NM     |
| L. Altitude at end of climb                              | 46,000 Ft. |
| M. Time at end of climb                                  | 3.7 Min.   |
| N. Distance at end of climb                              | 42.0 NM    |
| O. Gross weight at end of climb                          | 40,500 Lb. |
| P. Time required for climb (M-F)                         | 2.4 Min.   |
| Q. Distance required for climb (N-G)                     | 29.0 NM    |
| R. Fuel required for climb (H-O)                         | 1,000 Lb.  |
| S. Total time required to accelerate and climb (I+P)     | 3.0 Min.   |
| T. Total distance required to accelerate and climb (K+Q) | 35.1 NM    |
| U. Total fuel required to accelerate and climb (J+R)     | 1,500 Lb.  |

## SAMPLE SUPERSONIC MAXIMUM THRUST CLIMB

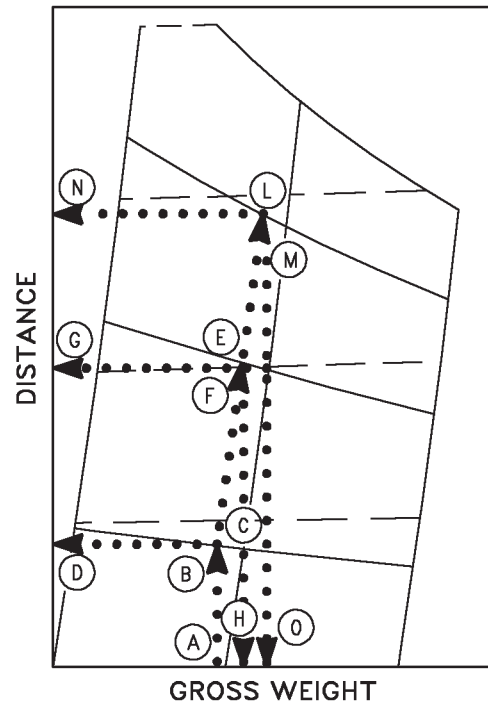

18AC-NFM-20-(311-1)11-CATI

# SINGLE ENGINE RATE OF CLIMB LAUNCH/TAKEOFF CONFIGURATION CHARTS

These charts (figure 11-33, sheets 1 thru 12) provide the single engine rate of climb capability in the catapult launch and field takeoff (half flaps, gear down) configurations with both maximum afterburner and military rated thrust on the operating engine. Charts are provided for six different external store loadings. The single engine rate of climb achievable with external stores jettisoned is also provided on each chart. Single engine rate of climb is presented as a function of temperature, gross weight, angle of attack, and airspeed. Dual engine operational launch endspeeds are provided for reference on each of the charts.

## USE


Enter the chart representing the applicable air temperature at the desired airspeed and project vertically upward until intersecting the appropriate gross weight curve. From this intersection, read the angle of attack required to maintain 1 g, unaccelerated flight at this condition and then project horizontally left to obtain the corresponding single engine rate of climb. For air temperatures between the values listed at the top of each chart, linear interpolation between the two applicable charts must be used.

## Sample Problem

FE + 330 Gallon Centerline Tank, (2)AIM-9 + (2)AIM-7 + 330 Gallon Centerline Fuel Tank, Maximum thrust launch power seting (figure 11-33, sheet 3)

- A. Temperature 59° F
- B.  $V_{operational}$  endspeed 166 knot

# SAMPLE SINGLE ENGINE RATE OF CLIMB

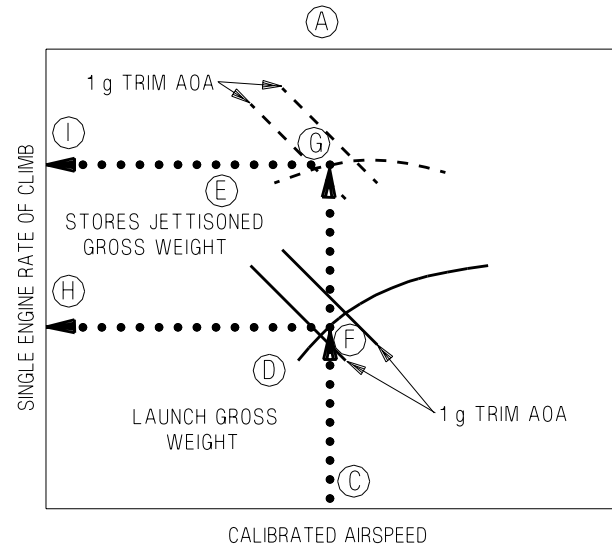

ADA523-309-1-017

- (from operational endspeed table at top of chart)
- C.  $V_{single\ engine}$  endspeed 161 knot  
(assume 5 knot reduction in endspeed due to single engine thrust loss)
- D. Launch weight 40,000 lb
- E. Stores jettisoned weight 36,000 lb
- F. Stores retained 1g trim AOA 9.3°
- G. Stores jett 1g trim AOA 7.2°
- H. Stores retained SEROC 1,820 fpm
- I. Stores jettisoned SEROC 2,730 fpm



## ADJUSTMENT TO SEROC FOR RETRACTING LANDING GEAR CHART

This chart (figure 11-33A) provides the effect of raising the landing gear on single engine rate of climb capability in the catapult launch and field takeoff (half flaps, gear down) configurations with maximum afterburner thrust on the operating engine. Gear up single engine rate of climb is presented as a function of gear down single engine rate of climb and the angle of attack required to maintain 1g, unaccelerated flight as determined from figure 11-33, sheets 1 through 12.


### USE

Enter the chart with the gear down single engine rate of climb established using figure 11-33 and project vertically upward to the appropriate angle of attack. From this intersection, project horizontally left to obtain the corresponding gear up single engine rate of climb.

### Sample Problem

|                   |           |
|-------------------|-----------|
| A Gear down SEROC | 2,730 fpm |
| B. 1g trim AOA    | 7.2°      |
| C. Gear up SEROC  | 3,340 fpm |

## SAMPLE ADJUSTMENT TO SEROC FOR RETRACTING LANDING GEAR

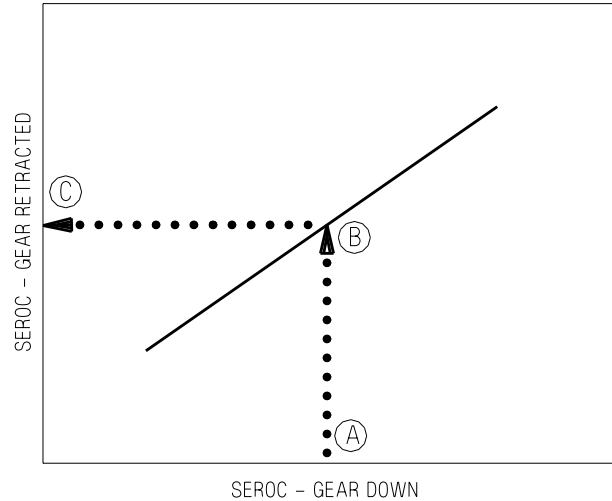

ADA523-489-1-017



# TAKEOFF ALLOWANCES AND ACCELERATION TO CLIMB SPEED

## F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

START = 10 LB / ENG

TAXI AT IDLE = 14 LB / MIN / ENG

ENGINE RUNUP, 30 SEC AT MIL = 66 LB / ENG

| BRAKE RELEASE TO CLIMB SPEED (NOMINAL VALUES) |                                      |  |  |  |  |
|---|--------------------------------------|--|--|--|--|
|   |                                      | MIL TAKEOFF<br>MIL ACCEL TO 350<br>KNOTS | MIL TAKEOFF<br>MIL ACCEL TO MIL<br>CLIMB SPEED | MAX TAKEOFF<br>MIL ACCEL TO MIL<br>CLIMB SPEED | MAX TAKEOFF<br>MAX ACCEL TO<br>MAX CLIMB SPEED |
| DI = 0 TO 75<br>TOGW = 38,000 LB.             | TIME (MIN)<br>FUEL (LB)<br>DIST (NM) | 0.9<br>260<br>2.5                        | 1.3<br>400<br>5.6                              | 1.2<br>540<br>5.4                              | 0.8<br>850<br>3.5                              |
| DI > 75<br>TOGW = 50,000 LB.                  | TIME (MIN)<br>FUEL (LB)<br>DIST (NM) | 1.4<br>410<br>4.1                        | 1.5<br>440<br>4.7                              | 1.3<br>670<br>4.4                              | 1.1<br>1120<br>4.0                             |

Figure 11- 22. Takeoff Allowances and Acceleration to Climb Speed - F404-GE-400.



# CLIMB SPEED SCHEDULE

## F404-GE-400 MILITARY THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES  
ALL GROSS WEIGHTS

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 JULY 1986  
DATA BASIS: ESTIMATED  
(BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                             |      | AIRCRAFT DRAG INDEX |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------------------------|------|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|                             |      | 0                   |      | 25   |      | 50   |      | 75   |      | 100  |      | 125  |      | 150  |      |
|                             |      | KCAS                | MACH | KCAS | MACH | KCAS | MACH | KCAS | MACH | KCAS | MACH | KCAS | MACH | KCAS | MACH |
| PRESSURE ALTITUDE<br>1000FT | S.L. | 515                 | .78  | 500  | .76  | 490  | .74  | 425  | .64  | 360  | .54  | 340  | .51  | 320  | .48  |
|                             | 5    | 515                 | .84  | 500  | .83  | 490  | .80  | 425  | .70  | 360  | .59  | 340  | .56  | 320  | .53  |
|                             | 10   | 478                 | .85  | 472  | .84  | 466  | .83  | 425  | .76  | 360  | .65  | 340  | .61  | 320  | .58  |
|                             | 15   | 438                 | .85  | 432  | .84  | 426  | .83  | 426  | .83  | 360  | .71  | 340  | .67  | 320  | .63  |
|                             | 20   | 398                 | .85  | 394  | .84  | 391  | .83  | 391  | .83  | 360  | .77  | 340  | .73  | 320  | .69  |
|                             | 25   | 361                 | .85  | 356  | .84  | 352  | .83  | 352  | .83  | 342  | .81  | 340  | .80  | 320  | .76  |
|                             | 30   | 325                 | .85  | 321  | .84  | 317  | .83  | 317  | .83  | 308  | .81  | 308  | .81  | 304  | .80  |
|                             | 35   | 291                 | .85  | 287  | .84  | 284  | .83  | 276  | .83  | 276  | .81  | 276  | .81  | 272  | .80  |
|                             | 40   | 259                 | .85  | 256  | .84  | 253  | .83  | 246  | .83  | 246  | .81  | 246  | .81  | 242  | .80  |

|                             |      | AIRCRAFT DRAG INDEX |      |      |      |      |      |      |      |      |      |      |      |
|-----------------------------|------|---------------------|------|------|------|------|------|------|------|------|------|------|------|
|                             |      | 175                 |      | 200  |      | 225  |      | 250  |      | 275  |      | 300  |      |
|                             |      | KCAS                | MACH | KCAS | MACH | KCAS | MACH | KCAS | MACH | KCAS | MACH | KCAS | MACH |
| PRESSURE ALTITUDE<br>1000FT | S.L. | 305                 | .46  | 285  | .43  | 285  | .43  | 280  | .42  | 270  | .41  | 260  | .39  |
|                             | 5    | 305                 | .50  | 285  | .47  | 285  | .47  | 280  | .46  | 270  | .45  | 260  | .43  |
|                             | 10   | 305                 | .55  | 285  | .51  | 285  | .51  | 280  | .51  | 270  | .49  | 260  | .47  |
|                             | 15   | 305                 | .60  | 285  | .56  | 285  | .56  | 280  | .55  | 270  | .54  | 260  | .52  |
|                             | 20   | 305                 | .66  | 285  | .62  | 285  | .62  | 280  | .61  | 270  | .59  | 260  | .57  |
|                             | 25   | 305                 | .73  | 285  | .68  | 285  | .68  | 280  | .67  | 270  | .65  | 260  | .63  |
|                             | 30   | 304                 | .80  | 285  | .75  | 285  | .75  | 280  | .74  | 270  | .72  | 260  | .69  |
|                             | 35   | 272                 | .80  | 269  | .79  | 265  | .78  | 257  | .76  | 250  | .74  | 243  | .72  |
|                             | 40   | 242                 | .80  | 240  | .79  | 236  | .78  | 229  | .76  | 222  | .74  | 216  | .72  |

**NOTE**

FUEL ALLOWANCE FOR TAKEOFF AND ACCELERATION  
TO CLIMB SPEED IS 1200 POUNDS, AND IS BASED ON  
START, 20 MINUTES AT IDLE, 30 SECONDS RUNUP  
AT MIL, AND A MIL POWER TAKEOFF.

**Figure 11-23. Military Thrust Climb - F404-GE-400  
(Sheet 1 of 6)**

# COMBAT CEILING AND SERVICE CEILING


F404-GE-400  
MILITARY THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

REMARKS  
ENGINE(S): (2)F404-GE-400  
COMBAT CEILING  
= 500 FPM  
SERVICE CEILING  
= 100 FPM

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

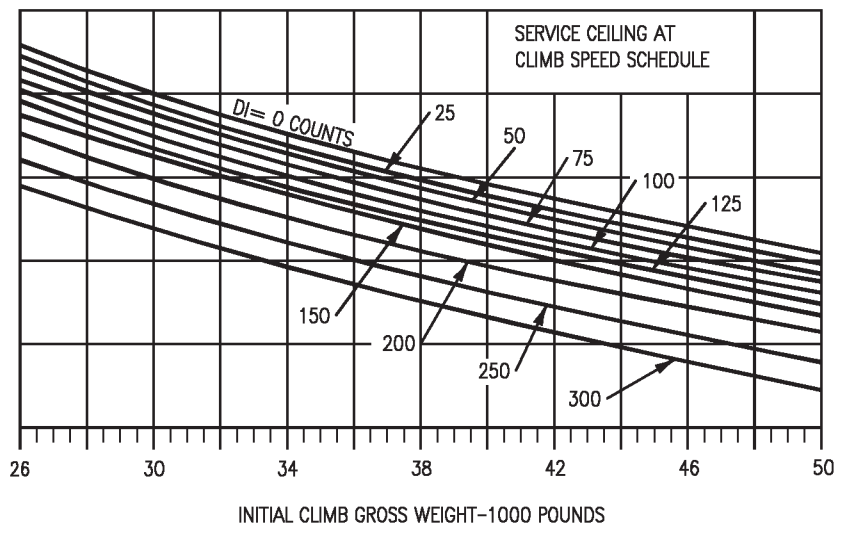
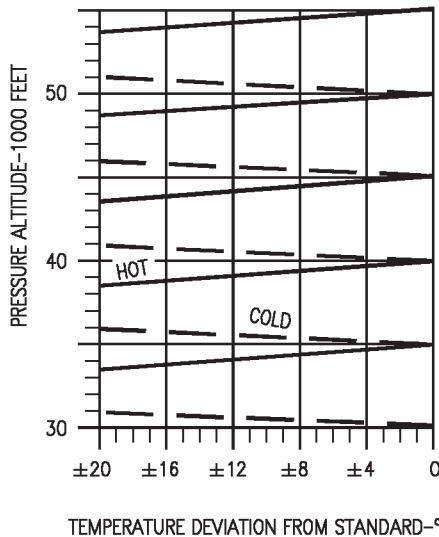
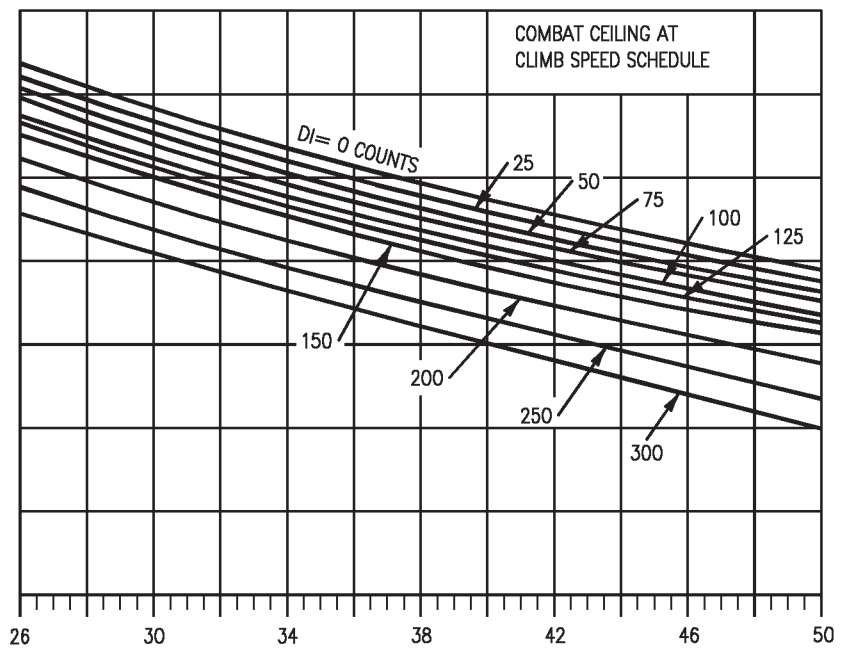
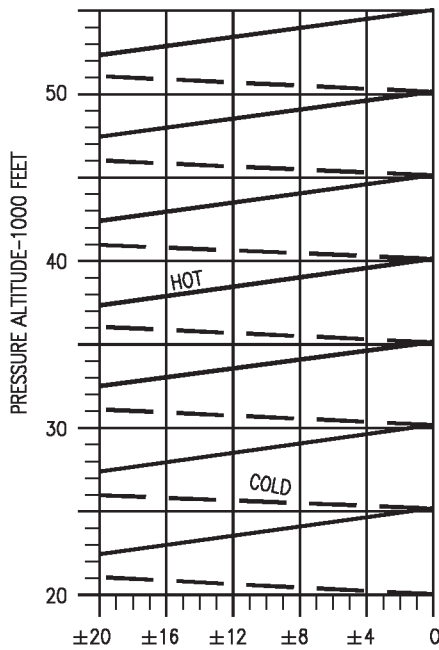


Figure 11-23. Military Thrust Climb - F404-GE-400  
(Sheet 2 of 6)

18AC-NFM-20-(162-1)11-CAT1


# OPTIMUM CRUISE ALTITUDE

F404-GE-400  
MILITARY THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

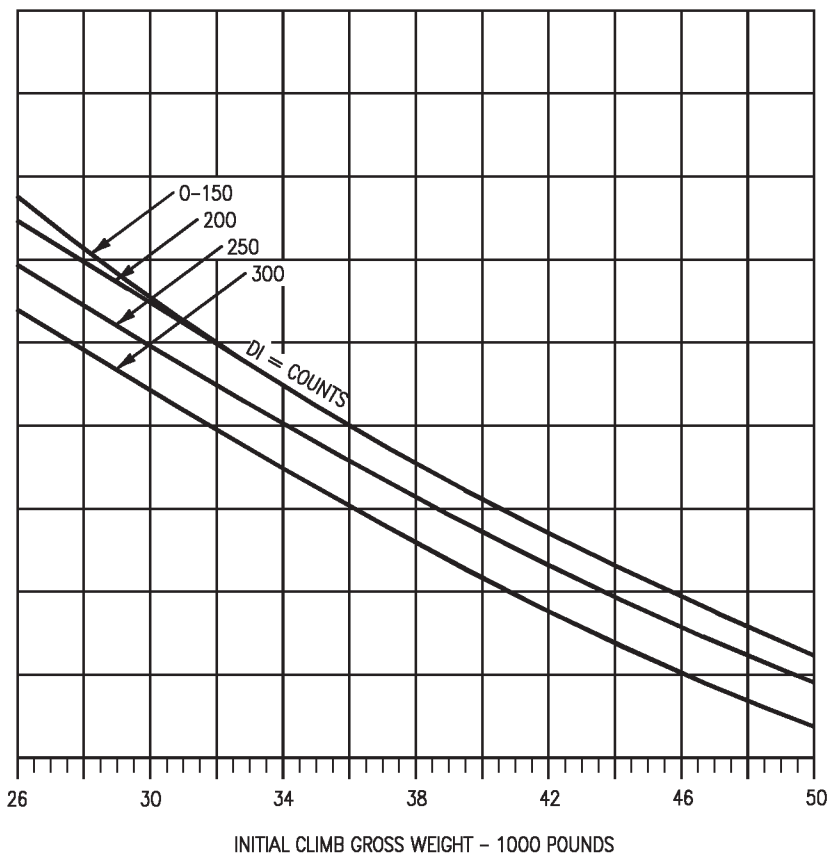
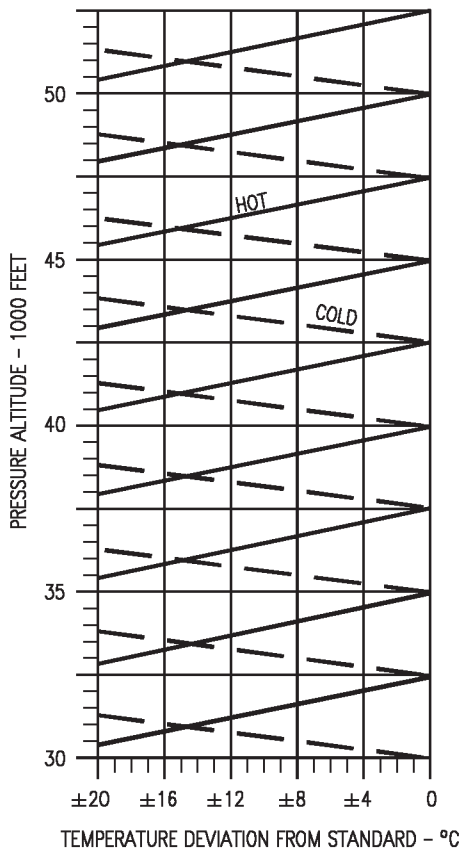


Figure 11-23. Military Thrust Climb - F404-GE-400  
(Sheet 3 of 6)

18AC-NFM-20-(162-2)12-CATI

# TIME REQUIRED TO CLIMB

F404-GE-400


MILITARY THRUST  
CLIMB SPEED SCHEDULE

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

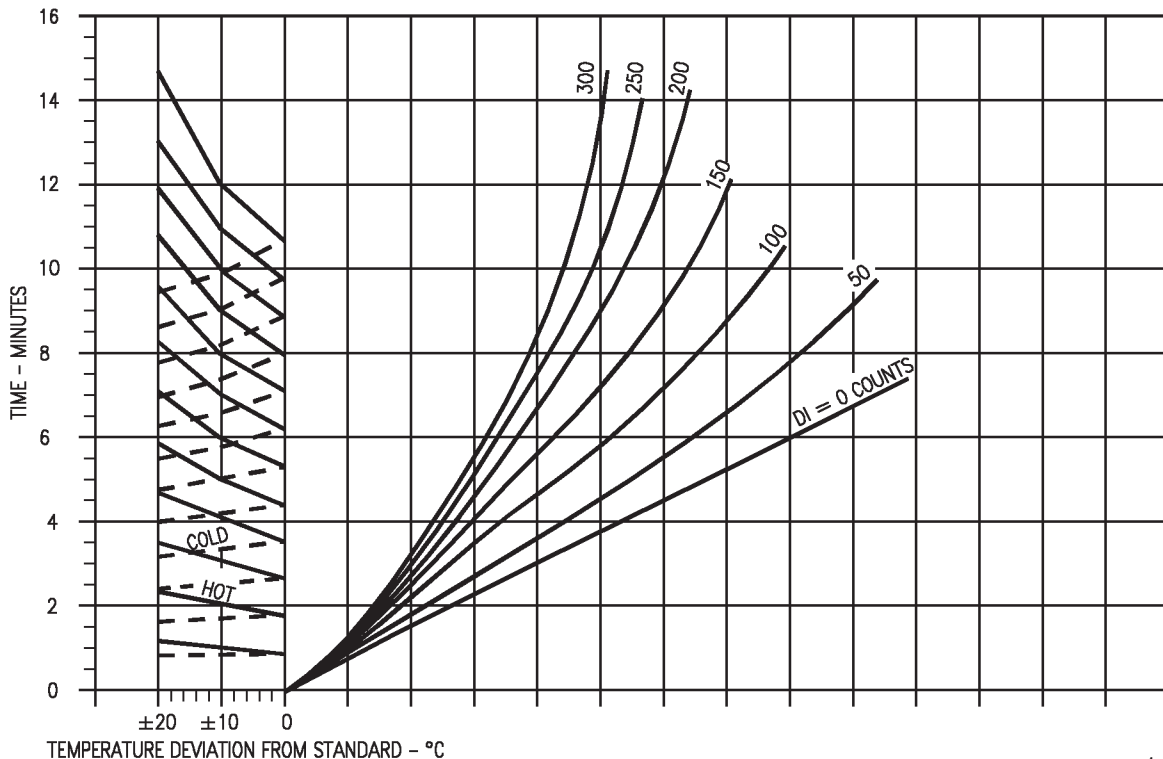
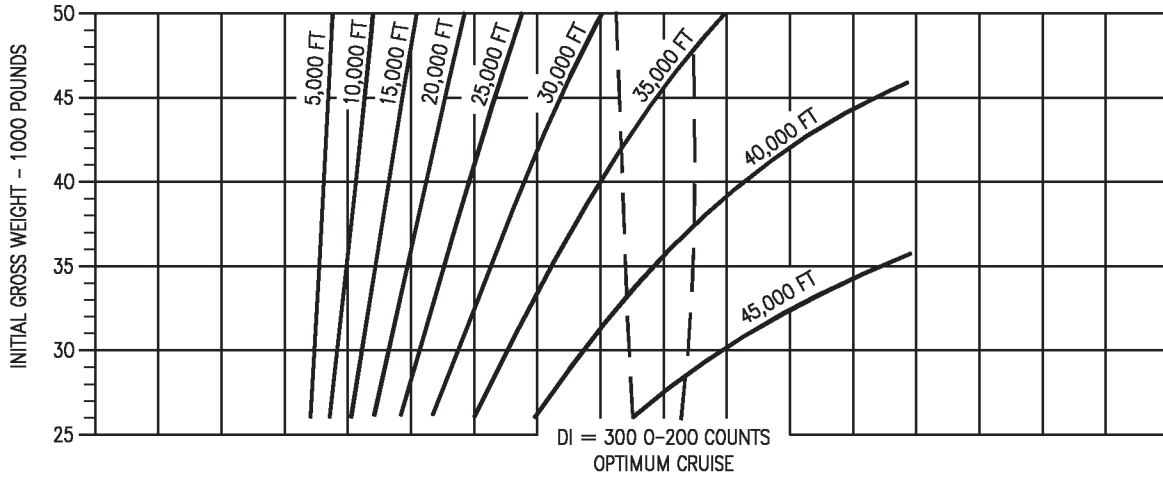


Figure 11-23. Military Thrust Climb - F404-GE-400  
(Sheet 4 of 6)


# FUEL REQUIRED TO CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MILITARY THRUST  
CLIMB SPEED SCHEDULE

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

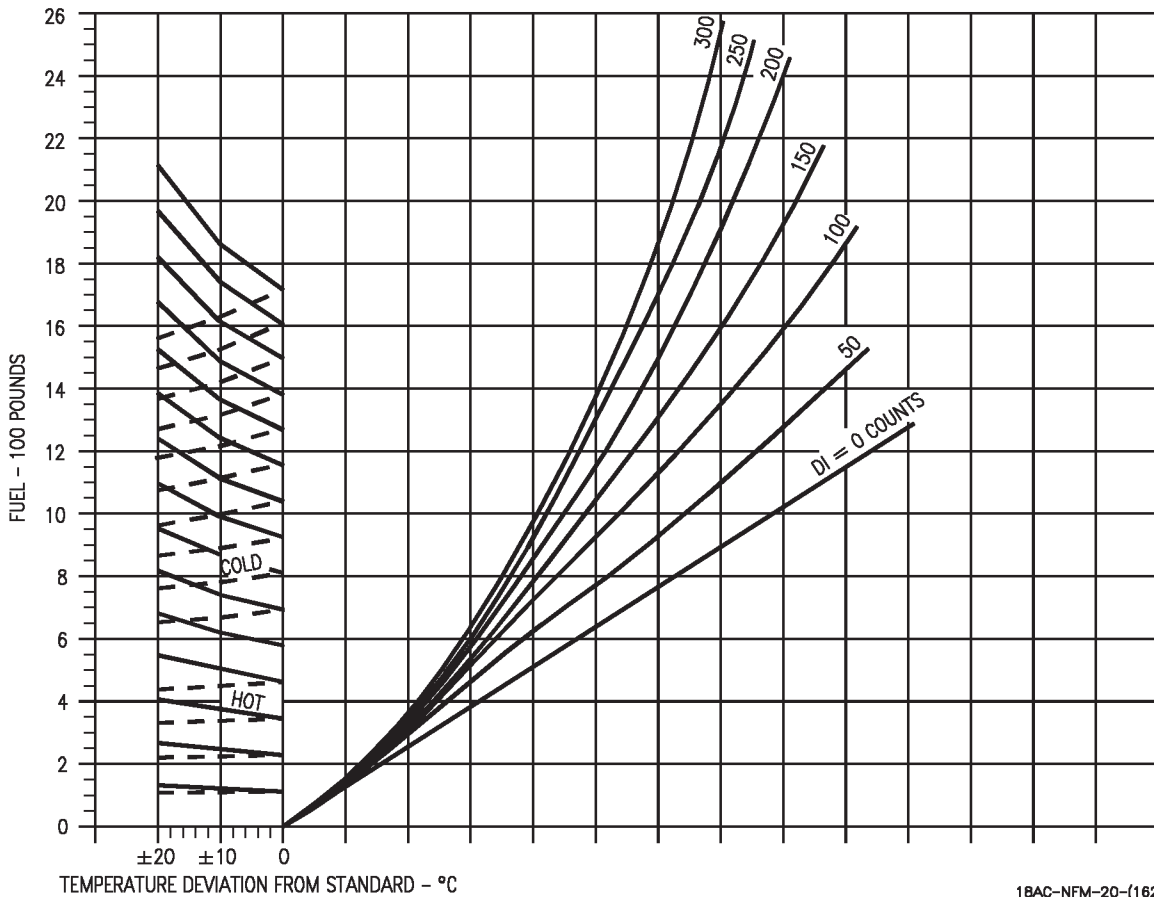
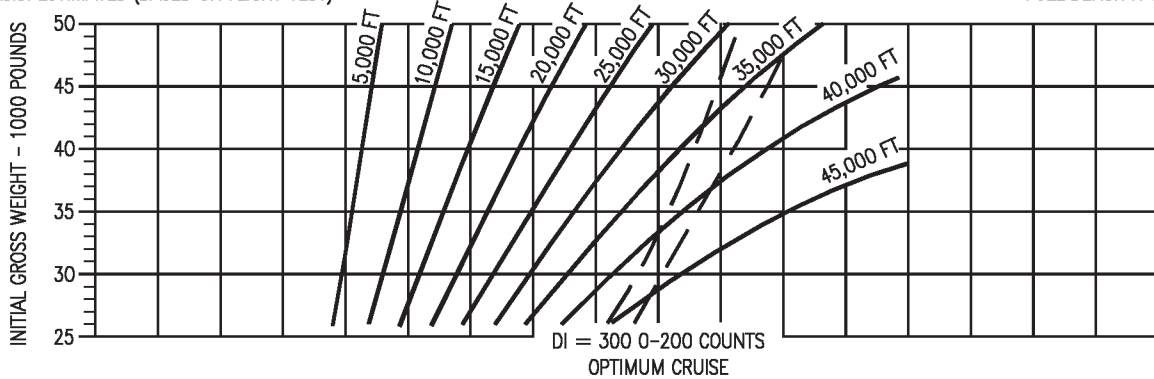


Figure 11-23. Military Thrust Climb - F404-GE-400  
(Sheet 5 of 6)

18AC-NFM-20-(162-4)12-CATI

# DISTANCE REQUIRED TO CLIMB


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MILITARY THRUST  
CLIMB SPEED SCHEDULE

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL


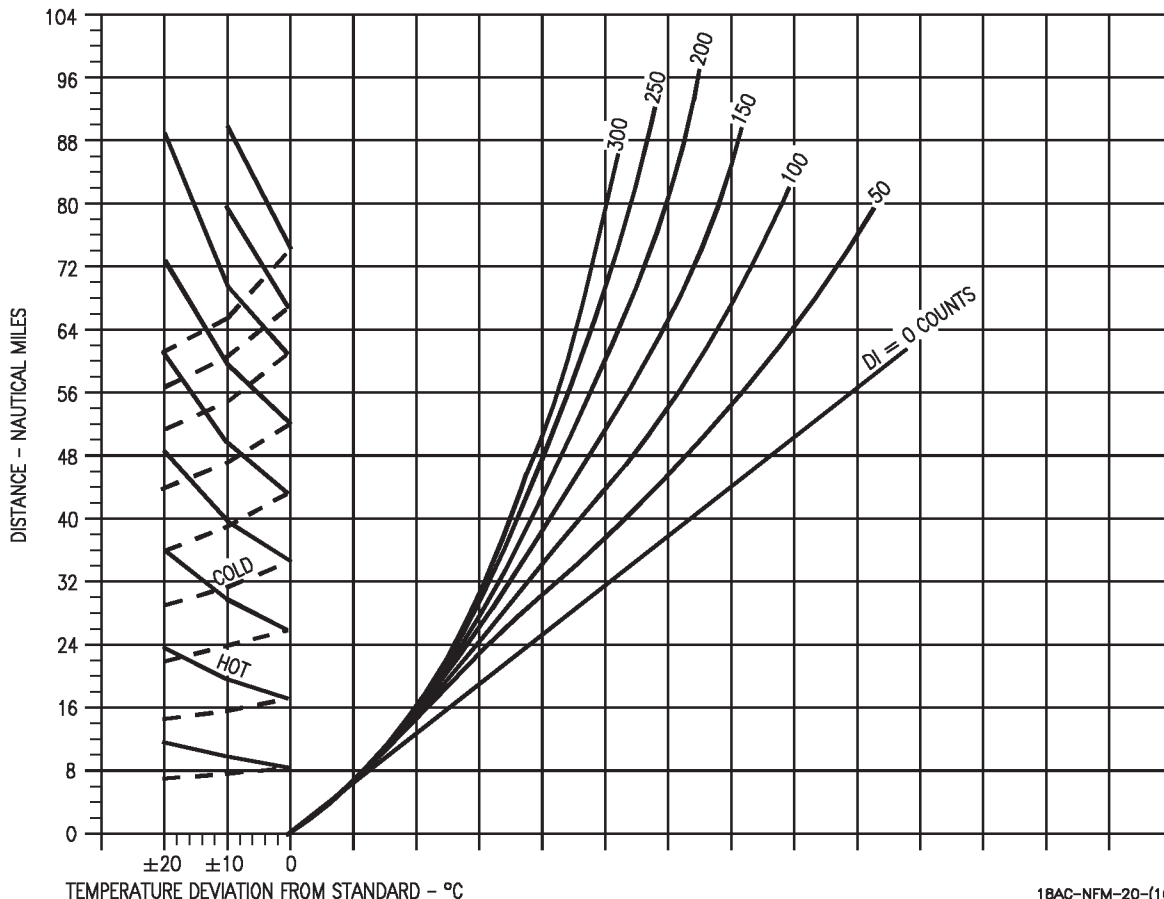


Figure 11-23. Military Thrust Climb - F404-GE-400  
(Sheet 6 of 6)

18AC-NFM-20-(162-5)12-CAT1

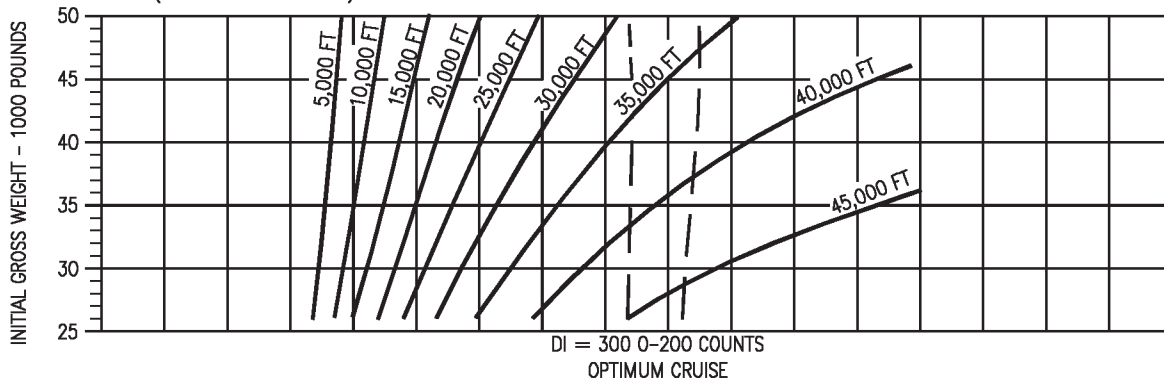

# TIME REQUIRED TO CLIMB

F404-GE-400  
MILITARY THRUST  
350 KCAS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE

DATA BASED ON 350 KNOT CLIMB UNTIL  
INTERCEPTION OF CONSTANT MACH PORTION  
OF MILITARY THRUST CLIMB SPEED SCHEDULE,  
THEN MAINTAIN CONSTANT MACH TO CRUISE  
ALTITUDE.



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

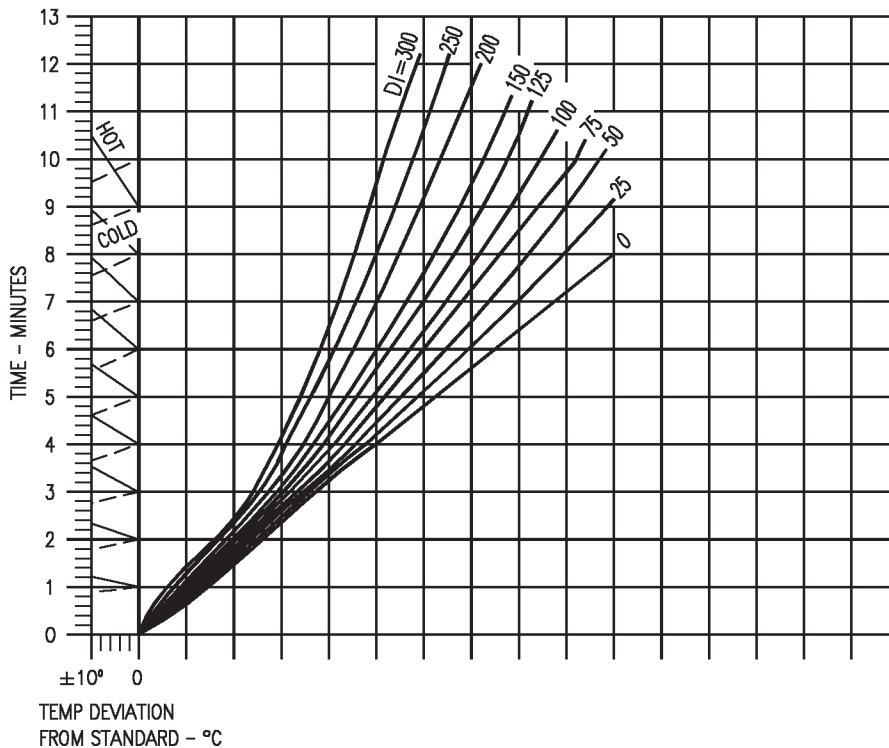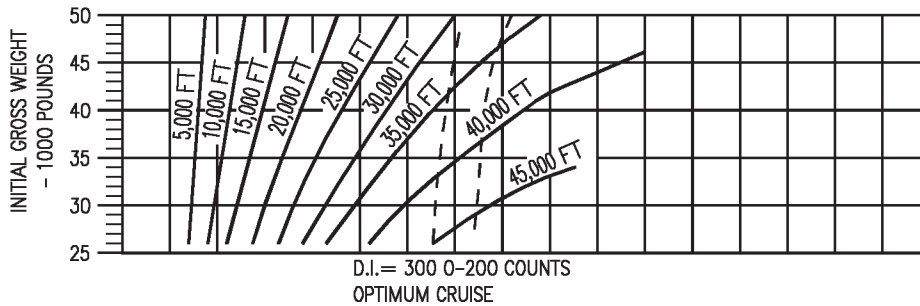

18AC-NFM-20-(312-2)12-CATI

Figure 11-24. Time to Climb - Military Thrust - 350 KCAS - F404-GE-400

# FUEL REQUIRED TO CLIMB


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MILITARY THRUST  
350 KCAS

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE





FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

NOTE

DATA BASED ON 350 KNOT CLIMB UNTIL INTERCEPTION OF CONSTANT MACH PORTION OF MILITARY THRUST CLIMB SPEED SCHEDULE, THEN MAINTAIN CONSTANT MACH TO CRUISE ALTITUDE.

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

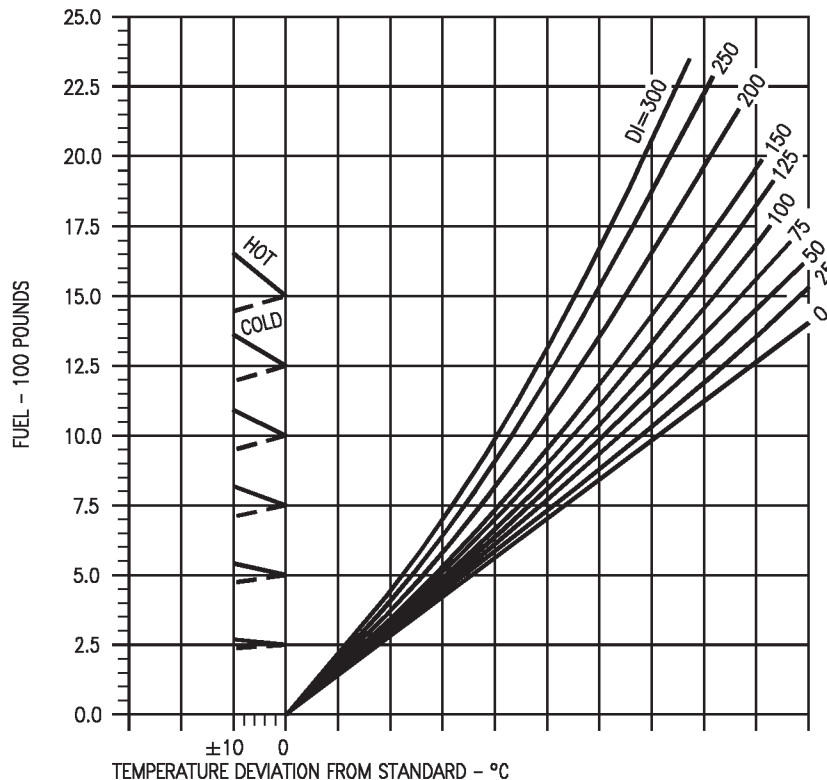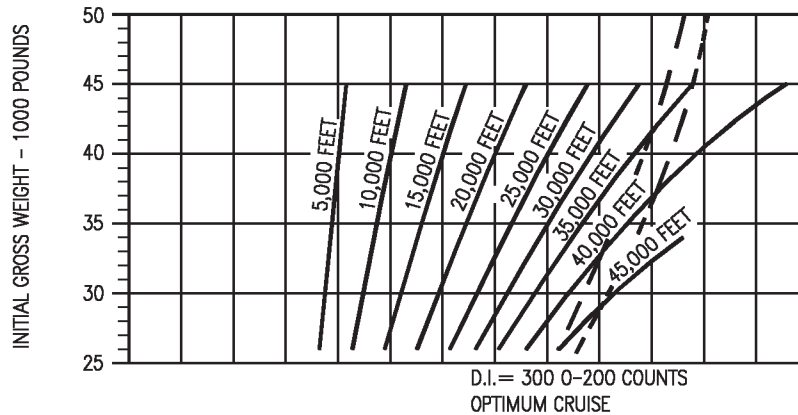

18AC-NFM-20-(314-1)12-CATI

Figure 11-25. Fuel to Climb - Military Thrust - 350 KCAS - F404-GE-400

# DISTANCE REQUIRED TO CLIMB


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MILITARY THRUST  
350 KCAS

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE




FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

**NOTE**

DATA BASED ON 350 KNOT CLIMB UNTIL  
INTERCEPTION OF CONSTANT MACH PORTION  
OF MILITARY THRUST CLIMB SPEED SCHEDULE,  
THEN MAINTAIN CONSTANT MACH TO CRUISE  
ALTITUDE.

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

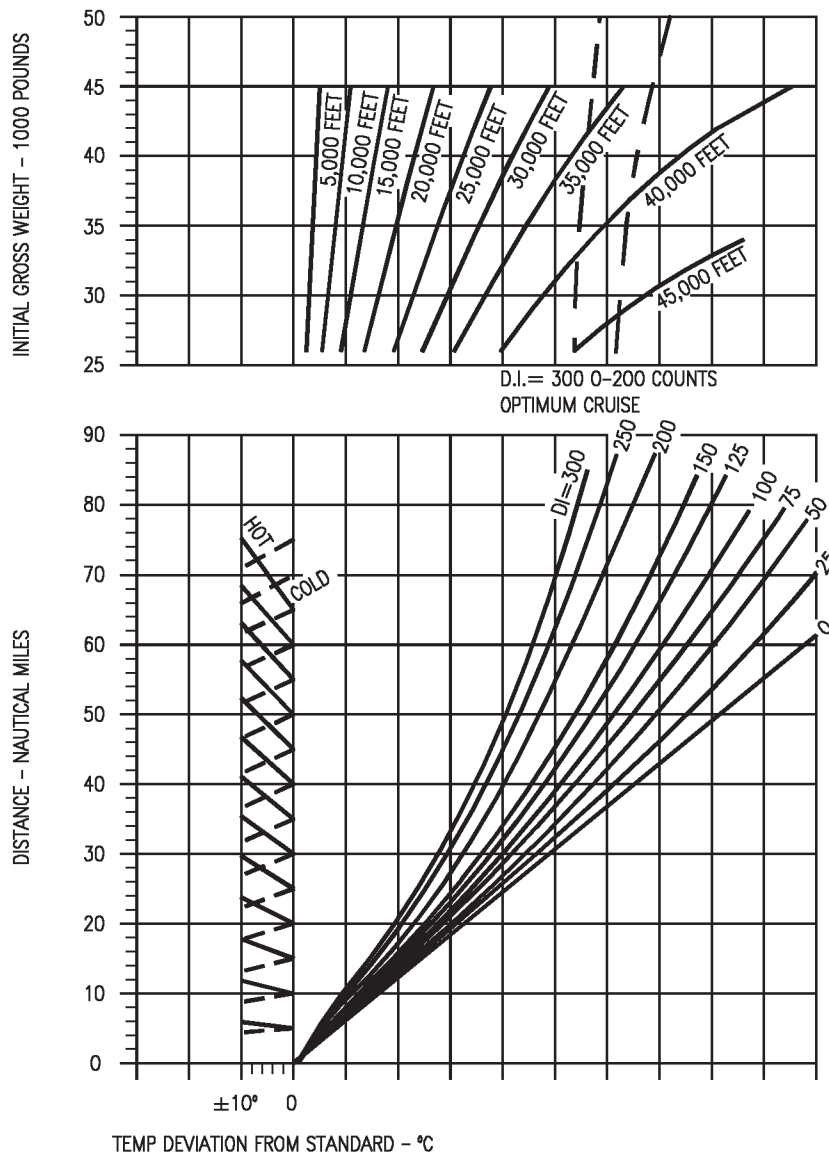

18AC-NFM-20-(313-1)12-CAT1

Figure 11-26. Distance To Climb - Military Thrust - 350 KCAS - F404-GE-400

# PEAK RATE OF CLIMB


F404-GE-400

MILITARY THRUST  
MACH NUMBER

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

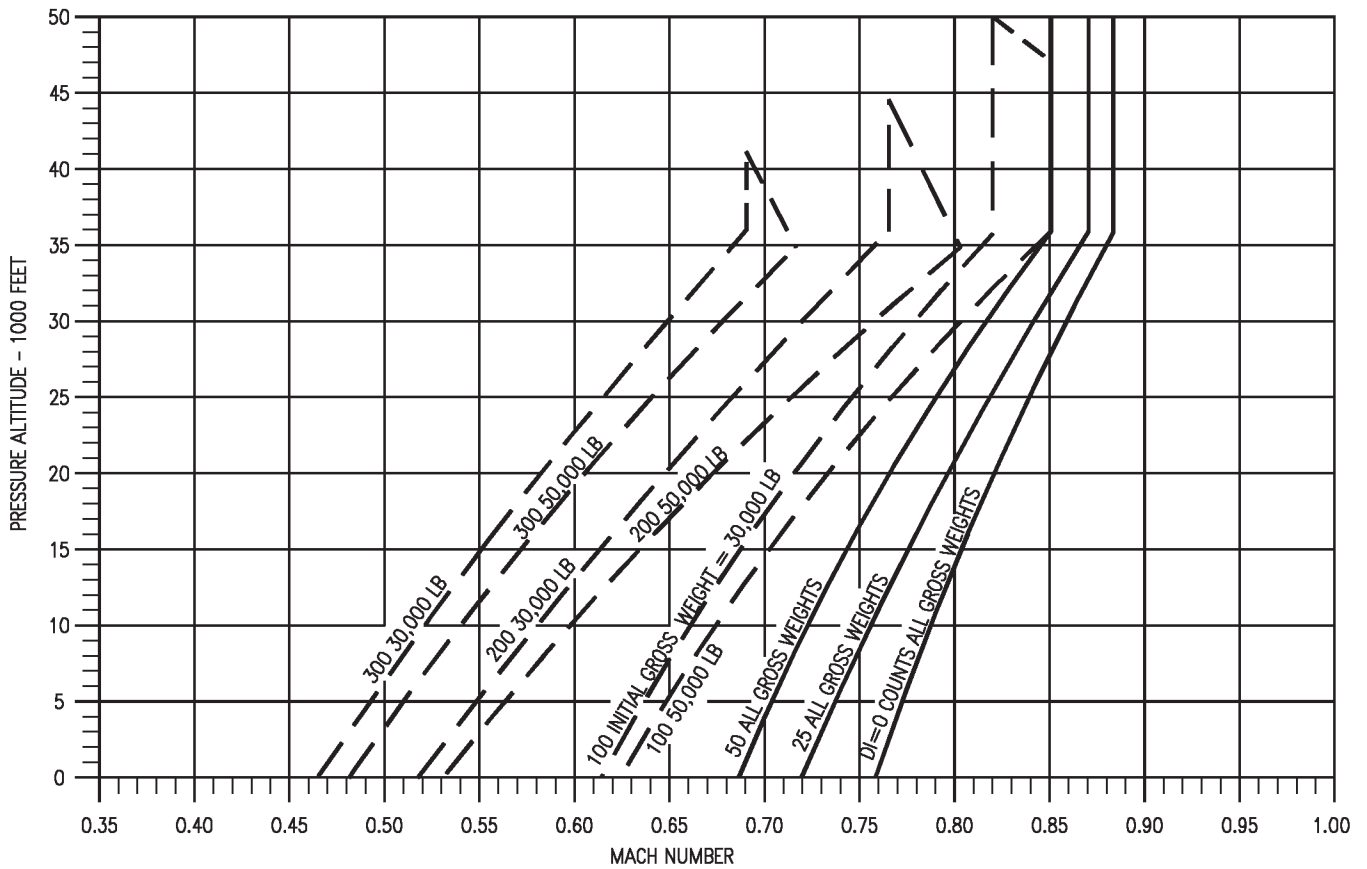


Figure 11-27. Peak Rate of Climb - Military Thrust - F404-GE-400  
(Sheet 1 of 4)


# TIME REQUIRED TO CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MILITARY THRUST  
PEAK RATE OF CLIMB

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

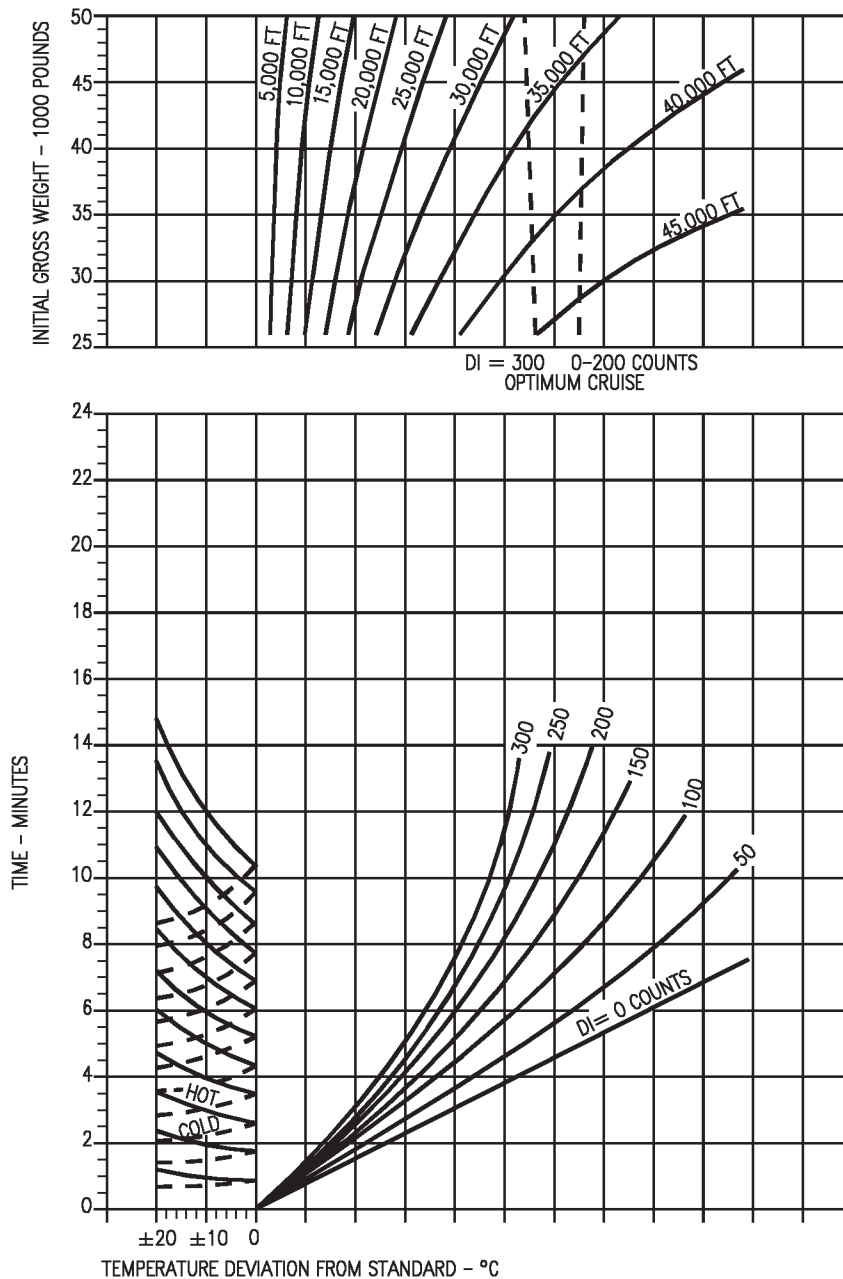


Figure 11-27. Peak Rate of Climb - Military Thrust - F404-GE-400  
(Sheet 2 of 4)

18AC-NFM-20-(163-2)12-CAT1

# FUEL REQUIRED TO CLIMB

F404-GE-400


MILITARY THRUST  
PEAK RATE OF CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

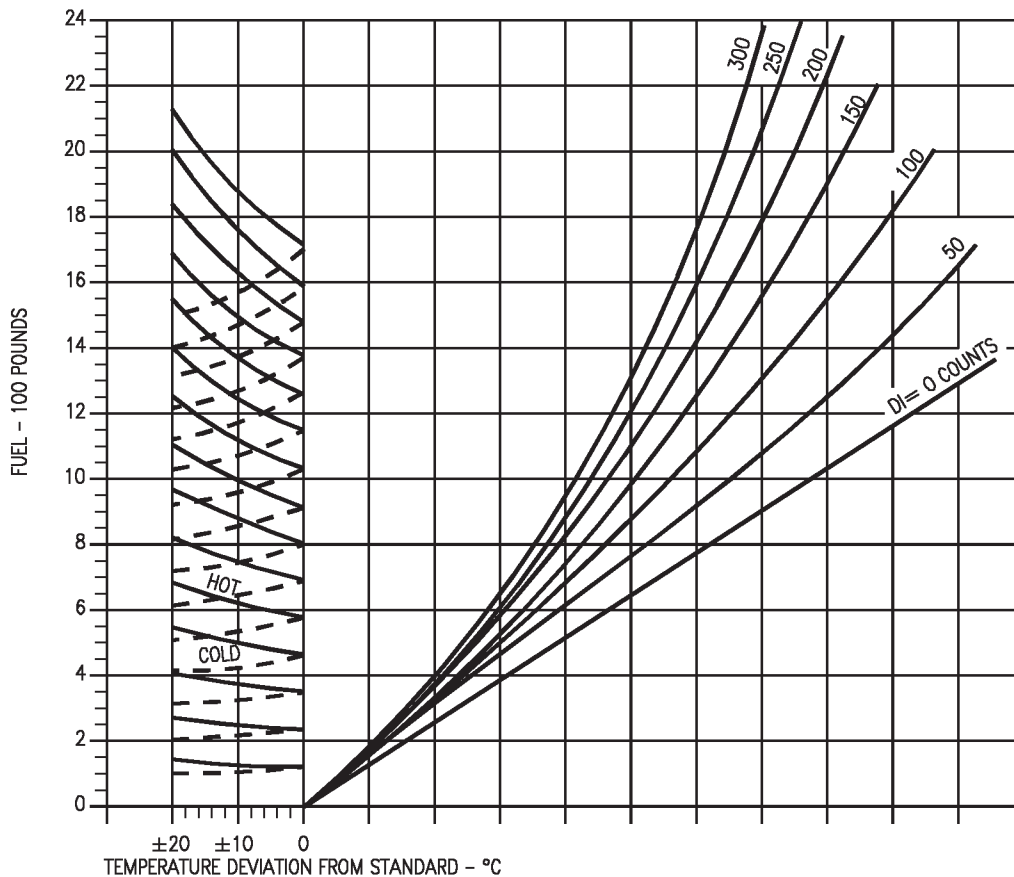
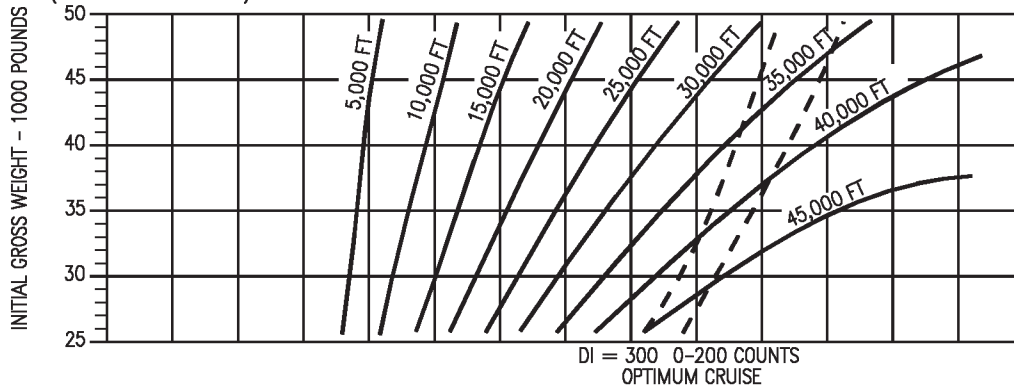


Figure 11-27. Peak Rate of Climb - Military Thrust - F404-GE-400  
(Sheet 3 of 4)


# DISTANCE REQUIRED TO CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MILITARY THRUST  
PEAK RATE OF CLIMB

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

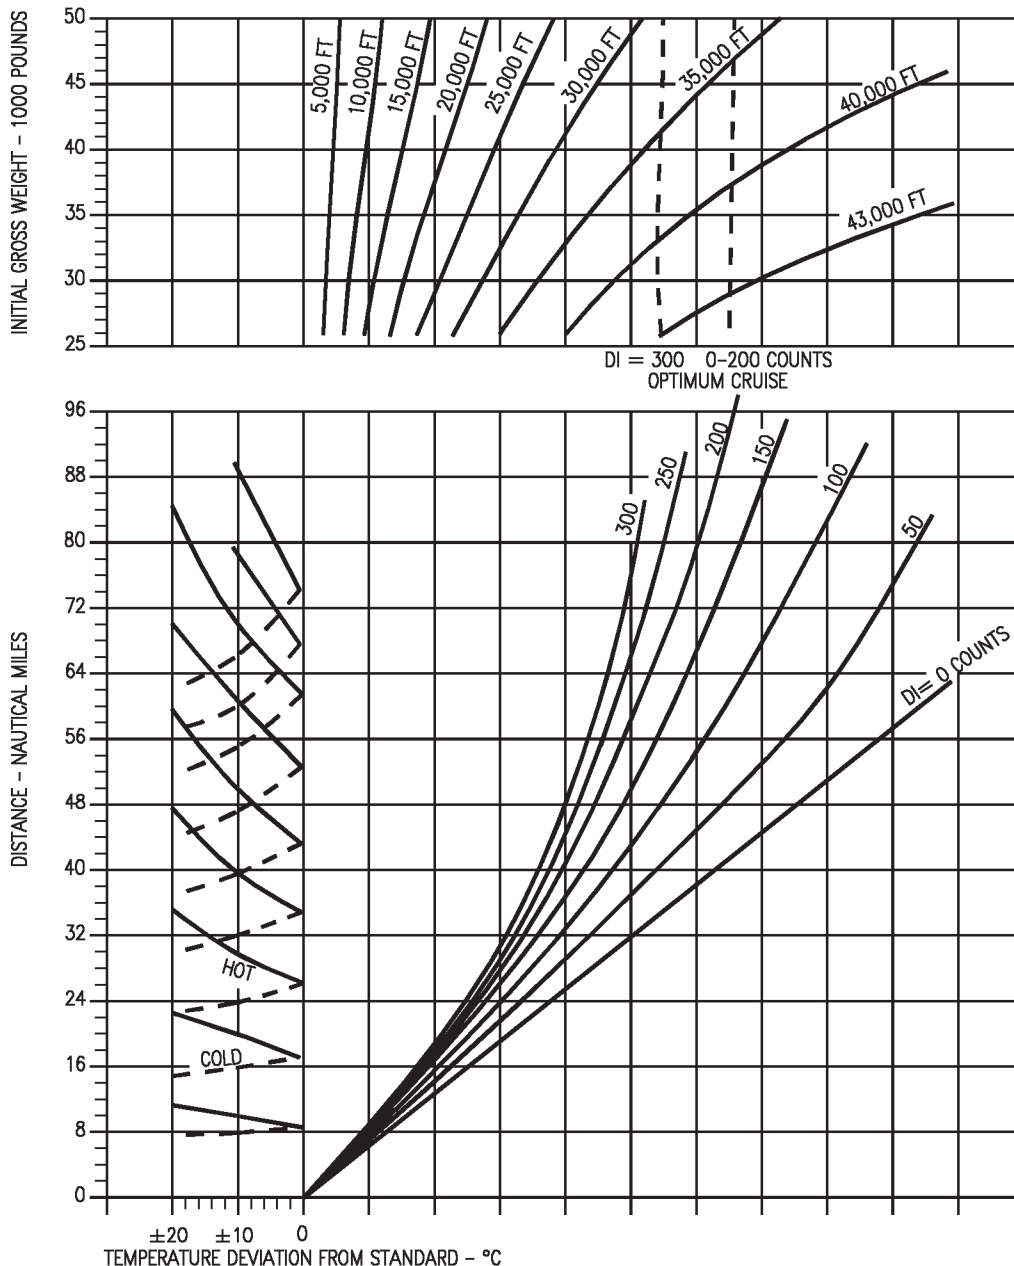


Figure 11-27. Peak Rate of Climb - Military Thrust - F404-GE-400  
(Sheet 4 of 4)

18AC-NFM-20-(163-4)12-CATI


# INSTANTANEOUS RATE OF CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MILITARY THRUST  
PEAK RATE OF CLIMB

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL


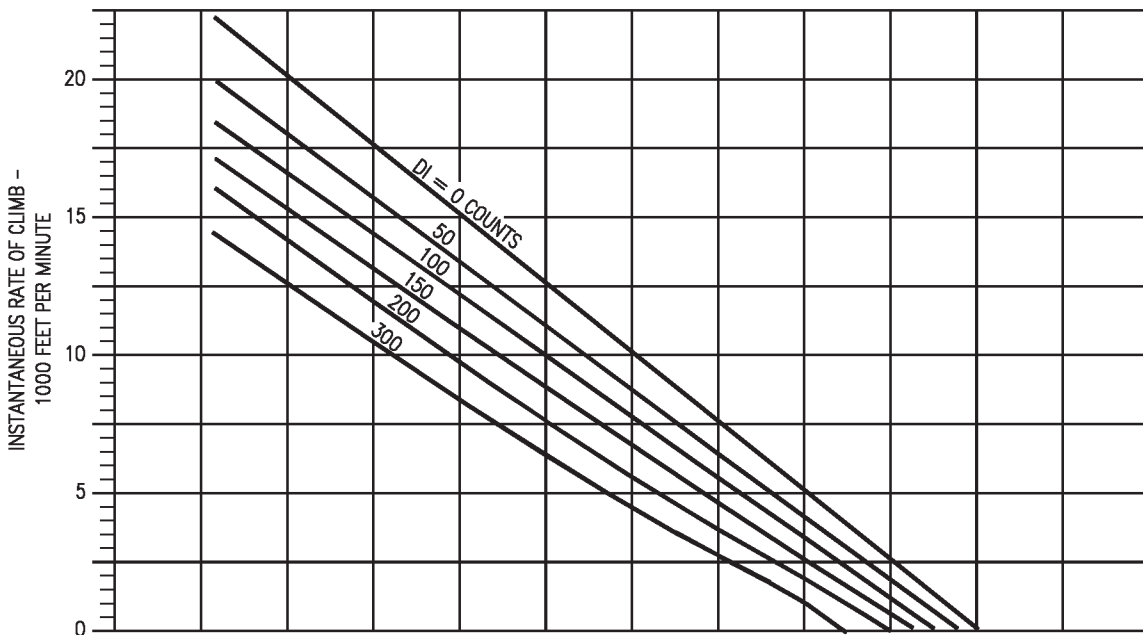


Figure 11-28. Instantaneous Rate of Climb - Military Thrust - F404-GE-400

18AC-NFM-20-(164-1)11-CAT1

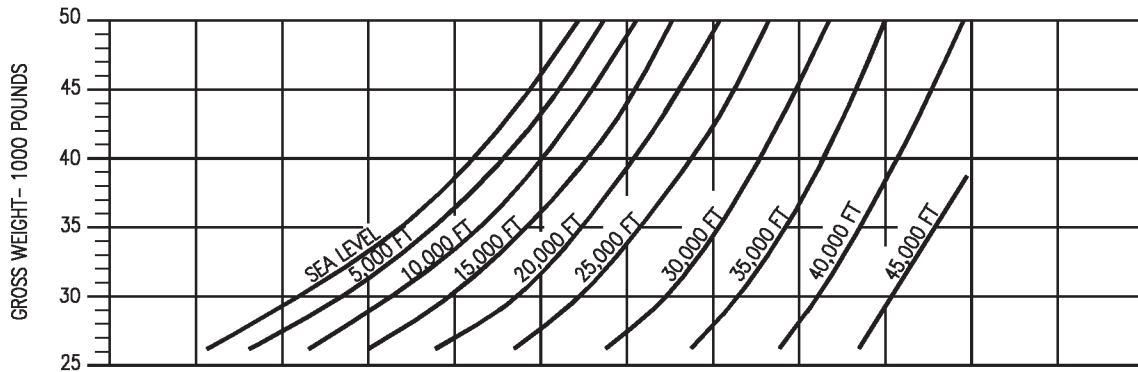


# PEAK RATE OF CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MAXIMUM THRUST  
MACH NUMBER

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

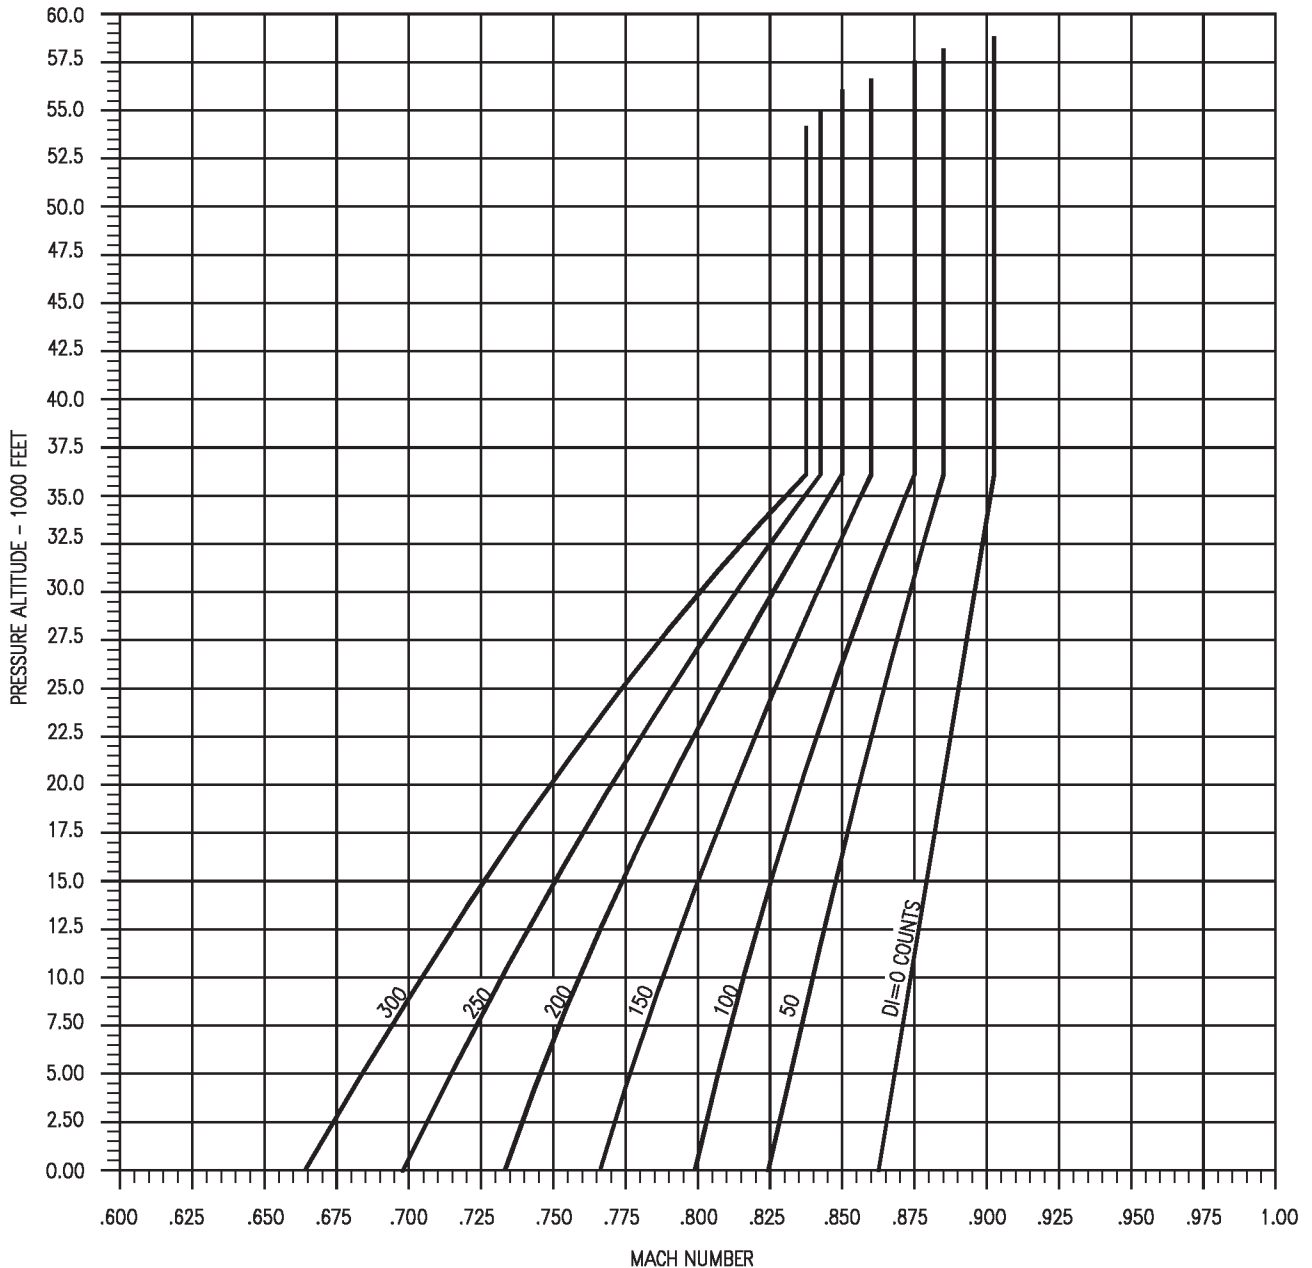


Figure 11-29. Peak Rate of Climb - Maximum Thrust - F404-GE-400  
(Sheet 1 of 5)

18AC-NFM-20-(271-1)12-CATI

# COMBAT CEILING


F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

MAXIMUM THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
COMBAT CEILING=500fpm

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

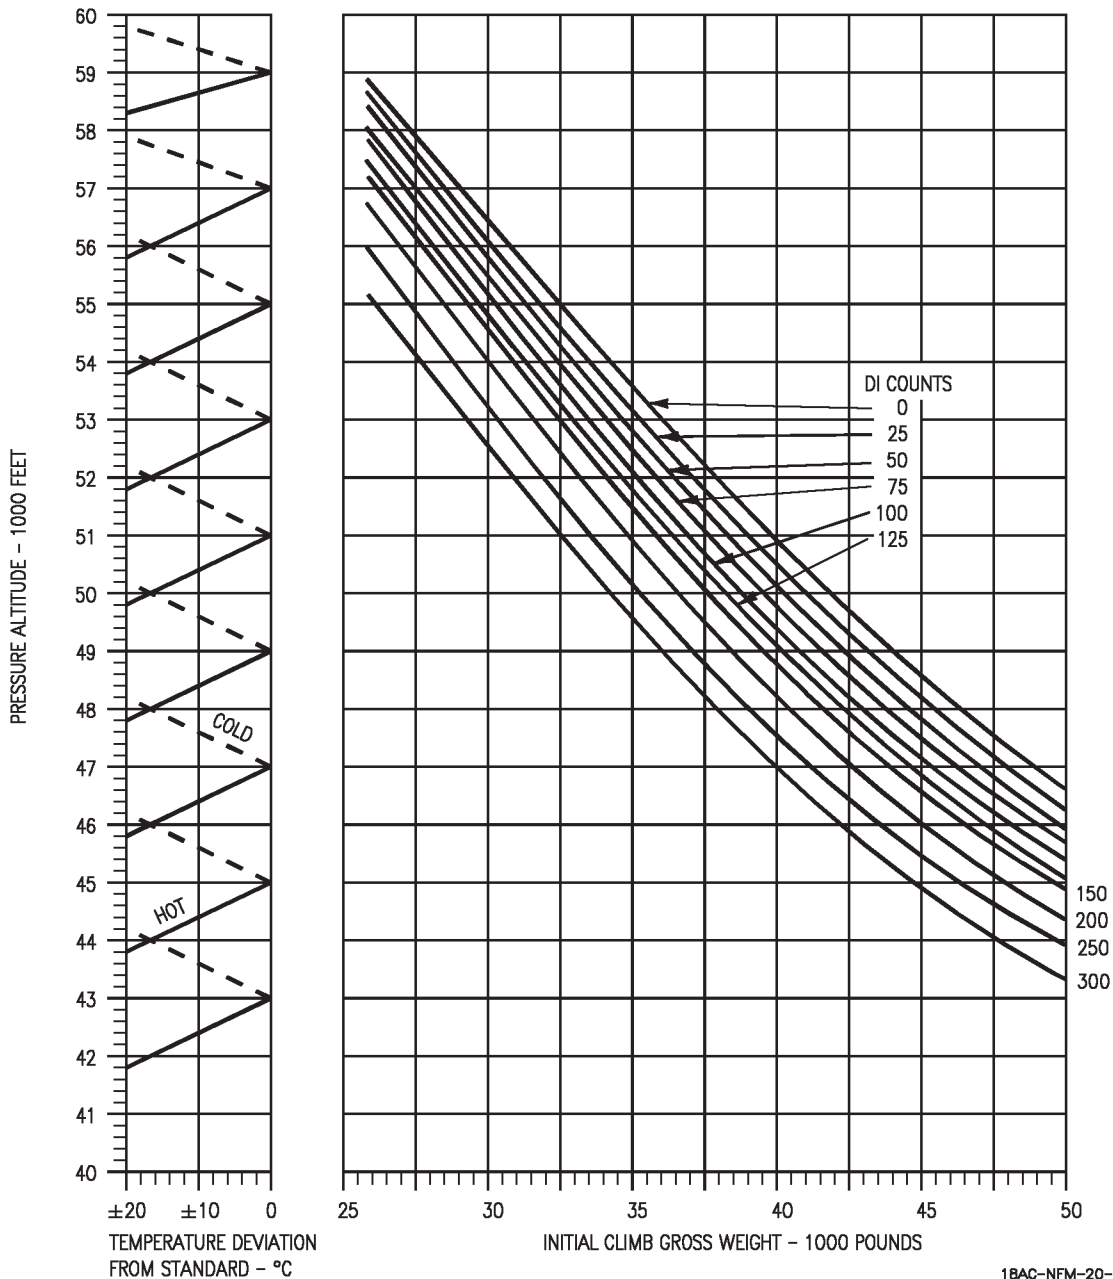


Figure 11-29. Peak Rate of Climb - Maximum Thrust - F404-GE-400  
(Sheet 2 of 5)

18AC-NFM-20-(271-2)12-CAT1

# TIME REQUIRED TO CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES


F404-GE-400

MAXIMUM THRUST  
PEAK RATE OF CLIMB

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

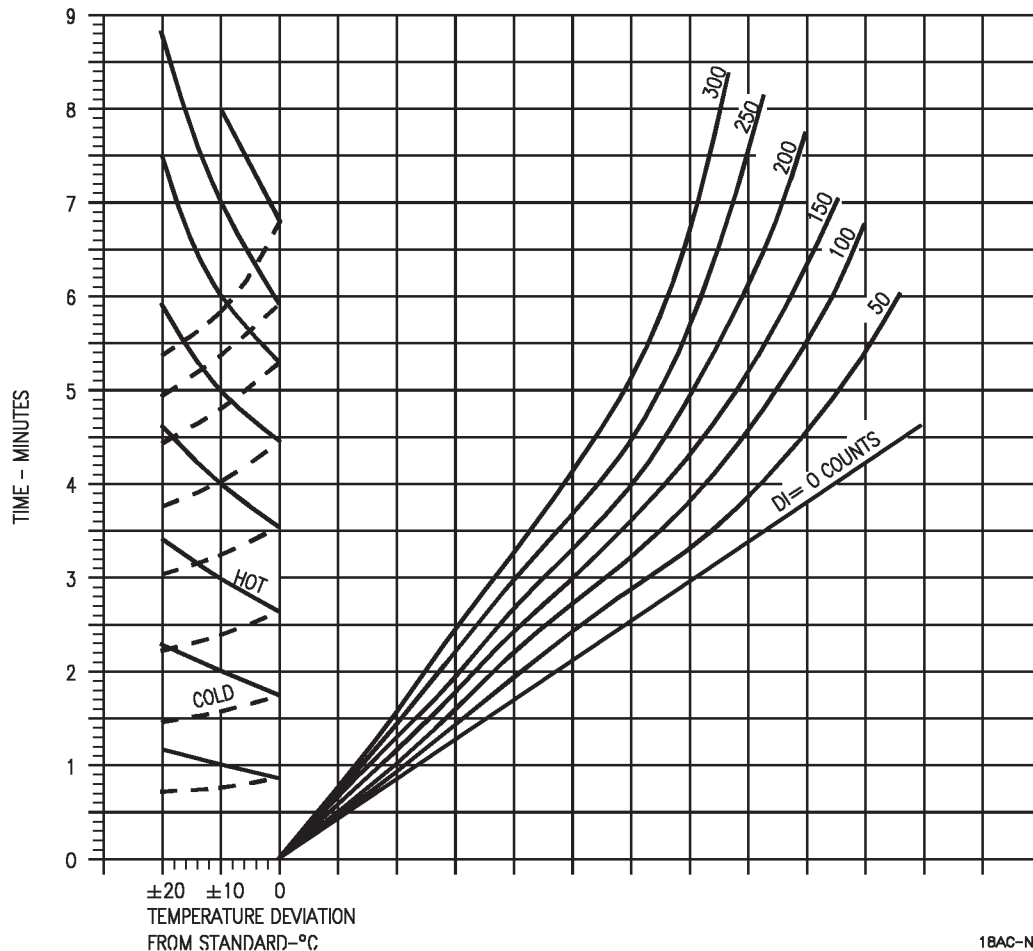
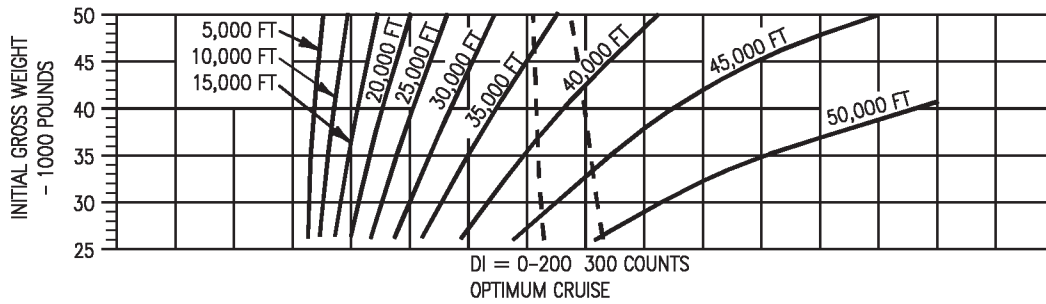


Figure 11-29. Peak Rate of Climb - Maximum Thrust - F404-GE-400  
(Sheet 3 of 5)

18AC-NFM-20-(271-3)12-CAT1


# FUEL REQUIRED TO CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MAXIMUM THRUST  
PEAK RATE OF CLIMB

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

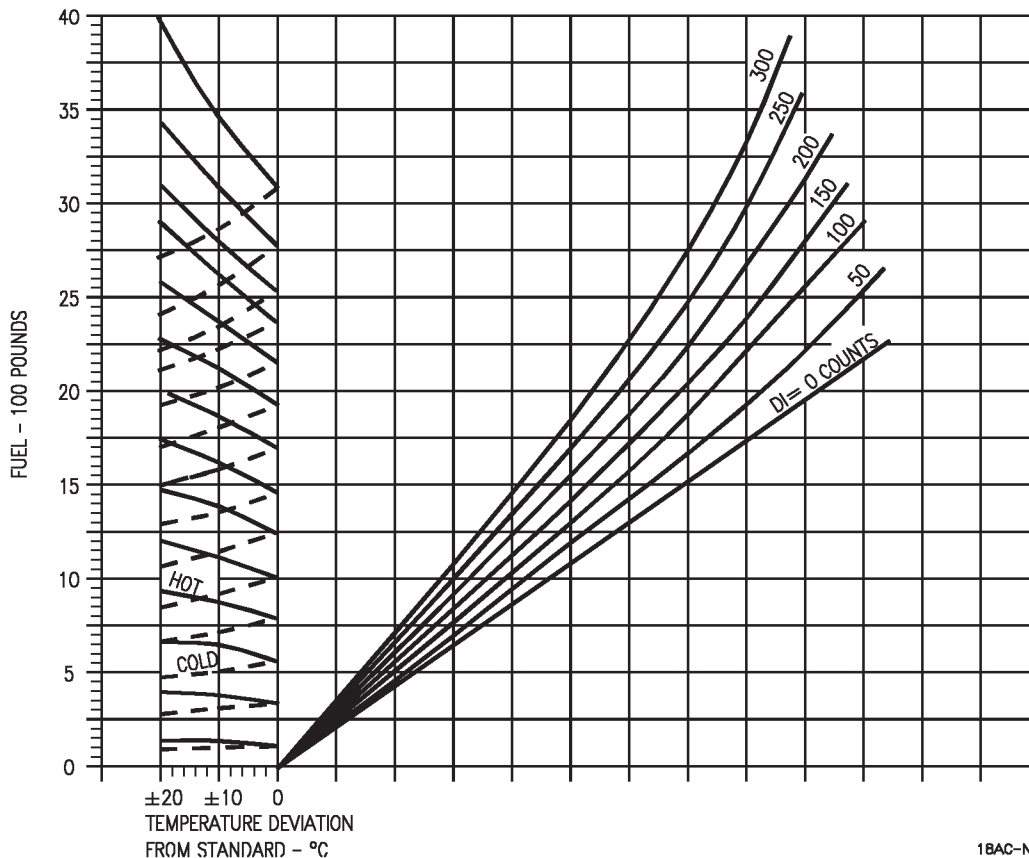
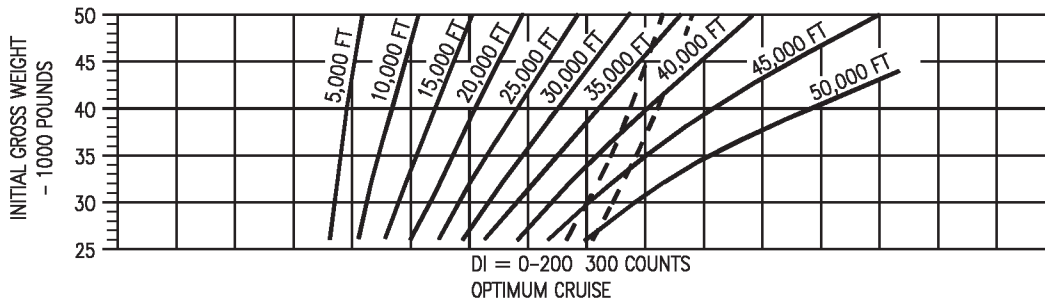


Figure 11-29. Peak Rate of Climb - Maximum Thrust - F404-GE-400  
(Sheet 4 of 5)

18AC-NFM-20-(271-4)12-CAT1

# DISTANCE REQUIRED TO CLIMB


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400

MAXIMUM THRUST  
PEAK RATE OF CLIMB

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

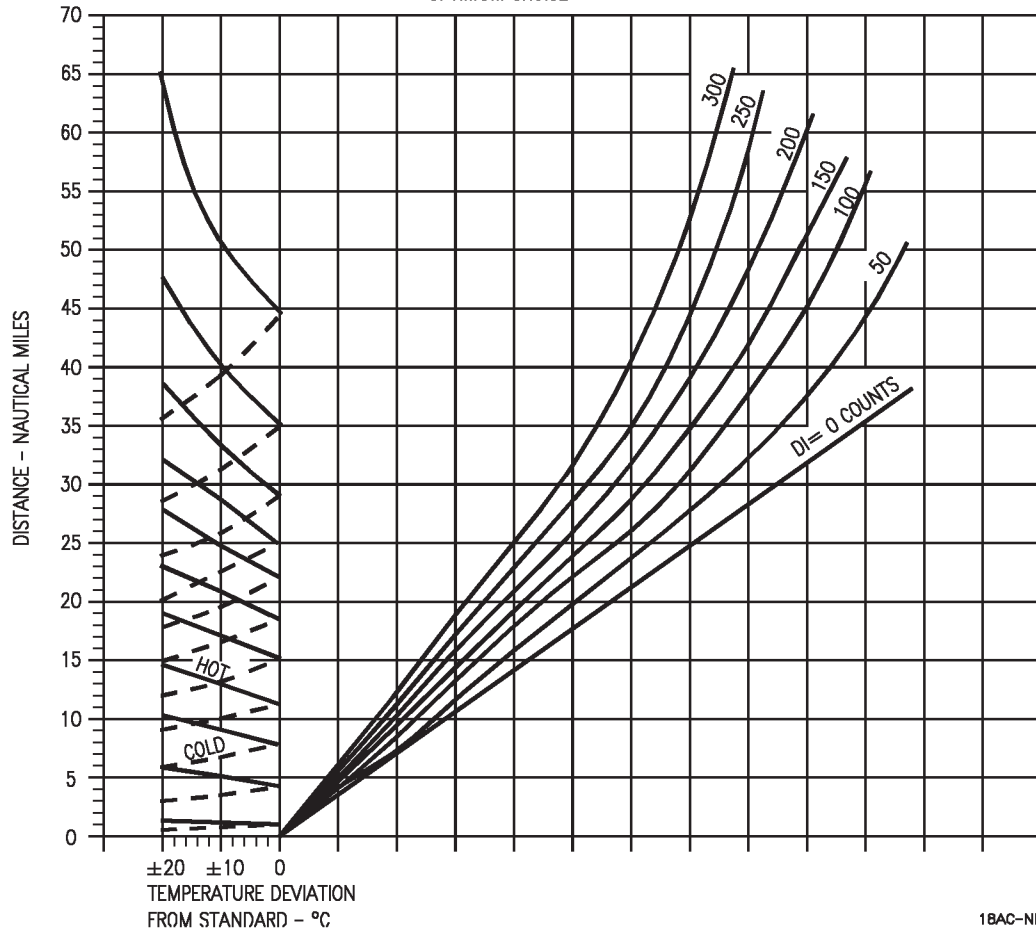
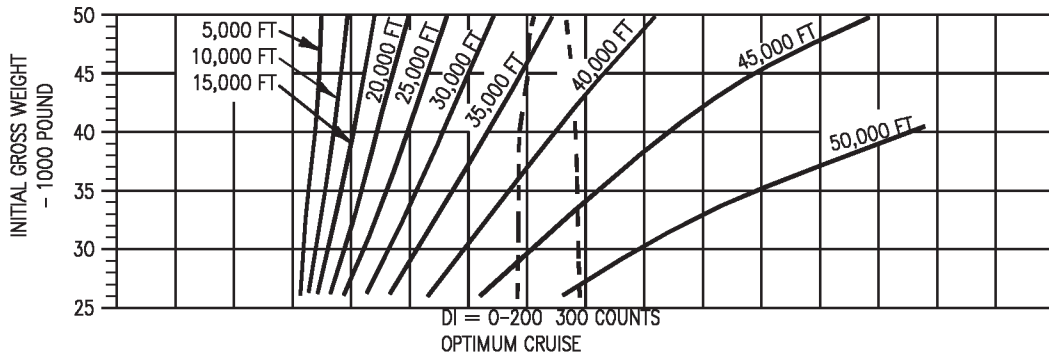


Figure 11-29. Peak Rate of Climb - Maximum Thrust - F404-GE-400  
(Sheet 5 of 5)

18AC-NFM-20-(271-5)12-CAT1


# INSTANTANEOUS RATE OF CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
MAXIMUM THRUST  
PEAK RATE OF CLIMB


REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

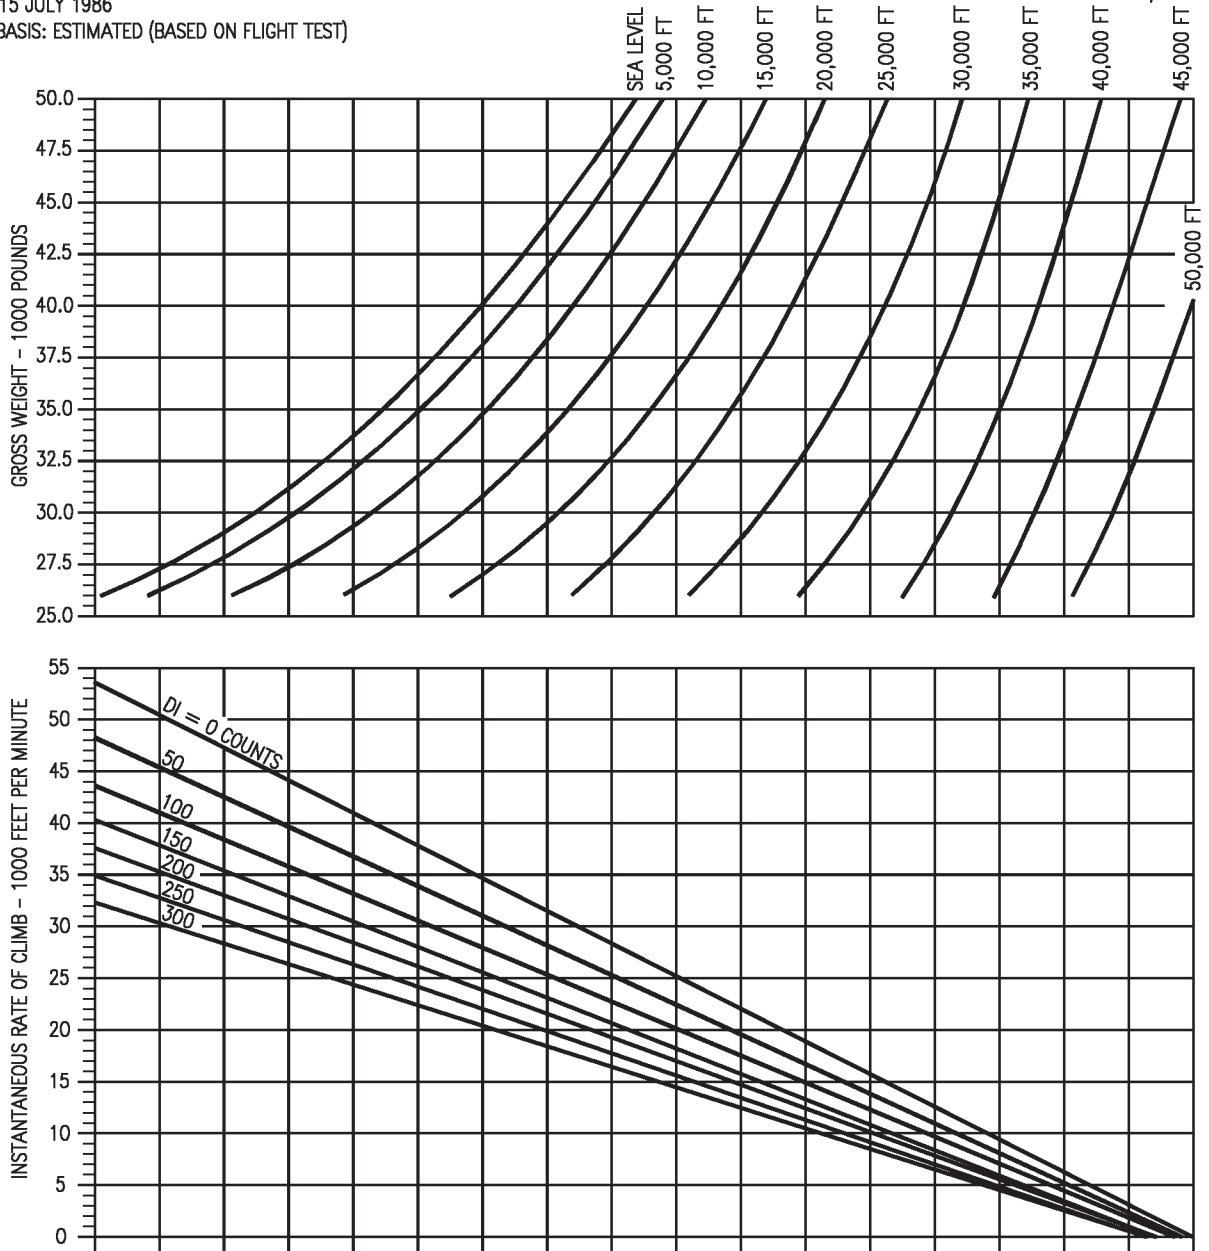

18AC-NFM-20-(272-1)12-CATI

Figure 11-30. Instantaneous Rate of Climb - Maximum Thrust - F404-GE-400

# CLIMB SPEED SCHEDULE

## F404-GE-400

### ONE ENGINE OPERATING MILITARY THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES  
ALL GROSS WEIGHTS

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

DATE: 15 JULY 1986  
DATA BASIS: **ESTIMATED**  
(BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                             |      | AIRCRAFT DRAG INDEX |      |      |      |            |      |
|-----------------------------|------|---------------------|------|------|------|------------|------|
|                             |      | 0                   |      | 25   |      | 50 & ABOVE |      |
|                             |      | KCAS                | MACH | KCAS | MACH | KCAS       | MACH |
| PRESSURE ALTITUDE<br>1000FT | S.L. | 275                 | .42  | 265  | .40  | 250        | .38  |
|                             | 5    | 275                 | .45  | 265  | .44  | 250        | .41  |
|                             | 10   | 275                 | .50  | 265  | .48  | 250        | .45  |
|                             | 15   | 275                 | .54  | 265  | .53  | 250        | .50  |
|                             | 20   | 275                 | .60  | 265  | .58  | 250        | .55  |
|                             | 25   | 275                 | .66  | 265  | .64  | 250        | .60  |
|                             | 30   | 263                 | .70  | 263  | .70  | 250        | .67  |
|                             | 35   | 235                 | .70  | 235  | .70  | 235        | .70  |
|                             | 40   | 208                 | .70  | 208  | .70  | 208        | .70  |

**NOTE**

FUEL ALLOWANCE FOR TAKEOFF AND ACCELERATION  
TO CLIMB SPEED IS 1200 POUNDS, AND IS BASED ON  
START, 20 MINUTES AT IDLE, 30 SECONDS RUNUP  
AT MIL, AND A MIL POWER TAKEOFF.

**Figure 11-31. Military Thrust Climb - One Engine Operating - F404-GE-400**  
(Sheet 1 of 6)

# COMBAT CEILING & SERVICE CEILING

F404-GE-400


ONE ENGINE OPERATING  
MILITARY THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
INOPERATIVE ENGINE WINDMILLING  
COMBAT CEILING  
=500 fpm  
SERVICE CEILING  
=100 fpm

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)




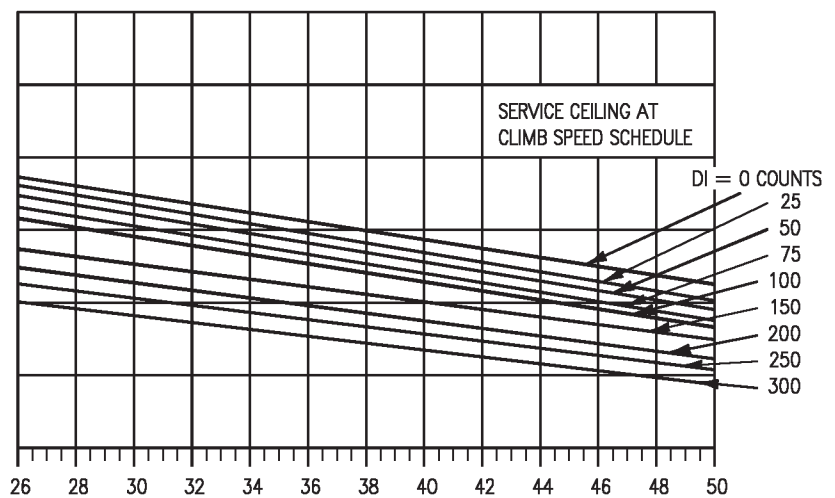


Figure 11-31. Military Thrust Climb - One Engine Operating - F404-GE-400  
(Sheet 2 of 6)

18AC-NFM-20-(165-1)12-CAT1

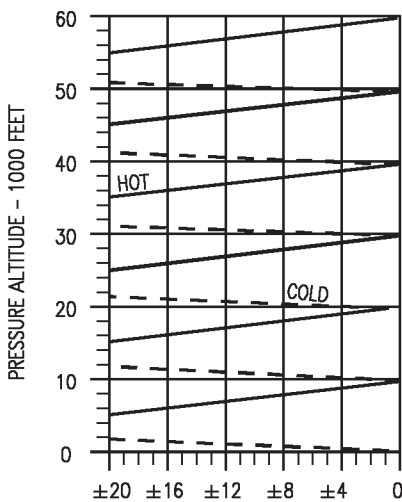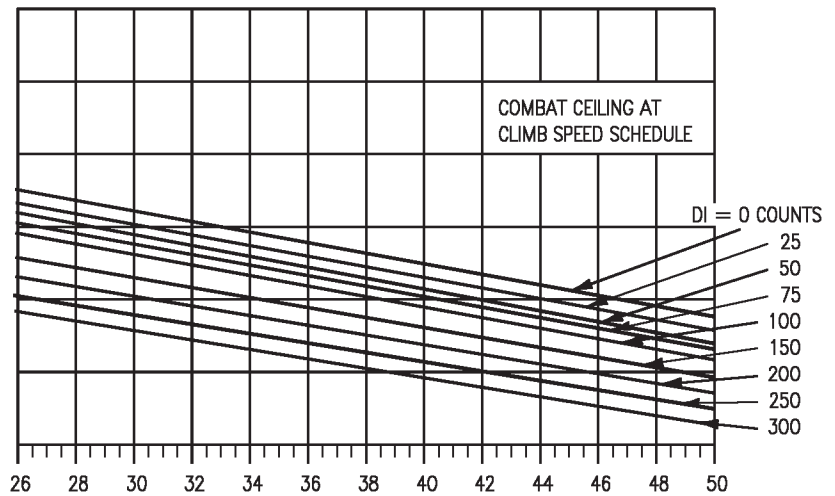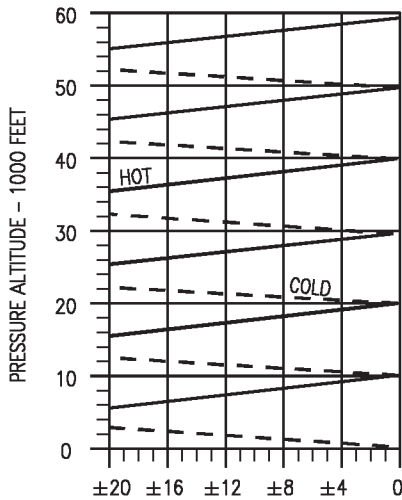

# OPTIMUM CRUISE ALTITUDE


F404-GE-400

ONE ENGINE OPERATING  
MILITARY THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
INOPERATIVE ENGINE WINDMILLING

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

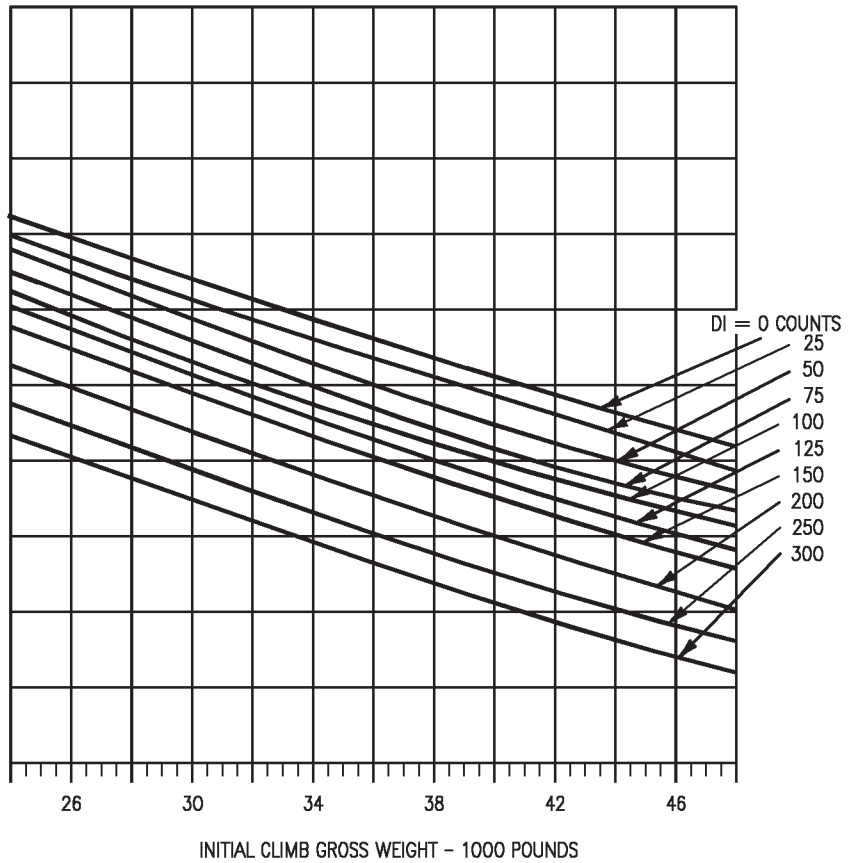
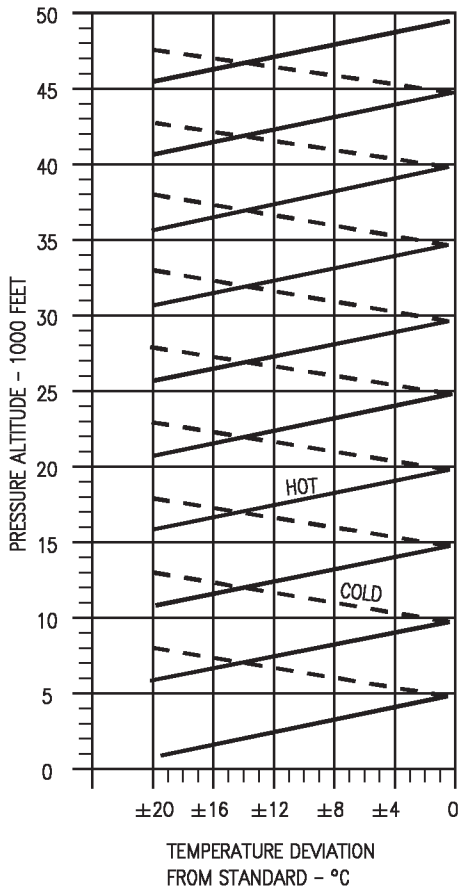


Figure 11-31. Military Thrust Climb - One Engine Operating - F404-GE-400  
(Sheet 3 of 6)

18AC-NFM-20-(165-2)12-CATI

# TIME REQUIRED TO CLIMB

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES


F404-GE-400

ONE ENGINE OPERATING  
MILITARY THRUST  
CLIMB SPEED SCHEDULE

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

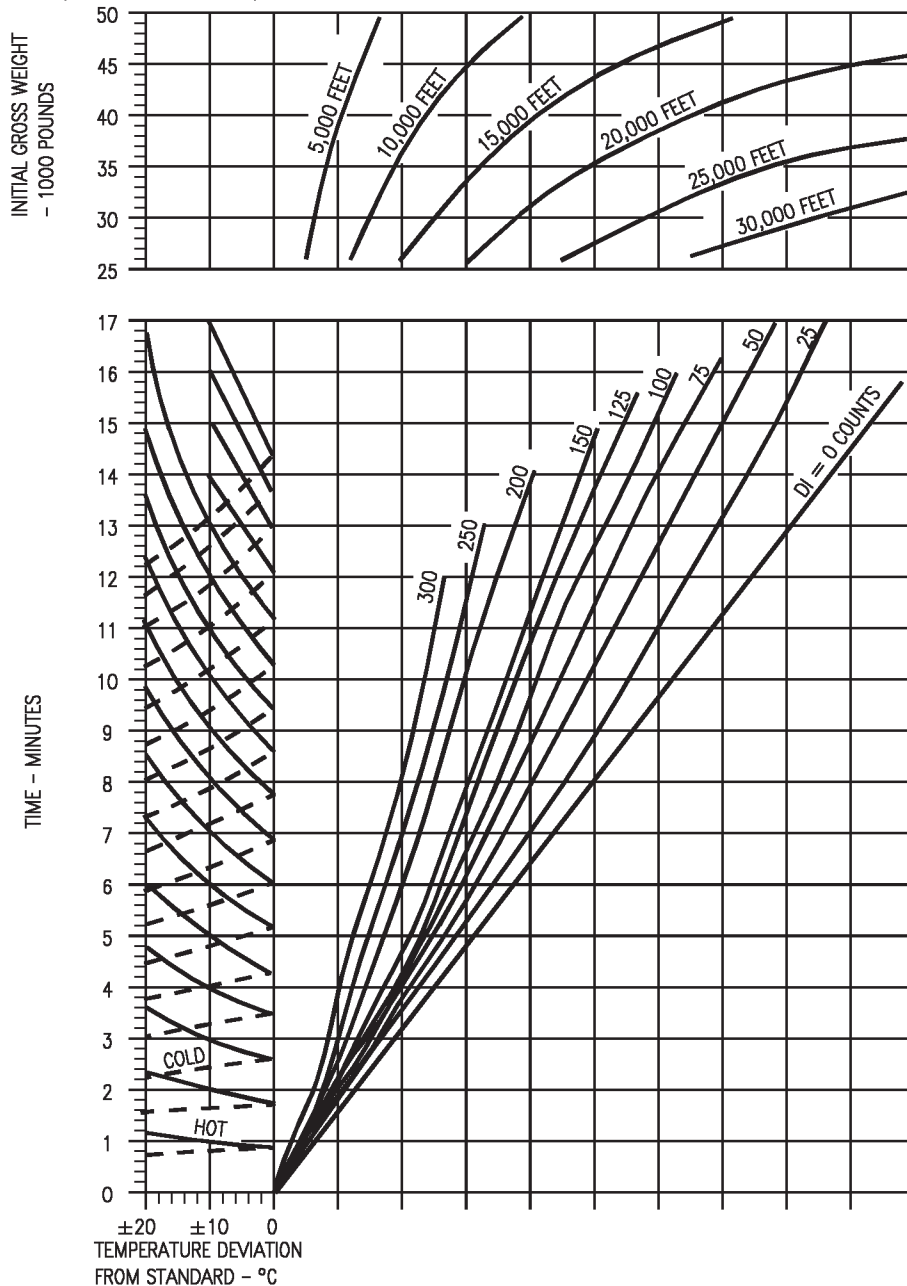


Figure 11-31. Military Thrust Climb - One Engine Operating - F404-GE-400  
(Sheet 4 of 6)

18AC-NFM-20-(165-3)12-CATI

# FUEL REQUIRED TO CLIMB


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
ONE ENGINE OPERATING  
MILITARY THRUST  
CLIMB SPEED SCHEDULE

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.5 LB/GAL

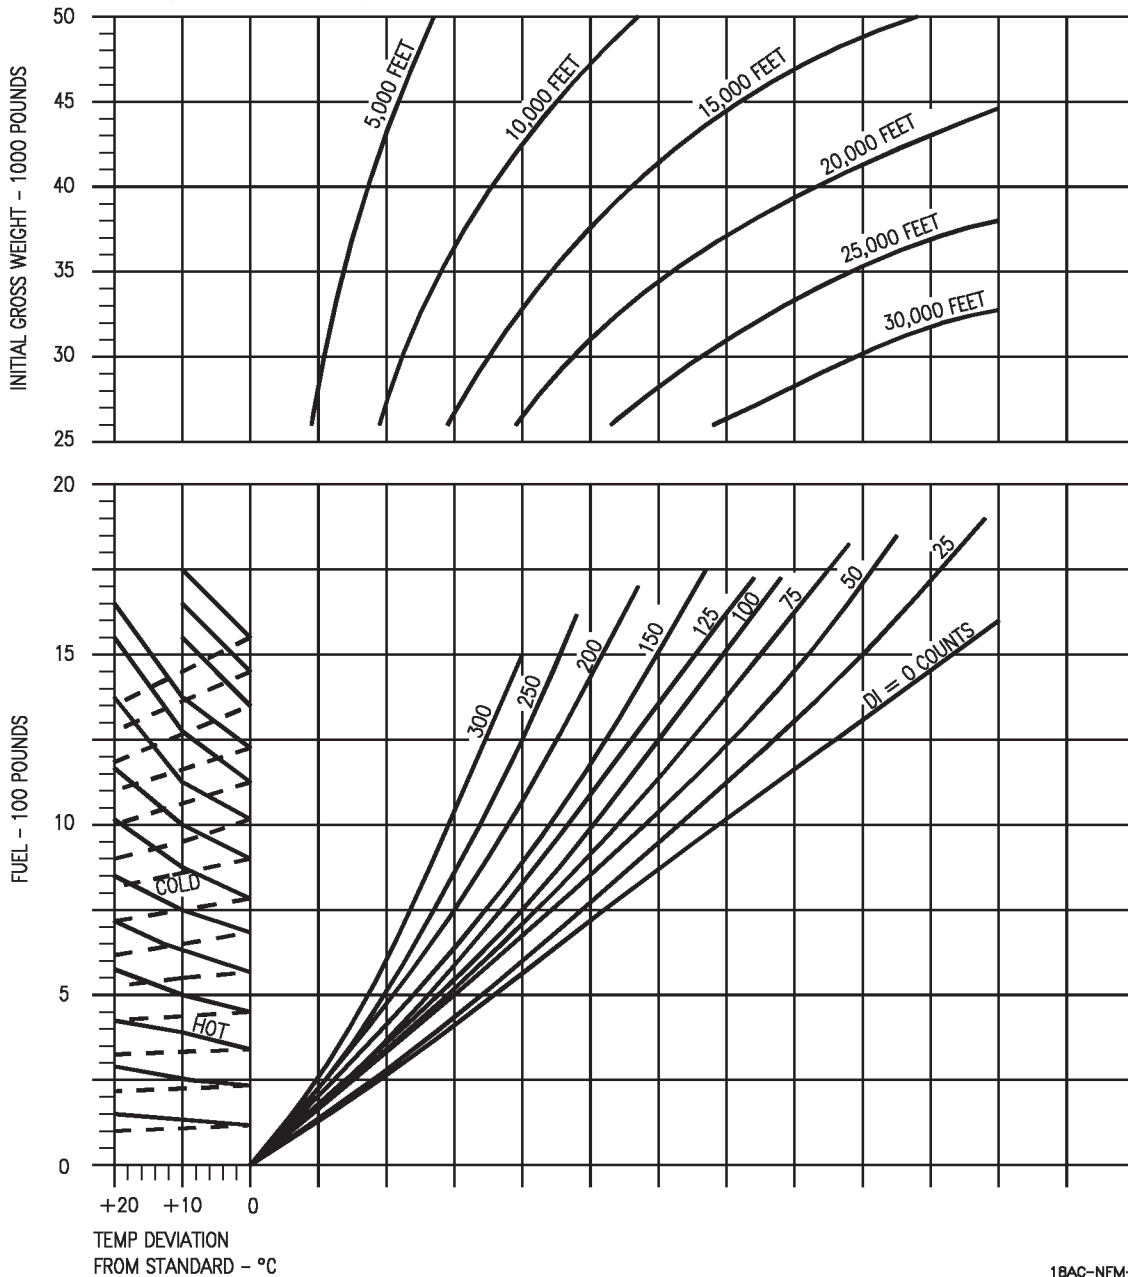


Figure 11-31. Military Thrust Climb - One Engine Operating - F404-GE-400  
(Sheet 5 of 6)

18AC-NFM-20-(165-4)12-CATI

# DISTANCE REQUIRED TO CLIMB

F404-GE-400


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

ONE ENGINE OPERATING  
MILITARY THRUST  
CLIMB SPEED SCHEDULE

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

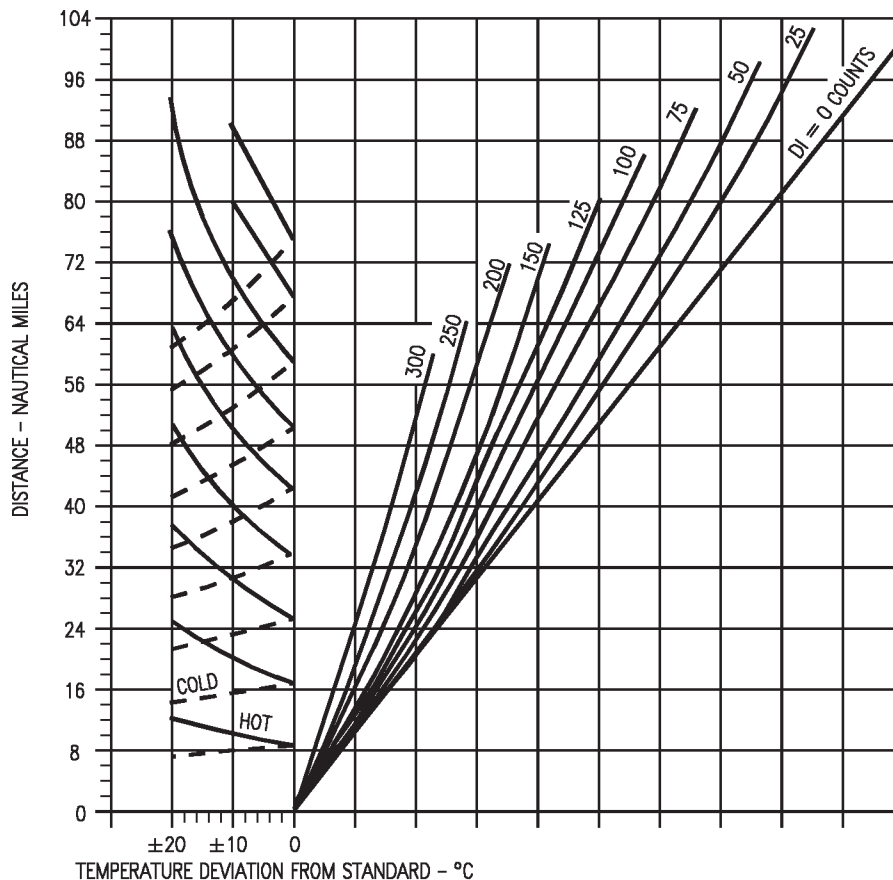
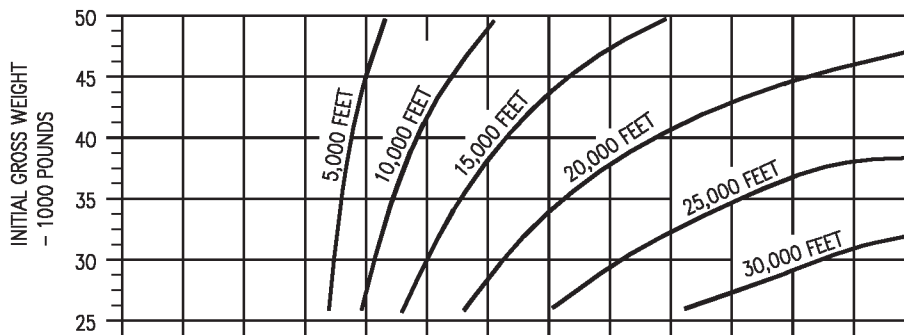


Figure 11-31. Military Thrust Climb - One Engine Operating - F404-GE-400  
(Sheet 6 of 6)

18AC-NFM-20-(165-5)12-CATI


# SUPERSONIC MAXIMUM THRUST CLIMB

F404-GE-400

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -13 |
| 25,000               | -35 | -31 |
| 30,000               | -44 | -47 |
| 35,000               | -54 | -65 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

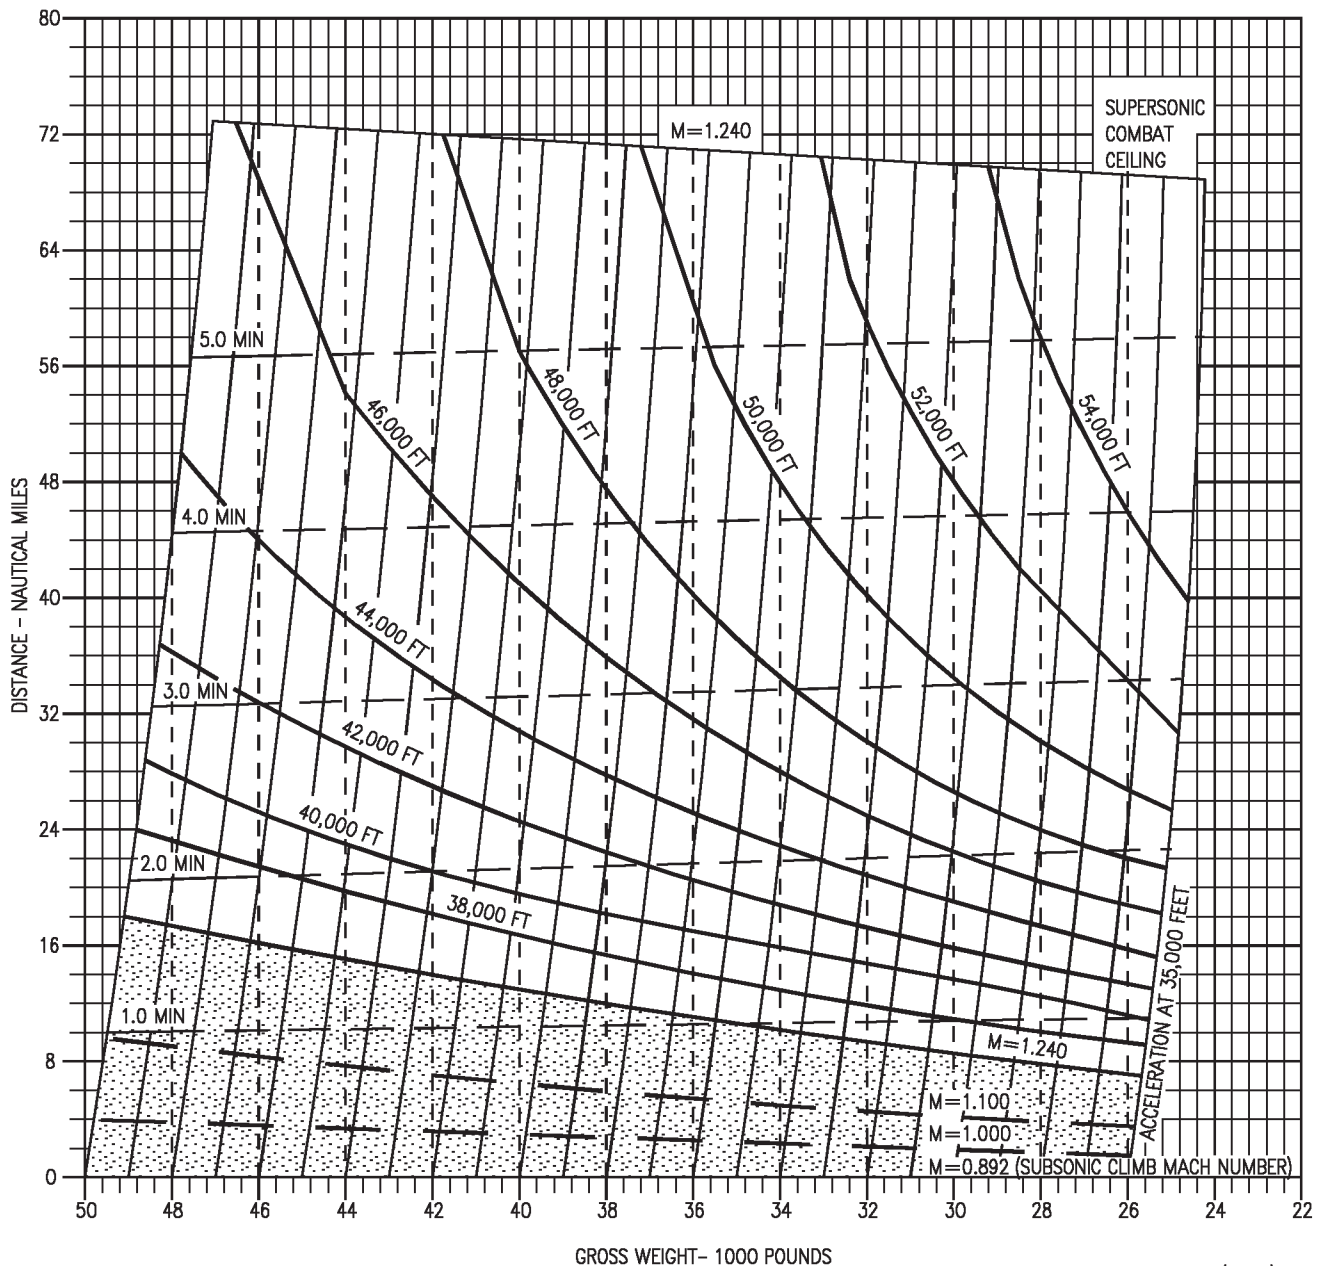


Figure 11-32. Supersonic Maximum Thrust Climb - F404-GE-400  
(Sheet 1 of 4)

18AC-NFM-20-(311-2)12-CAT1

# SUPERSONIC MAXIMUM THRUST CLIMB


F404-GE-400

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7  
+ C TANK

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

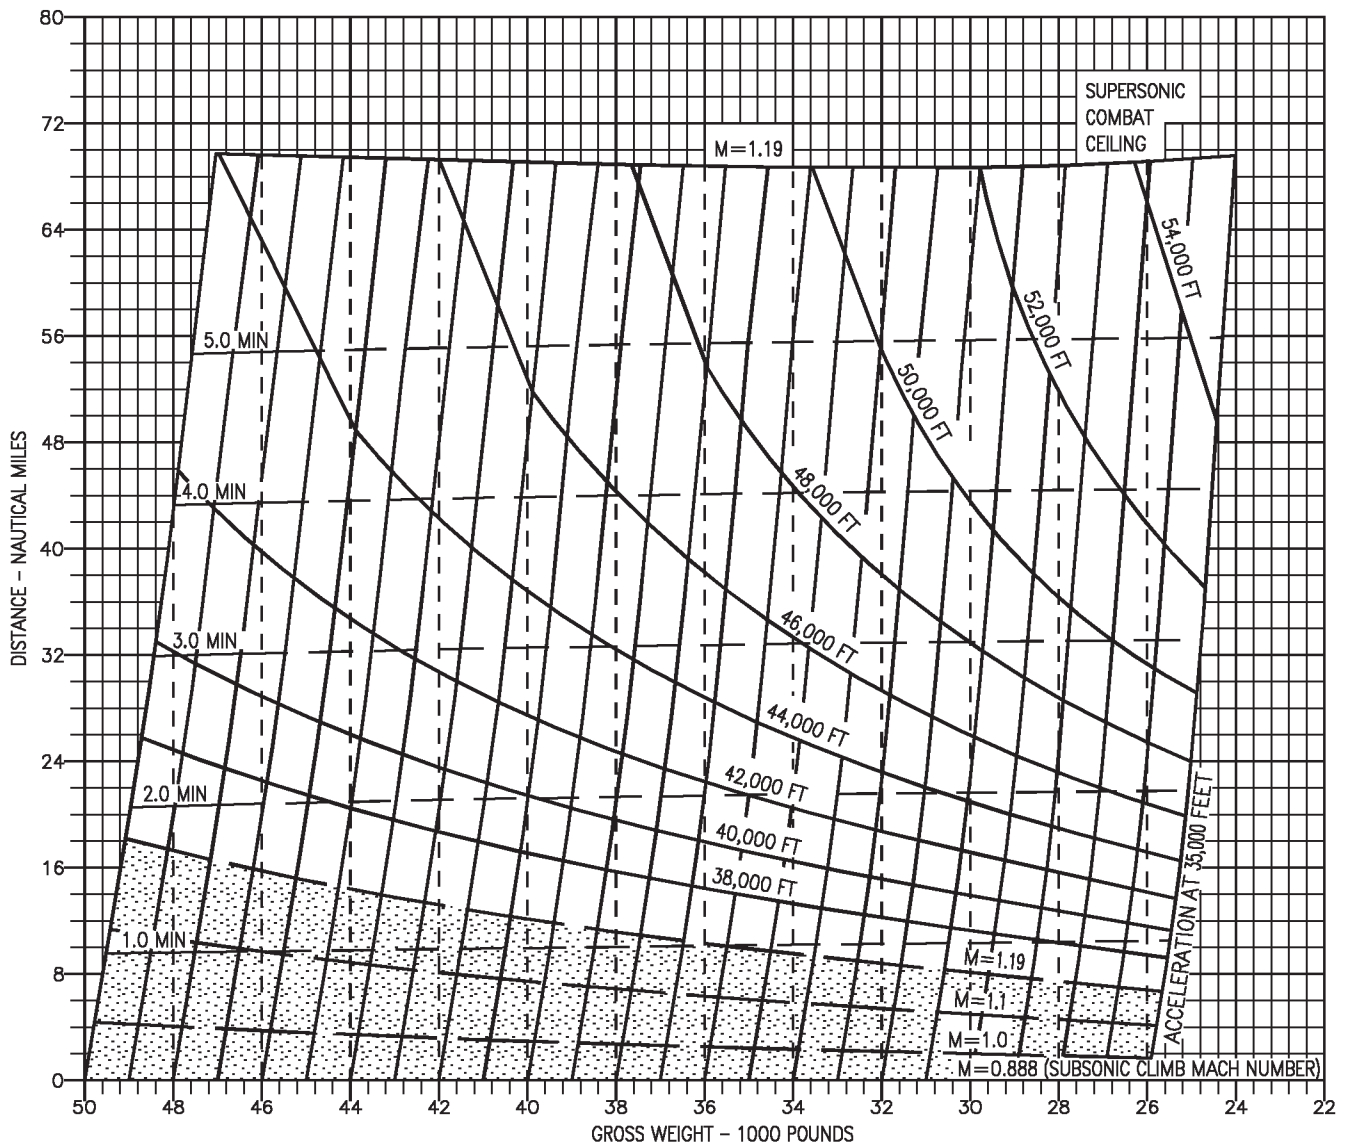

18AC-NFM-20-(311-3)12-CAT1

Figure 11-32. Supersonic Maximum Thrust Climb - F404-GE-400  
(Sheet 2 of 4)


# SUPERSONIC MAXIMUM THRUST CLIMB

F404-GE-400

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ FLIR


REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

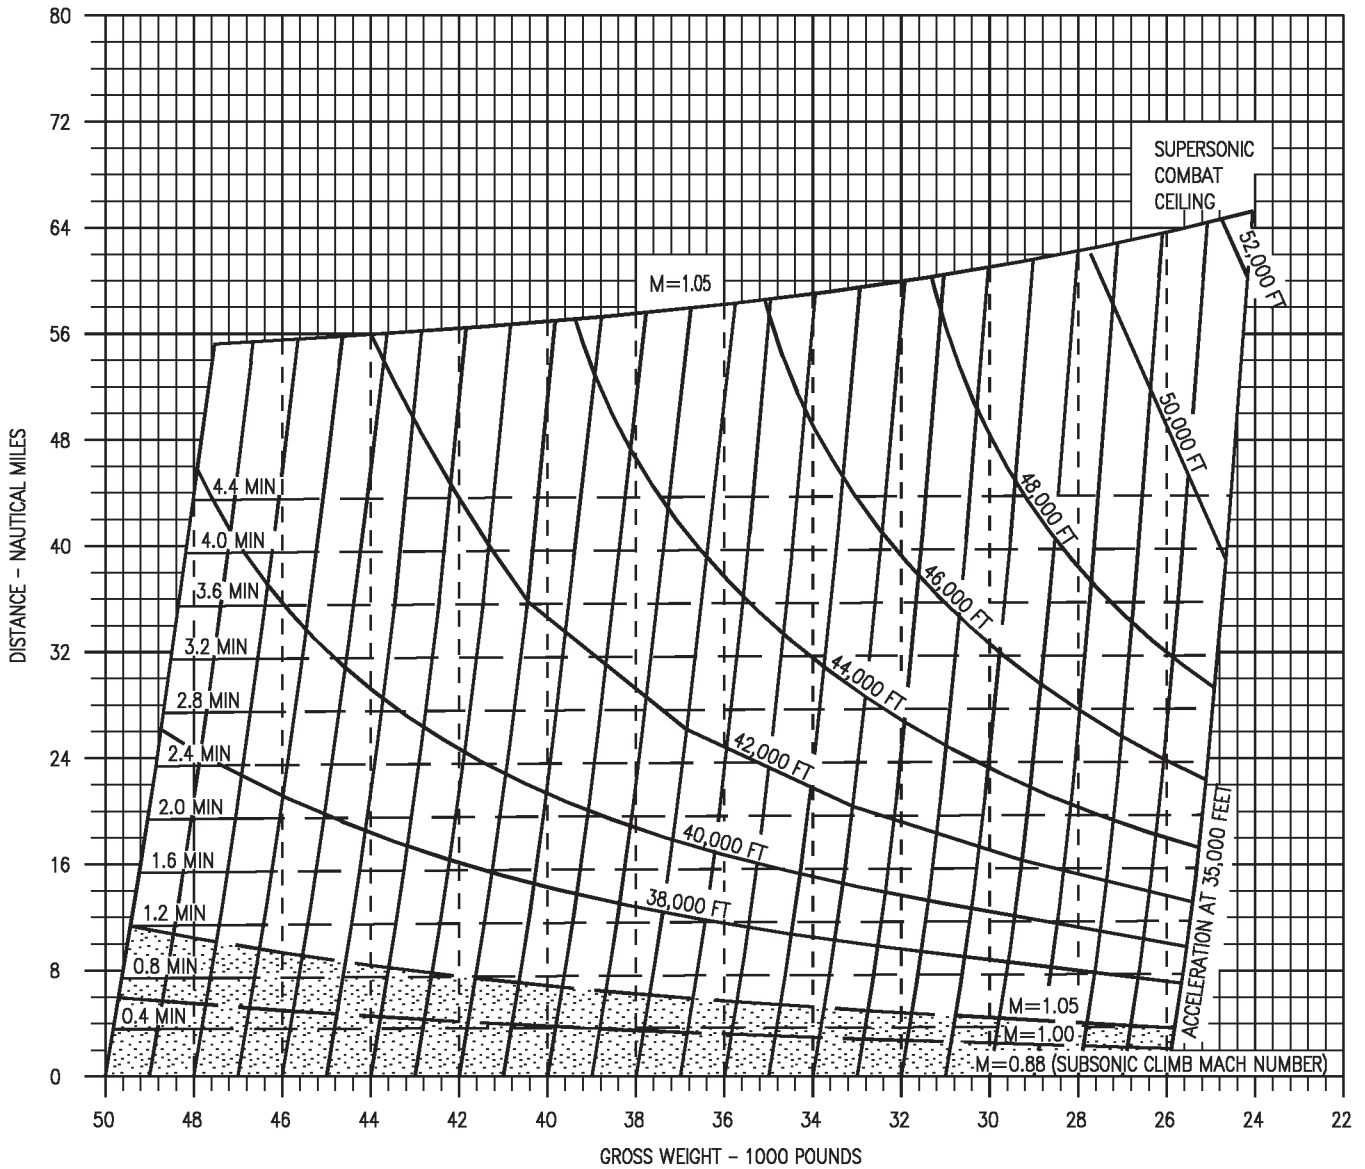

18AC-NFM-20-(311-4)12-CATI

Figure 11-32. Supersonic Maximum Thrust Climb - F404-GE-400  
(Sheet 3 of 4)

# SUPERSONIC MAXIMUM THRUST CLIMB


F404-GE-400

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ C TANK + FLIR

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

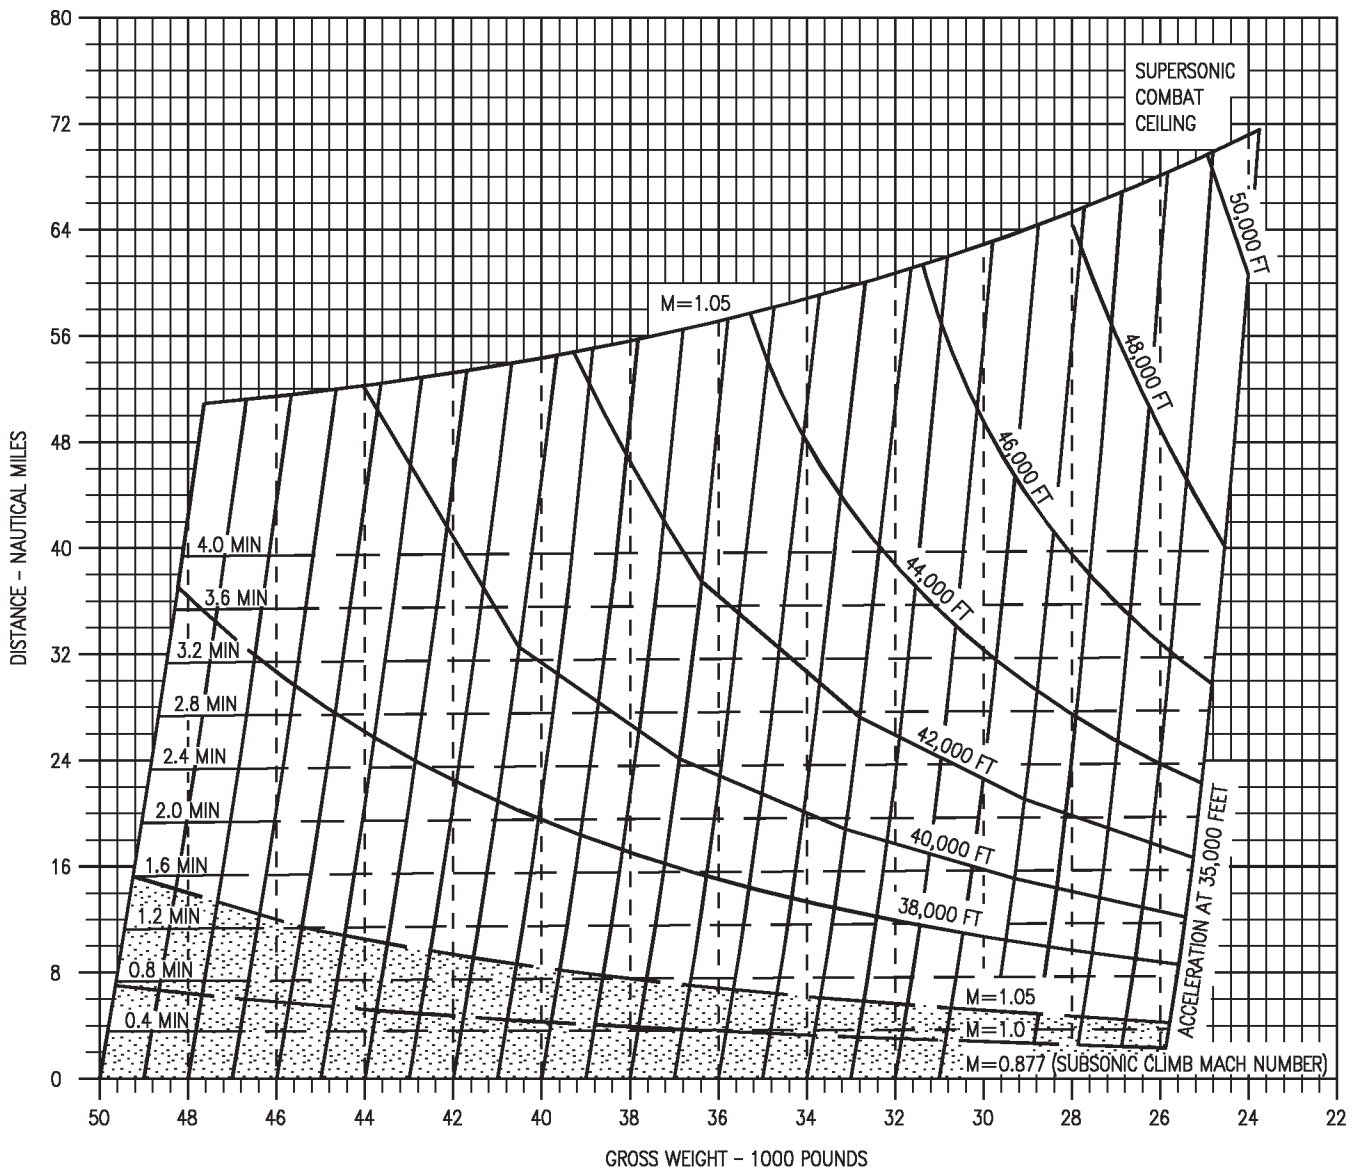

18AC-NFM-20-(311-5)12-CATI

Figure 11-32. Supersonic Maximum Thrust Climb - F404-GE-400  
(Sheet 4 of 4)




# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MAXIMUM THRUST  
HALF FLAPS, GEAR DOWN

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (2) AIM-7  
(DI=8)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

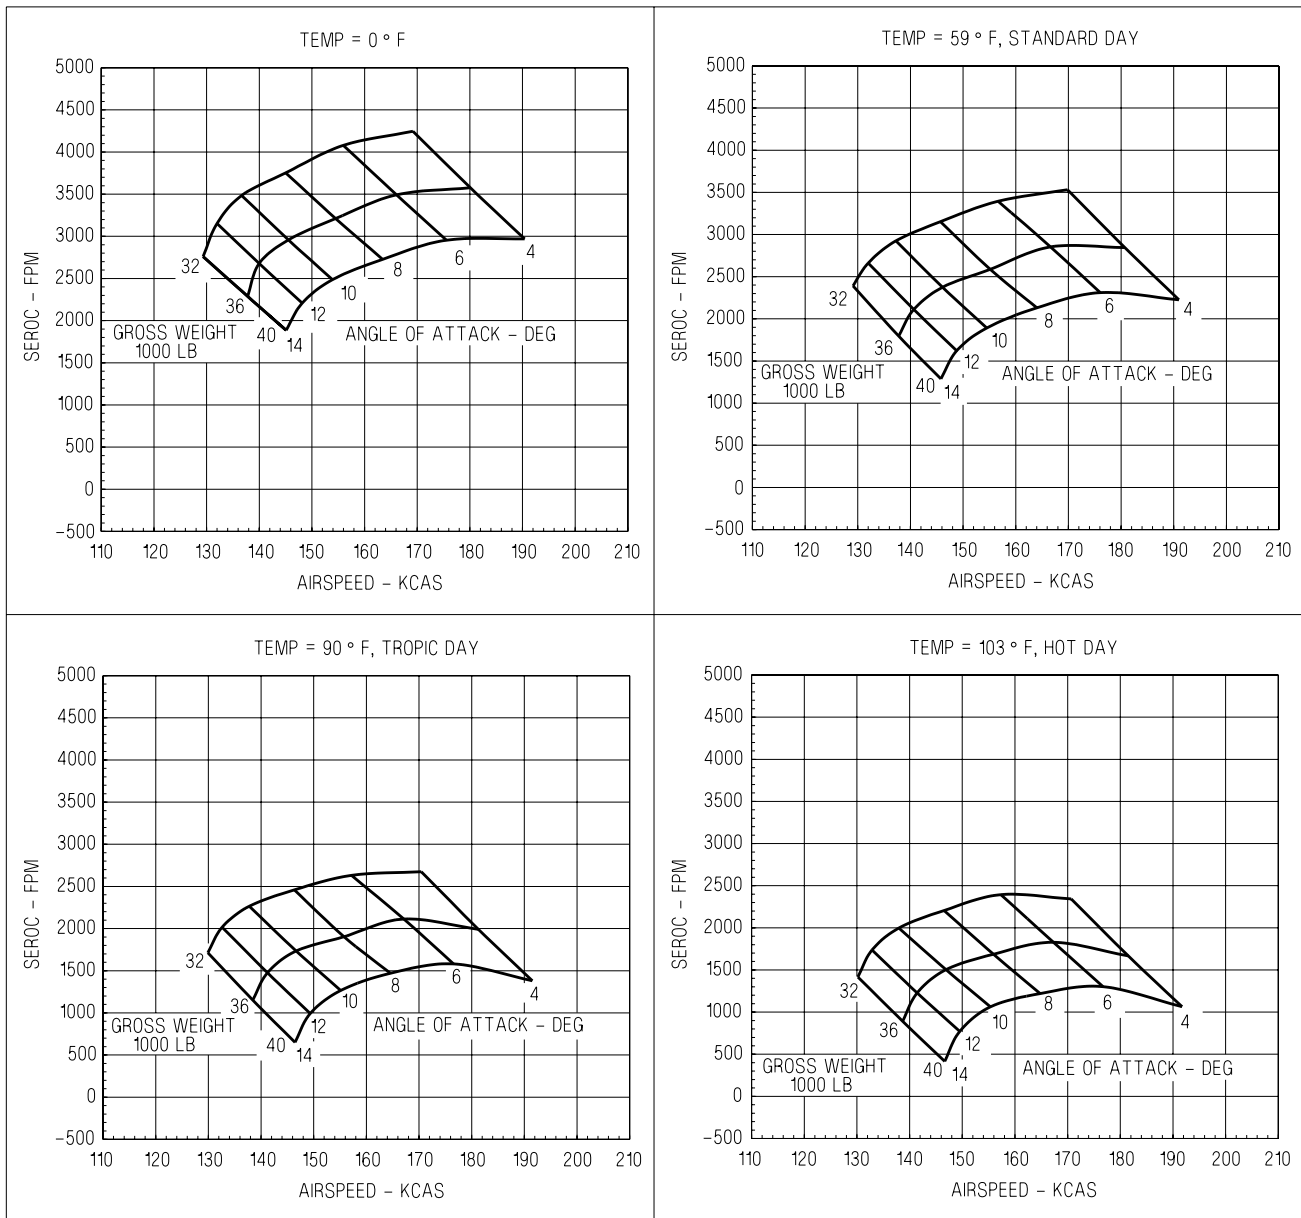

ADA523-310-1-017

Figure 11-33. Single Engine Rate of Climb - F404-GE-400  
(Sheet 1 of 12)


# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MILITARY THRUST  
HALF FLAPS, GEAR DOWN

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (2) AIM-7  
(DI=8)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| <36          | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

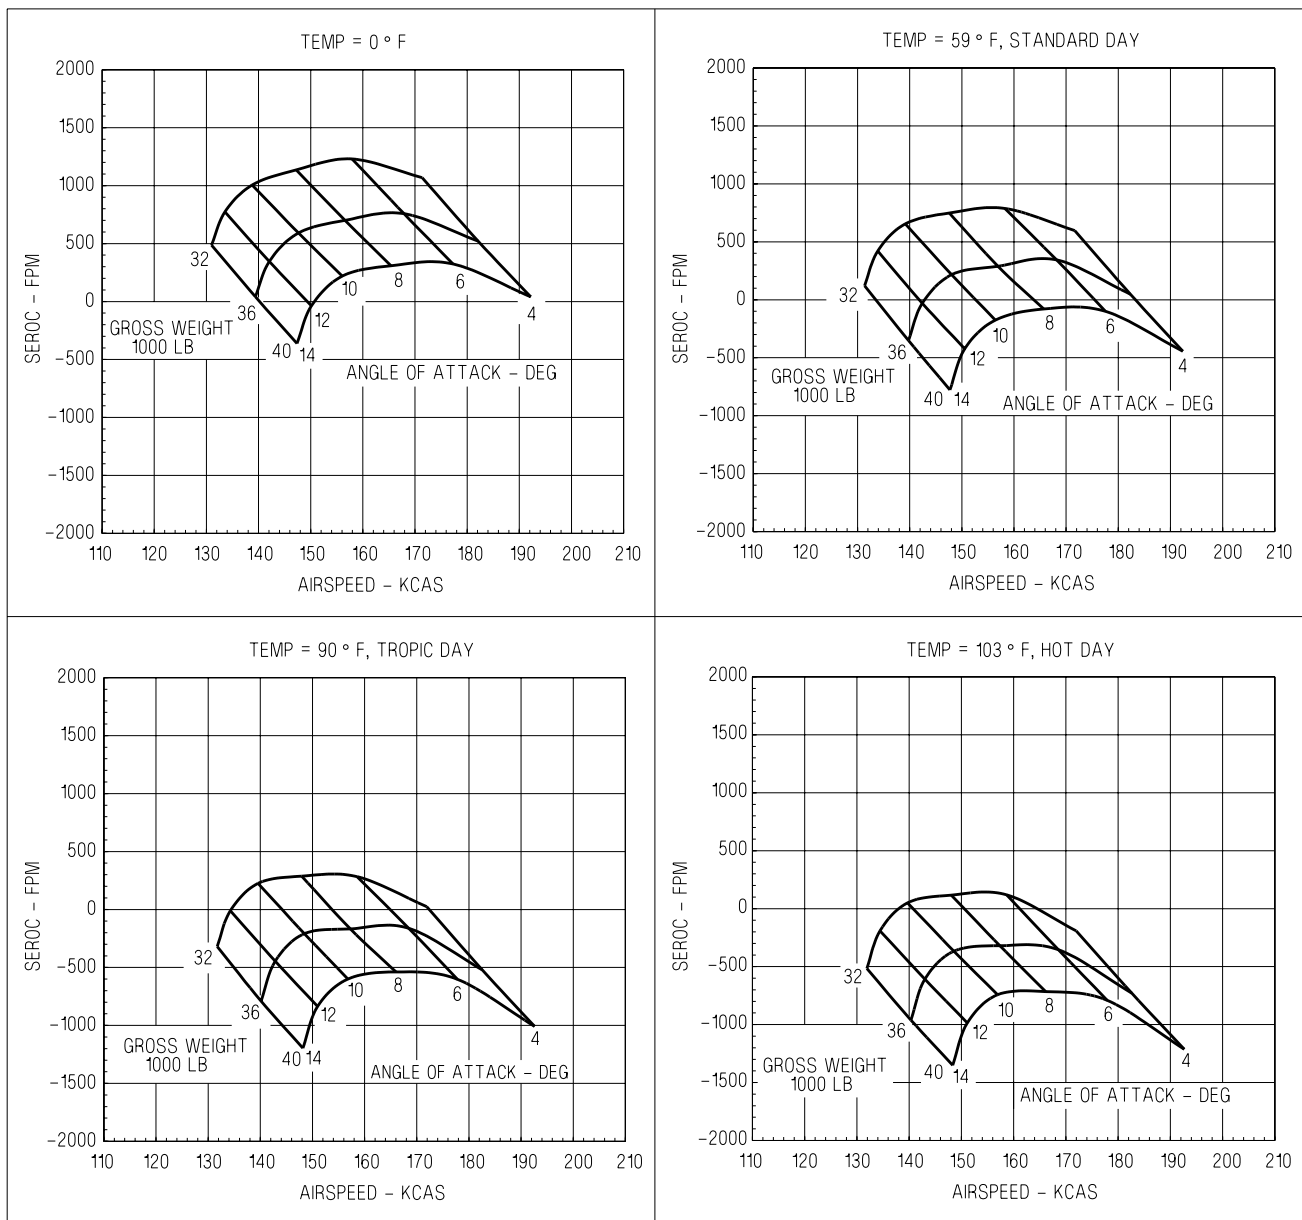

ADA523-310-2-017

**Figure 11-33. Single Engine Rate of Climb - F404-GE-400**  
(Sheet 2 of 12)

# SINGLE ENGINE RATE OF CLIMB

F404-GE-400


ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MAXIMUM THRUST  
HALF FLAPS, GEAR DOWN

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (2) AIM-7 +  
330 GALLON CENTERLINE FUEL TANK  
(DI=21.5)

STORES JETTISONED LOADING:  
(2) AIM-9 + (2) AIM-7  
(DI=8)  
(PYLON MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

— STORES RETAINED  
- - - STORES JETTISONED

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

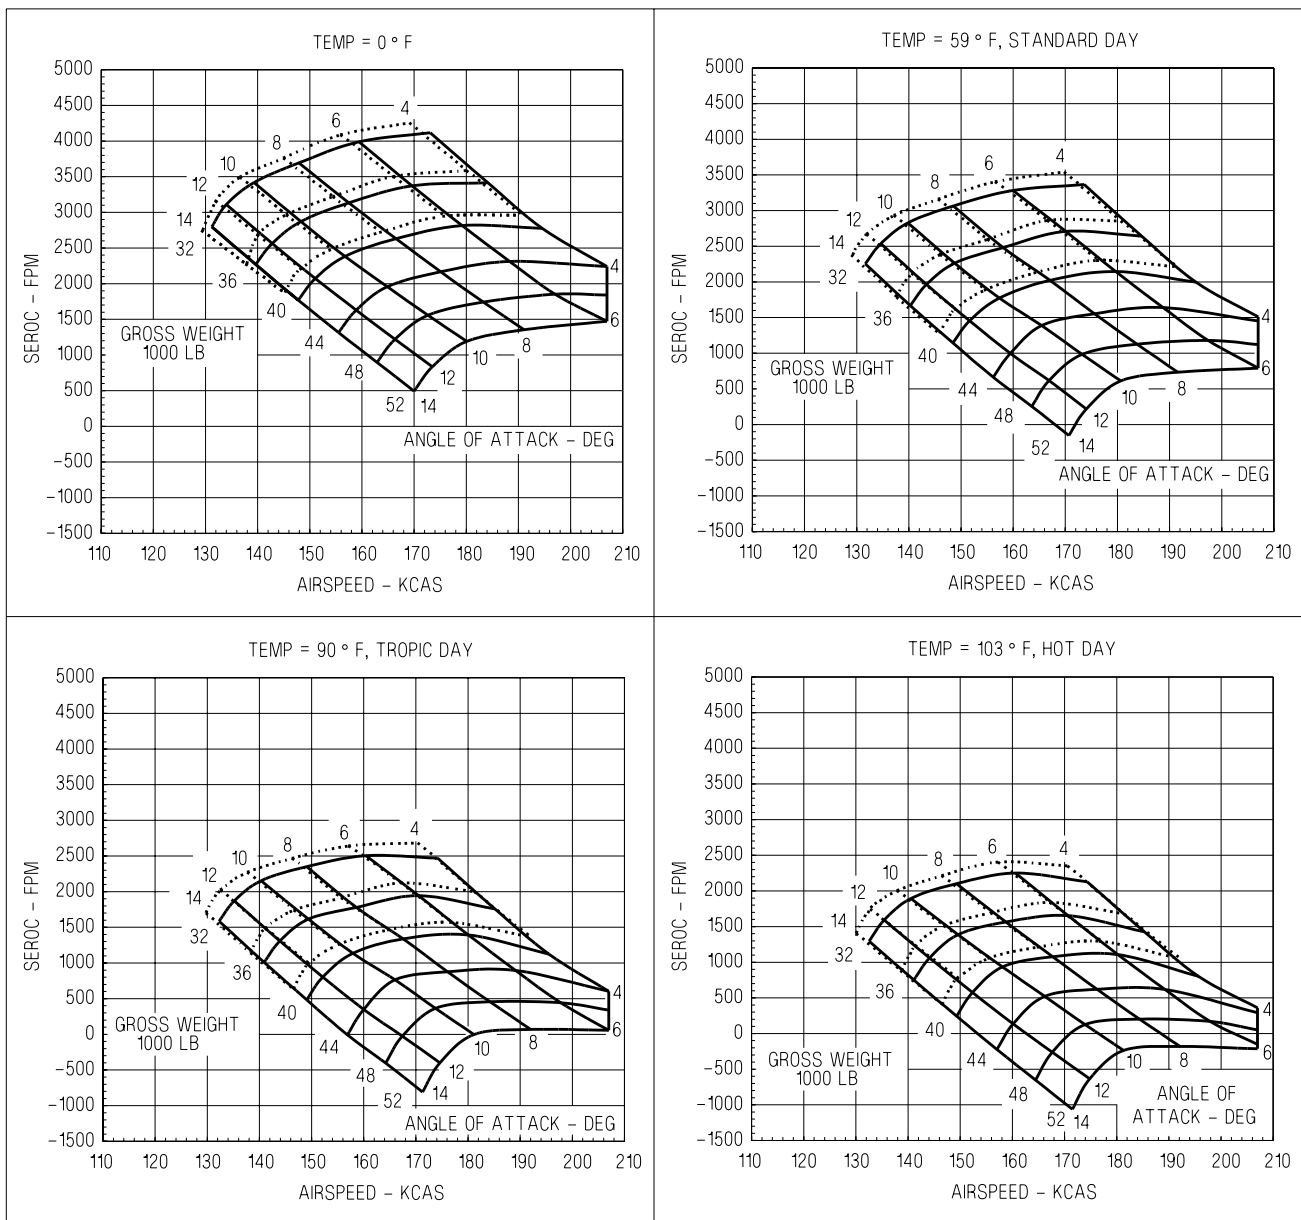

ADA523-310-3-017

Figure 11-33. Single Engine Rate of Climb - F404-GE-400  
(Sheet 3 of 12)

# SINGLE ENGINE RATE OF CLIMB

F404-GE-400


ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MILITARY THRUST  
HALF FLAPS, GEAR DOWN

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (2) AIM-7 +  
330 GALLON CENTERLINE FUEL TANK  
(DI=21.5)

STORES JETTISONED LOADING:  
(2) AIM-9 + (2) AIM-7  
(DI=8)  
(PYLON MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

— STORES RETAINED  
- - - STORES JETTISONED

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

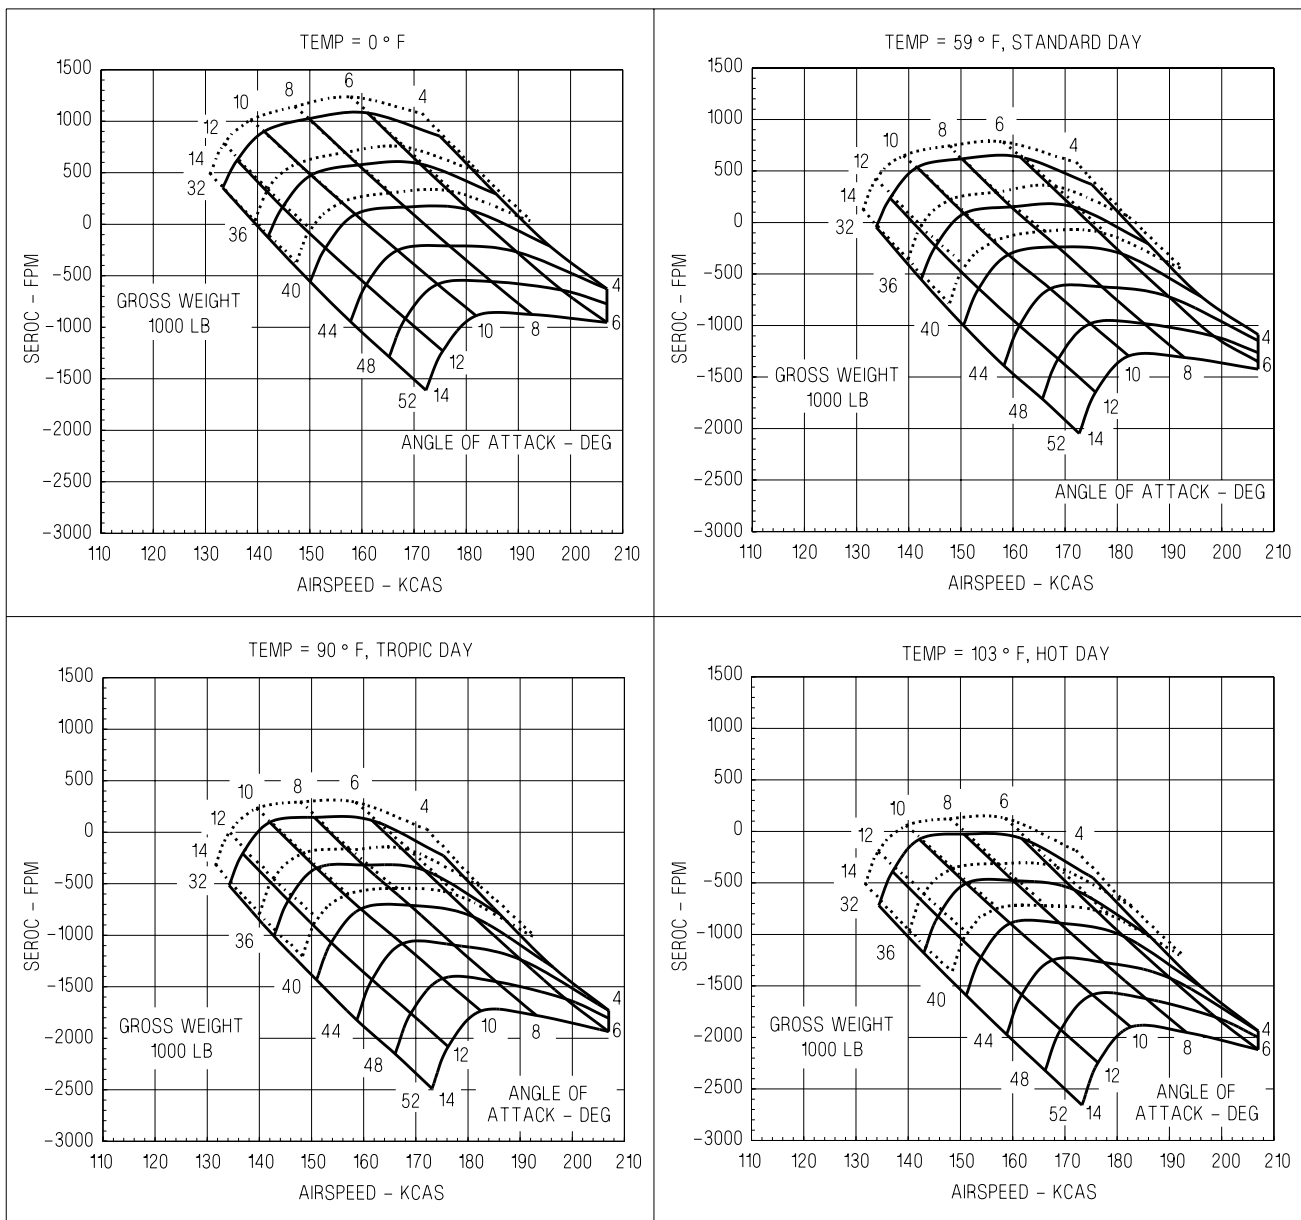

ADA523-310-4-017


Figure 11-33. Single Engine Rate of Climb - F404-GE-400  
(Sheet 4 of 12)

# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (1) AIM-7 + FLIR +  
(2) 330 GALLON FUEL TANKS  
(DI = 56)

ONE ENGINE OPERATING, INOPERATIVE ENGINE WINDMILLING  
MAXIMUM THRUST  
HALF FLAPS, GEAR DOWN



STORES JETTISON LOADING:  
(2) AIM-9 + (2) AIM-7  
(DI = 8)  
(PYLON/VER MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

— STORES RETAINED  
- - - STORES JETTISONED

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

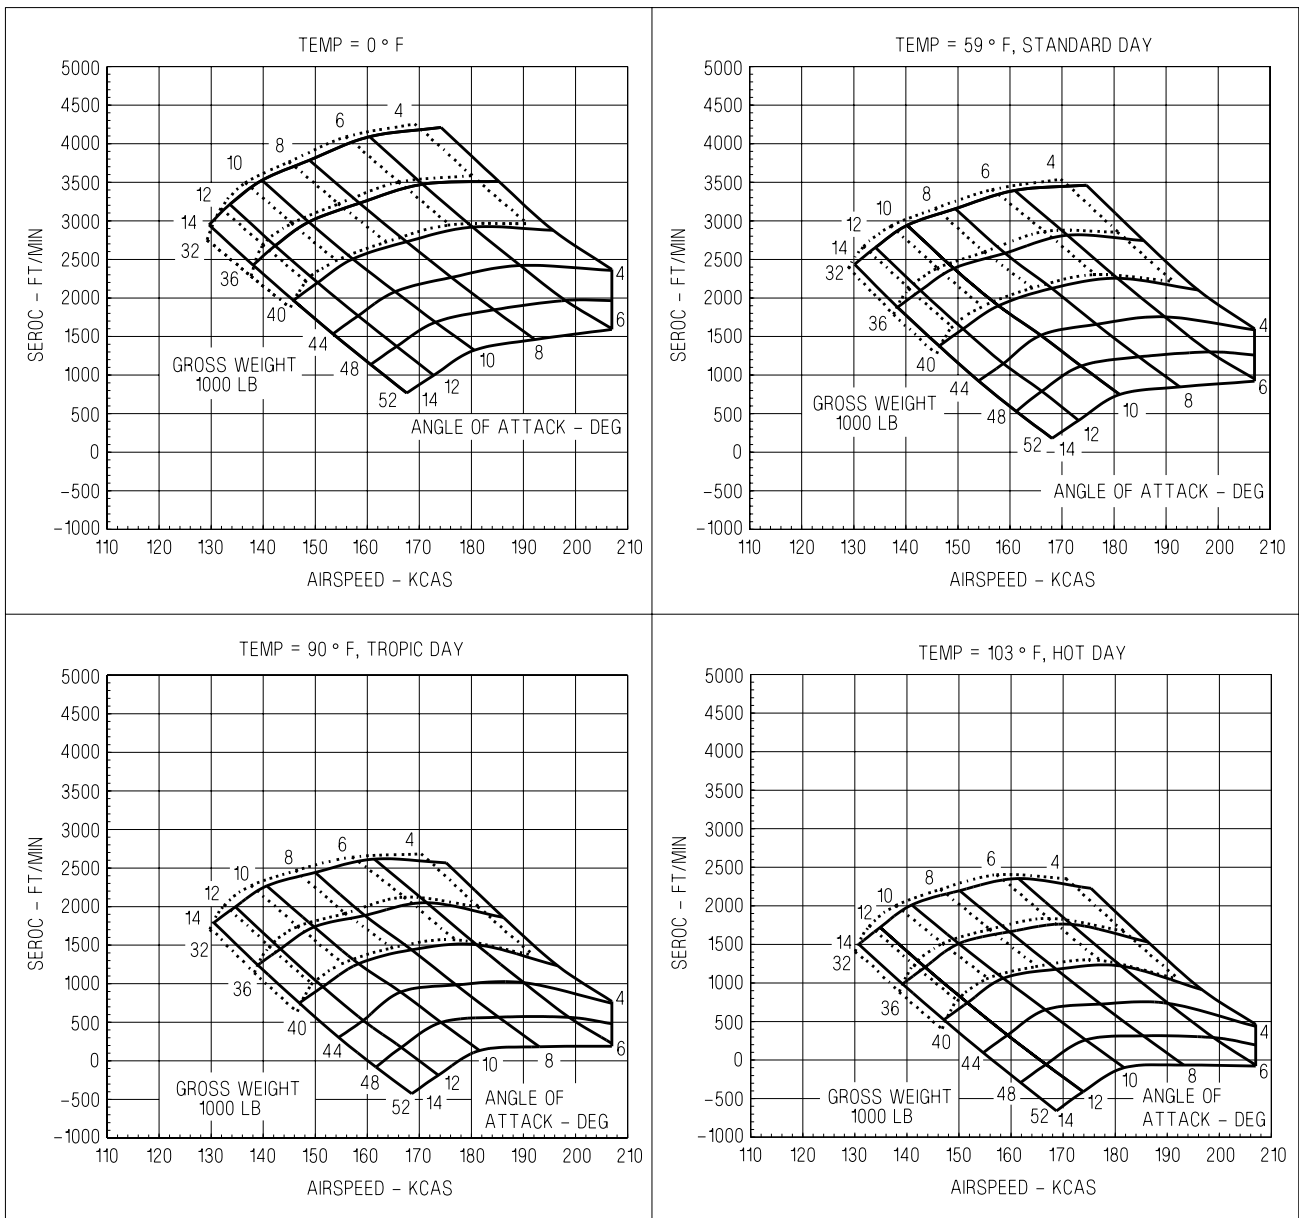

ADA523-310-9-017


**Figure 11-33. Single Engine Rate of Climb - F404-GE-400**  
(Sheet 5 of 12)

# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (1) AIM-7 + FLIR +  
(2) 330 GALLON FUEL TANKS  
(DI = 56)

ONE ENGINE OPERATING, INOPERATIVE ENGINE WINDMILLING  
MILITARY THRUST  
HALF FLAPS, GEAR DOWN



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL


STORES JETTISON LOADING:  
(2) AIM-9 + (2) AIM-7  
(DI = 8)  
(PYLON/VER MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |

— STORES RETAINED  
- - - STORES JETTISONED

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

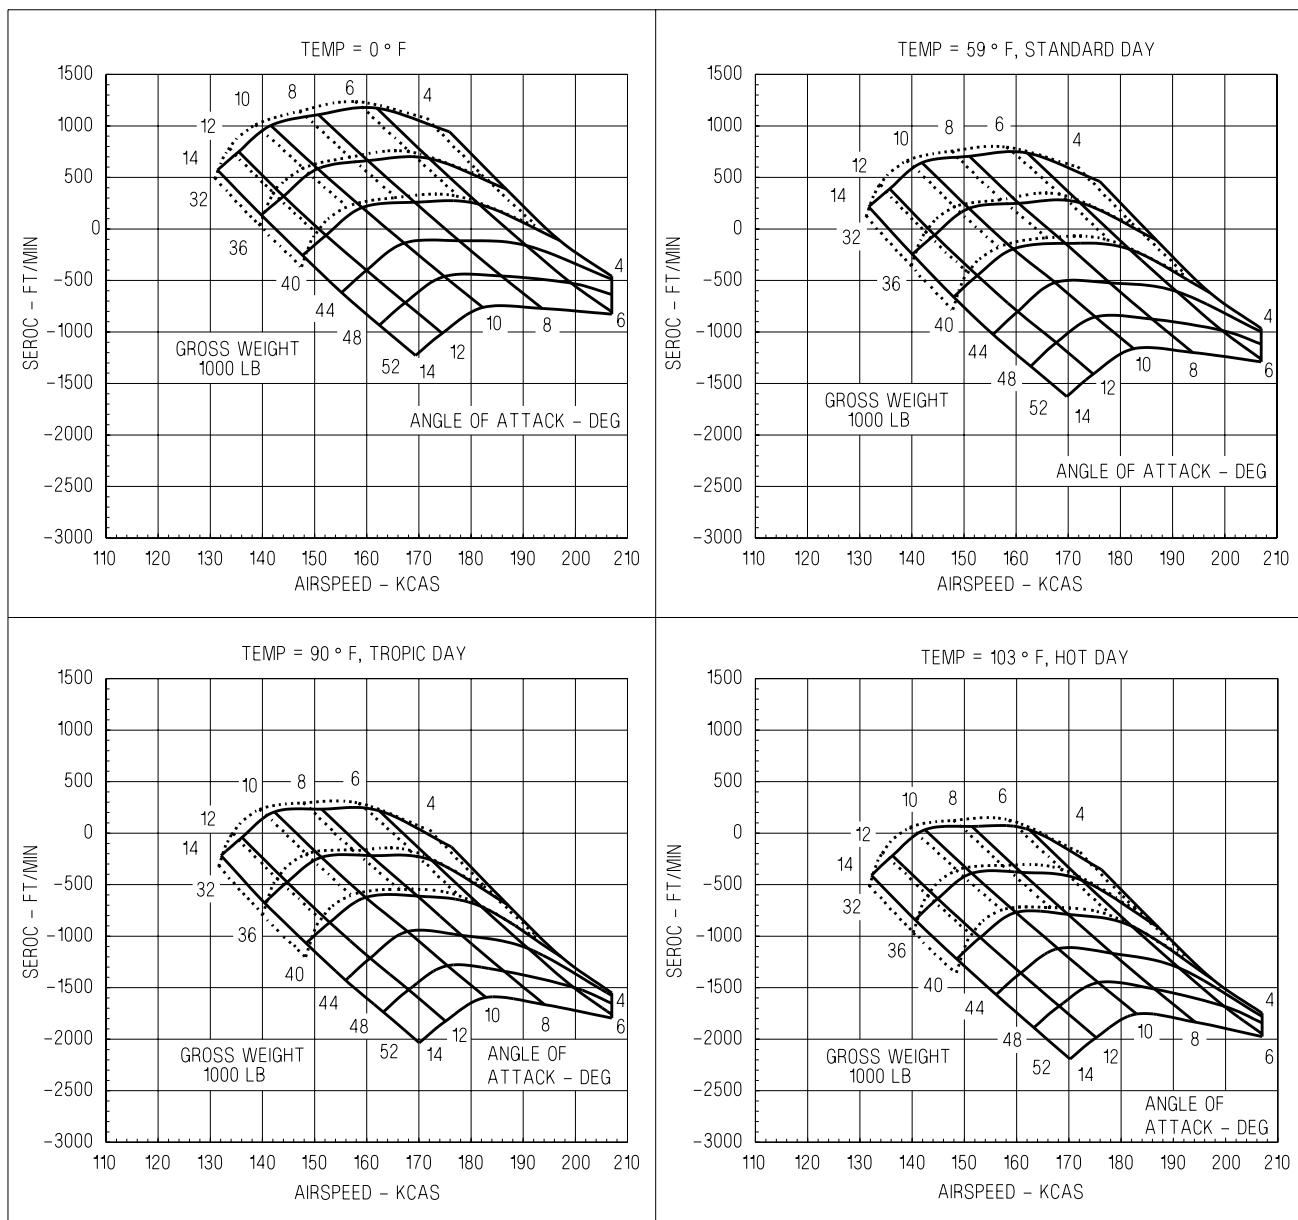

ADA523-310-10-017


**Figure 11-33. Single Engine Rate of Climb - F404-GE-400**  
(Sheet 6 of 12)

# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

AIRCRAFT CONFIGURATION:  
 (2) AIM-9 + (1) AIM-7 + (2) VER'S +  
 (4) MK-83 + (2) 330 GALLON FUEL TANKS + FLIR  
 (DI = 111)

ONE ENGINE OPERATING, INOPERATIVE ENGINE WINDMILLING  
 MAXIMUM THRUST  
 HALF FLAPS, GEAR DOWN



FUEL GRADE: JP-5  
 FUEL DENSITY: 6.8 LB/GAL


STORES JETTISON LOADING:  
 (2) AIM-9 + (2) AIM-7  
 (DI = 8)  
 (PYLON/VER MASS PROPERTIES AND  
 AERODYNAMICS NOT REFLECTED)

| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |

— STORES RETAINED  
 - - - STORES JETTISONED

DATE: SEPTEMBER 1999  
 DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

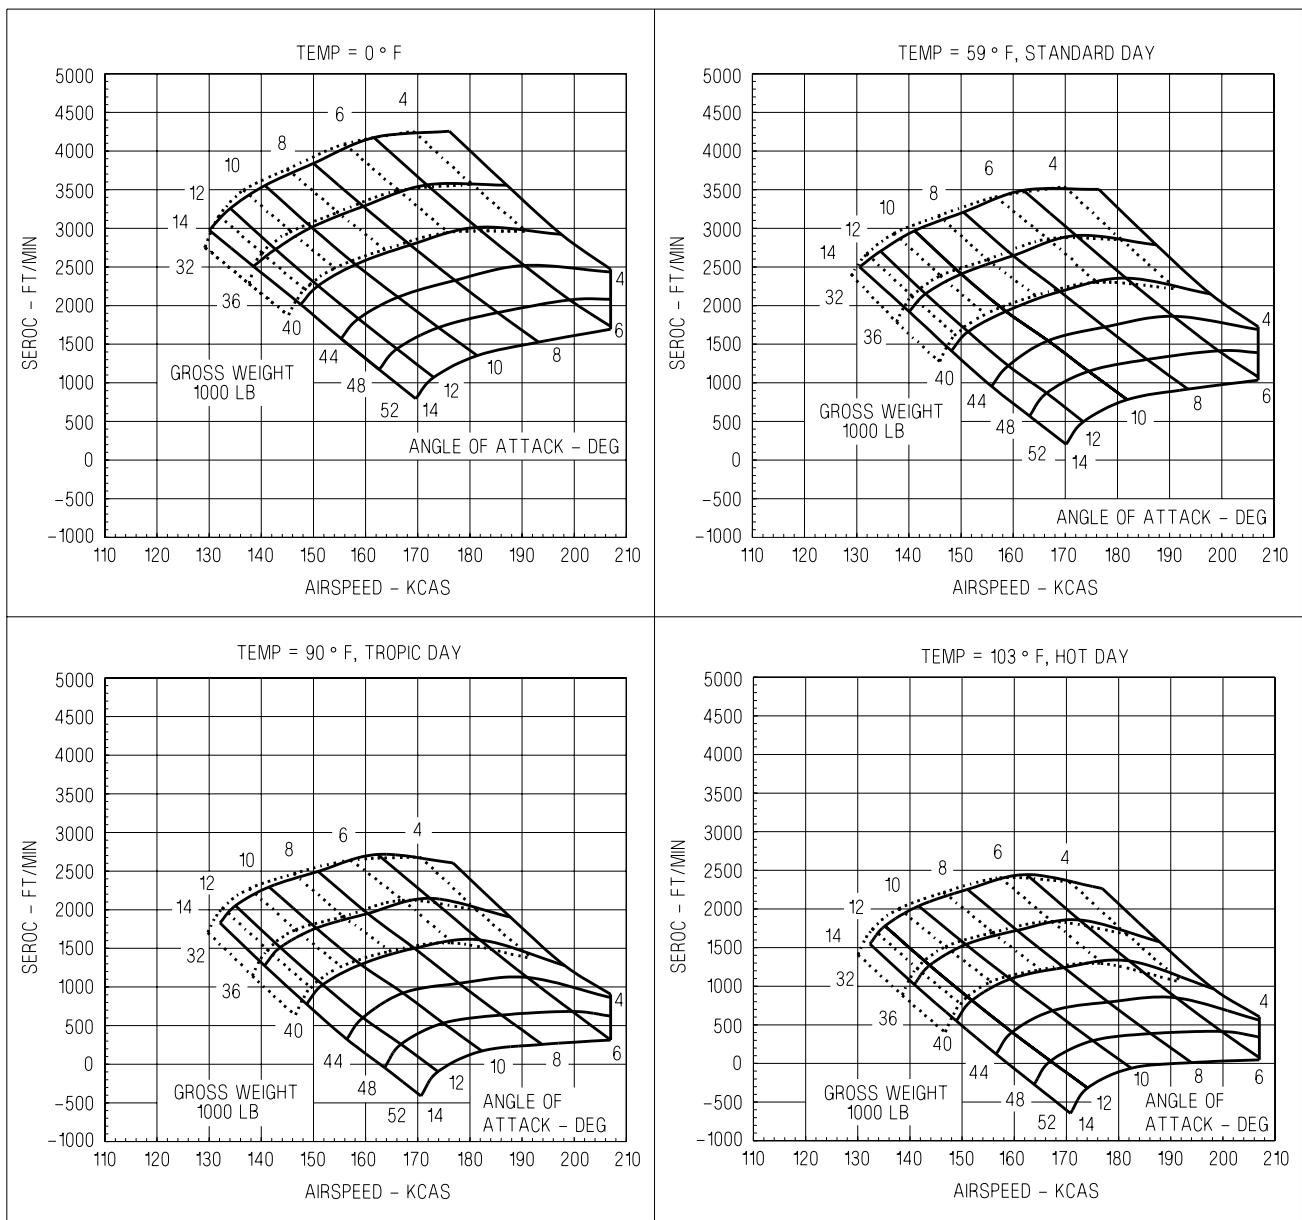

ADA523-310-11-017

**Figure 11-33. Single Engine Rate of Climb - F404-GE-400**  
 (Sheet 7 of 12)




# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (1) AIM-7 + (2) VER'S +  
(4) MK-83 + (2) 330 GALLON FUEL TANKS + FLIR  
(DI = 111)

ONE ENGINE OPERATING, INOPERATIVE ENGINE WINDMILLING  
MILITARY THRUST  
HALF FLAPS, GEAR DOWN



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL


— STORES RETAINED  
- - - STORES JETTISONED

STORES JETTISON LOADING:  
(2) AIM-9 + (2) AIM-7  
(DI = 8)  
(PYLON/VER MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

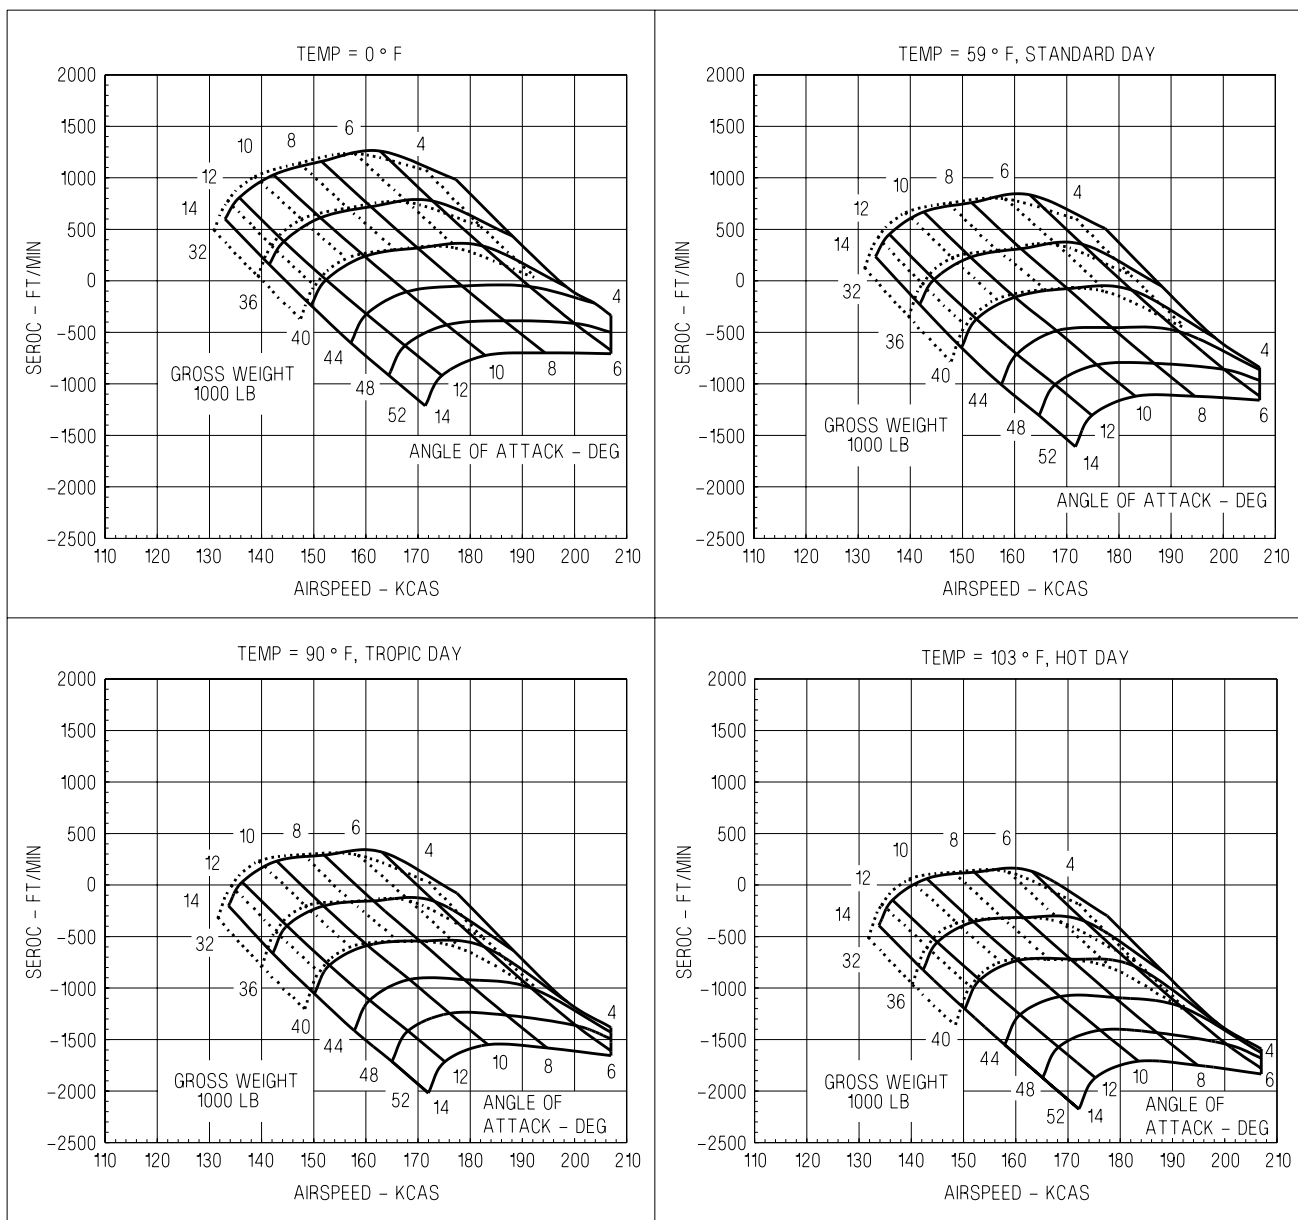

ADA523-310-12-017

**Figure 11-33. Single Engine Rate of Climb - F404-GE-400**  
(Sheet 8 of 12)



# SINGLE ENGINE RATE OF CLIMB

F404-GE-400


ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MAXIMUM THRUST  
HALF FLAPS, GEAR DOWN

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (2) AIM-7 +  
(3) 330 GALLON FUEL TANKS  
(DI=65.5)

STORES JETTISONED LOADING:  
(2) AIM-9 + (2) AIM-7  
(DI=8)  
(PYLON MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

— STORES RETAINED  
- - - STORES JETTISONED

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

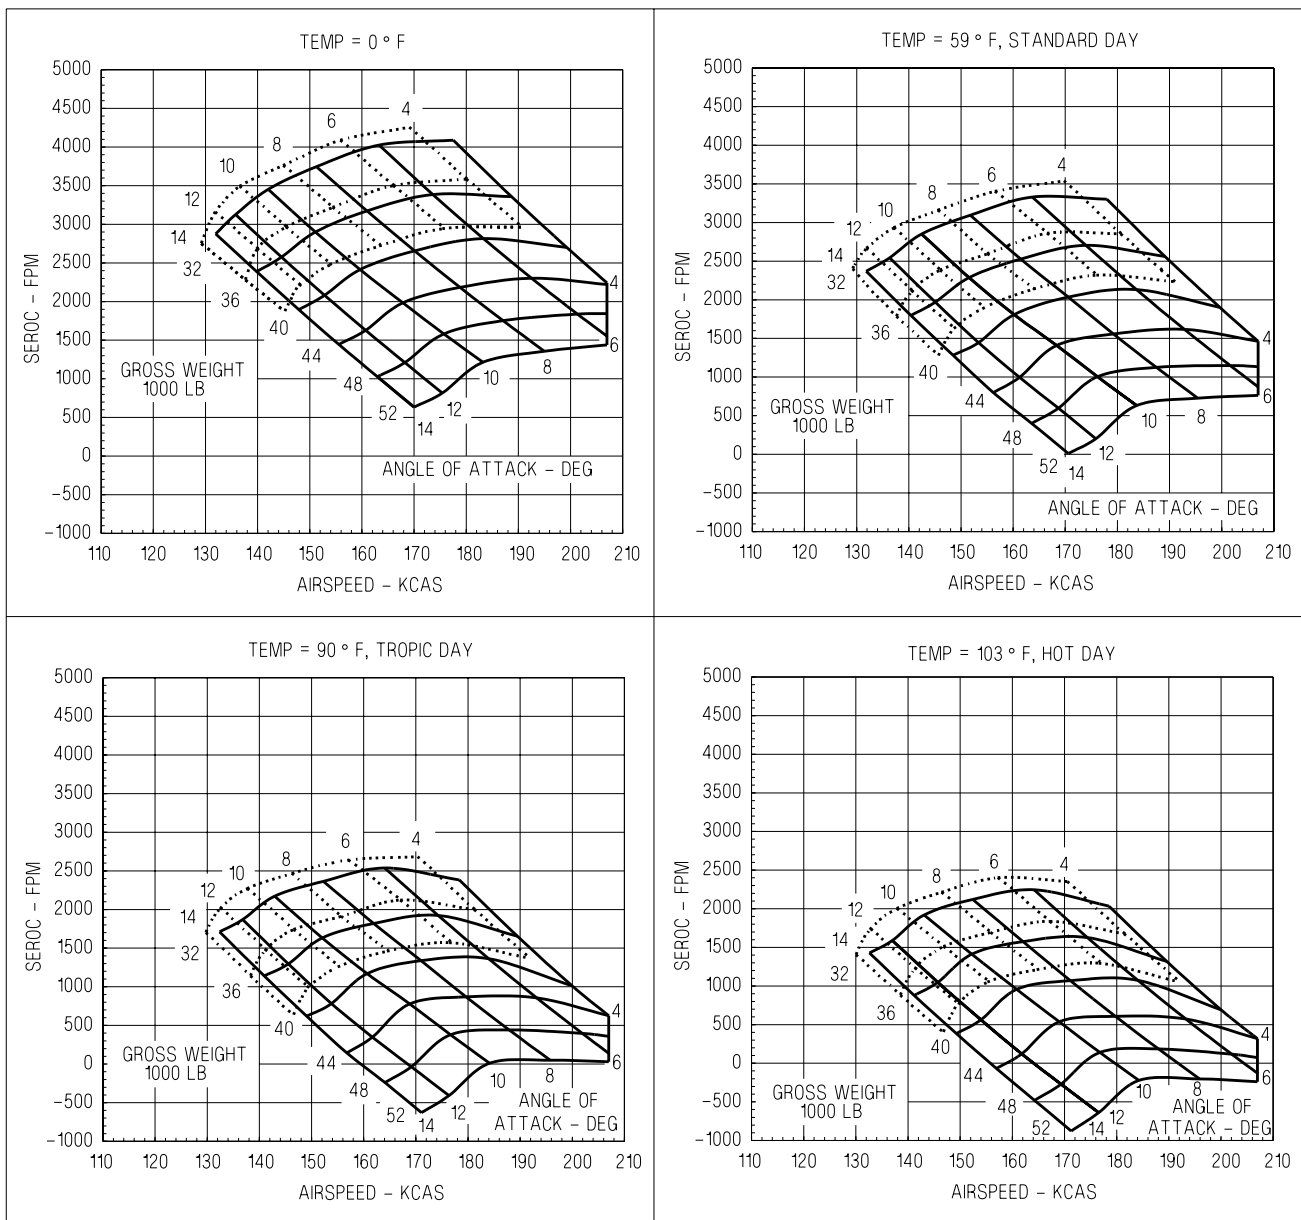

ADA523-310-5-017

Figure 11-33. Single Engine Rate of Climb - F404-GE-400  
(Sheet 9 of 12)

# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400


ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MILITARY THRUST  
HALF FLAPS, GEAR DOWN

AIRCRAFT CONFIGURATION:  
(2) AIM-9 + (2) AIM-7 +  
(3) 330 GALLON FUEL TANKS  
(DI=65.5)

STORES JETTISONED LOADING:  
(2) AIM-9 + (2) AIM-7  
(DI=8)  
(PYLON MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

— STORES RETAINED  
..... STORES JETTISONED

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

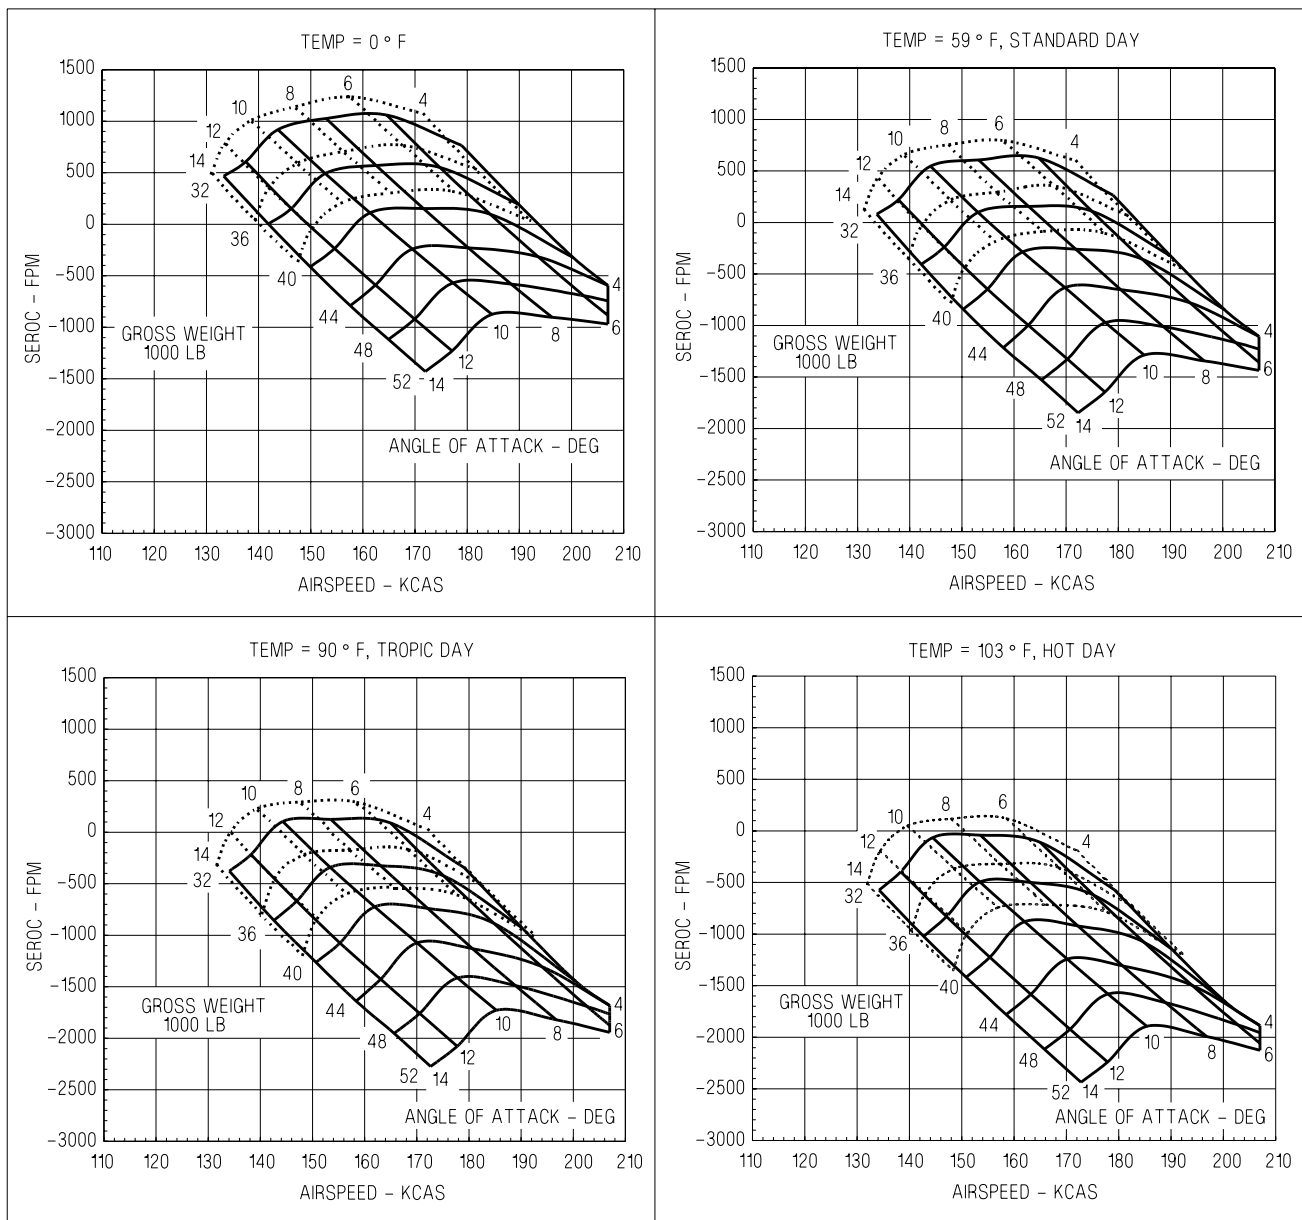

ADA523-310-6-017

Figure 11-33. Single Engine Rate of Climb - F404-GE-400  
(Sheet 10 of 12)

# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MAXIMUM THRUST  
HALF FLAPS, GEAR DOWN

**AIRCRAFT CONFIGURATION:**

(2) AIM-9 + (2) VER'S + (4) MK-83 +  
(3) 330 GALLON FUEL TANKS + LST + FLIR  
(DI=138.5)


**STORES JETTISONED LOADING:**

(2) AIM-9 + (2) AIM-7  
(DI=8)  
(PYLON/VER MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

DATE: SEPTEMBER 1999

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

— STORES RETAINED  
- - - STORES JETTISONED

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

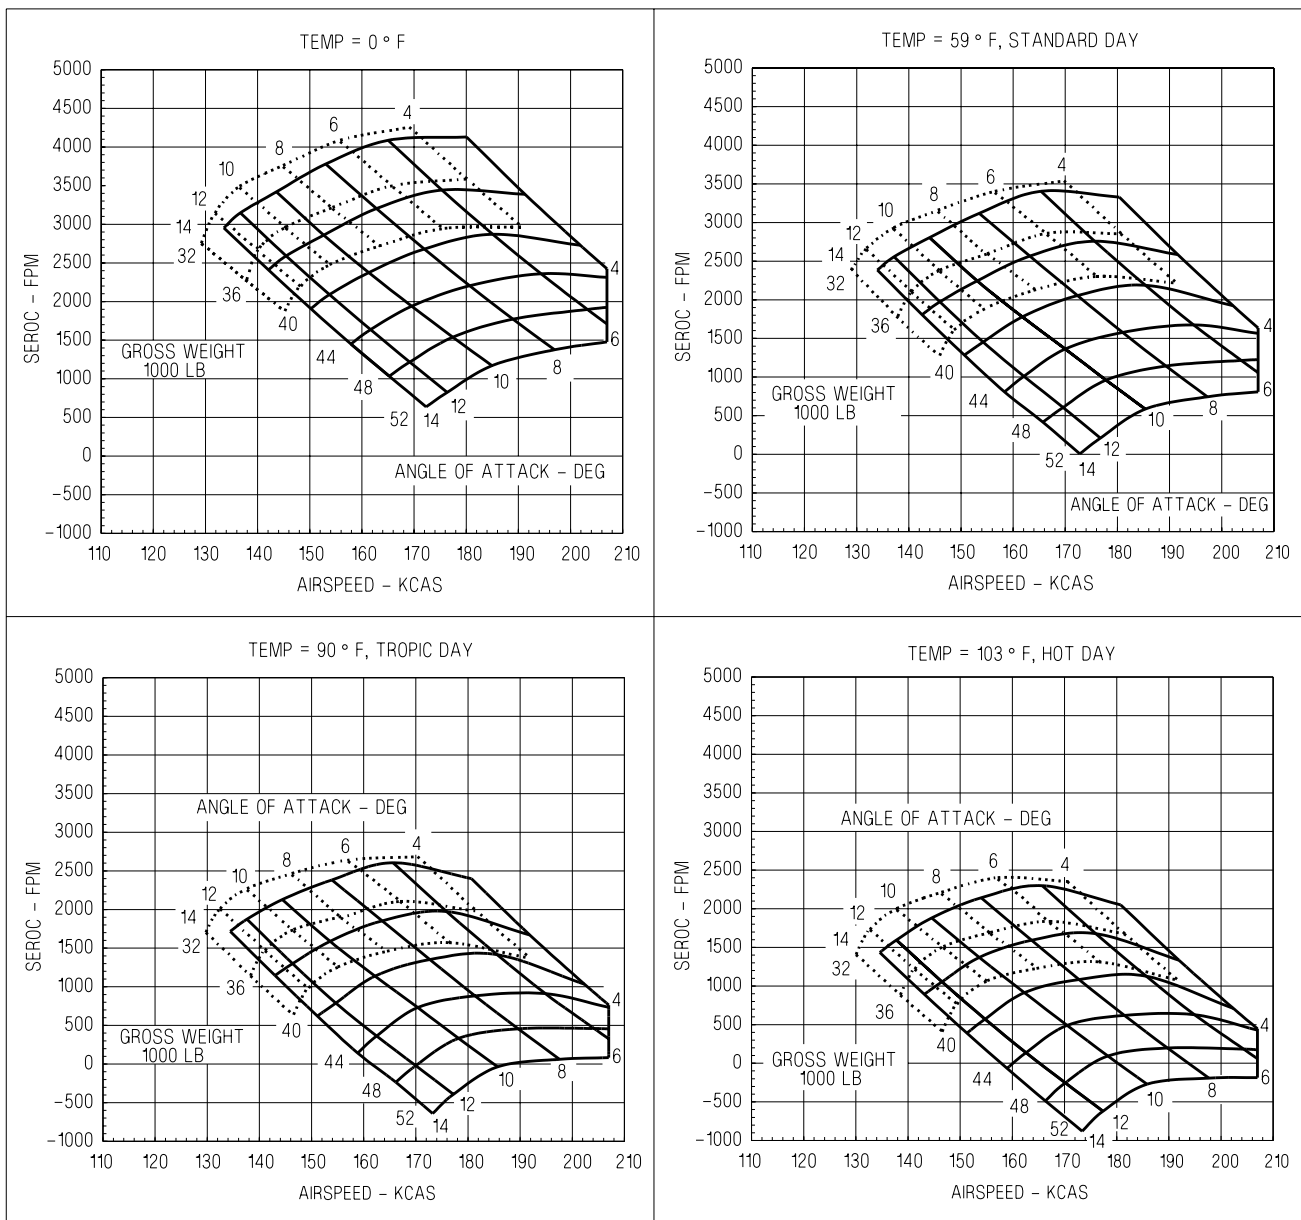

ADA523-310-7-017

**Figure 11-33. Single Engine Rate of Climb - F404-GE-400**  
(Sheet 11 of 12)

# SINGLE ENGINE RATE OF CLIMB

## F404-GE-400

ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MILITARY THRUST  
HALF FLAPS, GEAR DOWN

**AIRCRAFT CONFIGURATION:**

(2) AIM-9 + (2) VER'S + (4) MK-83 +  
(3) 330 GALLON FUEL TANKS + LST + FLIR  
(DI=138.5)


**STORES JETTISONED LOADING:**

(2) AIM-9 + (2) AIM-7  
(DI=8)  
(PYLON/VER MASS PROPERTIES AND  
AERODYNAMICS NOT REFLECTED)

DATE: SEPTEMBER 1999

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)


| GW (1000 LB) | OPERATIONAL ENDSPEED (KCAS) |
|--------------|-----------------------------|
| < 36         | 149                         |
| 37-45        | 166                         |
| 46           | 167                         |
| 48           | 171                         |
| 50           | 175                         |
| 51.9         | 179                         |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

— STORES RETAINED  
- - - STORES JETTISONED

NOTE: FOR FIELD OPERATIONS, REFER TO TAKEOFF SPEEDS ON TAKEOFF DISTANCE CHARTS.

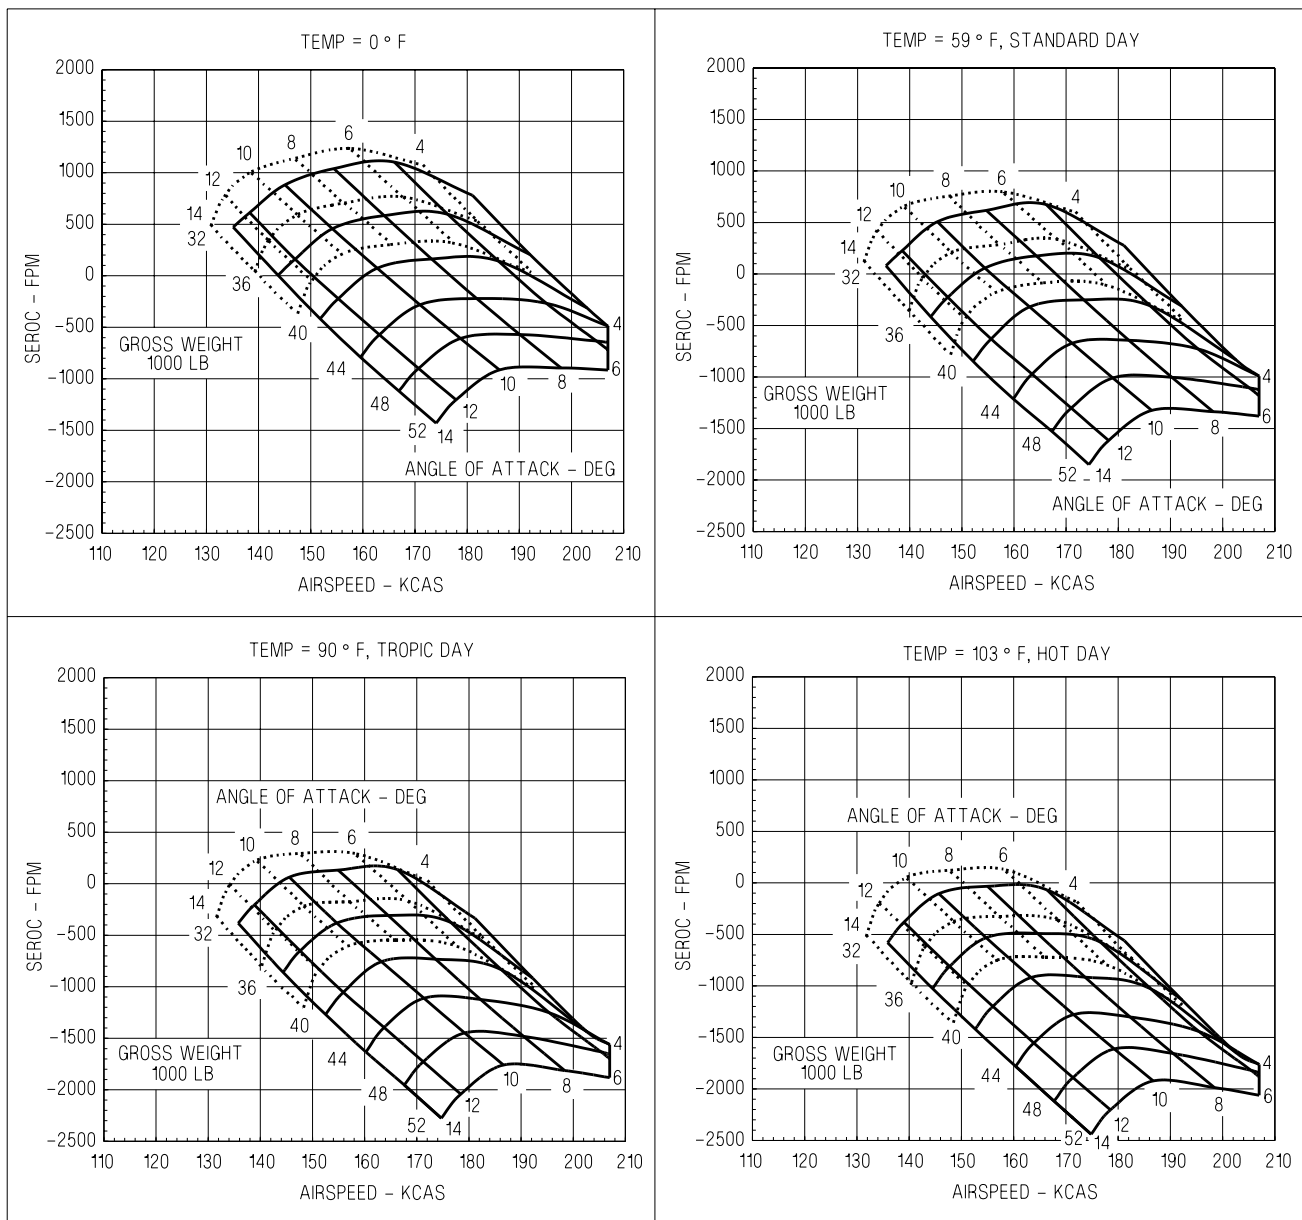

ADA523-310-8-017


Figure 11-33. Single Engine Rate of Climb - F404-GE-400  
(Sheet 12 of 12)

# ADJUSTMENT TO SEROC FOR RETRACTING LANDING GEAR

## F404-GE-400


ONE ENGINE OPERATING,  
INOPERATIVE ENGINE WINDMILLING  
MILITARY AND MAXIMUM THRUST  
HALF FLAPS

AIRCRAFT CONFIGURATION:  
LAUNCH  
ALL LOADINGS



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: SEPTEMBER 1999  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

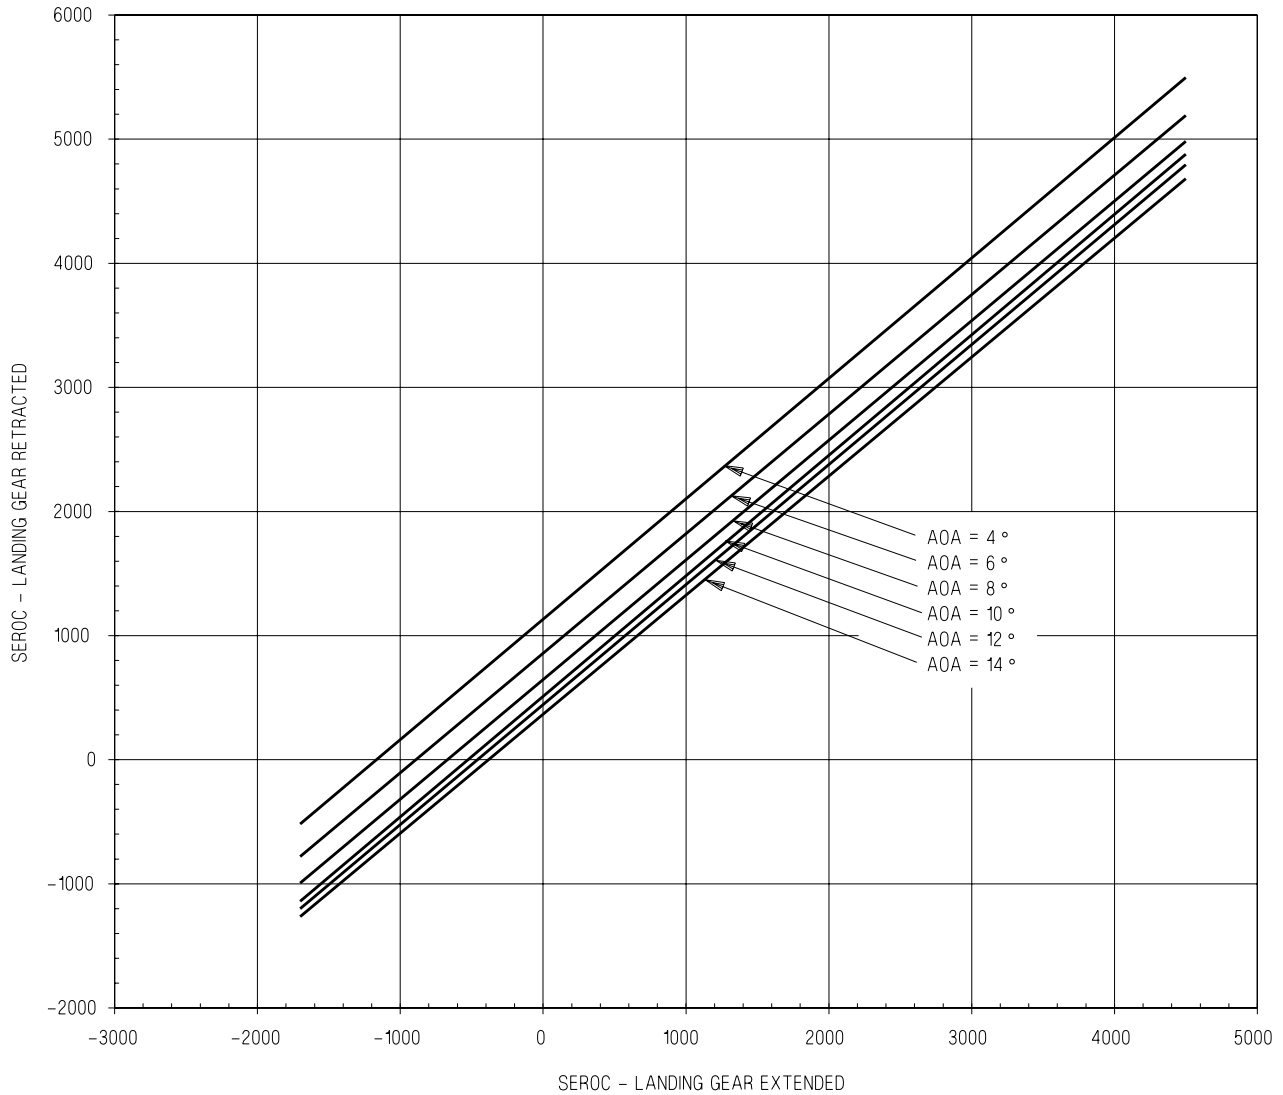

ADA523-310-13-017

Figure 11-33A. Adjustment to SEROC for Retracting Landing Gear - F404-GE-400



**PART 4 - RANGE F404-GE-400**

**TABLE OF CONTENTS**

**CHARTS**

|   |         |
|---|---------|
| Optimum Cruise .....                      | 11-91   |
| Optimum Cruise -                          |         |
| One Engine Operating .....                | 11-93   |
| Specific Range.....                       | 11-94   |
| Specific Range -                          |         |
| One Engine Operating .....                | 11-160  |
| Combat Specific Range.....                | 11-200  |
| Combat Fuel Flow.....                     | 11-204  |
| Constant Altitude/Long Range Cruise ..... | 11-208  |
| Rangewind Correction.....                 | 11-210  |
| Headwind Effects on Bingo Fuel .....      | 11-210A |
| Bingo .....                               | 11-211  |
| Bingo -                                   |         |
| One Engine Operating .....                | 11-221  |


**OPTIMUM CRUISE CHARTS**

These charts (figures 11-34 and 11-35) present cruise data for two-engine and single engine operation. The charts depict cruise altitude, specific range (nautical miles per pound of fuel (NMPP)), and cruise Mach number for various gross weights and drag indexes.

**USE**

Enter the chart with the applicable gross weight and project vertically up to intersect the appropriate drag index curves. From the intersection of these drag index curves, reflect horizontally left and read Mach number and specific range in nautical miles per pound. To read optimum cruise altitude, project horizontally left from the intersection of the drag index curve to the temperature baseline and parallel the appropriate temperature deviation guideline to the correct temperature deviation. Project horizontally to read optimum cruise altitude.

**SAMPLE OPTIMUM CRUISE**

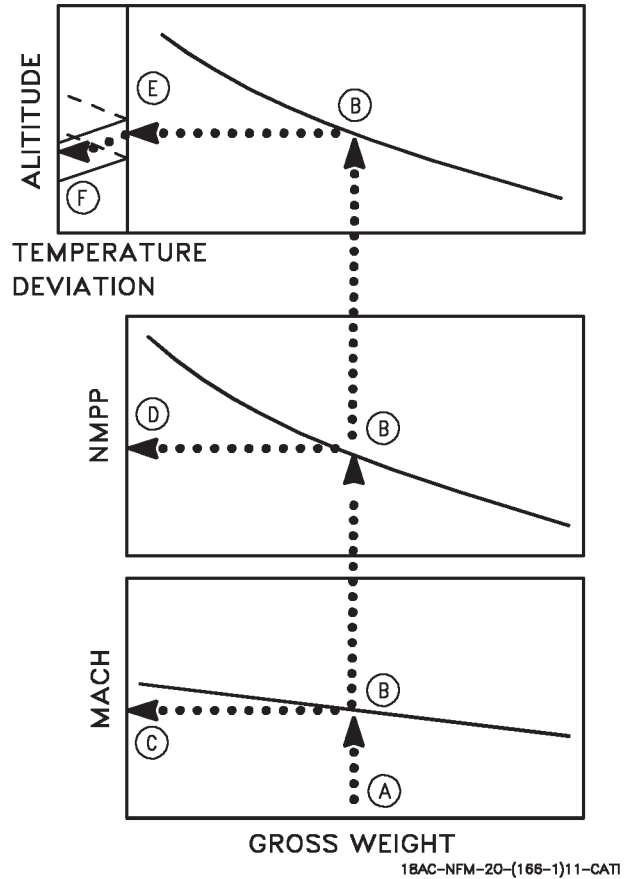

**Sample Problem**

One Engine Operating (figure 11-35)

- |                            |            |
|----------------------------|------------|
| A. Gross weight            | 40,000 Lb. |
| B. Drag index              | 50         |
| C. Mach number             | 0.64       |
| D. Specific range          | 0.079 NMPP |
| E. Temperature deviation   | +10°C      |
| from standard day          |            |
| F. Optimum cruise altitude | 20,700 Ft. |


## SPECIFIC RANGE CHARTS

These charts (figures 11-36 thru 11-141) present planning data for constant altitude cruise with various drag indexes at altitudes of sea level, 5,000, 10,000, 15,000, 20,000, 25,000, 30,000, 35,000, 40,000, and 45,000 feet and gross weights of 26,000 thru 50,000 pounds in 4,000 pound increments. The charts depict specific range (nautical miles per pound of fuel (NMPP)) and total fuel flow in pounds per hour for various Mach numbers at cruise AOA (greater than approximately 2.5°) and dash AOA (approximately 2.5° or lower). Also depicted on the charts are lines for optimum cruise and maximum endurance.

### USE

Enter the appropriate chart for desired cruise altitude and gross weight with the desired Mach number for cruise AOA and project vertically up to the computed drag index. From this point read total fuel flow, then project horizontally left to read specific range in nautical miles per pound of fuel. Repeat this process to obtain like data for desired Mach number at dash AOA. Total fuel flow for any combination of Mach number and drag index can be obtained by interpolating between the total fuel flow lines provided on the charts. Mach number, total fuel flow and specific range for optimum cruise can be obtained by entering the chart on the optimum cruise line at the appropriate drag index and projecting vertically down and horizontally left to read Mach number and specific range respectively. Maximum endurance data is obtained in an identical manner entering the chart on the line labeled maximum endurance. Maximum Mach number at a particular drag index and military power setting can be obtained by reading the  $V_{MAX}$  curve at that drag index. To correct for nonstandard day conditions, multiply the maximum Mach number obtained by the  $V_{MAX}$  factor corresponding to the desired temperature deviation.

## SAMPLE SPECIFIC RANGE

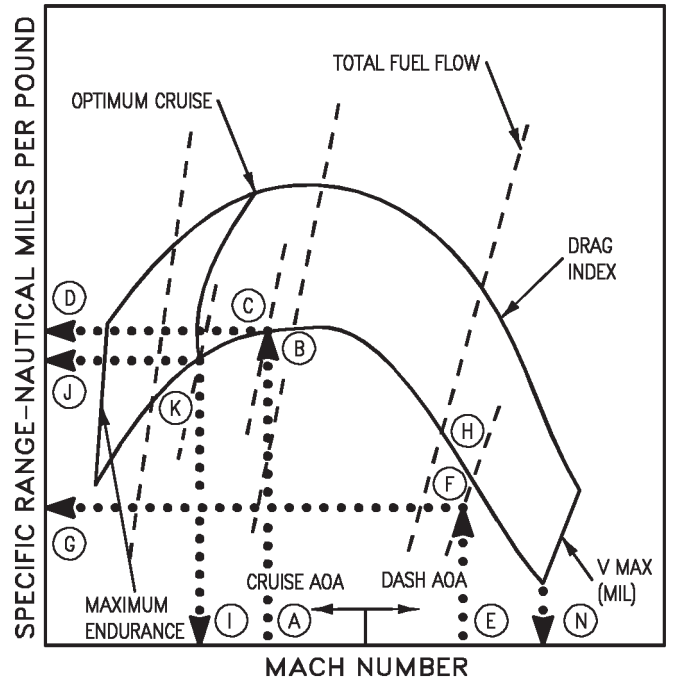

18AC-NFM-20-(167-1)-CATI-24

### Sample Problem

Chart: 5,000 Feet - 42,000 Pounds (figure 11-47)  
Problem based on loading in figure 11-1.

|  |             |
|--|-------------|
| A. Mach number (cruise AOA)                | 0.6         |
| B. Drag index (total)                      | 138.5       |
| C. Total fuel flow                         | 7,900 PPH   |
| D. Specific range                          | 0.0495 NMPP |
| E. Mach number (dash AOA)                  | 0.8         |
| F. Drag index (total)                      | 152.5       |
| G. Specific range                          | 0.0362 NMPP |
| H. Total fuel flow                         | 14,300 PPH  |
| I. Mach number (optimum cruise)            | 0.5         |
| J. Specific range                          | 0.0515 NMPP |
| K. Total fuel flow                         | 6,300 PPH   |
| L. Temperature deviation from standard day | +20°C       |
| M. $V_{MAX}$ Factor                        | 0.96        |
| N. Standard Day $V_{MAX}$                  | 0.862       |
| O. Correct $V_{MAX}$                       | 0.827       |



### COMBAT SPECIFIC RANGE CHARTS

These charts (figure 11-142, sheets 1 thru 4) present the specific range and the general thrust settings required to maintain a constant Mach number for a U.S. standard day and standard day +10°C at all altitudes from sea level to 50,000 feet. The specific range values are based on a stabilized level flight condition and do not represent the fuel flow required to accelerate to a given Mach number.

#### USE

Enter the chart corresponding to the aircraft configuration with the desired Mach number for stabilized level flight. Proceed vertically upward to the selected flight altitude. Note the general thrust setting required, and then project horizontally left to obtain the specific range.


### COMBAT FUEL FLOW CHARTS

These charts (figure 11-143, sheets 1 thru 4) present the specific fuel flow and general thrust setting to maintain a constant Mach number for a U.S. standard day and standard day +10°C at all altitudes between sea level and 50,000 feet. Each chart is plotted for a specific configuration. The fuel flow values are based on a stabilized level flight condition and do not represent the fuel flow required to accelerate to a given Mach number.

#### USE

Enter the chart corresponding to the aircraft configuration with the desired Mach number for stabilized level flight. Proceed vertically upward to the selected flight altitude. Note the general thrust setting required, and then project horizontally to the left to read specific fuel flow.


### SAMPLE COMBAT SPECIFIC RANGE

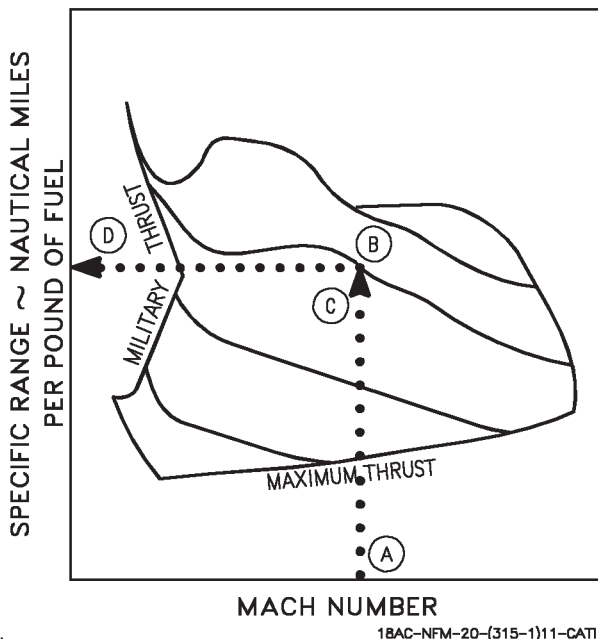

#### Sample Problem

- Configuration: (2)AIM-9 + (2)AIM-7
- A. Desired Mach number 1.2
  - B. Altitude (Standard Day) 25,000 Ft.
  - C. Thrust setting required Mod. Afterburners
  - D. Specific range 0.023 NMPP

### SAMPLE COMBAT FUEL FLOW

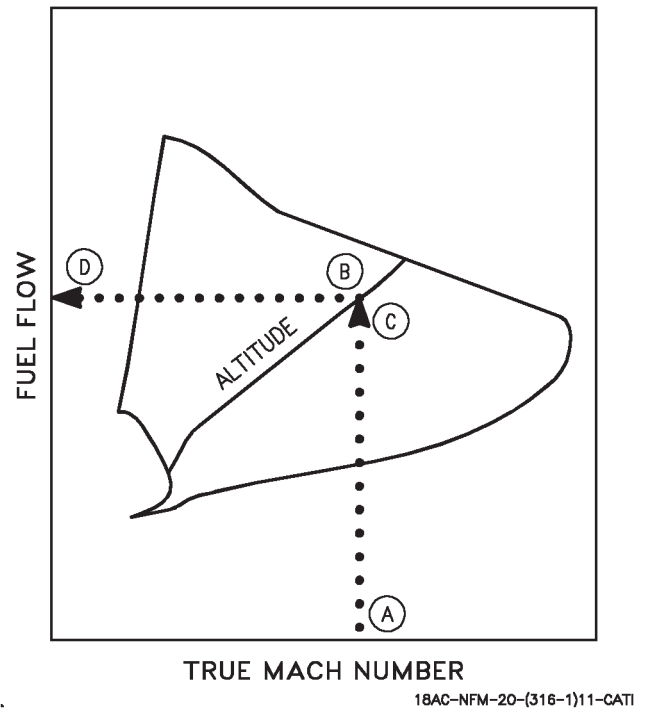

#### Sample Problem

- Configuration: (2) AIM-9 + (2)AIM-7
- A. Desired Mach number 1.4
  - B. Altitude (Standard Day) 30,000 Ft.
  - C. Thrust setting required Mod. Afterburners
  - D. Specific fuel flow 630 Lb/Min.

## CONSTANT ALTITUDE/LONG RANGE CRUISE (SPEED-TIME-FUEL) CHART

This chart (figure 11-144, sheet 1) is used to determine the airspeed, time, and fuel required to travel a given distance when the cruise Mach number, outside air temperature (OAT), wind component at altitude, and fuel flow are known. The chart may be used for single engine or two-engine operation.

### USE


Enter the chart with the desired cruise Mach number and parallel the guidelines to intersect a vertical line projected up from the outside air temperature scale. From this point, project horizontally to the zero wind component line, then vertically down to read true airspeed. If winds are expected at the cruise altitude, trace back to the zero wind line and project horizontally to the appropriate headwind or tailwind line, then vertically down to read fuel required.

then vertically up to read groundspeed. From this point, continue to project vertically up to the selected distance curve, then horizontally left to read time required. Continue to project horizontally left to the appropriate fuel flow line, then vertically down to read fuel required.

### Sample Problem

|                      |           |
|----------------------|-----------|
| A. Cruise Mach       | 0.65      |
| B. OAT               | 20 ° F    |
| C. Intersect OAT     |           |
| D. Wind component    | 0         |
| E. True airspeed     | 410 Kt.   |
| F. Headwind          | 50 Kt.    |
| G. Groundspeed       | 360 Kt.   |
| H. Selected distance | 600 NM    |
| I. Time required     | 100 Min.  |
| J. Fuel flow         | 4,000 PPH |
| K. Fuel required     | 6,667 Lb. |

## SAMPLE CONSTANT ALTITUDE/LONG RANGE CRUISE - SPEED, TIME AND FUEL

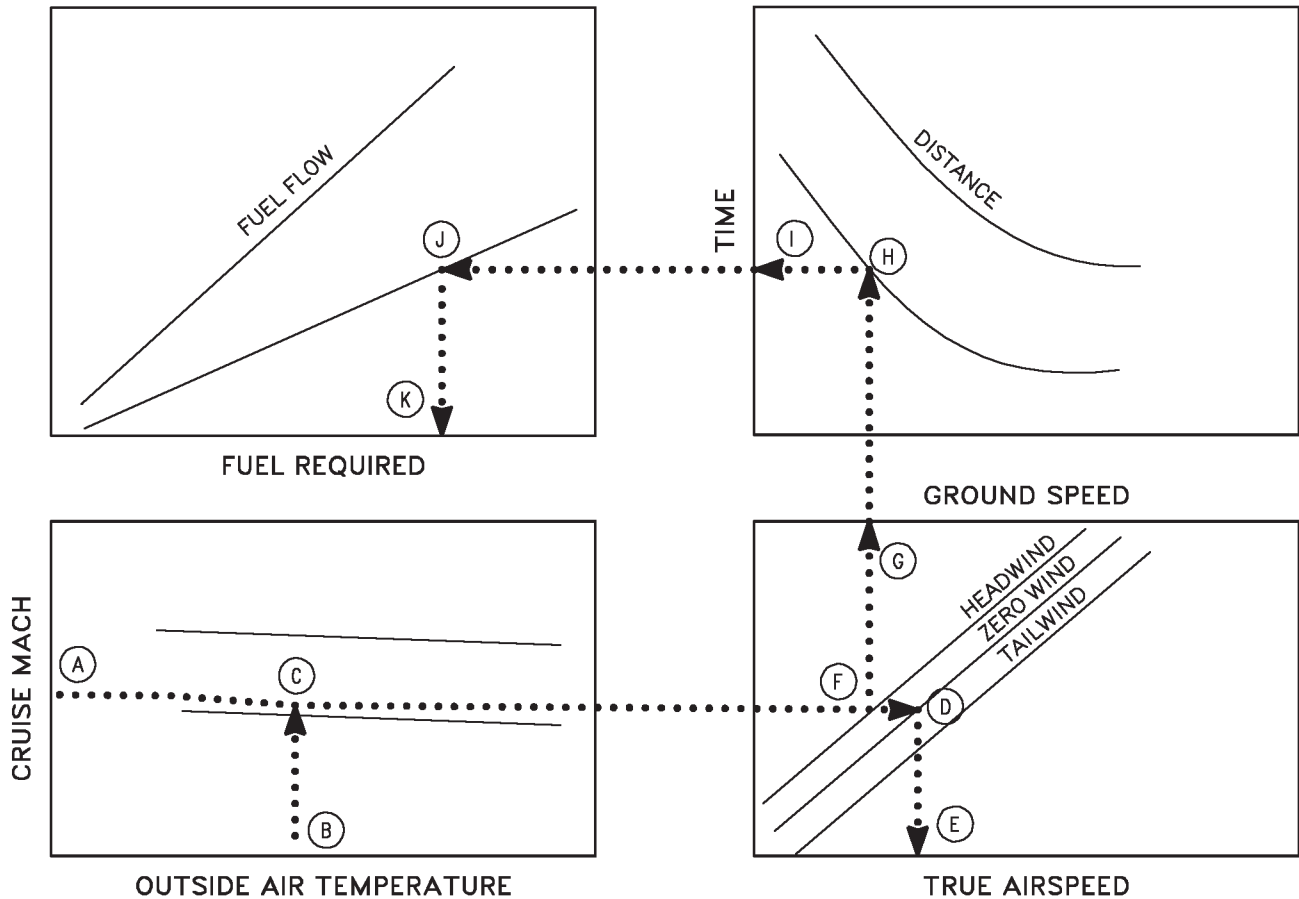

### CONSTANT ALTITUDE/LONG RANGE CRUISE (TRUE AIRSPEED AND FUEL FLOW) CHART

This chart (figure 11-144, sheet 2) is used to determine the true airspeed and total fuel flow when the cruise Mach number, outside air temperature (OAT), and specific range are known at a particular cruise condition. The chart may be used for single engine or two-engine operation.


#### USE

Enter the chart with the desired cruise Mach number and project horizontally right to the outside air temperature curve. Project horizontally down to read true airspeed and continue projection down to the specific range (nautical miles per pound) curve as determined from the specific range charts at the gross weight, altitude and drag index of interest. From the intersection of the nautical miles per pound curve project horizontally left to read total fuel flow.

#### Sample Problem

- |                    |               |
|--------------------|---------------|
| A. Cruise Mach     | 0.52          |
| B. OAT             | -20°C         |
| C. True Airspeed   | 320 Kt.       |
| D. Specific Range  | 0.0400 NM/Lb. |
| E. Total Fuel Flow | 8,100 PPH     |

### SAMPLE CONSTANT ALT/ LONG RANGE CRUISE- TAS AND FUEL FLOW

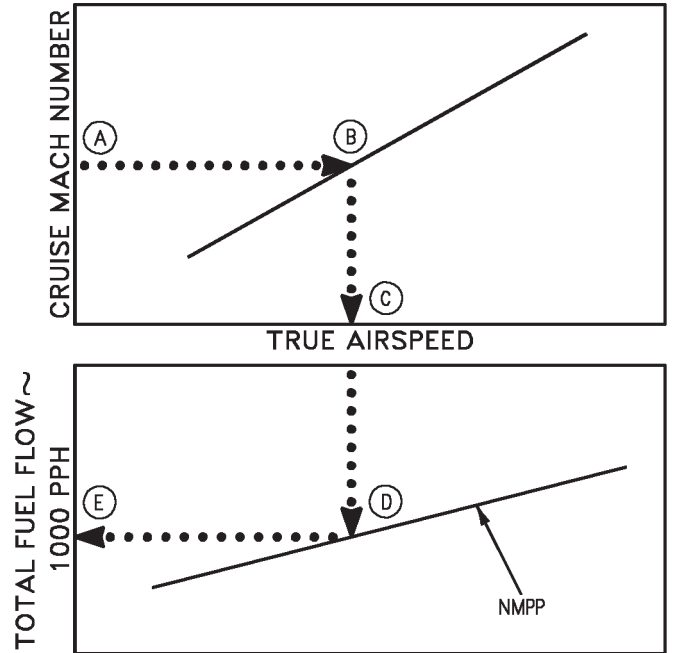

18AC-NFM-20-(305-1)-CATI-26

## RANGEWIND CORRECTION CHART

This chart (figure 11-145) provides a means of correcting computed range (specific or total) for existing wind effects. The presented range factors consider wind speeds up to 150 knots from any relative wind direction for aircraft speeds of 200 to 1,300 KTAS.



### USE

Determine the relative wind direction by subtracting the aircraft heading from the forecast wind direction. If the aircraft heading is greater than forecast wind direction, add 360° to the wind direction and then perform the subtraction. Enter the chart with relative wind direction and proceed vertically to the interpolated wind speed. From this point, project horizontally to intersect the aircraft true airspeed and reflect to the lower scale to read the range factor. Multiply computed range by this range factor to find range as affected by wind.

### Sample Problem

- |                            |          |
|----------------------------|----------|
| A. Relative wind direction | 150°     |
| B. Wind speed              | 125 Kt.  |
| C. Aircraft speed          | 400 KTAS |
| D. Range - factor          | 1.25     |

## SAMPLE RANGEWIND CORRECTION

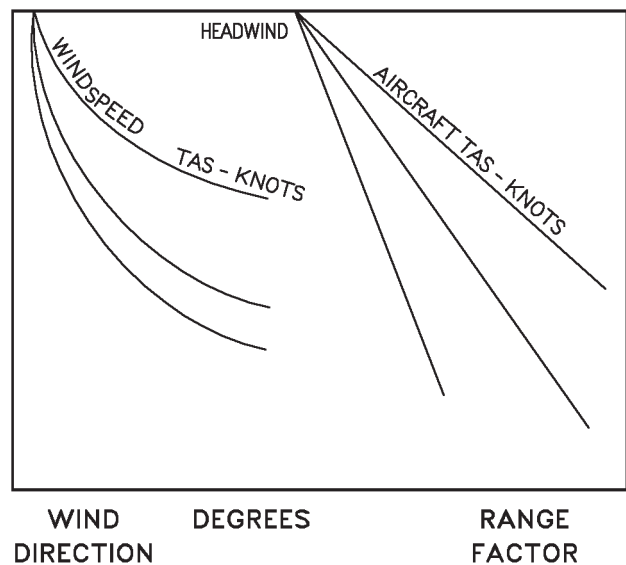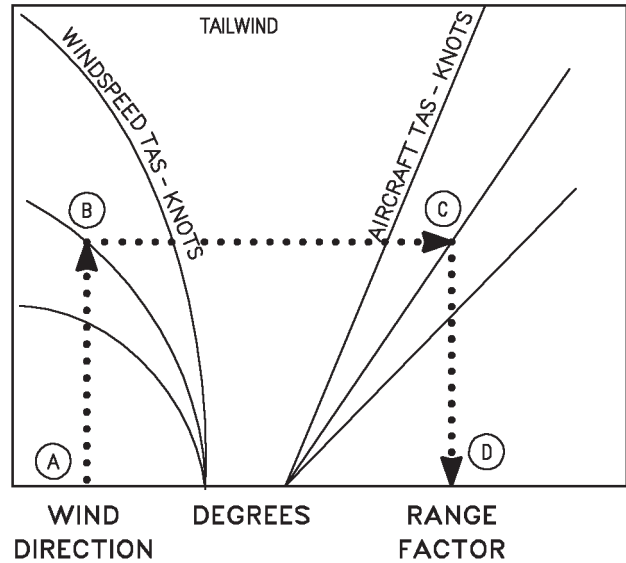

18AC-NFM-20-(169-1)11-CAT1

## HEADWIND EFFECTS ON BINGO FUEL

These charts (figure 11-145a and 11-145b) show the adjusted fuel required to perform the Bingo mission profiles as a function of headwind, aircraft landing gear, and flap setting. Charts are provided for Bingo cruise at best altitude and cruise at sea level.

### USE


Enter the appropriate chart with the zero wind fuel required and project horizontally to the headwind speed. From this point, project vertically down to read the adjusted fuel required.

### Sample Problem

Cruise at Sea Level, Gear Up - Flaps Half

- |                            |           |
|----------------------------|-----------|
| A. Zero wind fuel required | 3,200 Lb. |
| B. Headwind speed          | 75 Kts.   |
| C. Adjusted fuel required  | 4,460 Lb. |

## SAMPLE HEADWIND EFFECTS ON BINGO FUEL

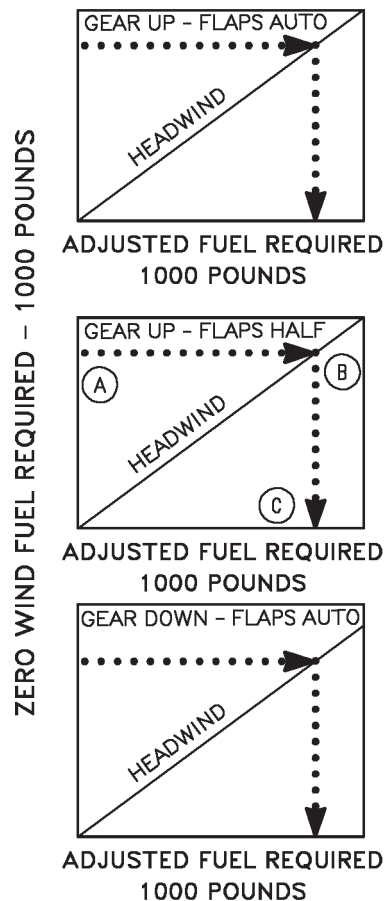

18AC-NFM-20-(488-1)13-CATI

## BINGO CHARTS

These charts (figures 11-146 thru 11-154) show time, fuel, and airspeed required to travel a given distance using a combination of climb, maximum range cruise, and normal descent. Charts are provided for two-engine and single engine operation at various combinations of drag index, weight and gear up and gear down configurations. Fuel required values include a 1,500 pound reserve. Data are provided for both cruise at optimum cruise altitude and at sea level.



# OPTIMUM CRUISE


F404-GE-400  
ALTITUDE AND MACH NUMBER

REMARKS  
ENGINE(S): (2)F404-GE-400



AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

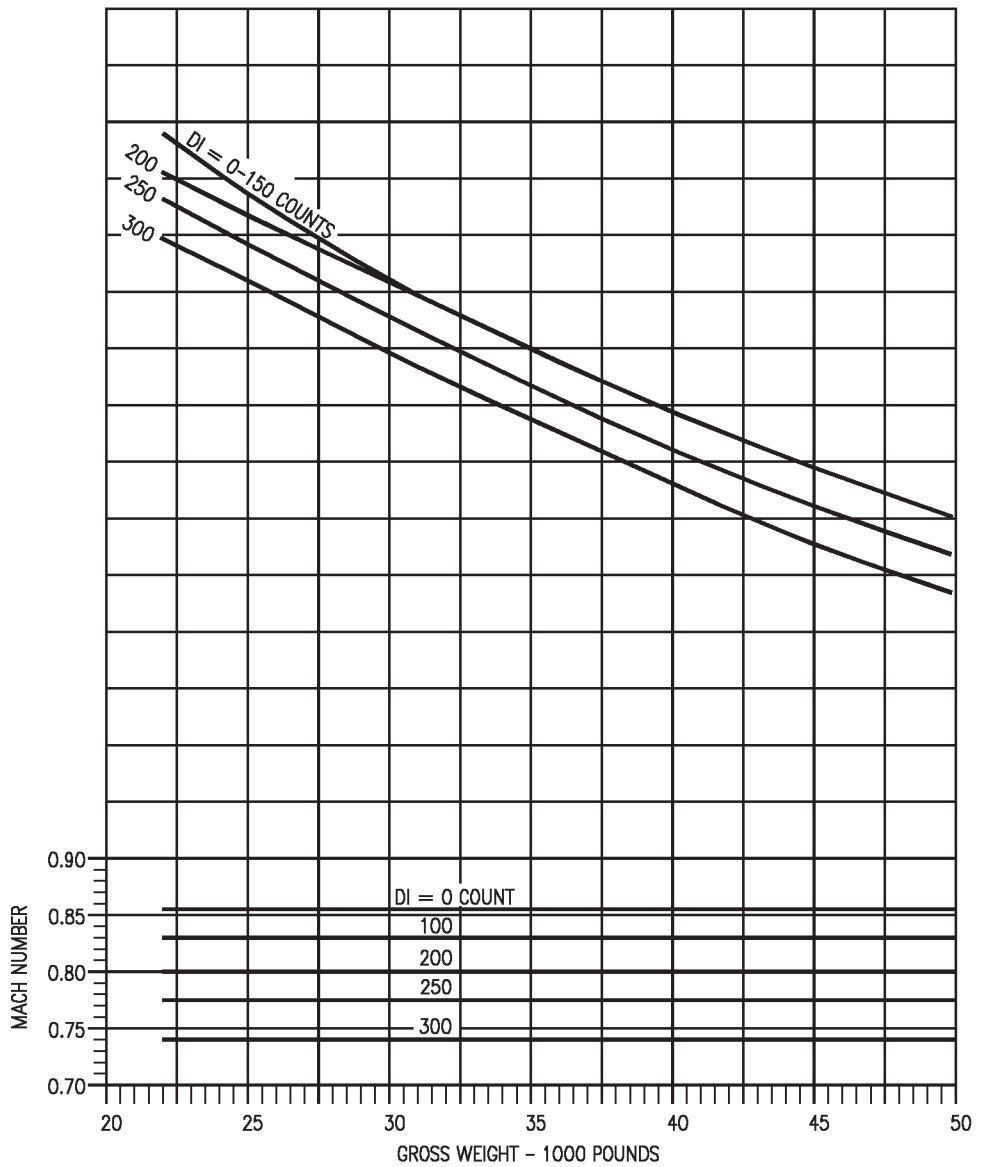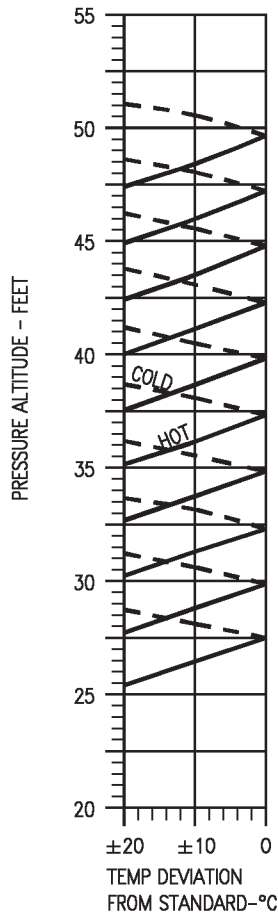

18AC-NFM-20-(170-1)11-CAT1

Figure 11-34. Optimum Cruise - F404-GE-400  
(Sheet 1 of 2)

# OPTIMUM CRUISE

F404-GE-400

SPECIFIC RANGE


REMARKS

ENGINE(S): (2)F404-GE-400


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

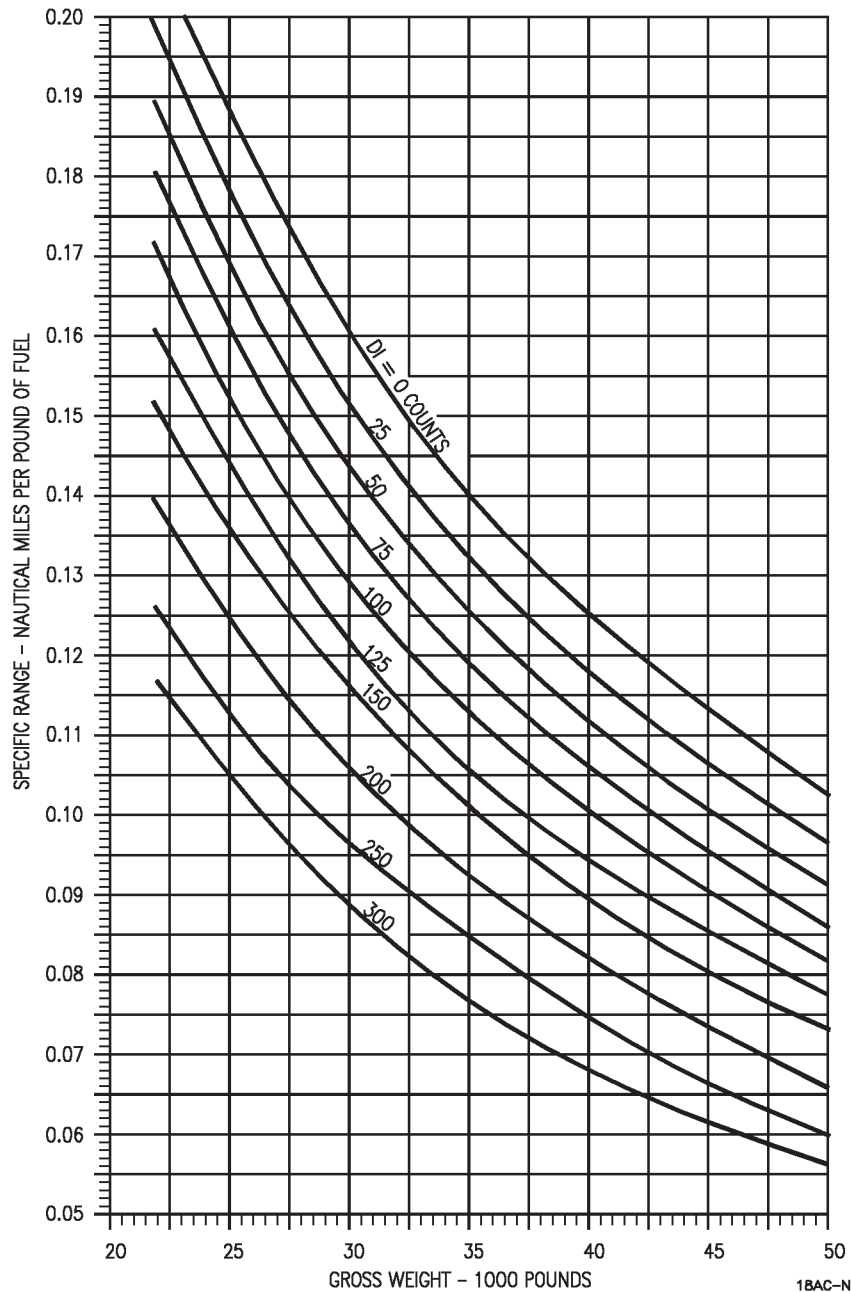

18AC-NFM-20-(170-2)01-CAT1

Figure 11-34. Optimum Cruise - F404-GE-400  
(Sheet 2 of 2)



# OPTIMUM CRUISE

F404-GE-400


ONE ENGINE OPERATING

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING





| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

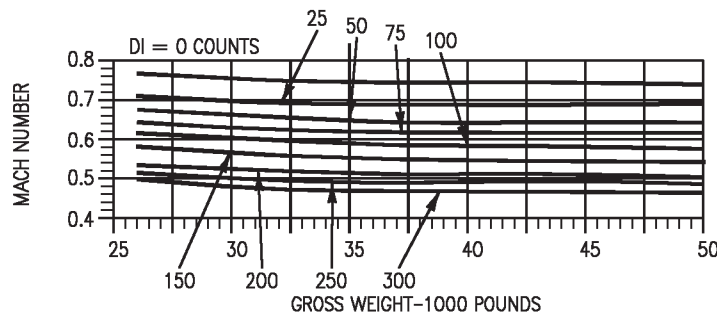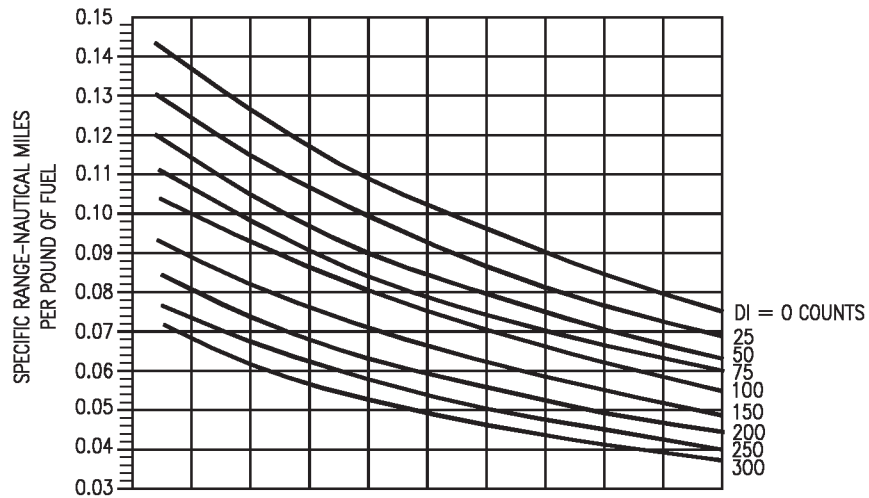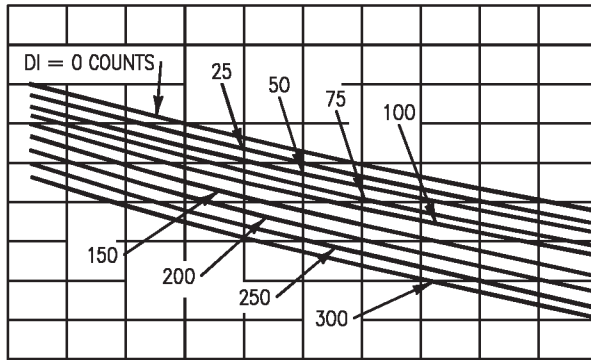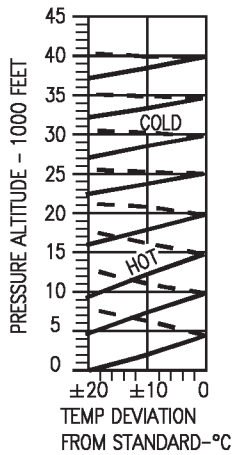

18AC-NFM-20-(171-1)12-CATI

Figure 11-35. Optimum Cruise - One Engine Operating - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400


### SEA LEVEL - 26,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = 15°C

| TEMPERATURE EFFECTS           |                  |
|-------------------------------|------------------|
| $\Delta T$ - °C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                           | 1.02             |
| -10                           | 1.01             |
| 0                             | 1.00             |
| +10                           | .98              |
| +20                           | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

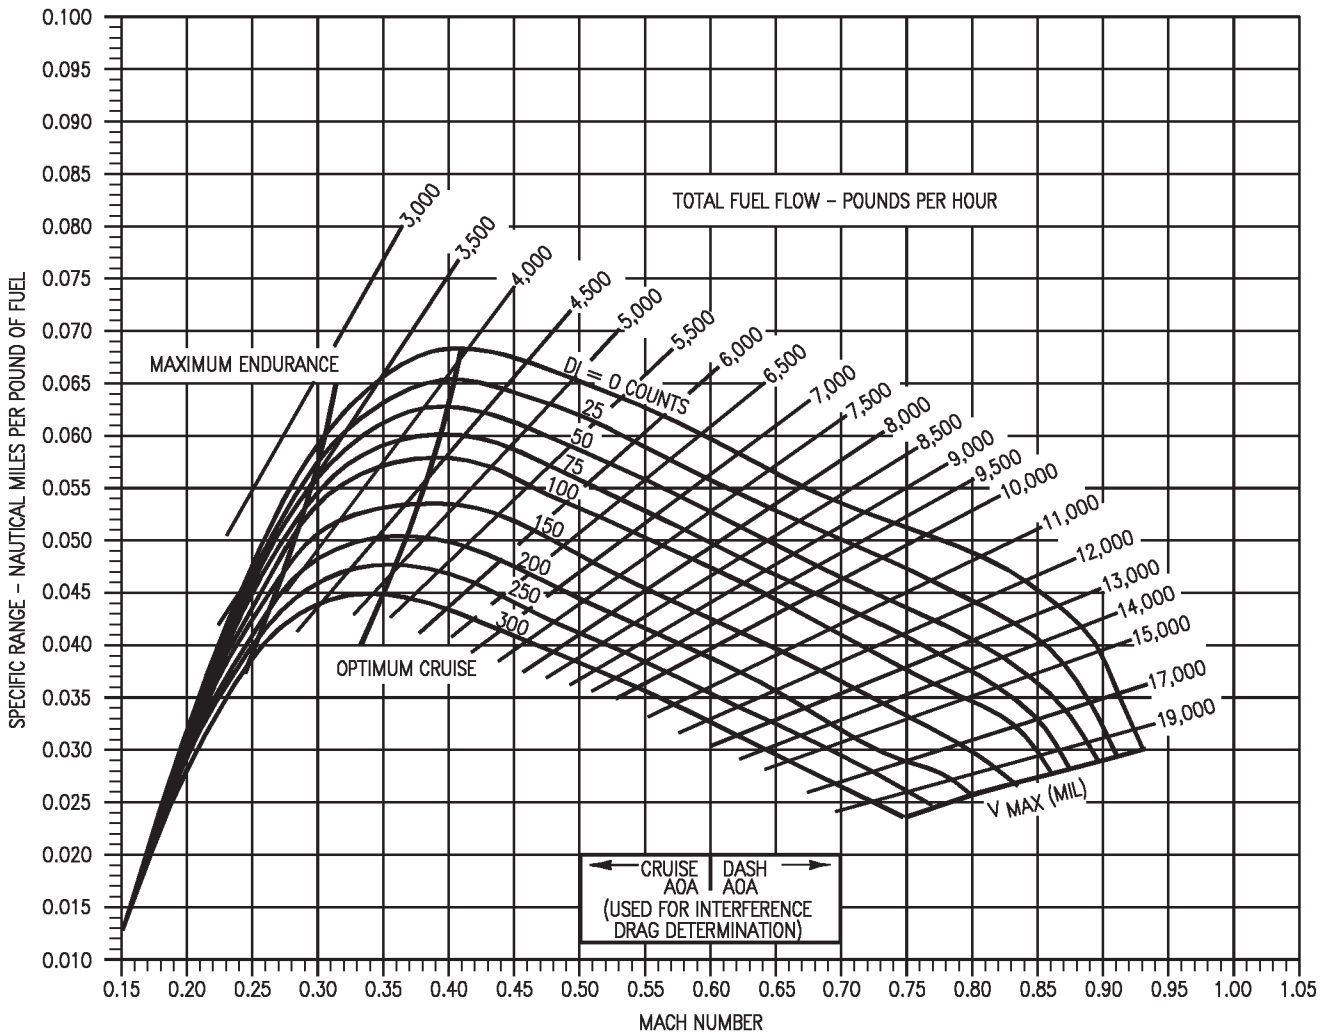

18AC-NFM-20-(172-1)12-CATI

Figure 11-36. Specific Range - Sea Level - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400


### SEA LEVEL - 30,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = 15°C

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

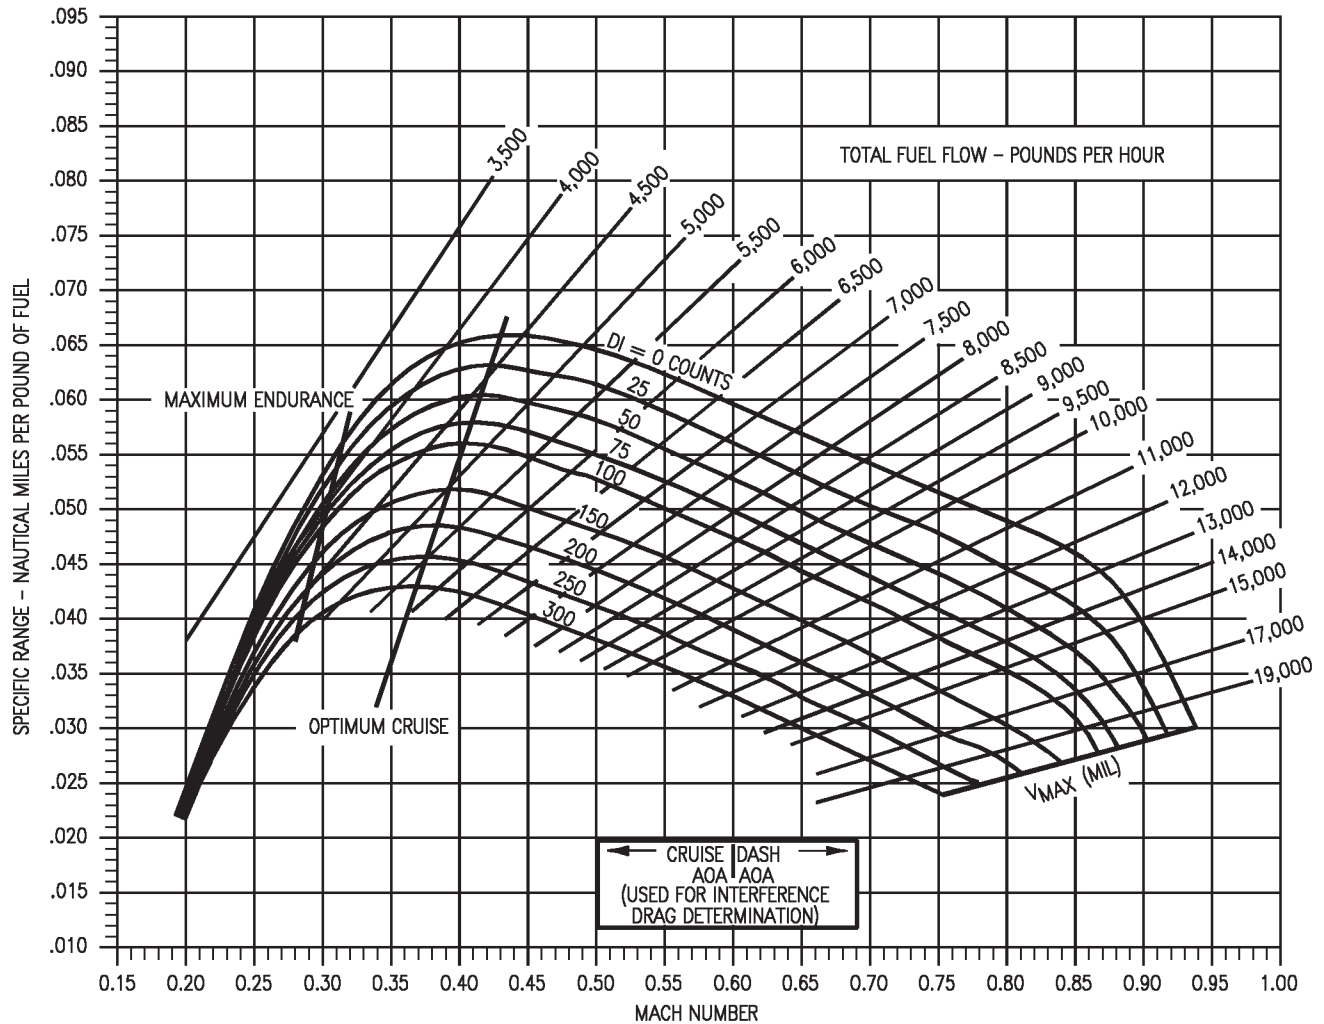

18AC-NFM-20-(173-1)12-CAT1

Figure 11-37. Specific Range - Sea Level - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

SEA LEVEL - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 15°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

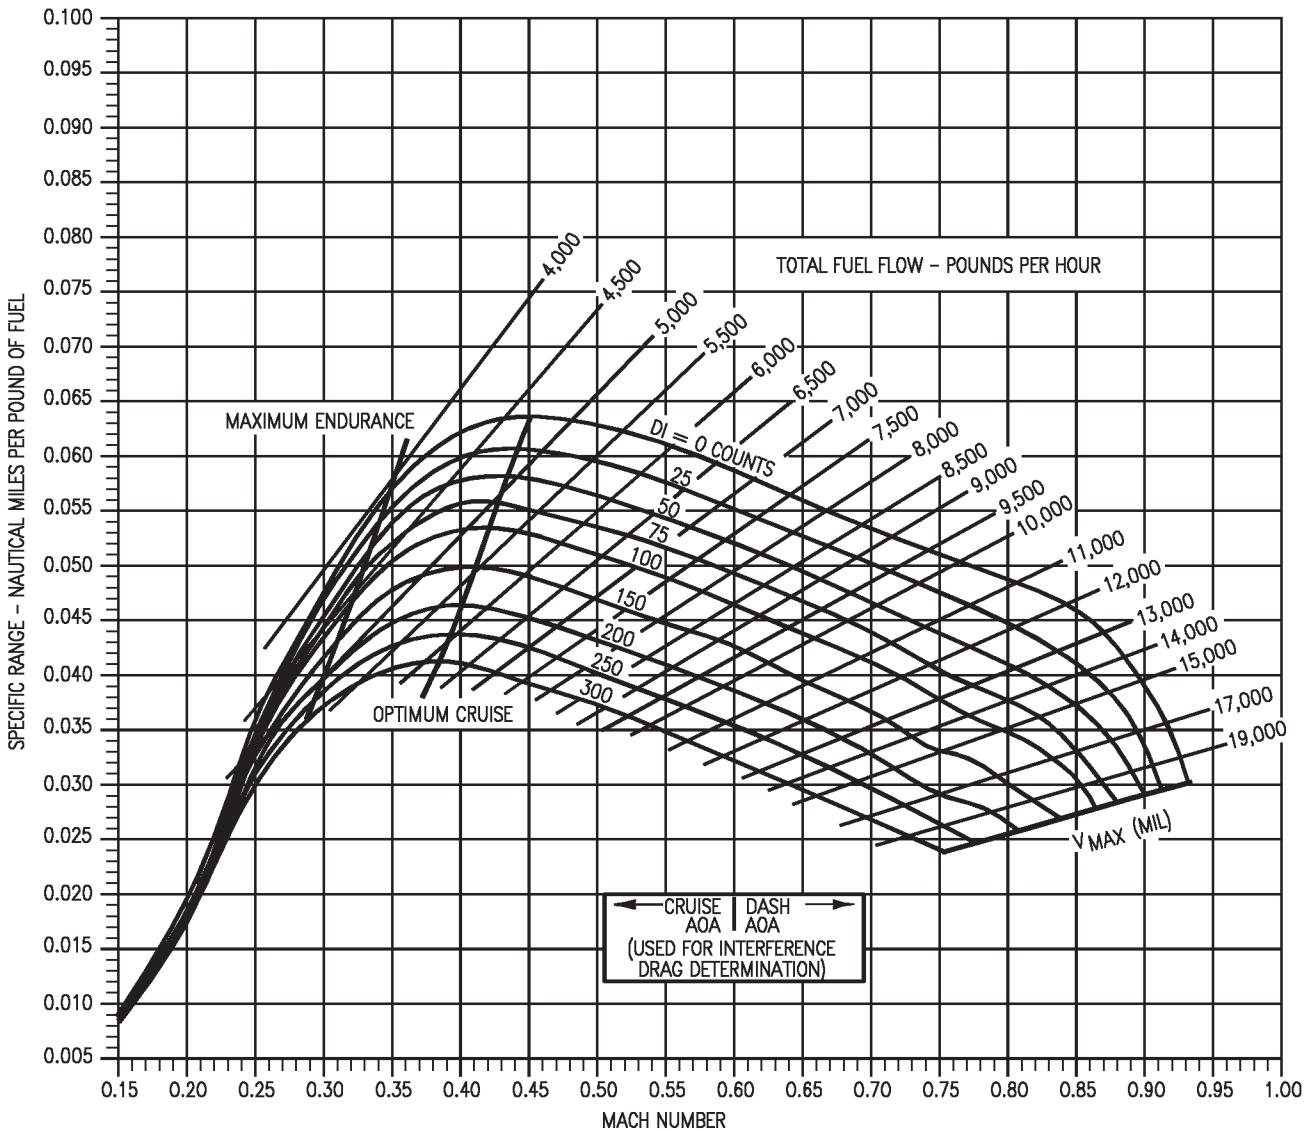

18AC-NFM-20-(174-1)12-CAT1

Figure 11-38. Specific Range - Sea Level - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
SEA LEVEL - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP.=15°C


| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

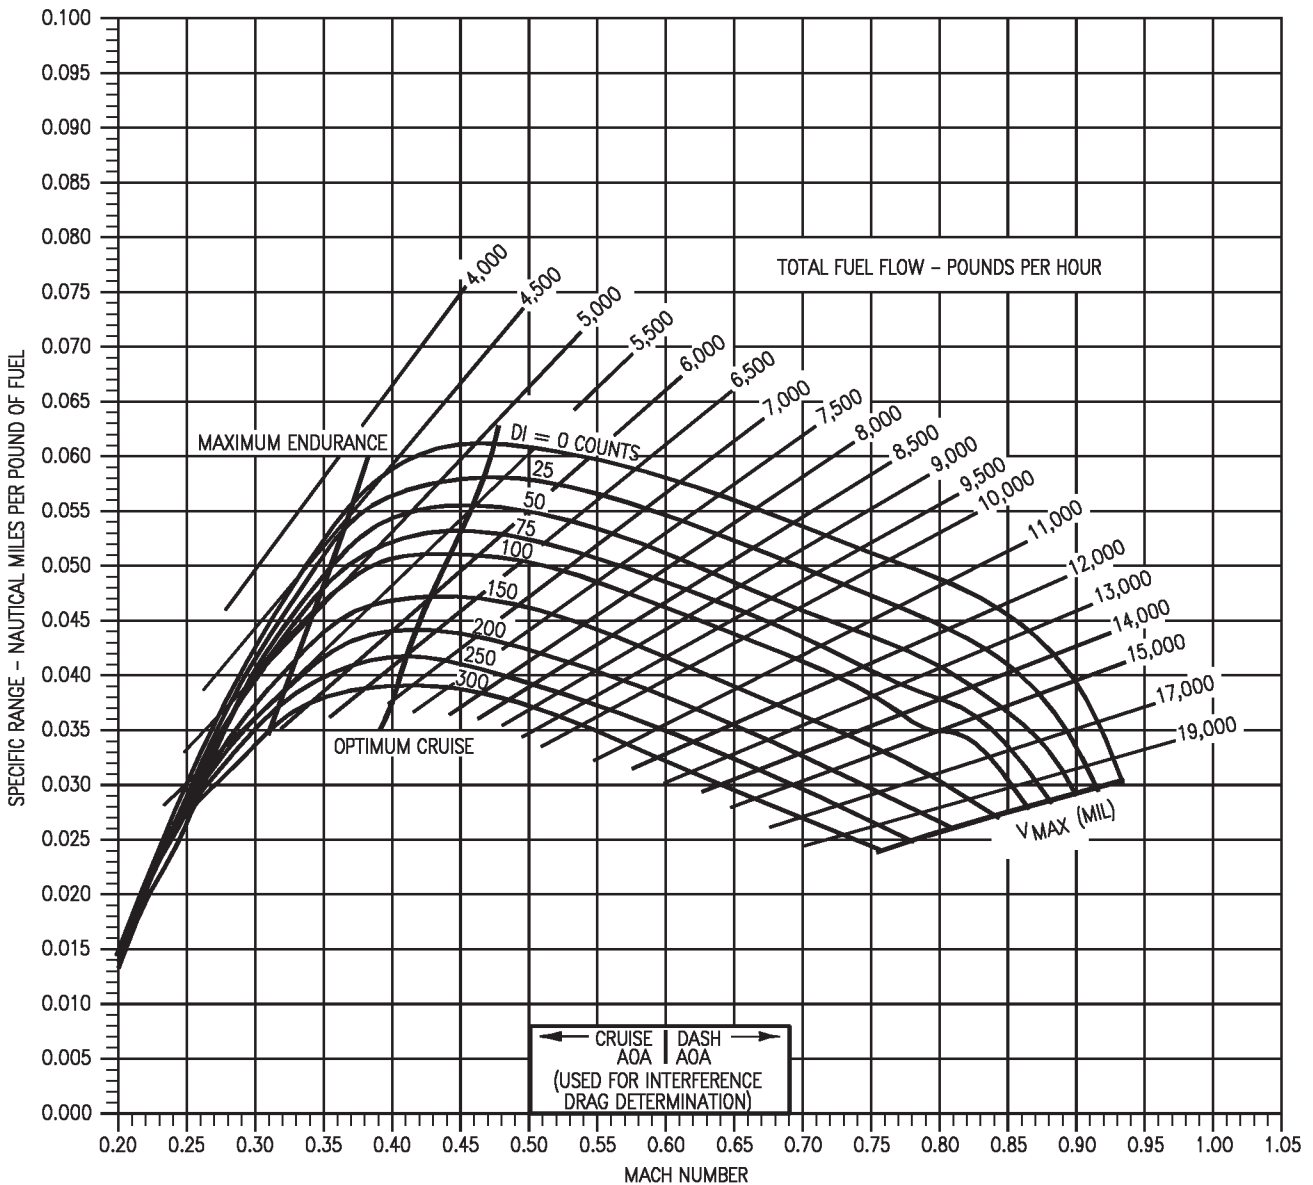

18AC-NFM-20-(175-1)12-CAT1

Figure 11-39. Specific Range - Sea Level - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

SEA LEVEL - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 15°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

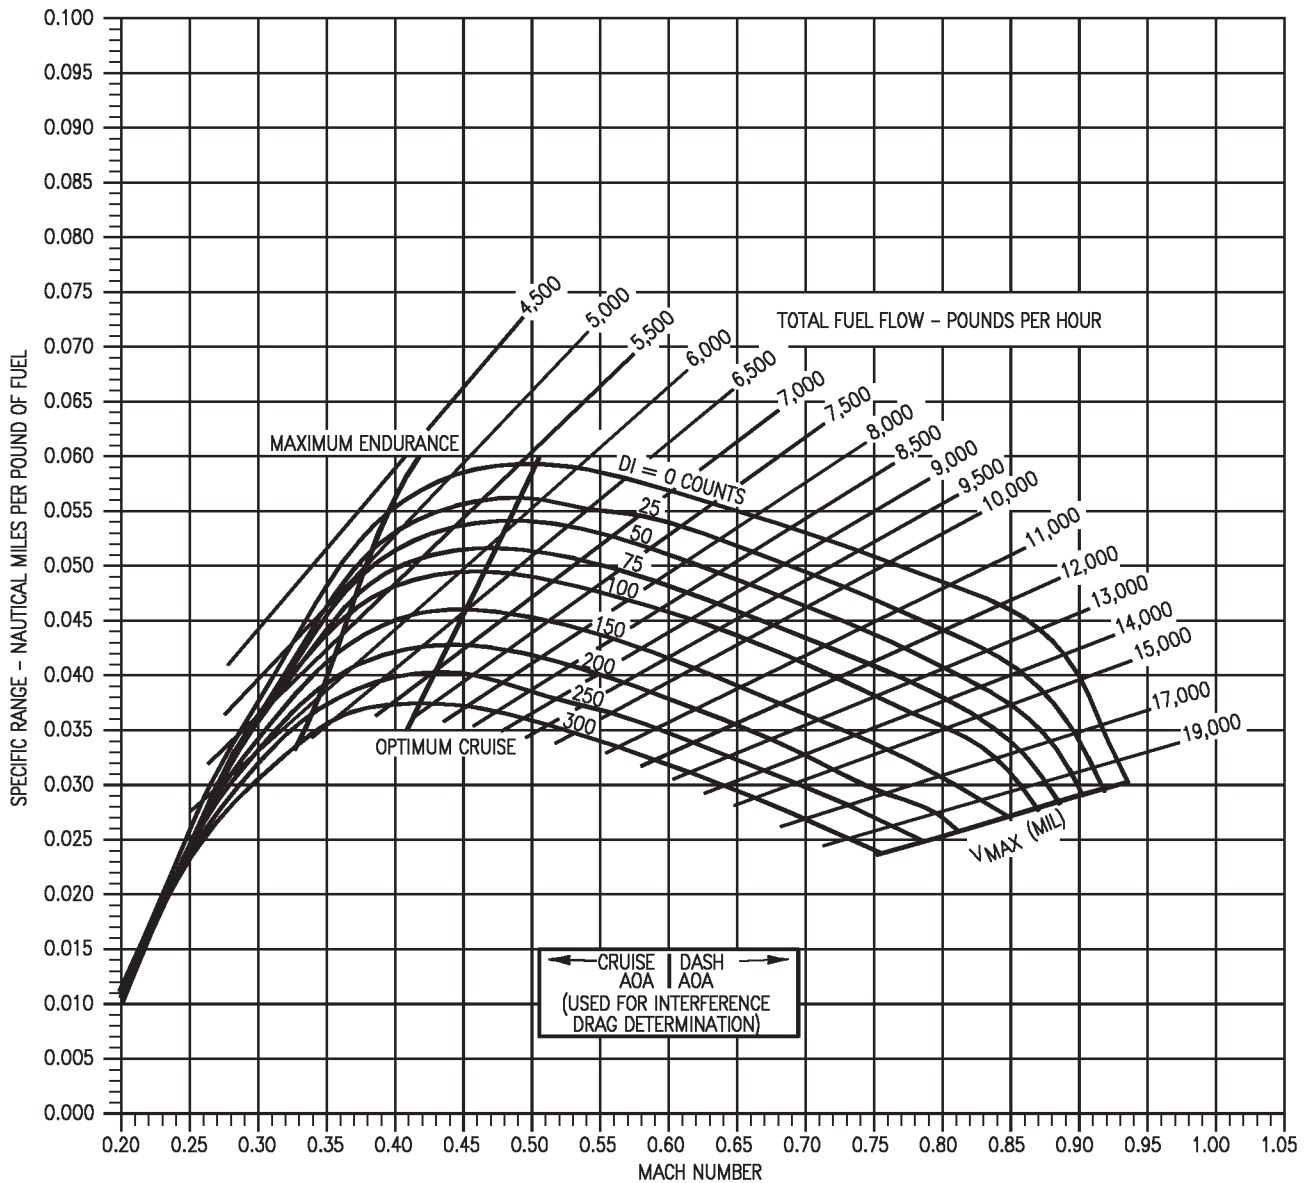

18AC-NFM-20-(176-1)12-CAT1

Figure 11-40. Specific Range - Sea Level - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### SEA LEVEL - 46,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 15°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

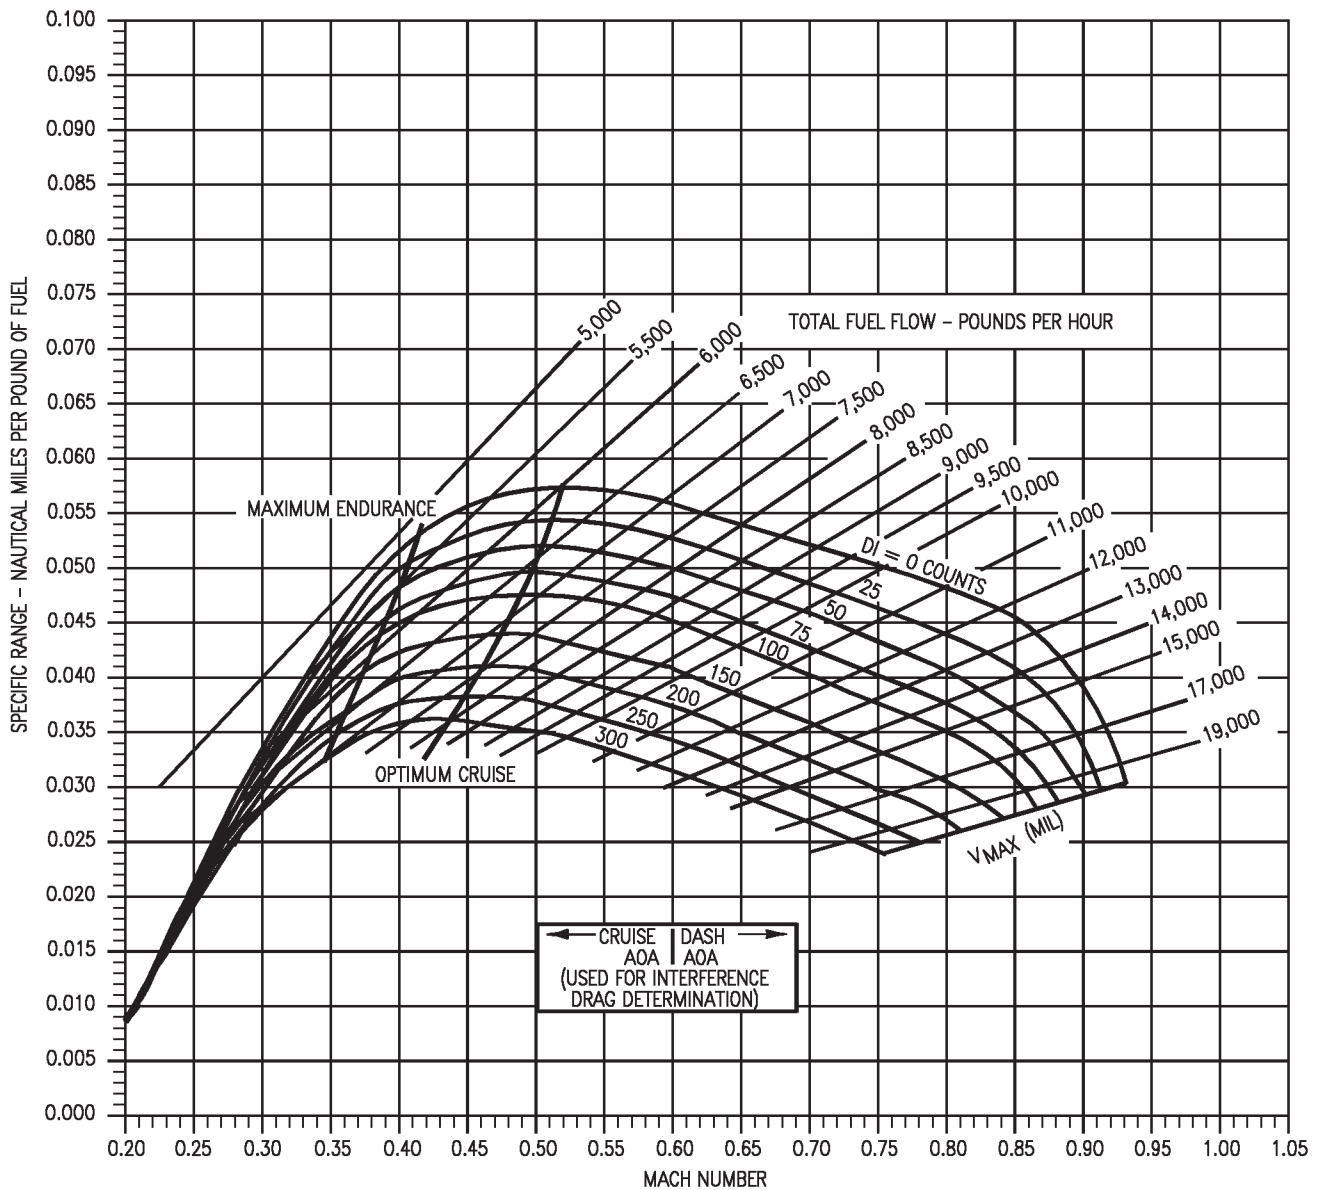

18AC-NFM-20-(177-1)12-CAT1

Figure 11-41. Specific Range - Sea Level - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### SEA LEVEL - 50,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 15°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

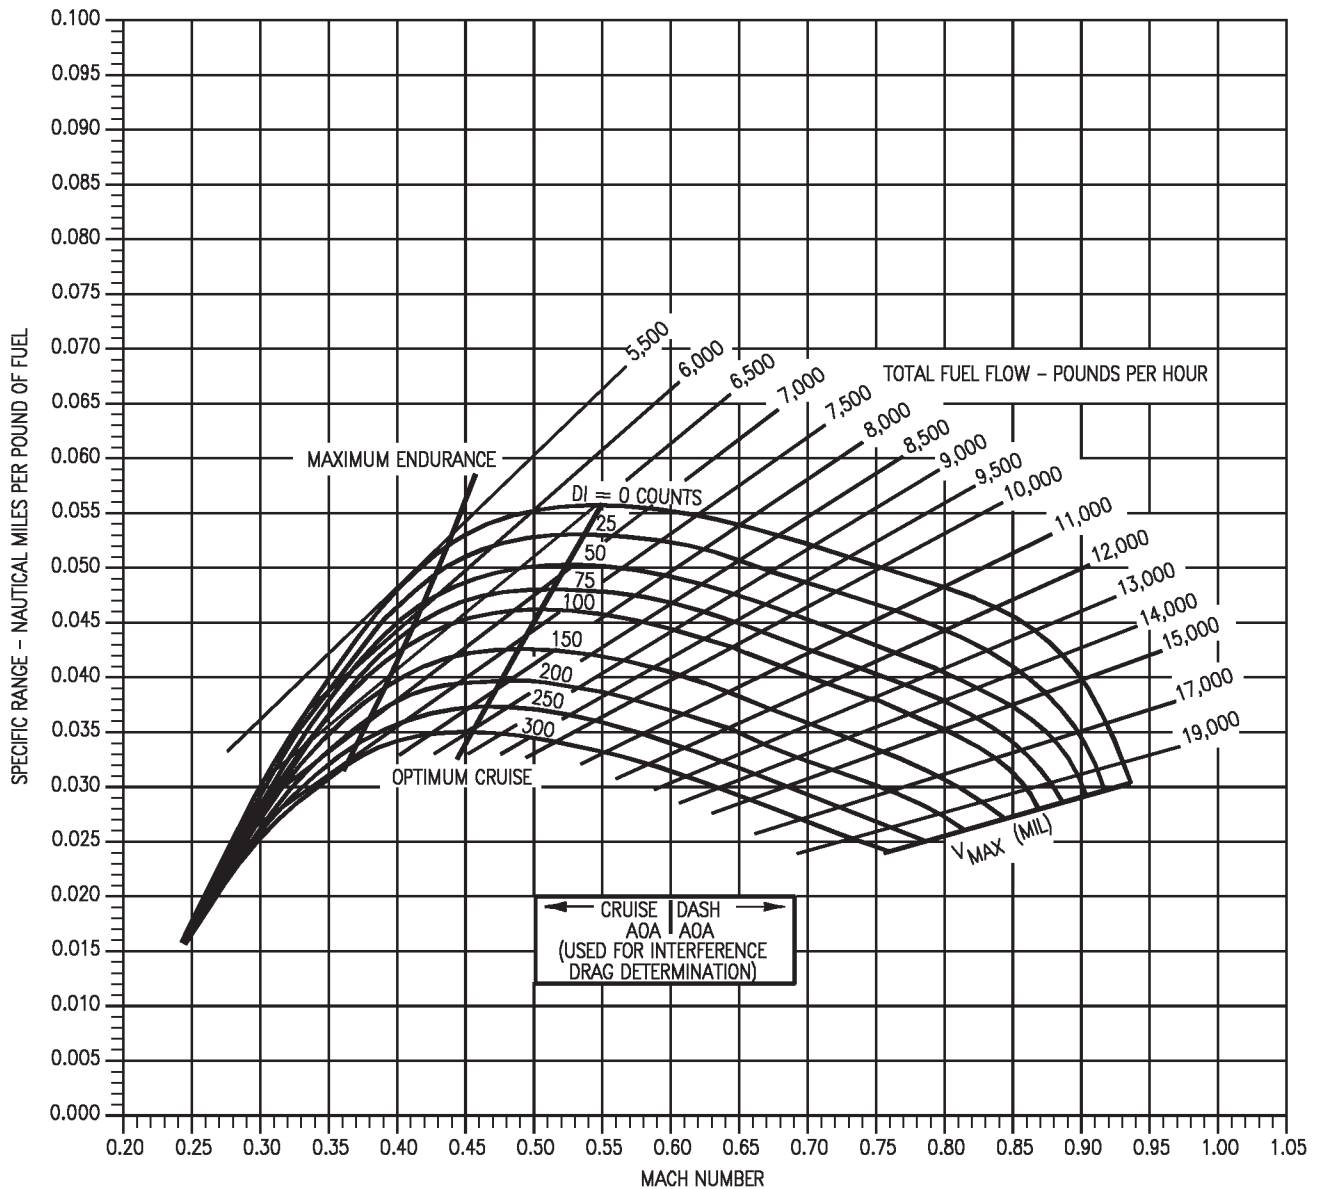

18AC-NFM-20-(178-1)12-CAT1

Figure 11-42. Specific Range - Sea Level - 50,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400

### 5,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 5°C


| TEMPERATURE EFFECTS           |                  |
|-------------------------------|------------------|
| $\Delta T$ - °C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                           | 1.02             |
| -10                           | 1.01             |
| 0                             | 1.00             |
| +10                           | .98              |
| +20                           | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

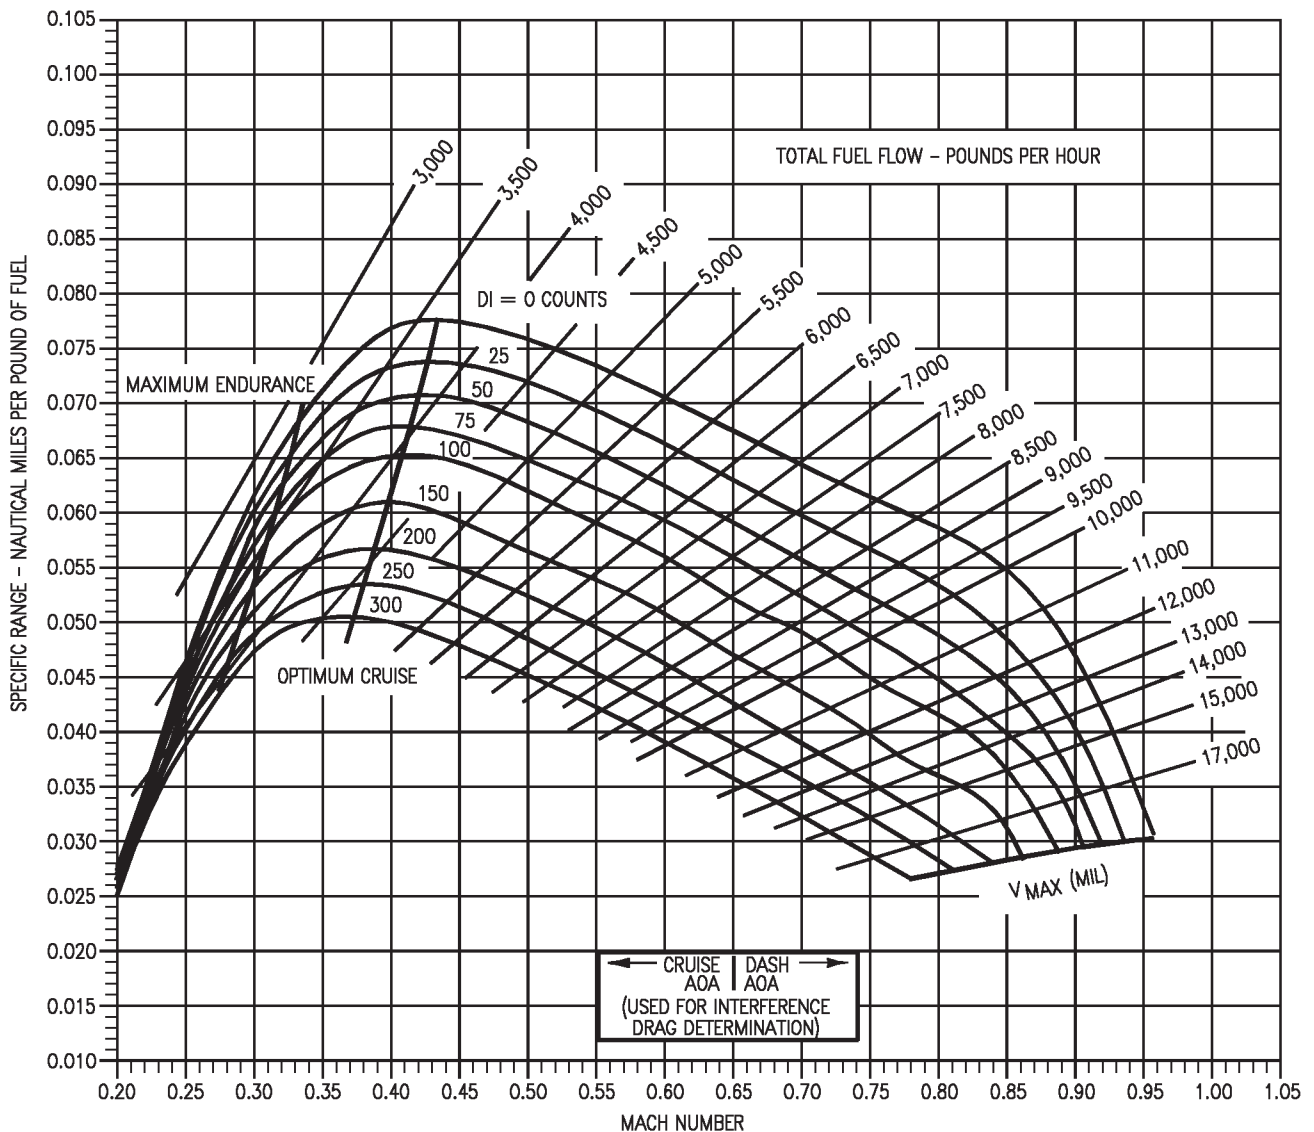

18AC-NFM-20-(273-1)12-CAT1

Figure 11-43. Specific Range - 5,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 5,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 5°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

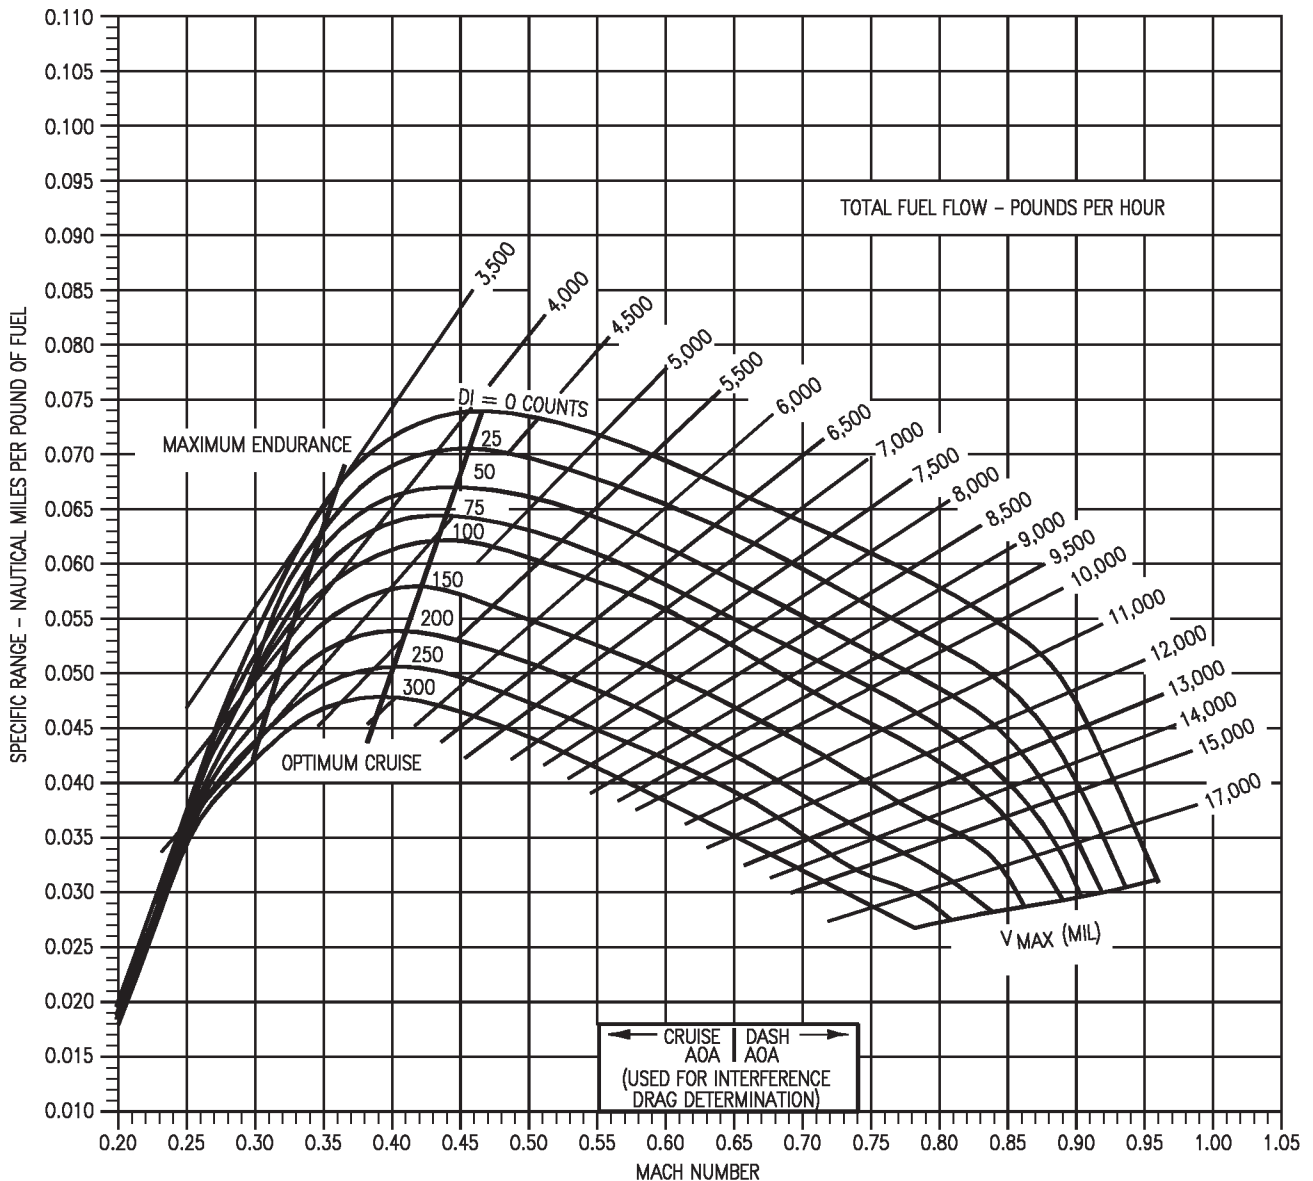

18AC-NFM-20-(274-1)12-CAT1

Figure 11-44. Specific Range - 5,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 5,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 5°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

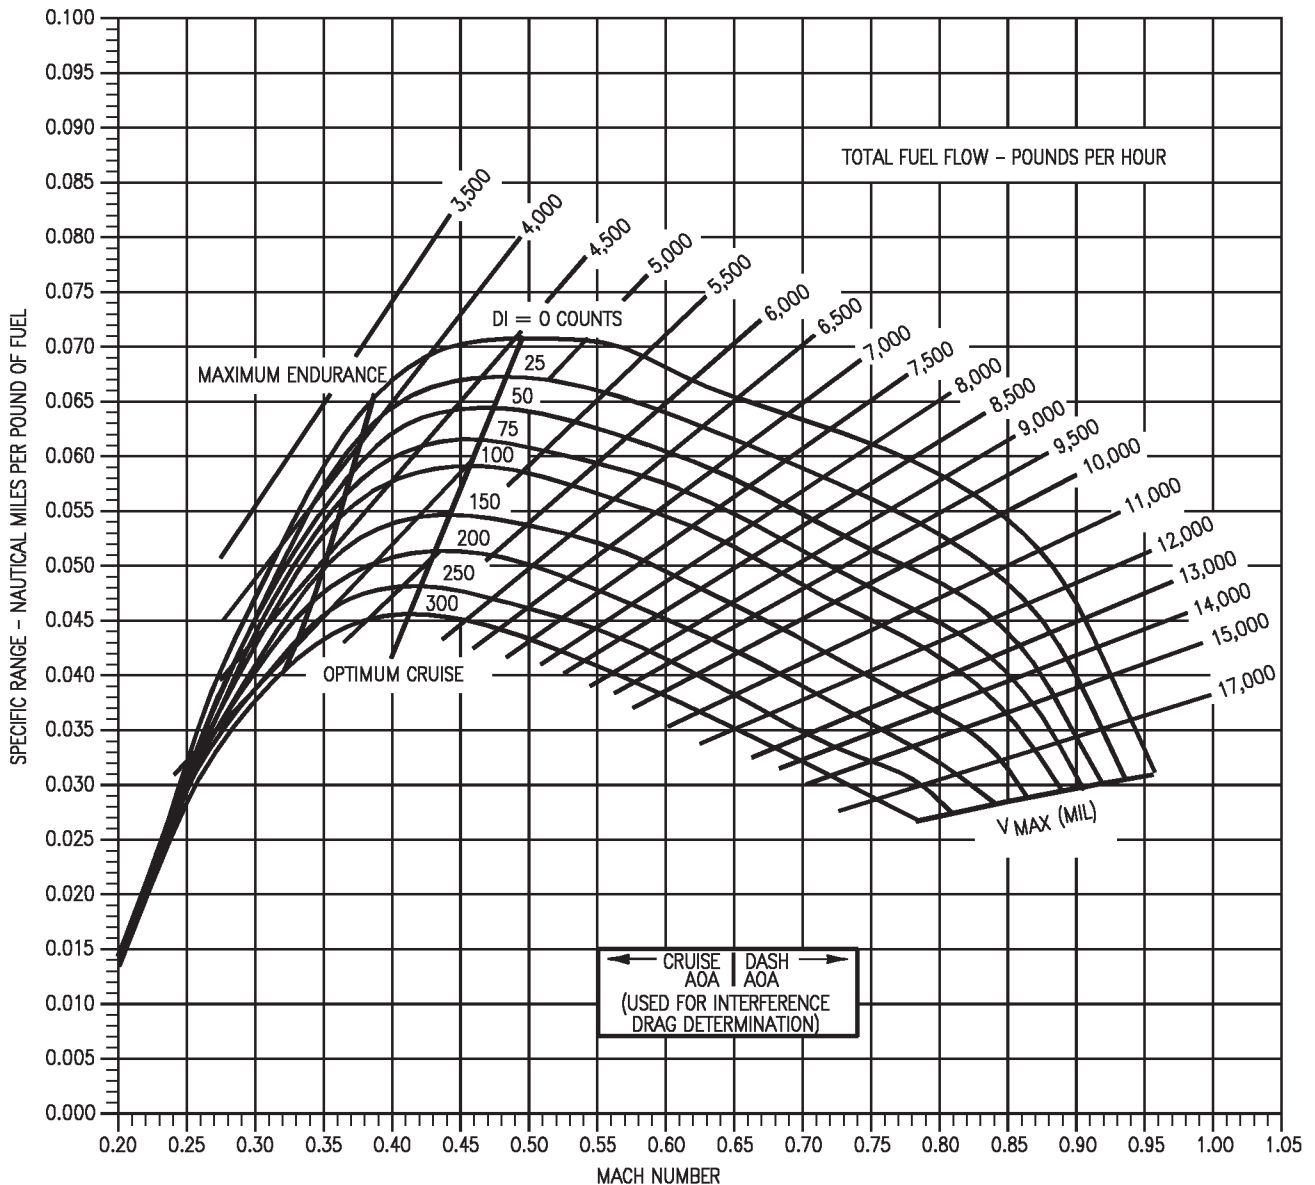

18AC-NFM-20-(275-1)12-CAT1

Figure 11-45. Specific Range - 5,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 5,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 5°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

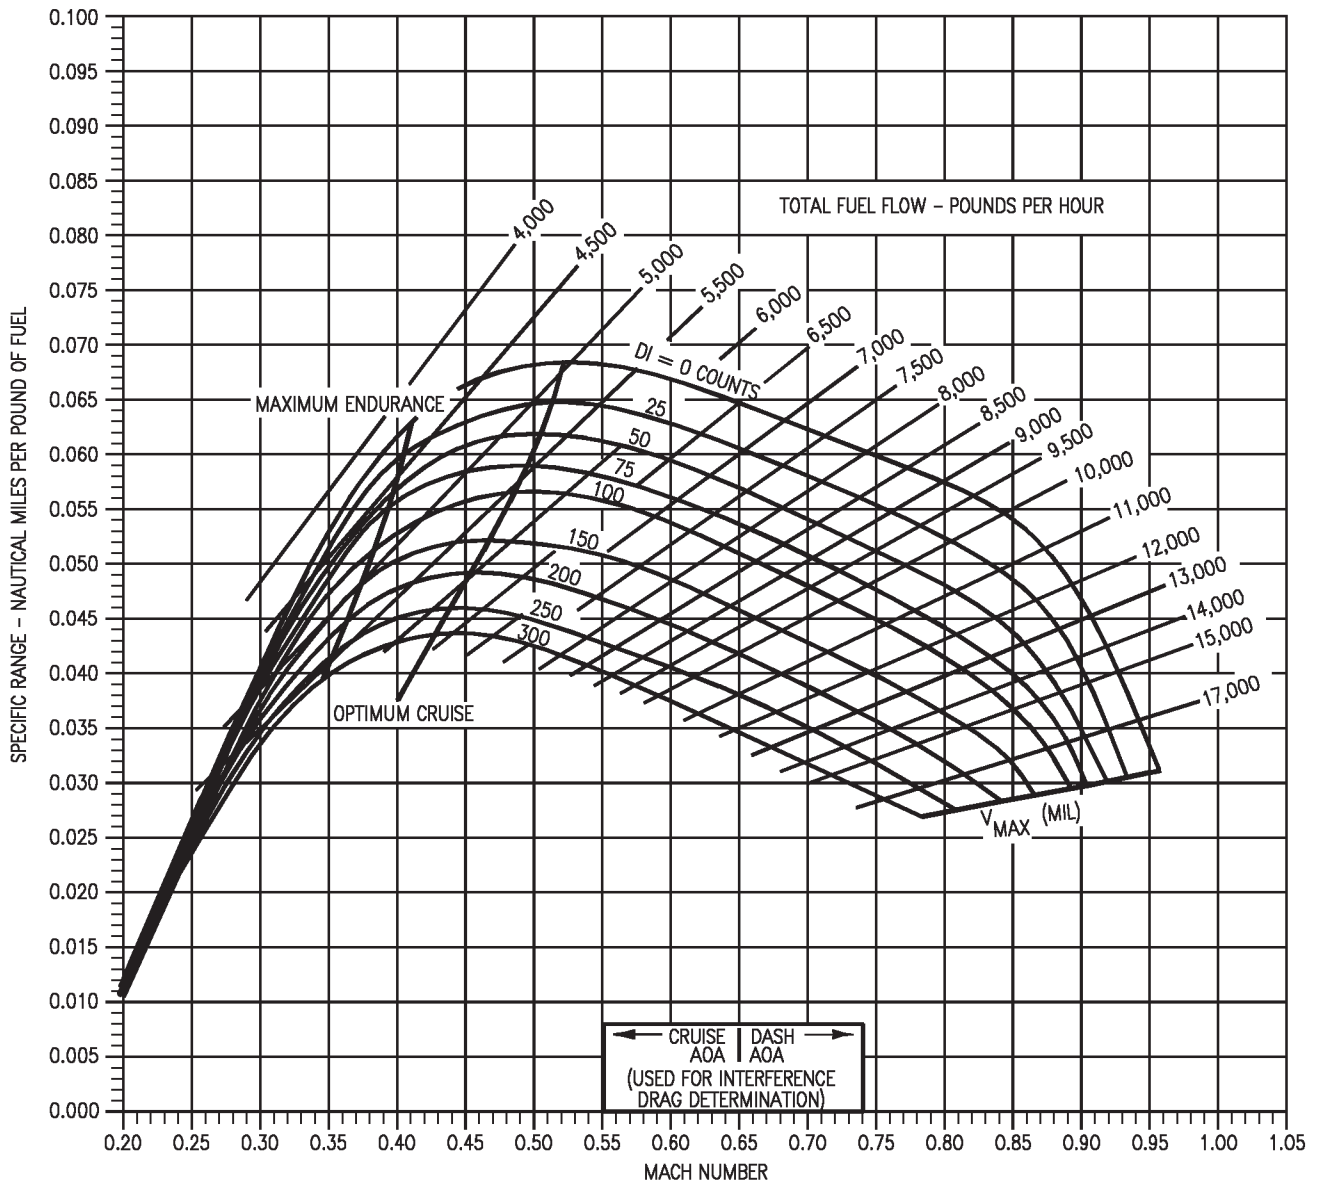

18AC-NFM-20-(276-1)12-CAT1

Figure 11-46. Specific Range - 5,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 5,000 FEET - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 5°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

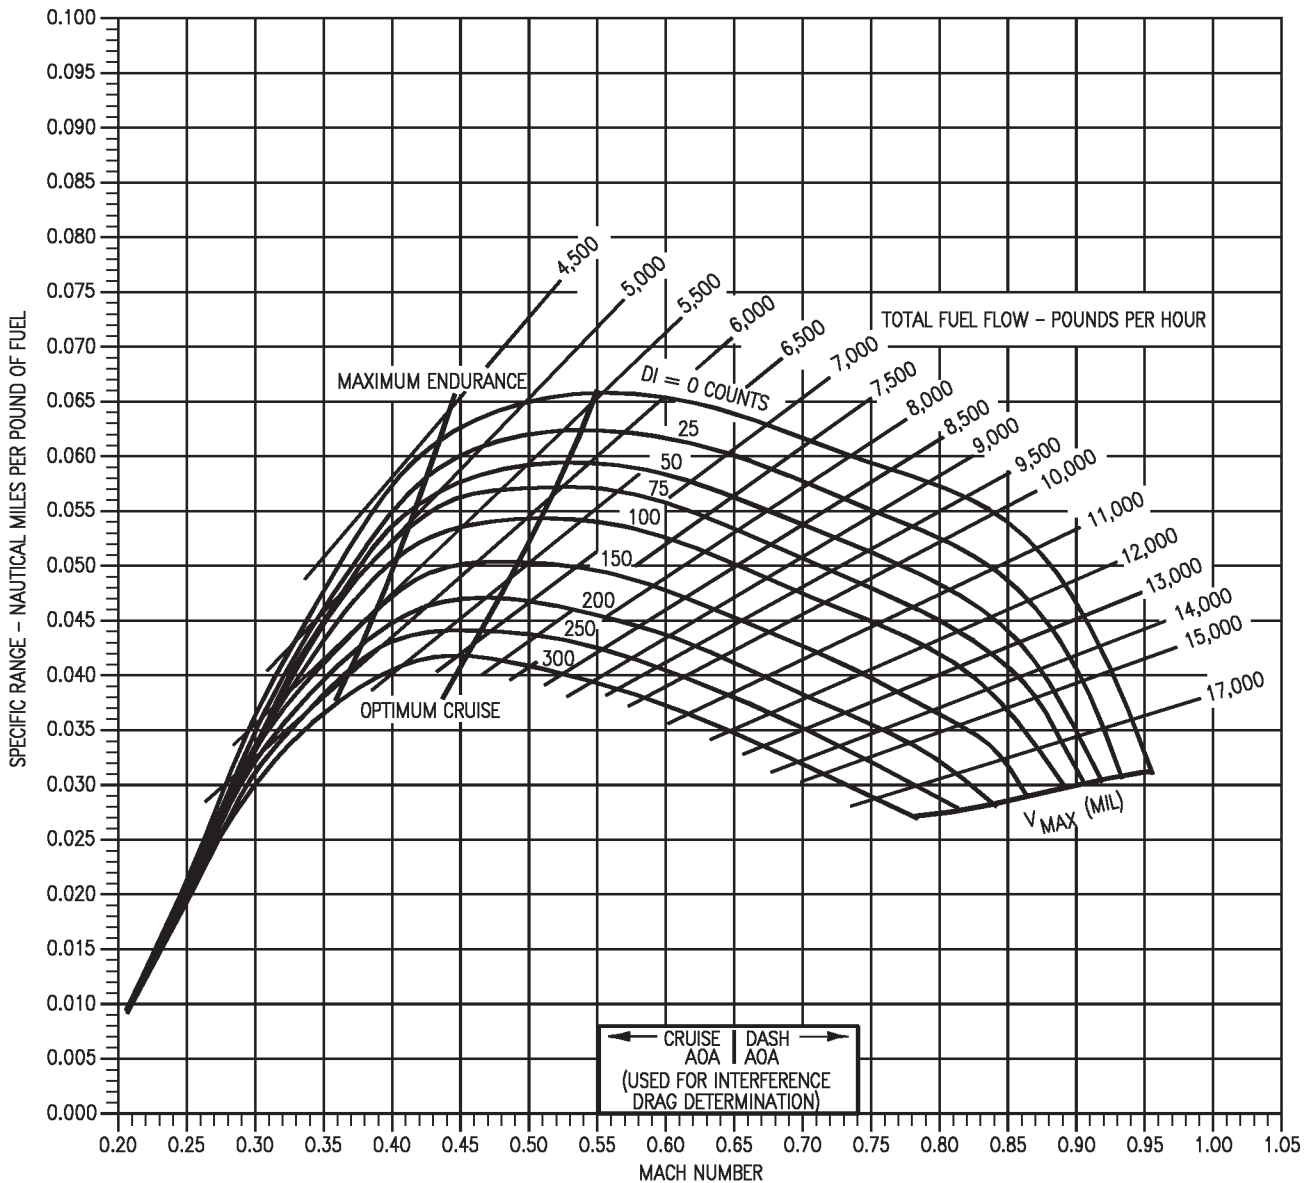

18AC-NFM-20-(277-1)12-CAT1

Figure 11-47. Specific Range - 5,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 5,000 FEET - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = 5°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

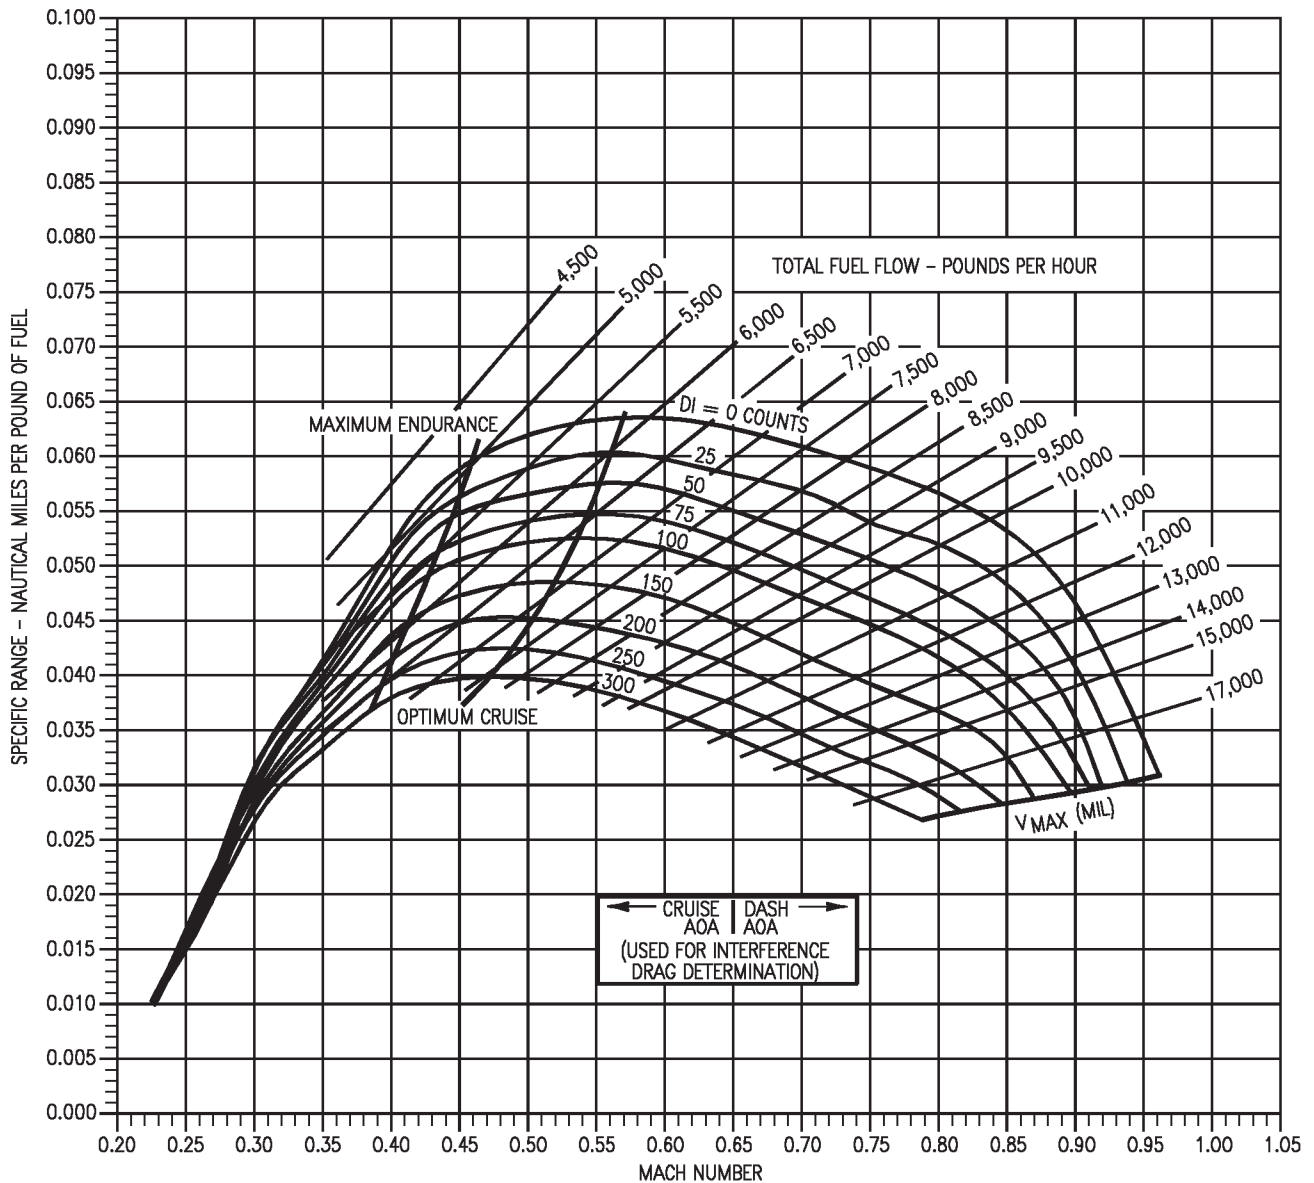

18AC-NFM-20-(278-1)12-CAT1

Figure 11-48. Specific Range - 5,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
5,000 FEET - 50,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = 5°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

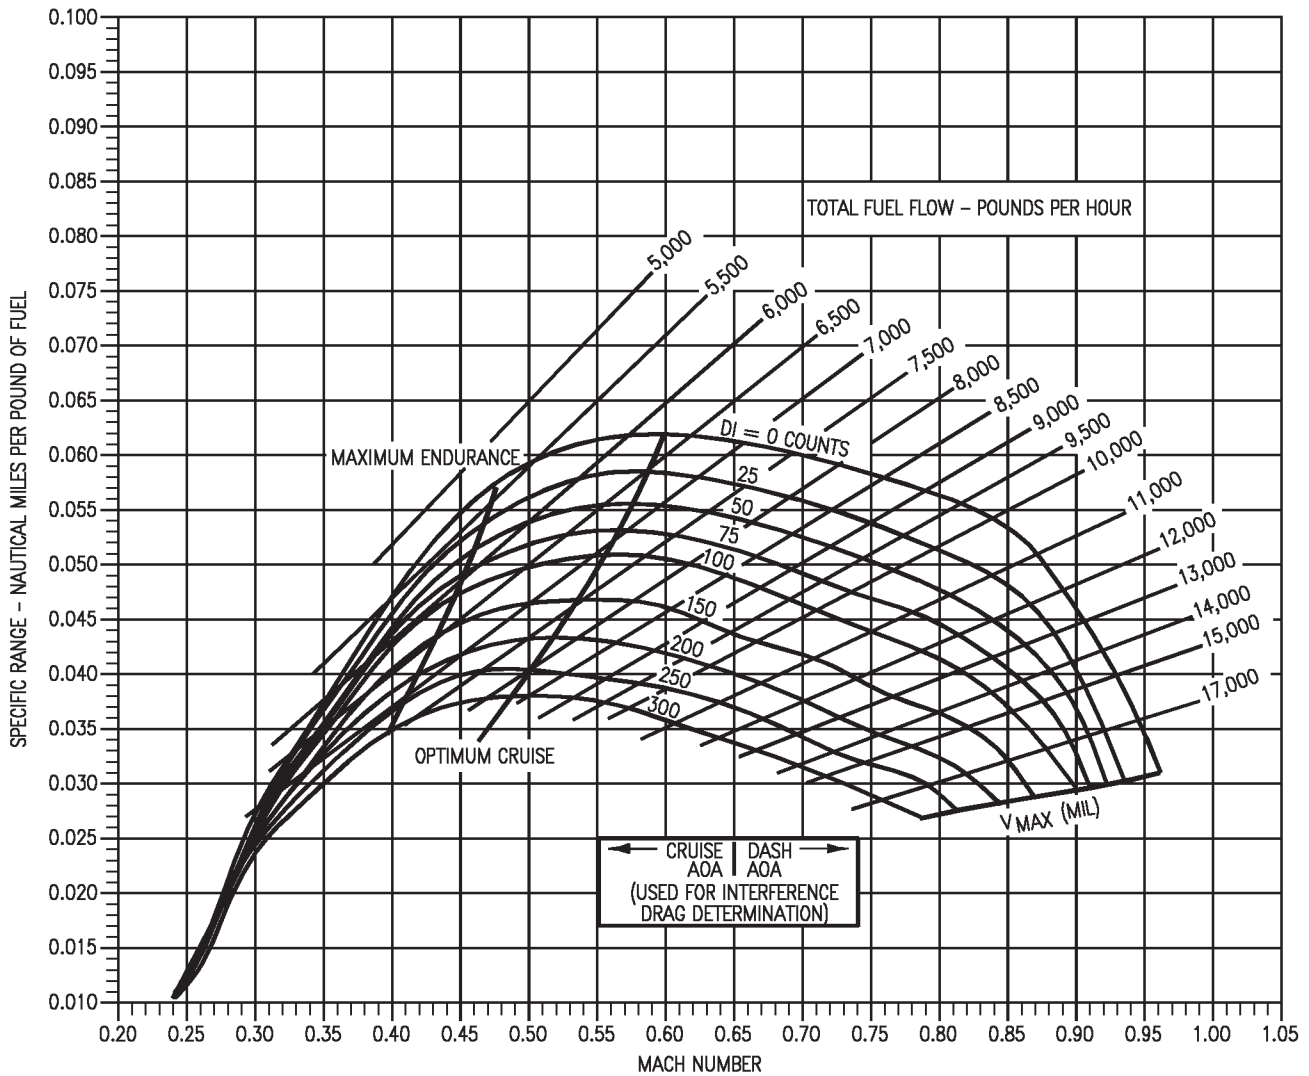

18AC-NFM-20-(279-1)12-CAT1

Figure 11-49. Specific Range - 5,000 Feet - 50,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400


### 10,000 FEET - 26,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = 5°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

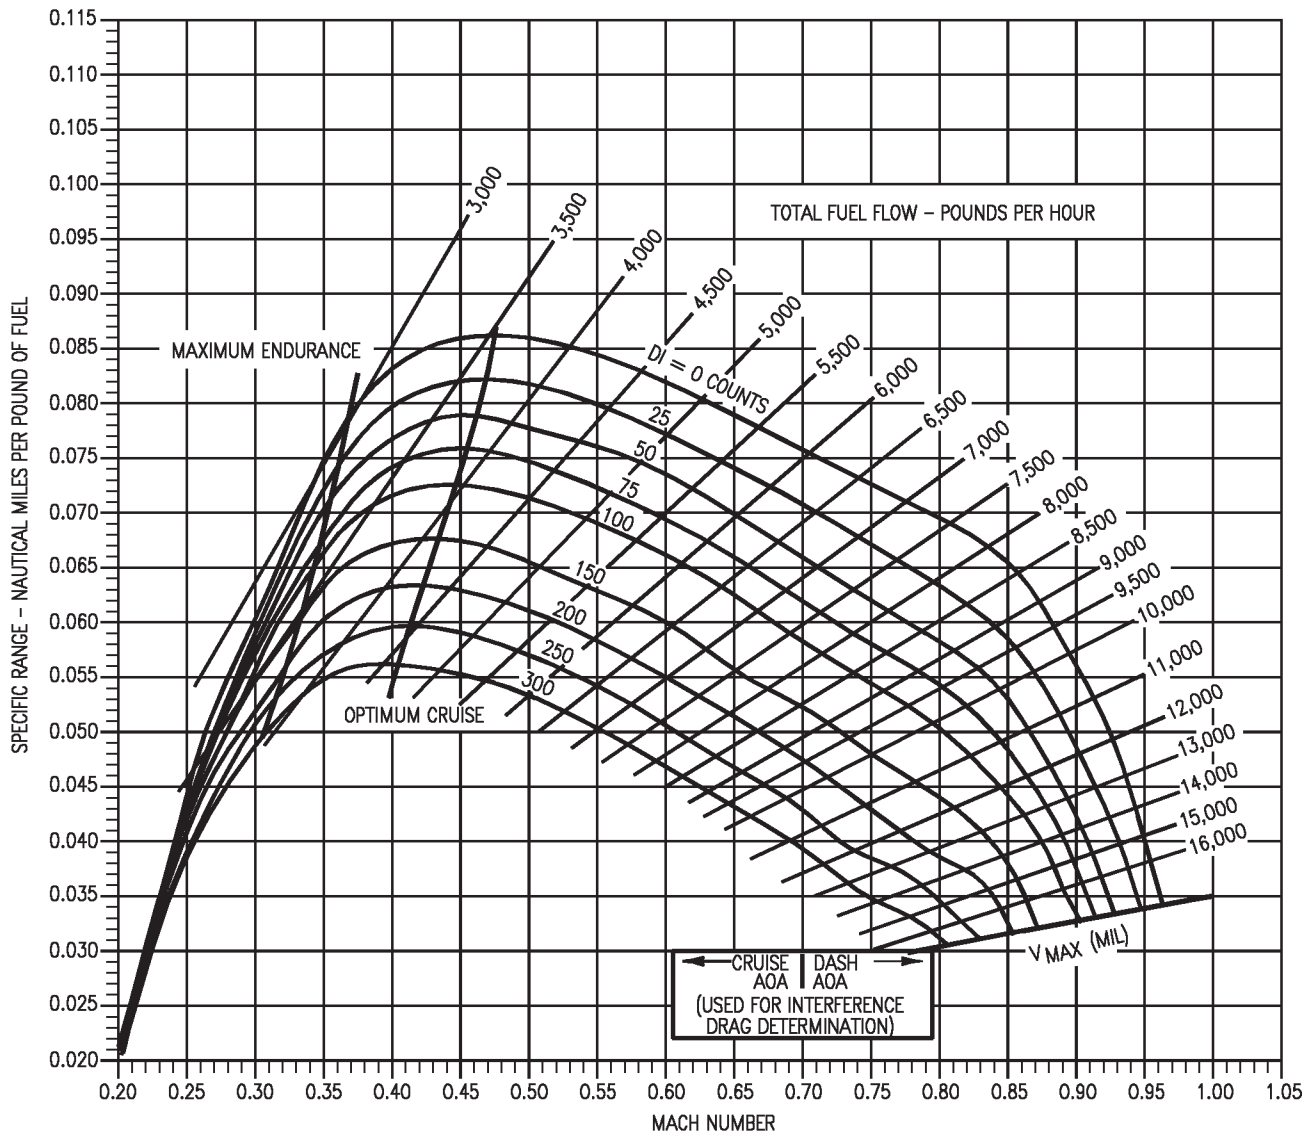

18AC-NFM-20-(179-1)12-CAT1

Figure 11-50. Specific Range - 10,000 Feet - 26,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400

### 10,000 FEET - 30,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -5°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

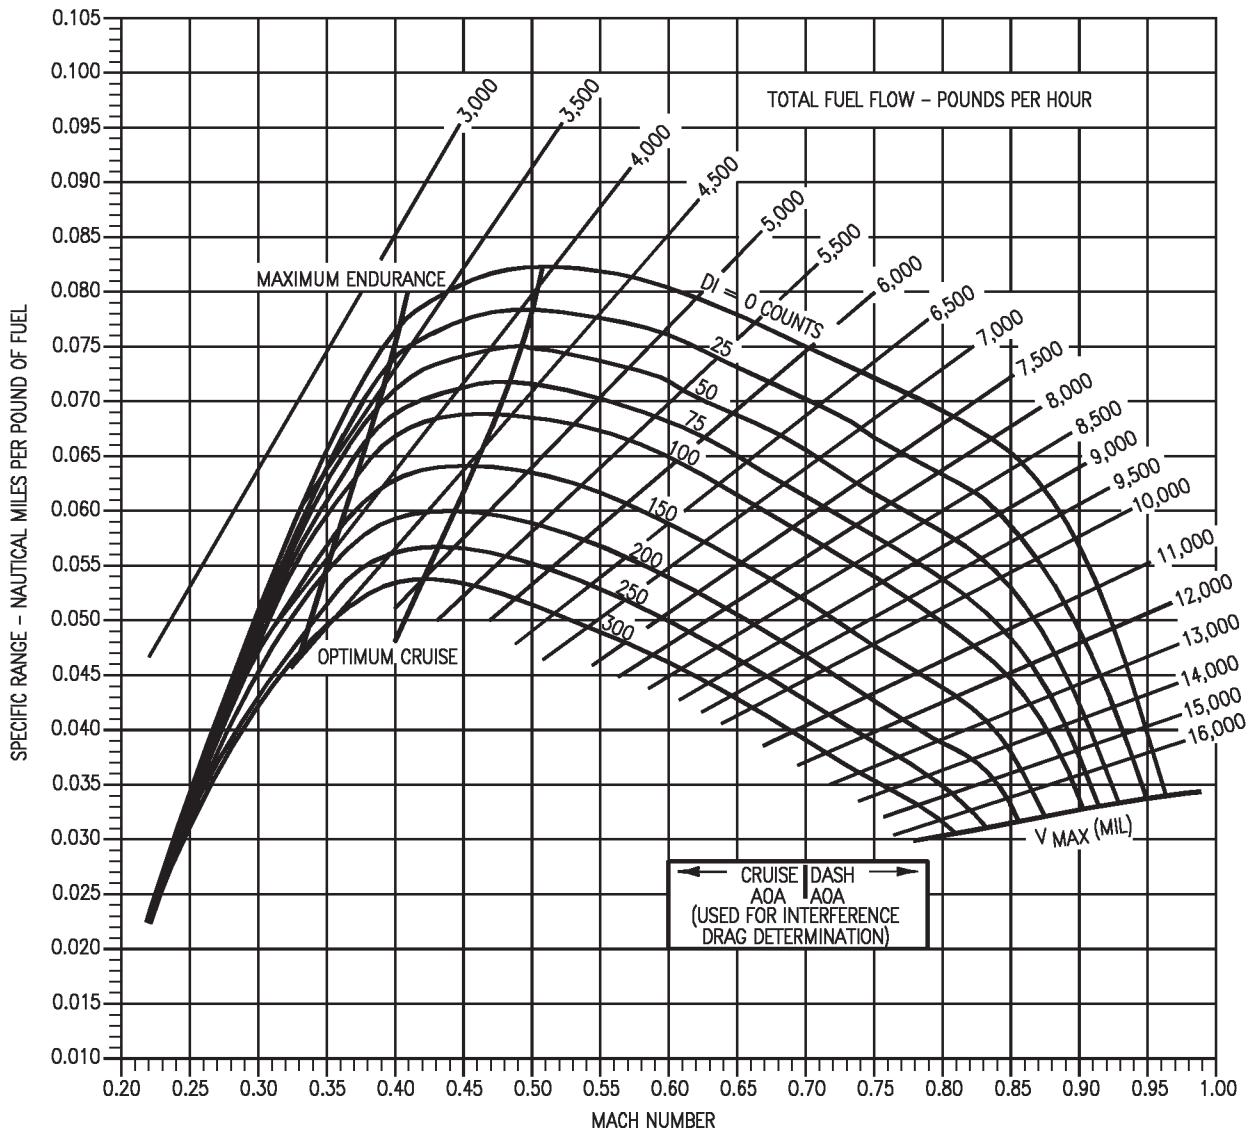

18AC-NFM-20-(180-1)12-CAT1

Figure 11-51. Specific Range - 10,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
10,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -5°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

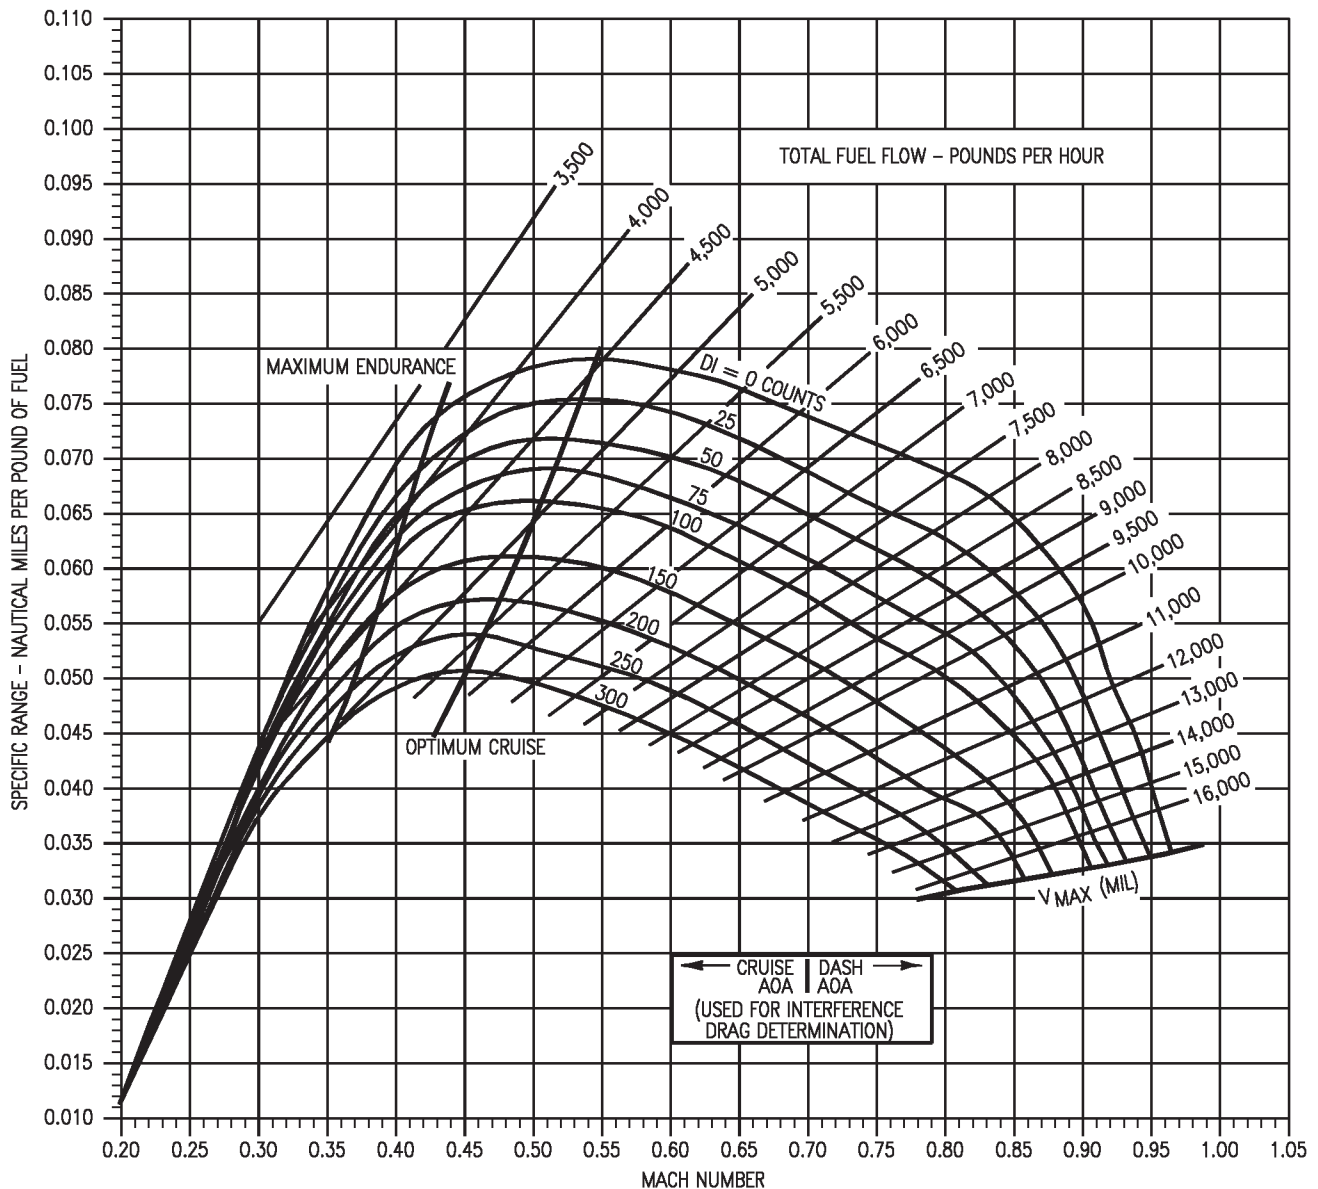

18AC-NFM-20-(181-1)12-CAT1

Figure 11-52. Specific Range - 10,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
10,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -5°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

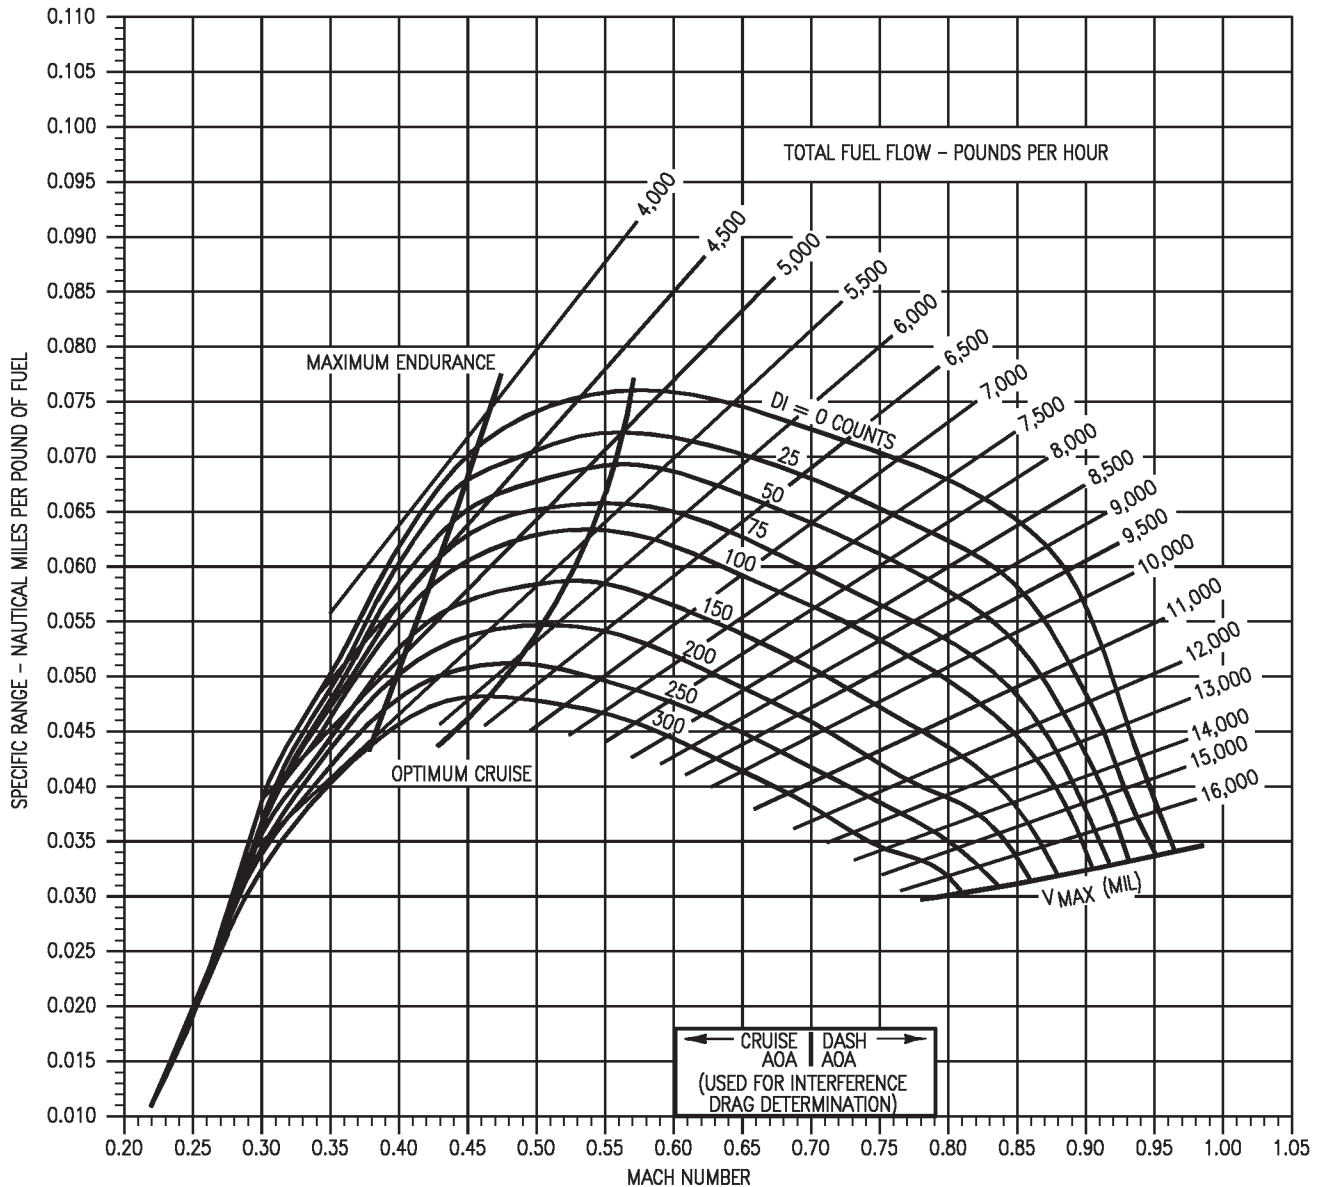

18AC-NFM-20-(182-1)12-CAT1

Figure 11-53. Specific Range - 10,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
10,000 FEET - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -5°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

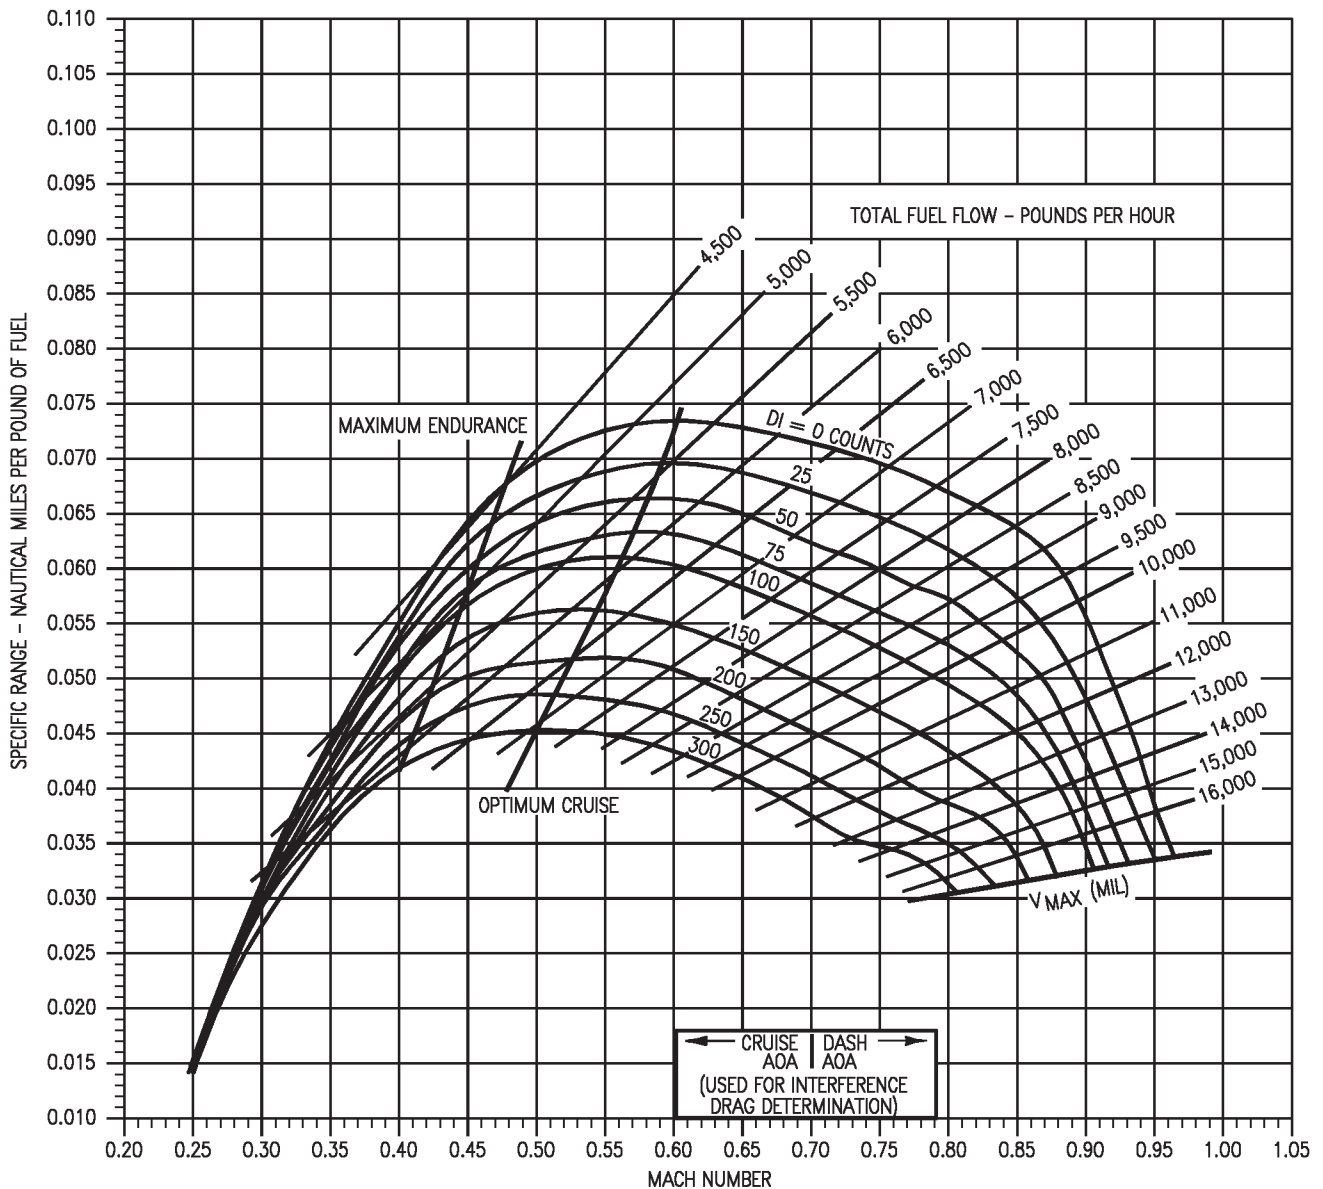

18AC-NFM-20-(183-1)12-CAT1

Figure 11-54. Specific Range - 10,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
10,000 FEET - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -5°C


| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

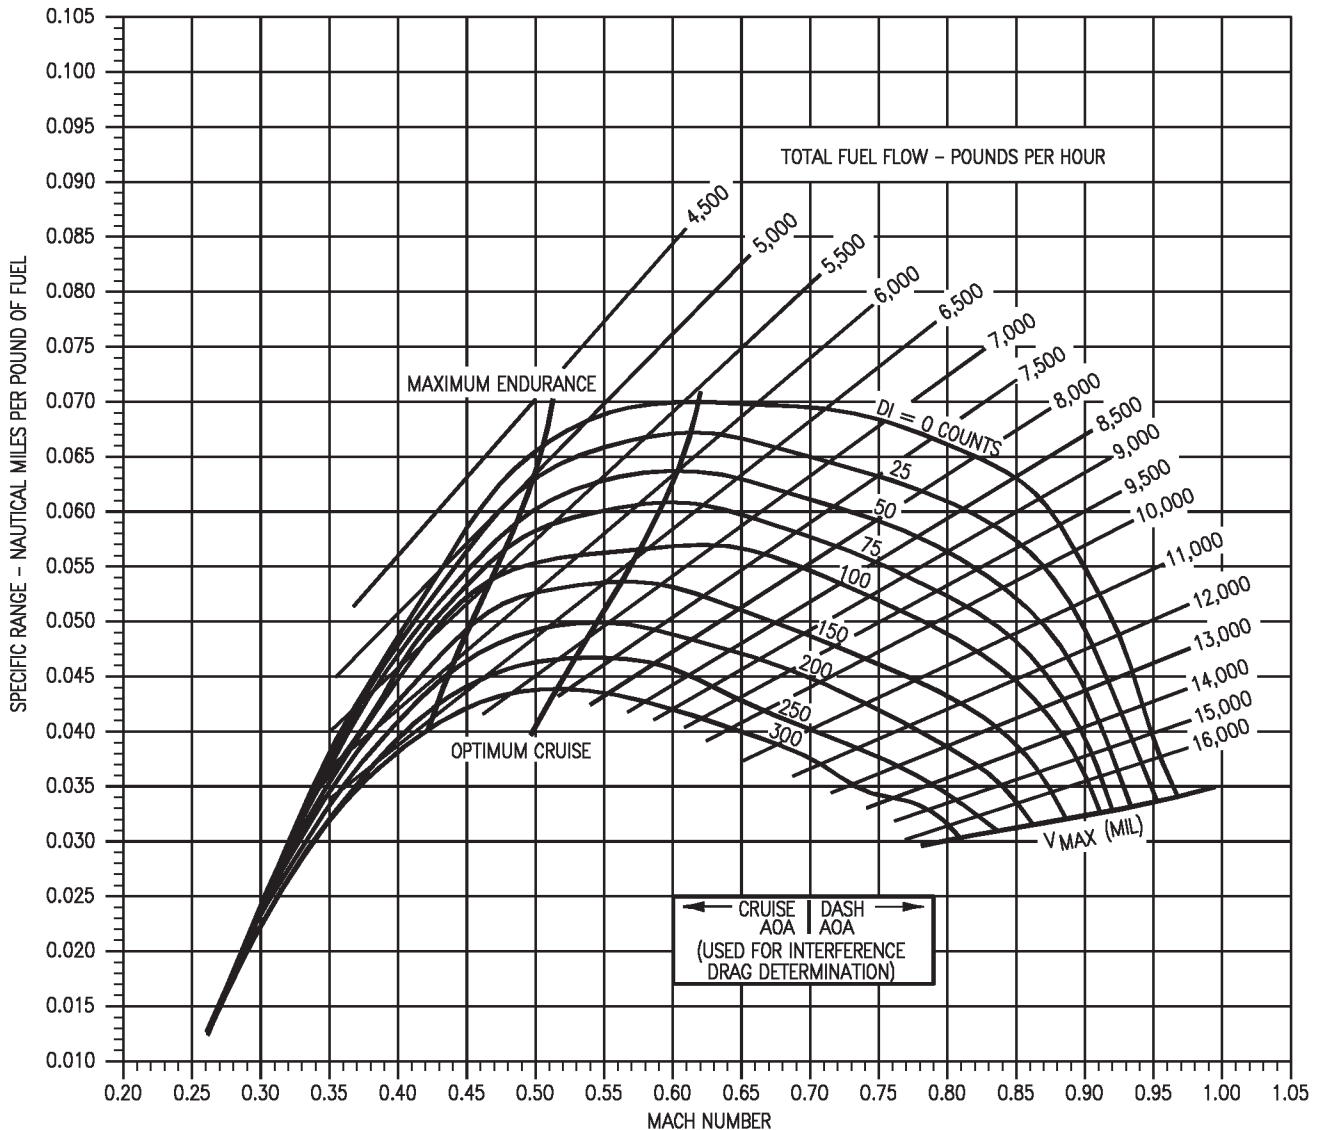

18AC-NFM-20-(184-1)12-CAT1

Figure 11-55. Specific Range - 10,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
10,000 FEET - 50,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -5°C


| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

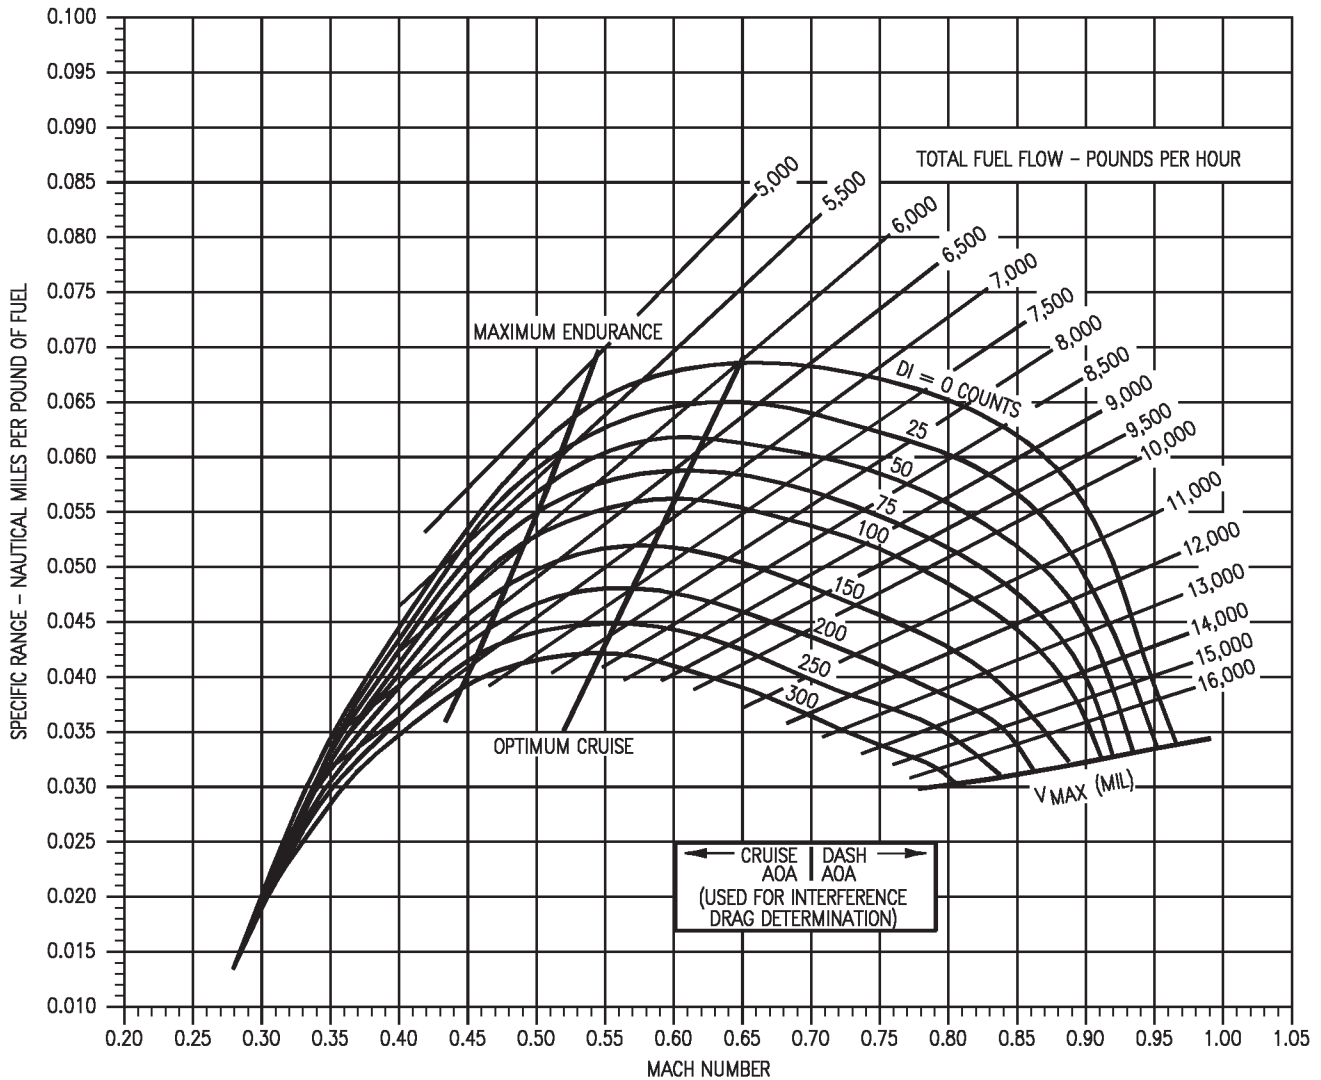

18AC-NFM-20-(185-1)12-CATI

Figure 11-56. Specific Range - 10,000 Feet - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400

15,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

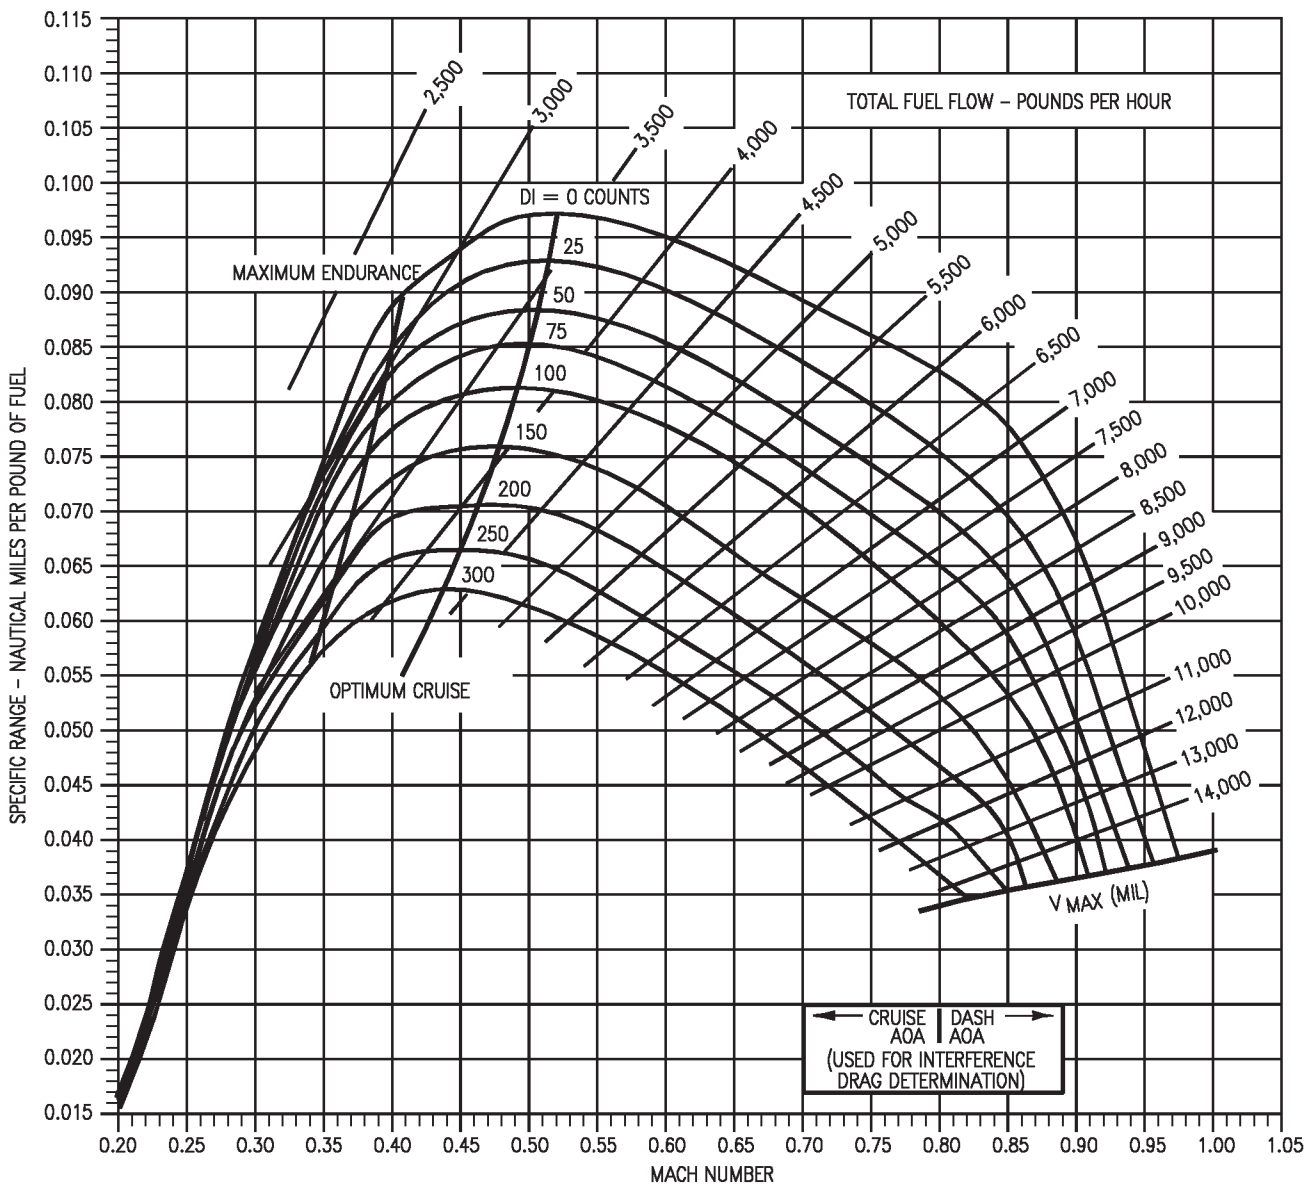

18AC-NFM-20-(280-1)12-CAT1

Figure 11-57. Specific Range - 15,000 Feet - 26,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400

### 15,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

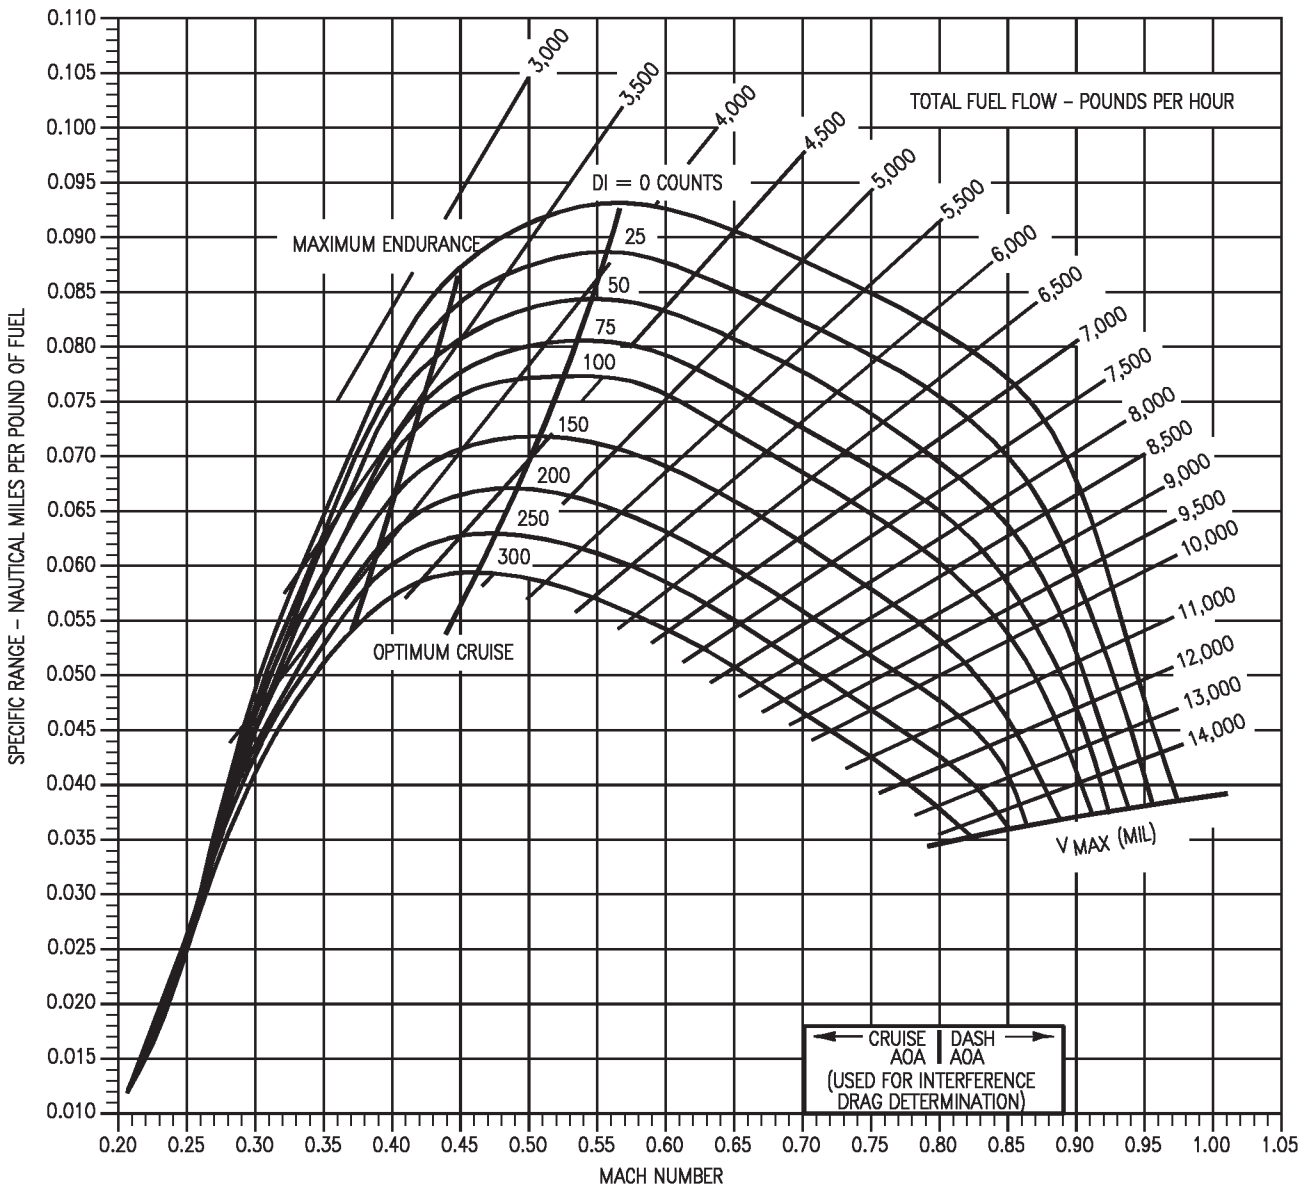

18AC-NFM-20-(281-1)12-CAT1

Figure 11-58. Specific Range - 15,000 Feet - 30,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400  
15,000 FEET - 34,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -15°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

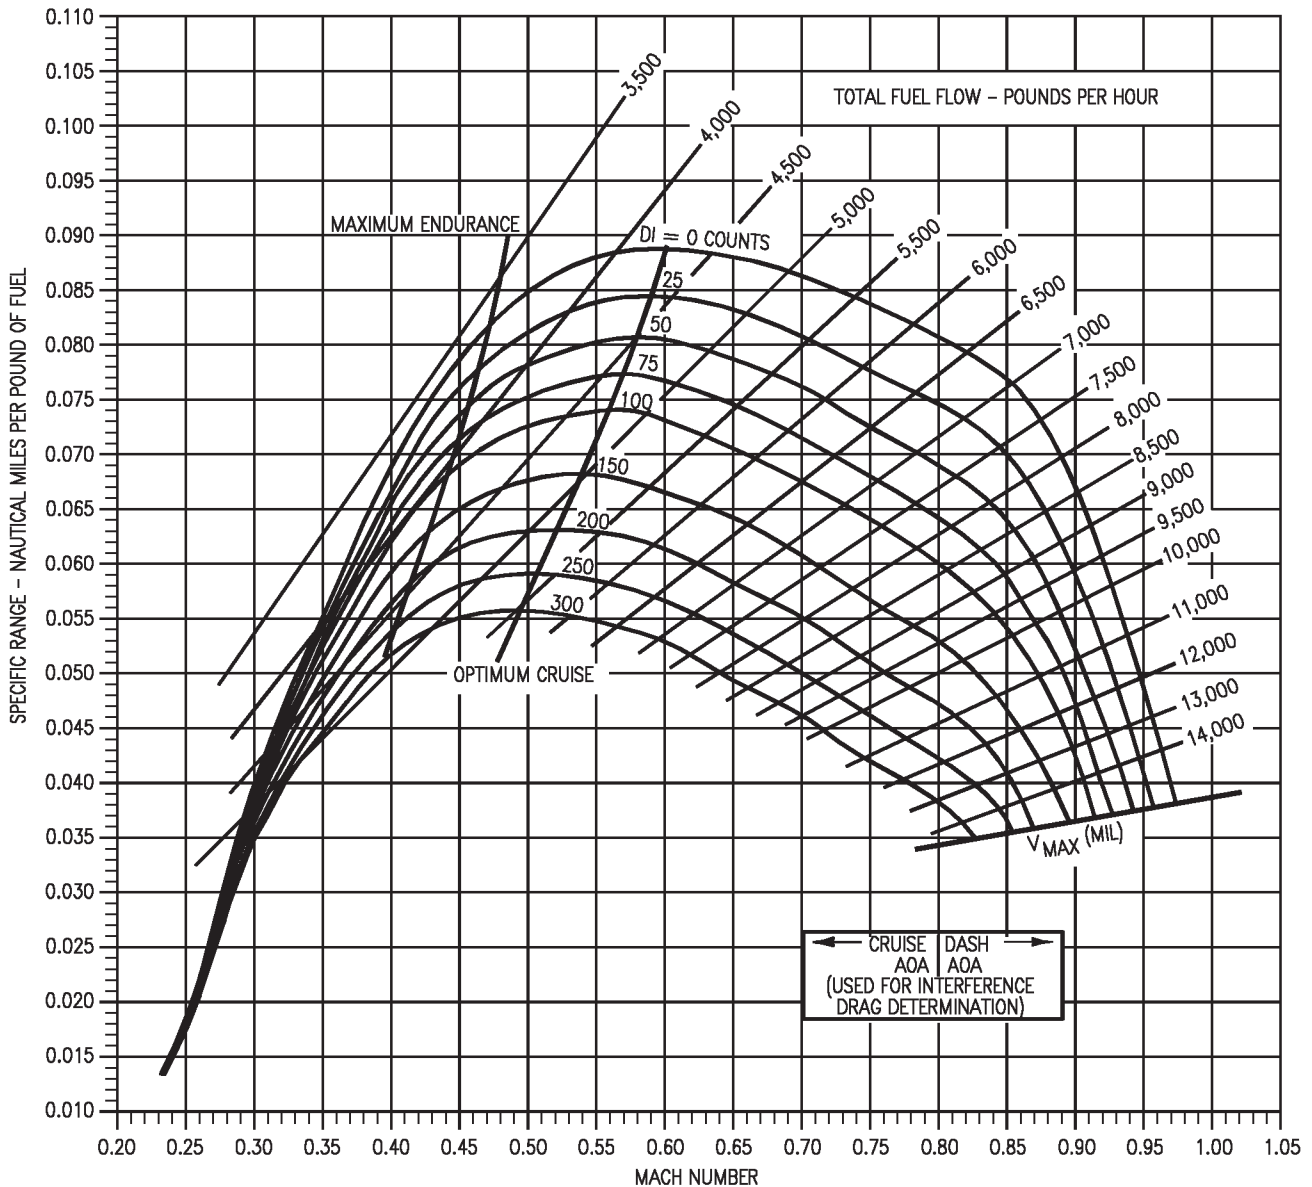

18AC-NFM-20-(282-1)12-CAT1

Figure 11-59. Specific Range - 15,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
15,000 FEET - 38,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

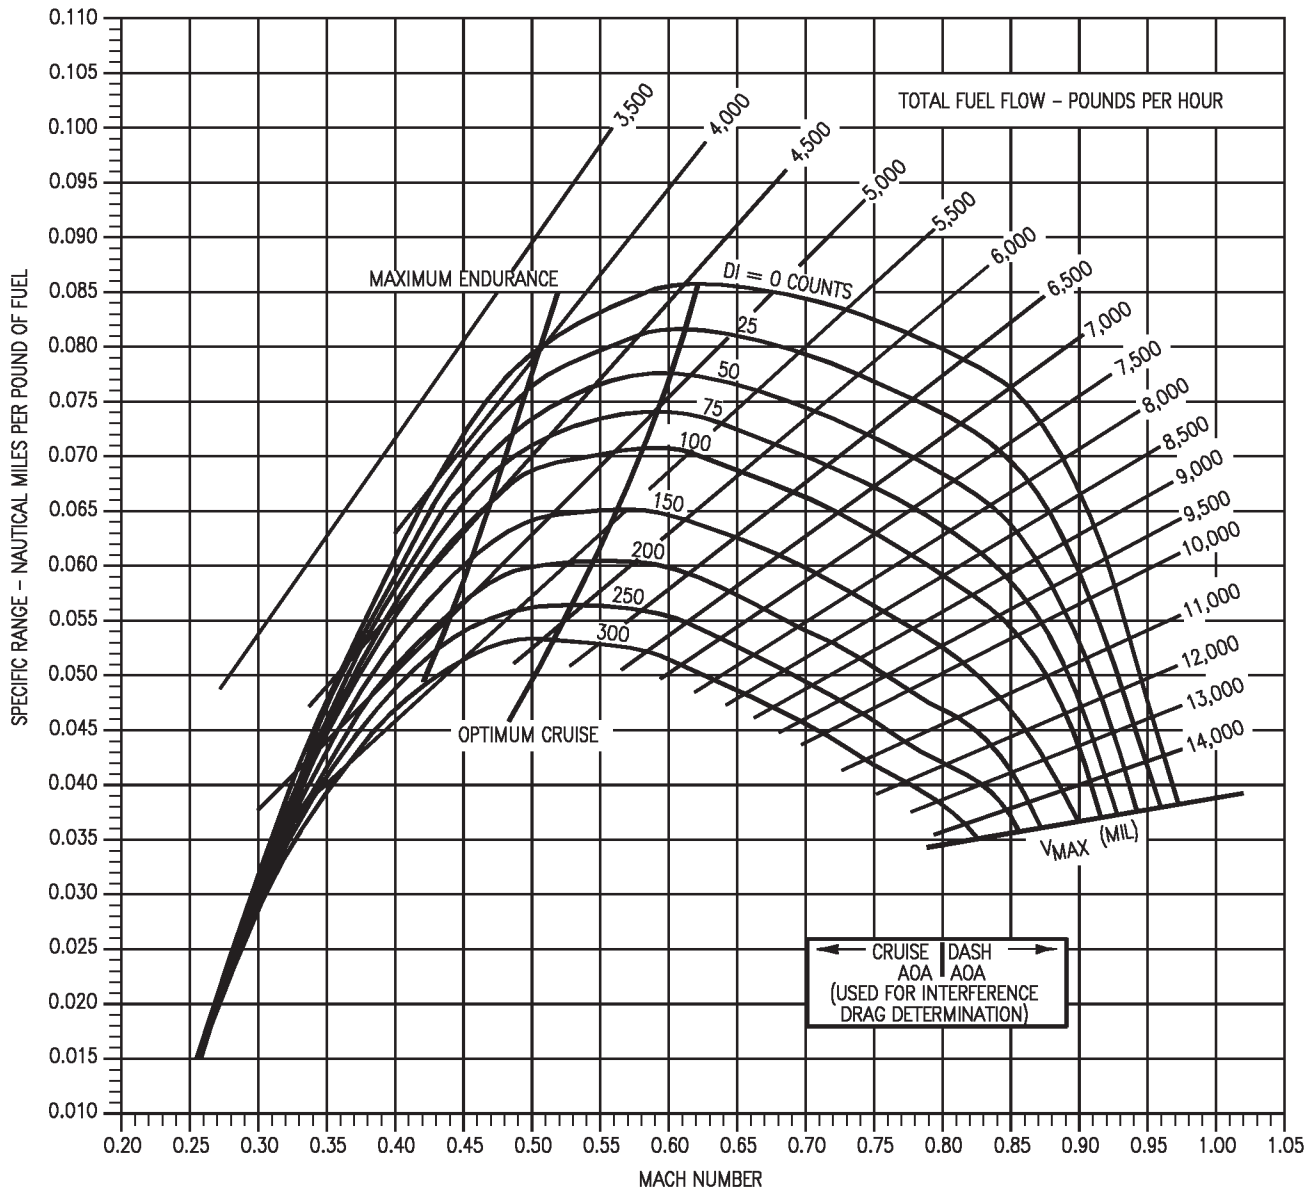

18AC-NFM-20-(283-1)12-CAT1

Figure 11-60. Specific Range - 15,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
15,000 FEET - 42,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

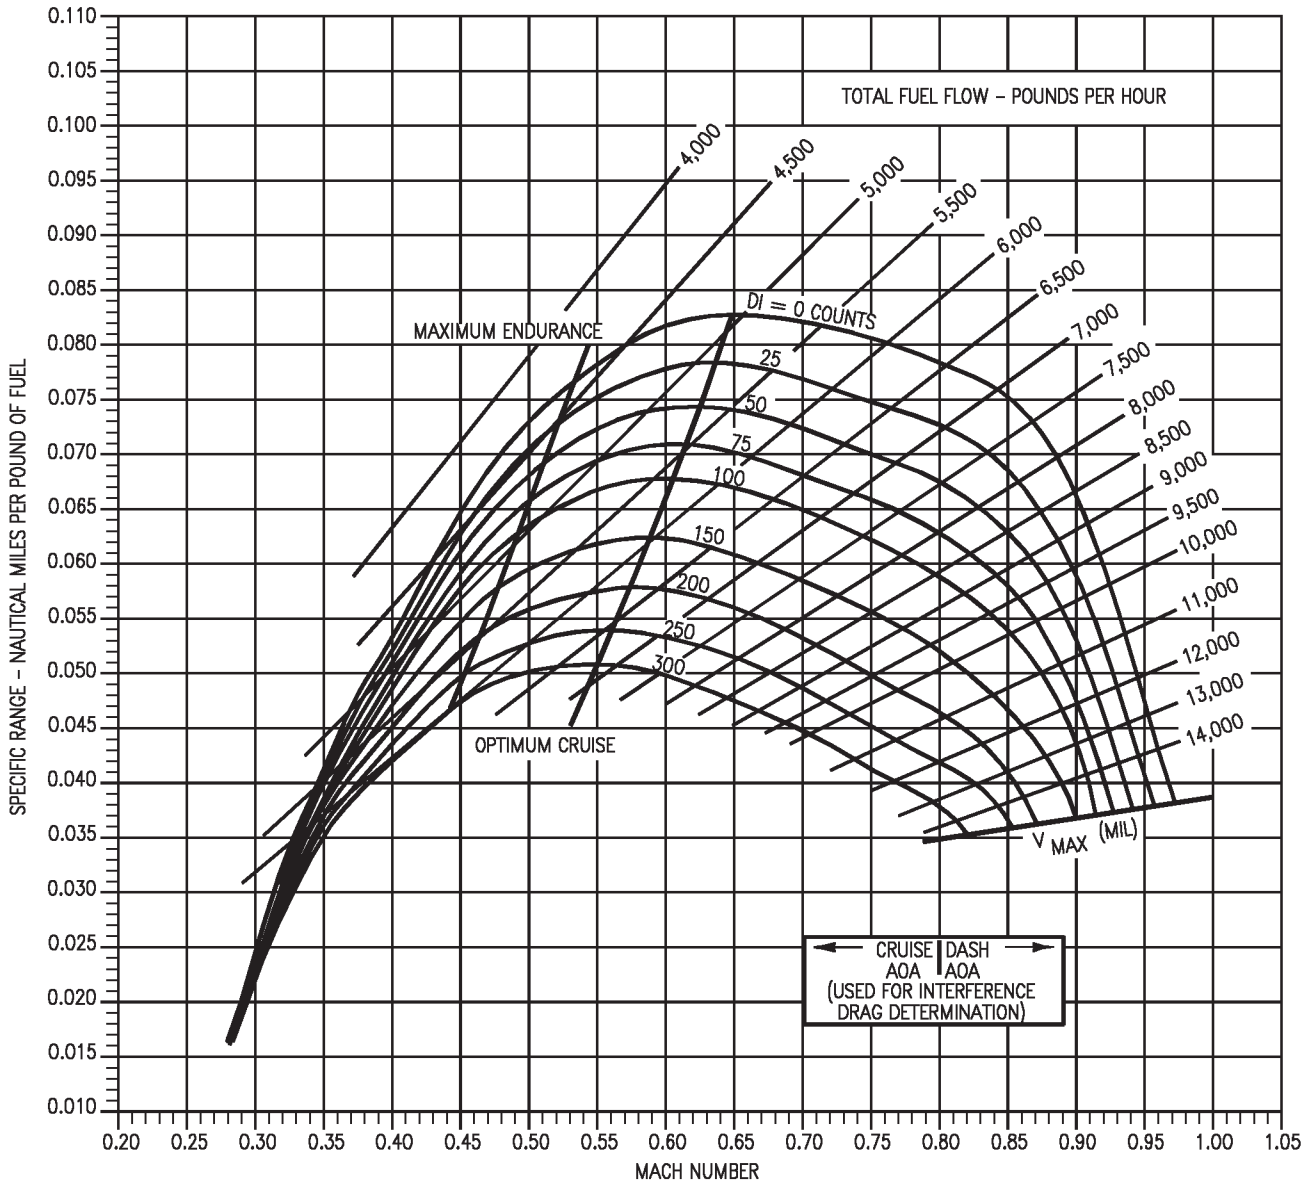

18AC-NFM-20-(284-1)12-CAT1

Figure 11-61. Specific Range - 15,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
15,000 FEET - 46,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

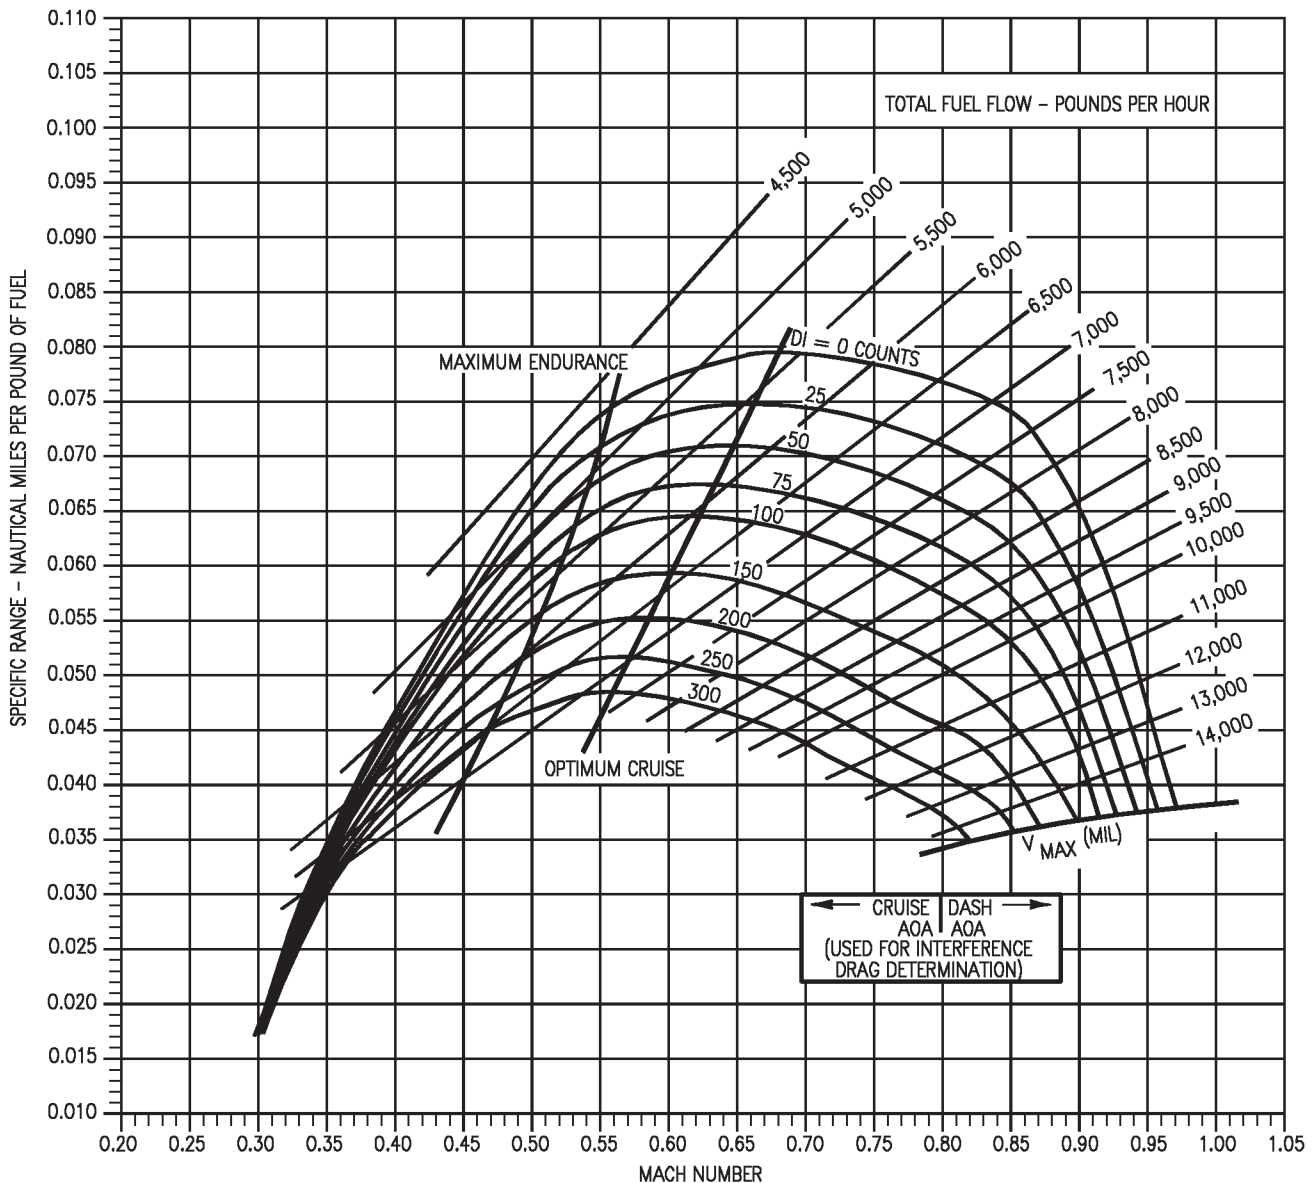

18AC-NFM-20-(285-1)12-CAT1

Figure 11-62. Specific Range - 15,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400


### 15,000 FEET - 50,000 POUND

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = 5°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

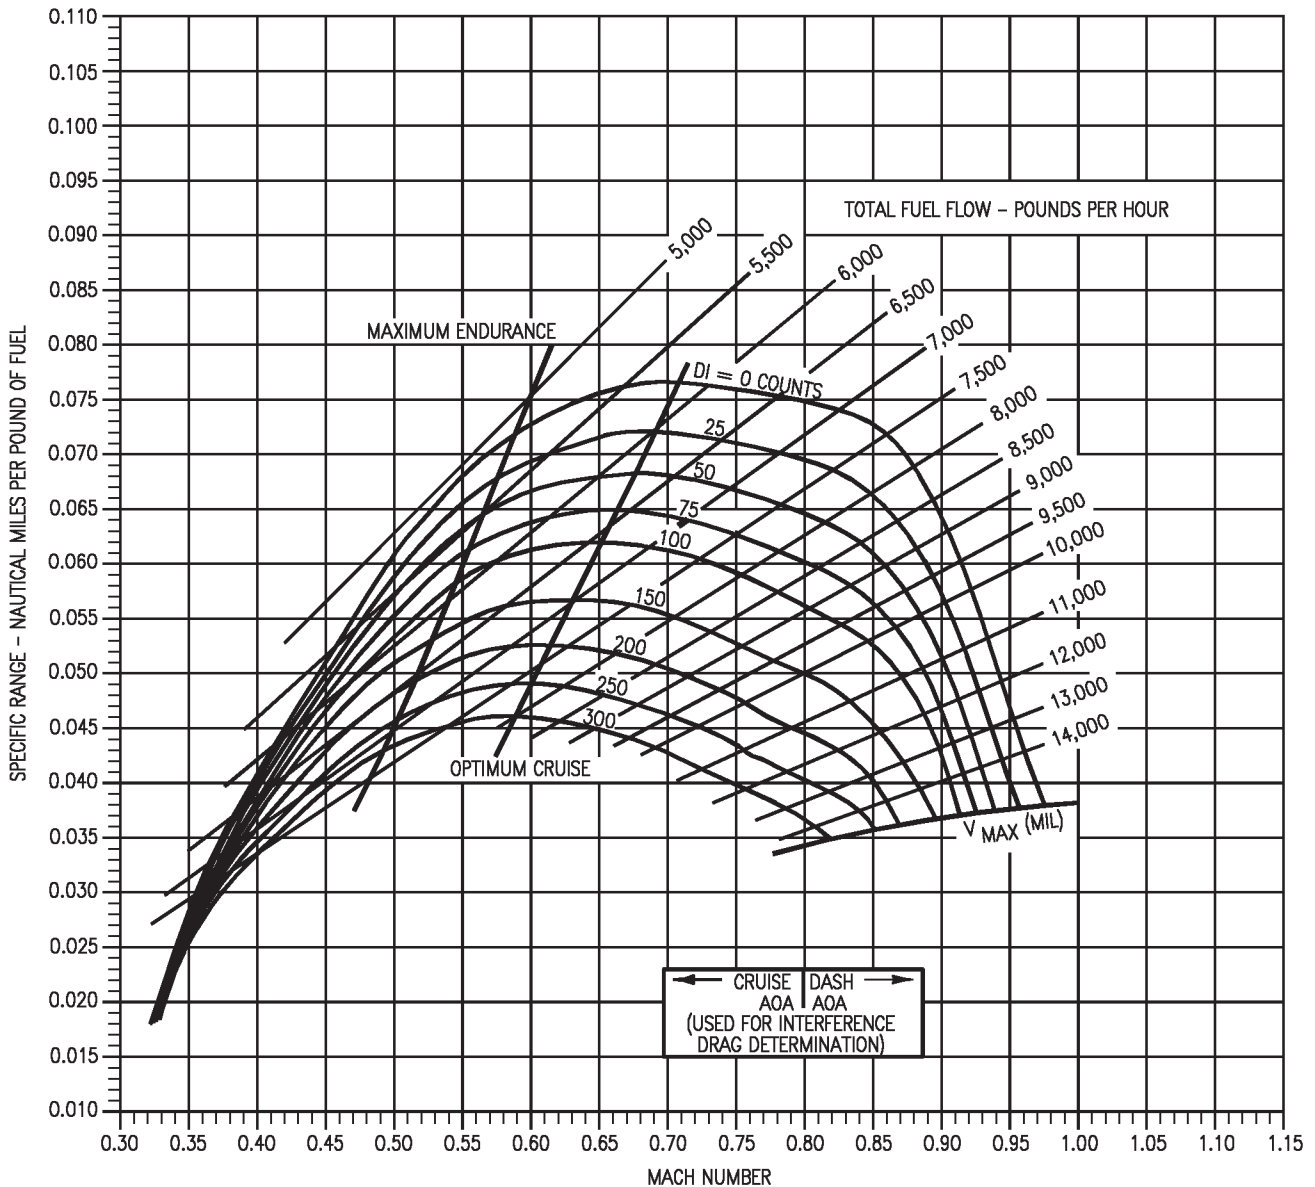

18AC-NFM-20-(286-1)12-CAT1

Figure 11-63. Specific Range - 15,000 Feet - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
20,000 FEET - 26,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

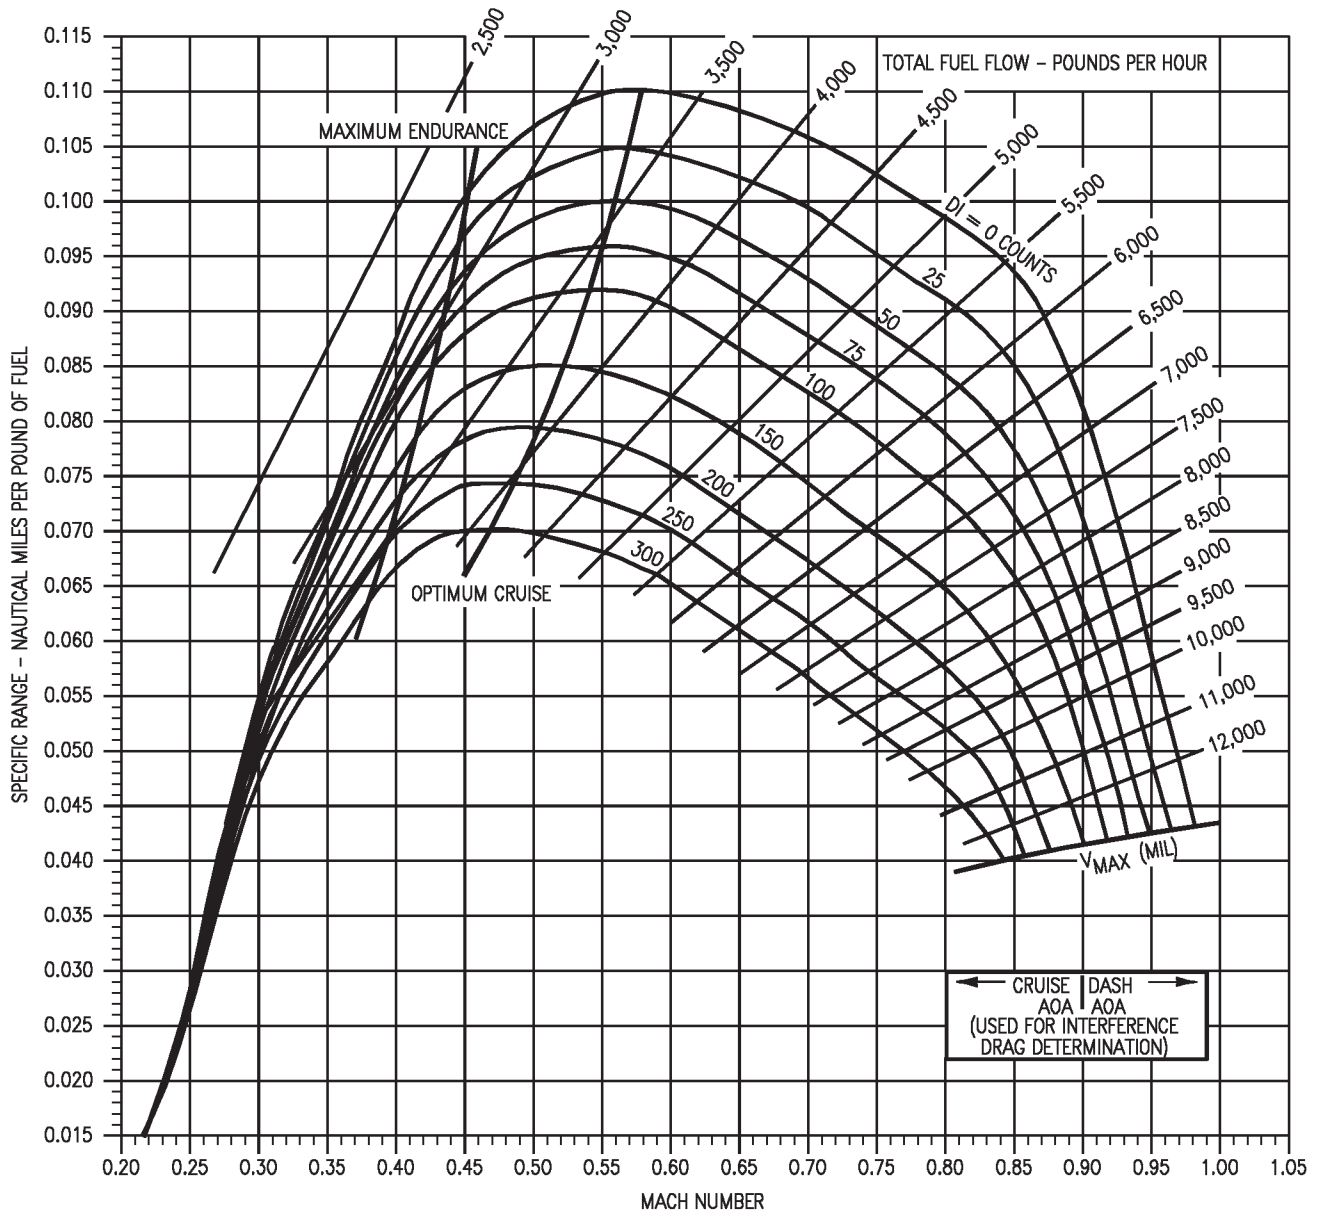

18AC-NFM-20-(186-1)12-CAT1

Figure 11-64. Specific Range - 20,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
20,000 FEET - 30,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

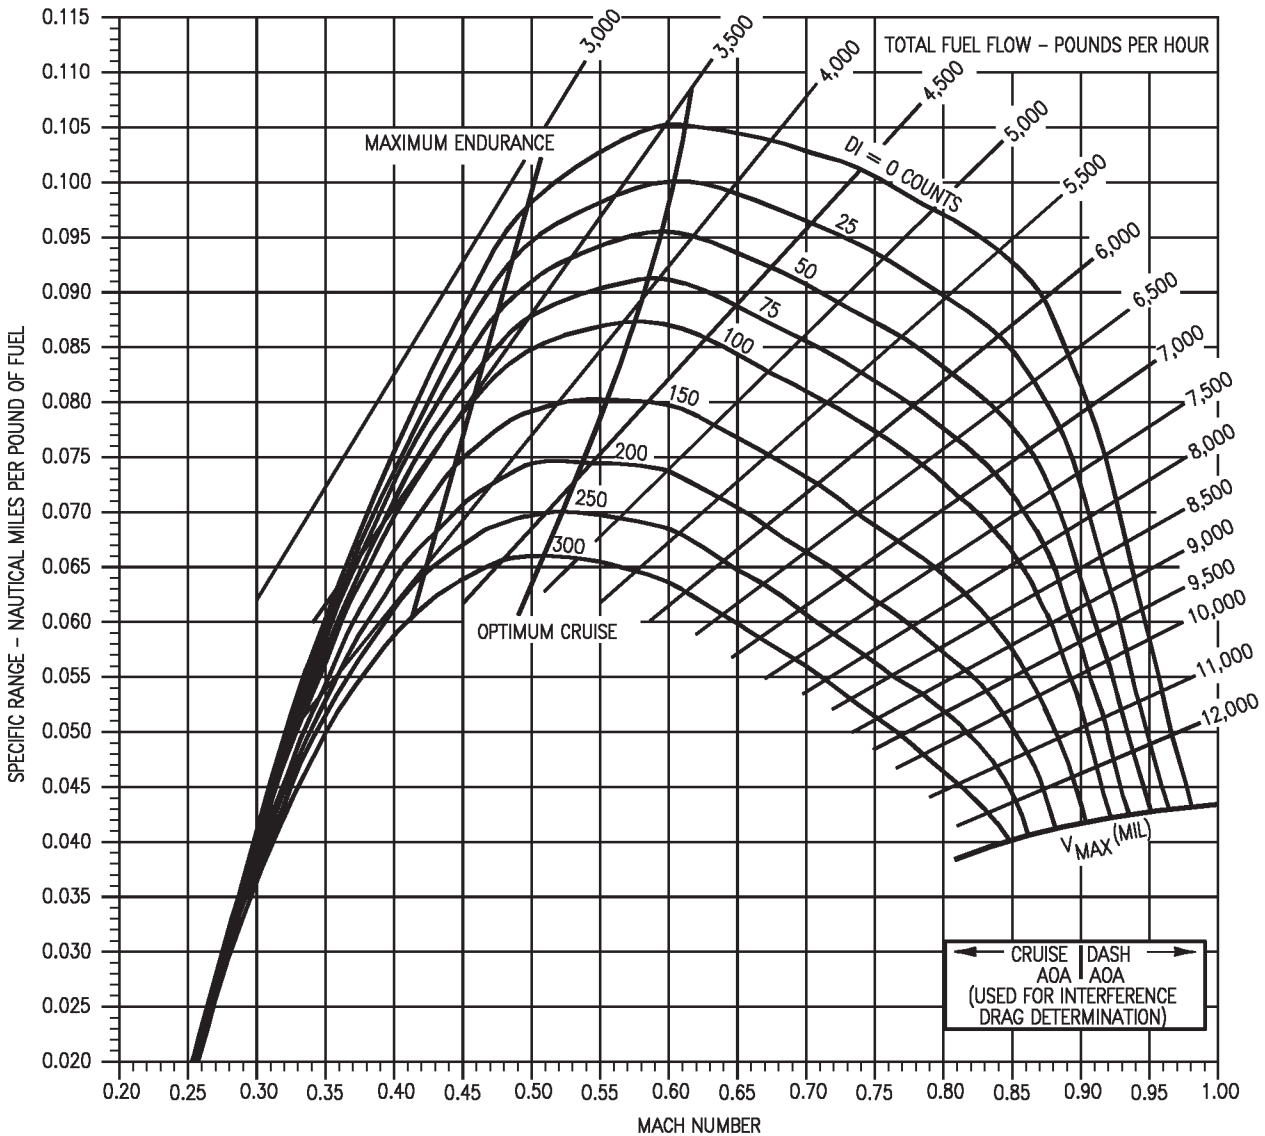

18AC-NFM-20-(187-1)12-CATI

Figure 11-65. Specific Range - 20,000 Feet - 30,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400  
20,000 FEET - 34,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

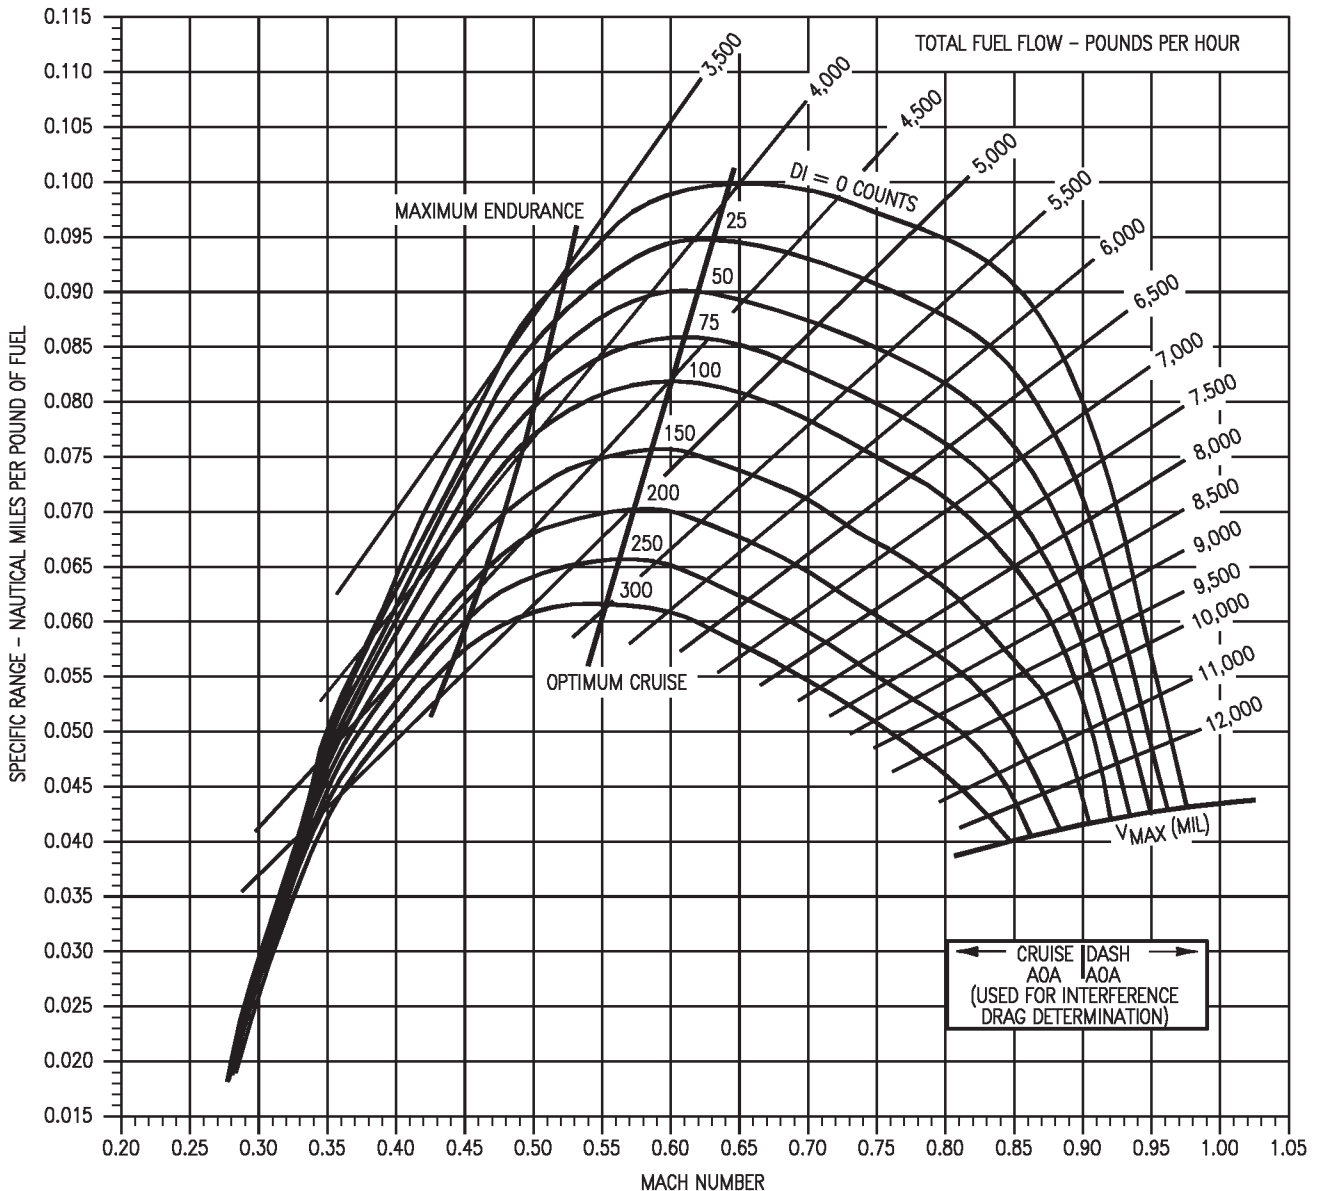

18AC-NFM-20-(188-1)12-CAT1

Figure 11-66. Specific Range - 20,000 Feet - 34,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400  
20,000 FEET - 38,000 POUND

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES


REMARKS

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -25°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |


GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

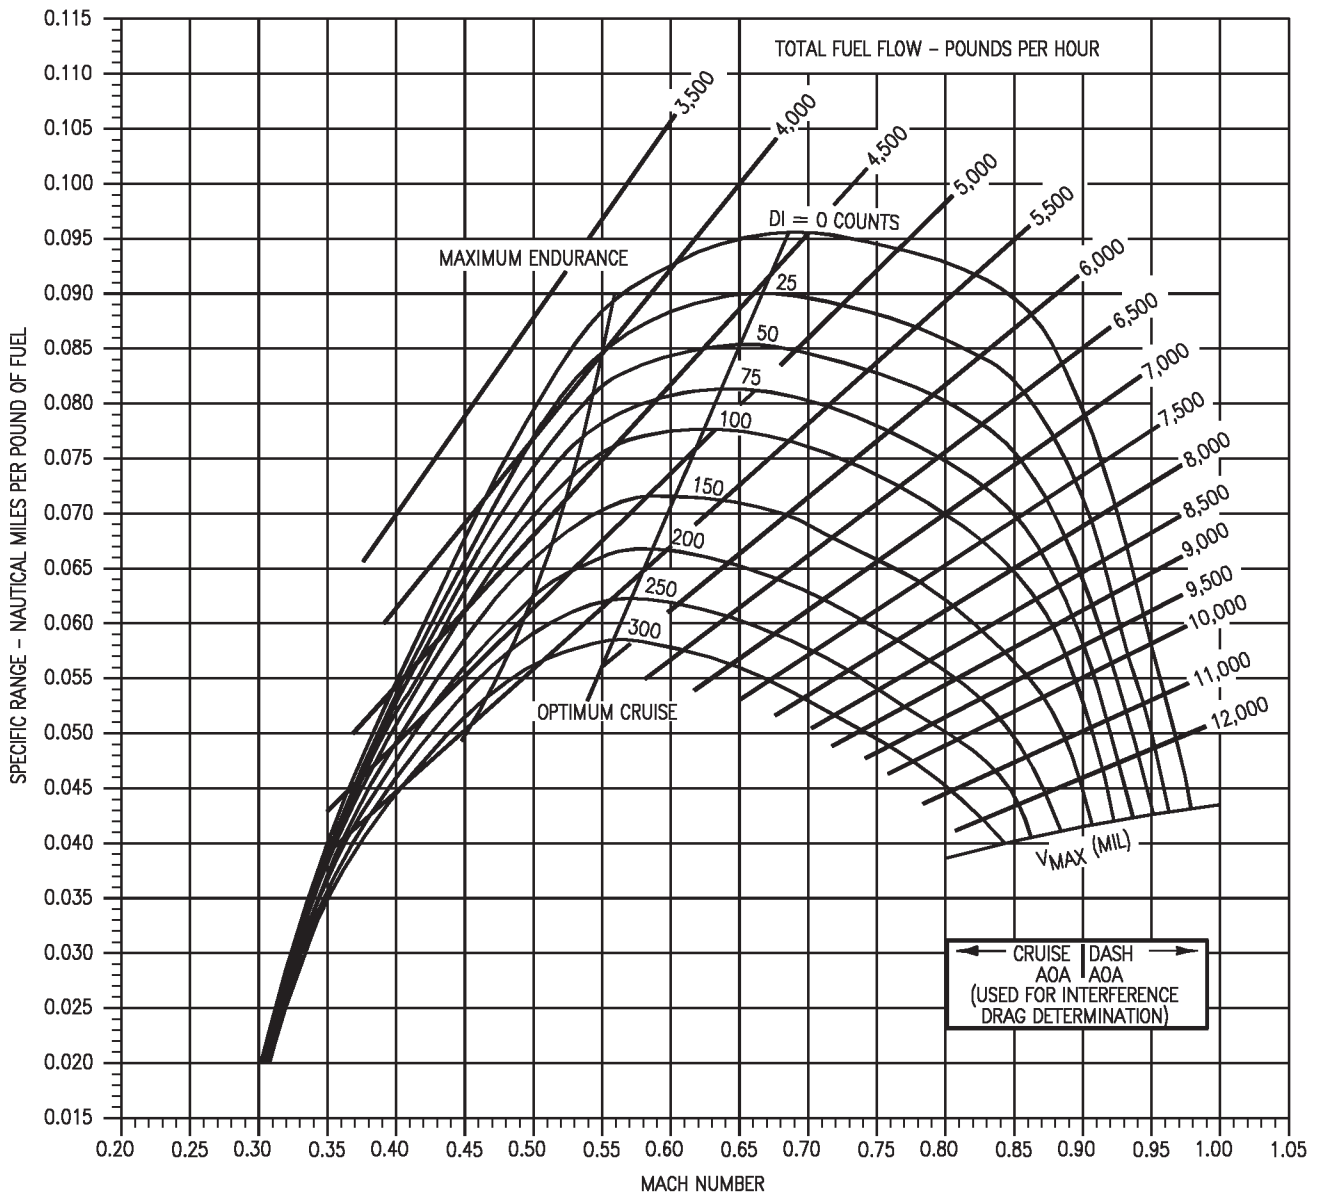

18AC-NFM-20-(189-1)12-CAT1

Figure 11-67. Specific Range - 20,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
20,000 FEET - 42,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -25°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

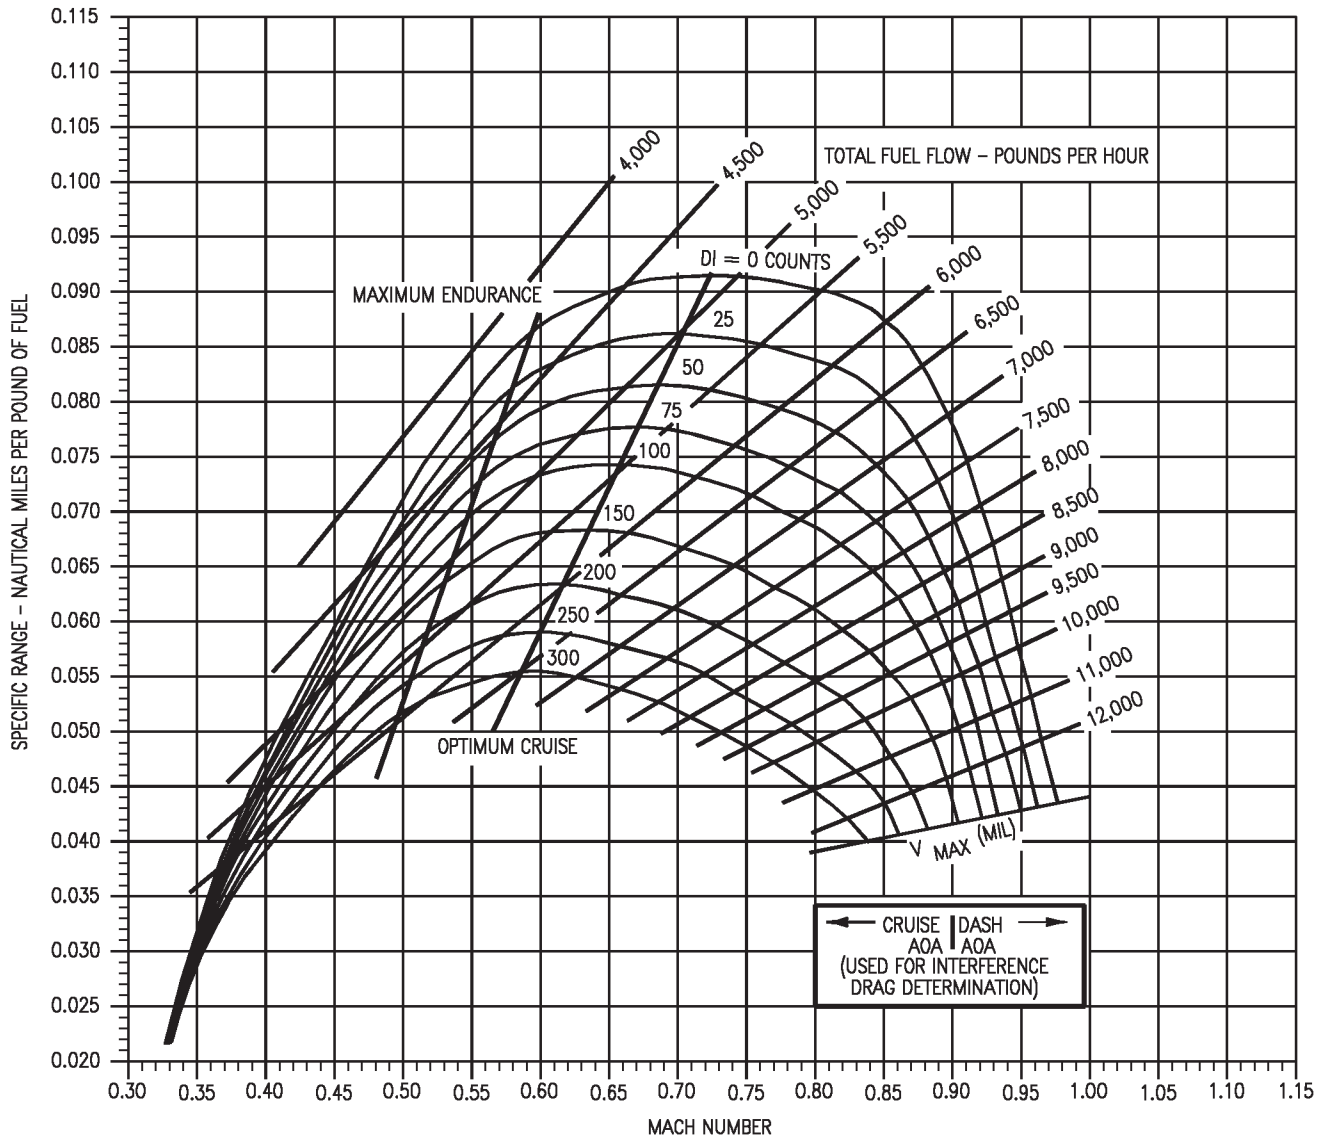

18AC-NFM-20-(190-1)12-CAT1

Figure 11-68. Specific Range - 20,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
20,000 FEET - 46,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

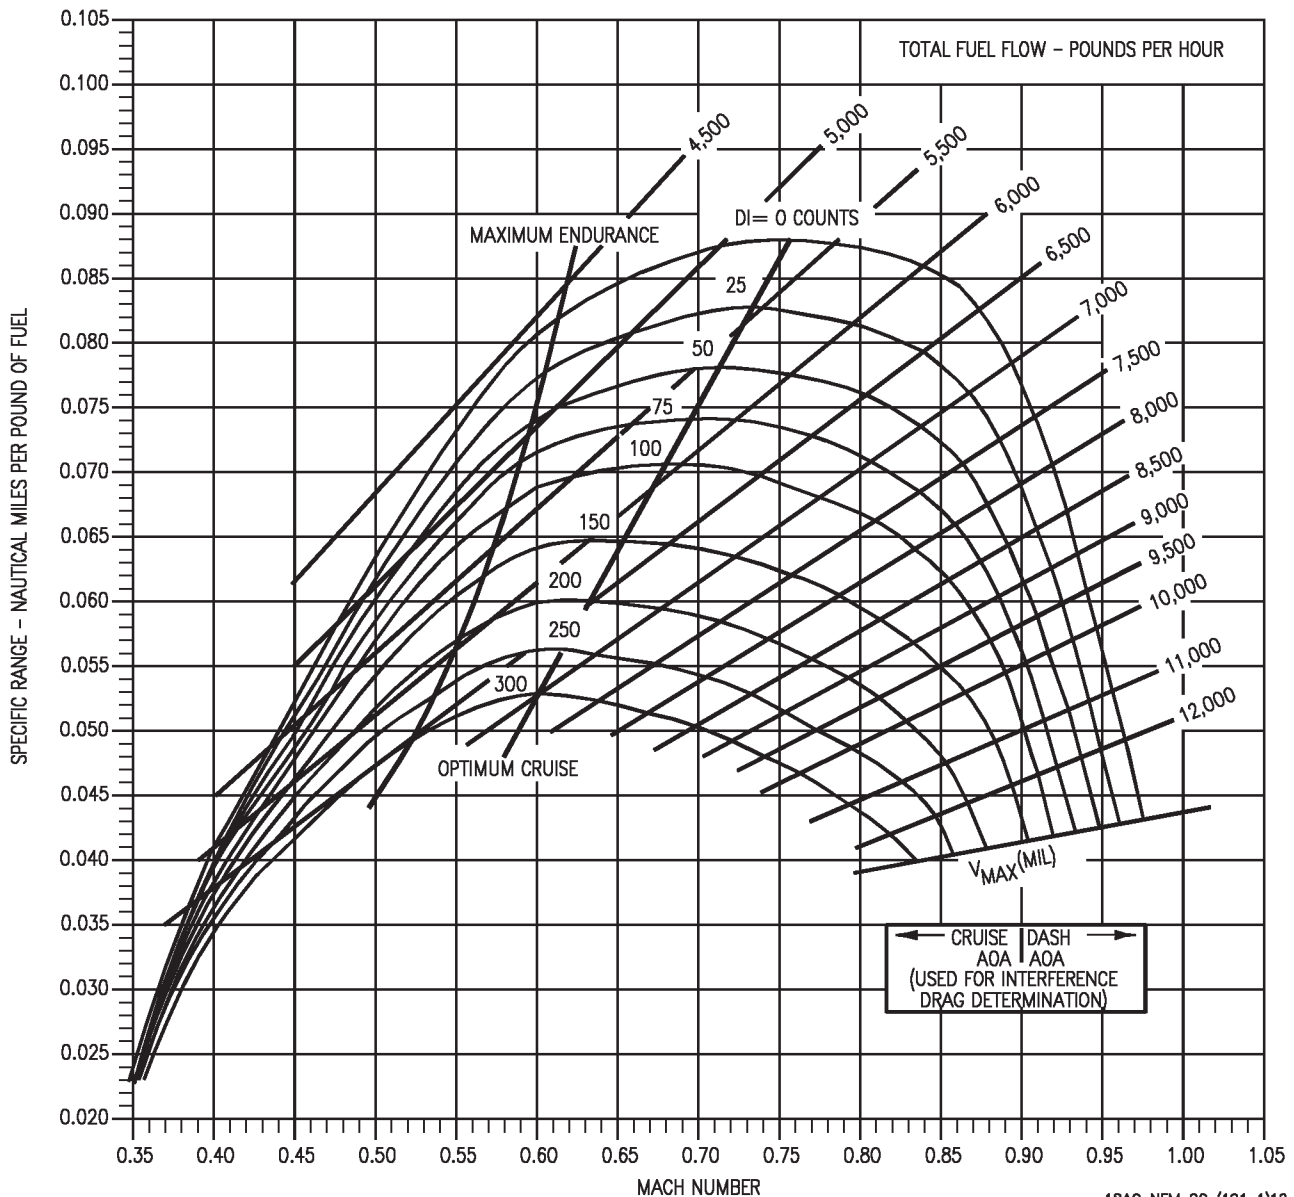

18AC-NFM-20-(191-1)12-CATI

Figure 11-69. Specific Range - 20,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 20,000 FEET - 50,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -25°C

GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

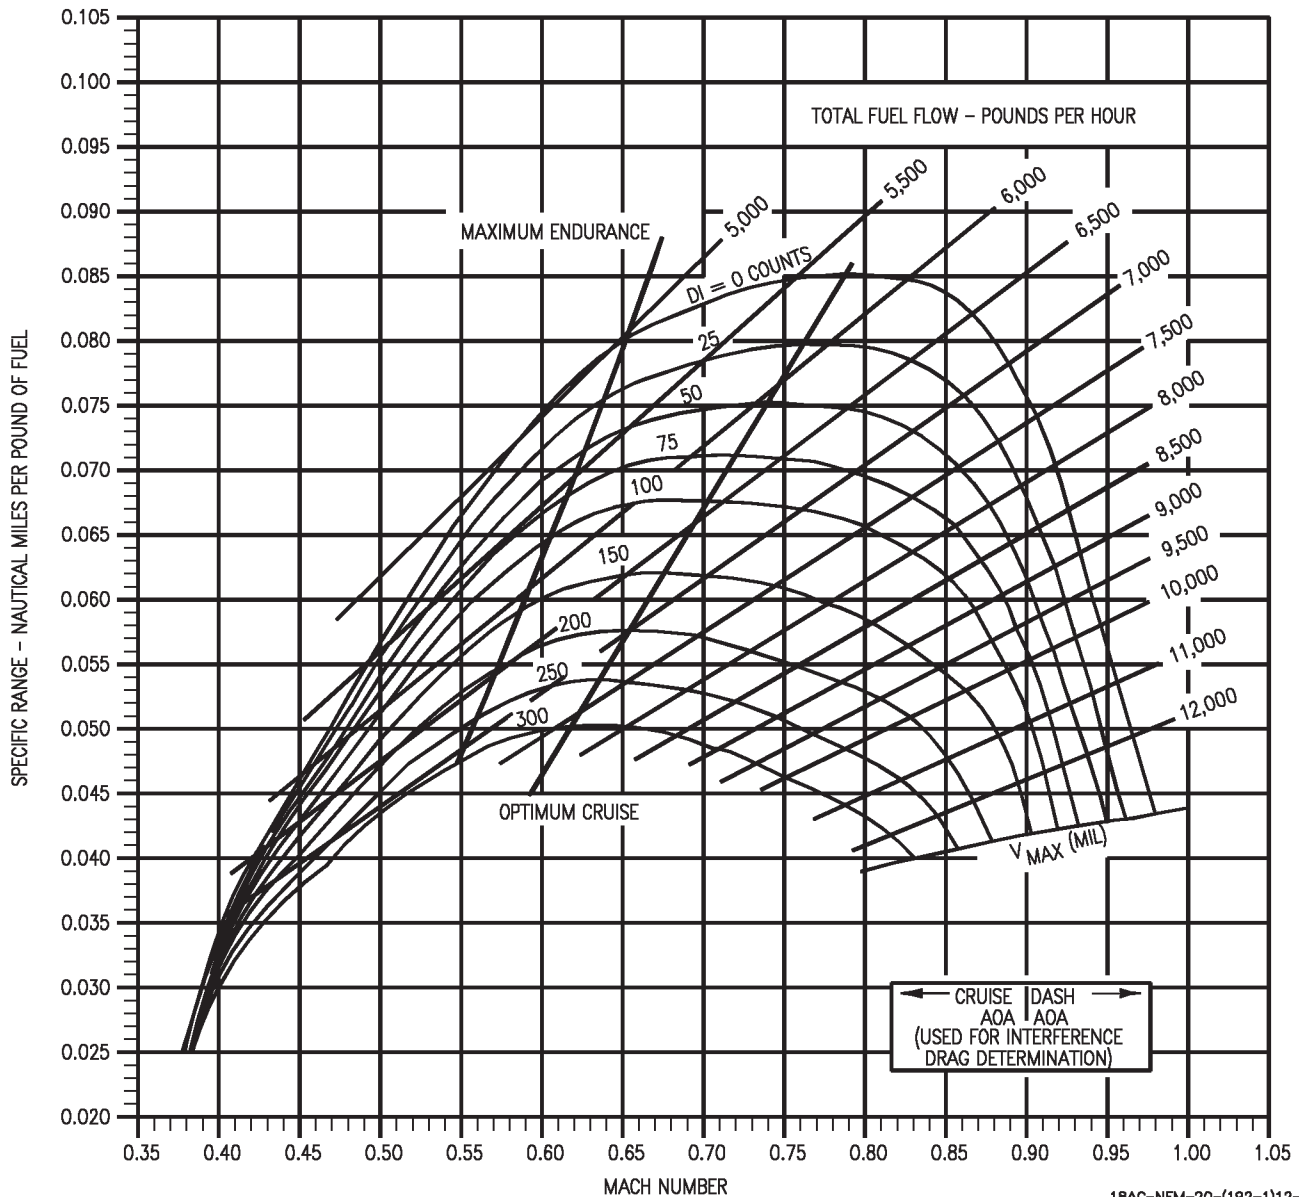


Figure 11-70. Specific Range - 20,000 Feet - 50,000 Pounds - F404-GE-400

18AC-NFM-20-(192-1)12-CAT1

# SPECIFIC RANGE

F404-GE-400  
25,000 FEET - 26,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -35°C

GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

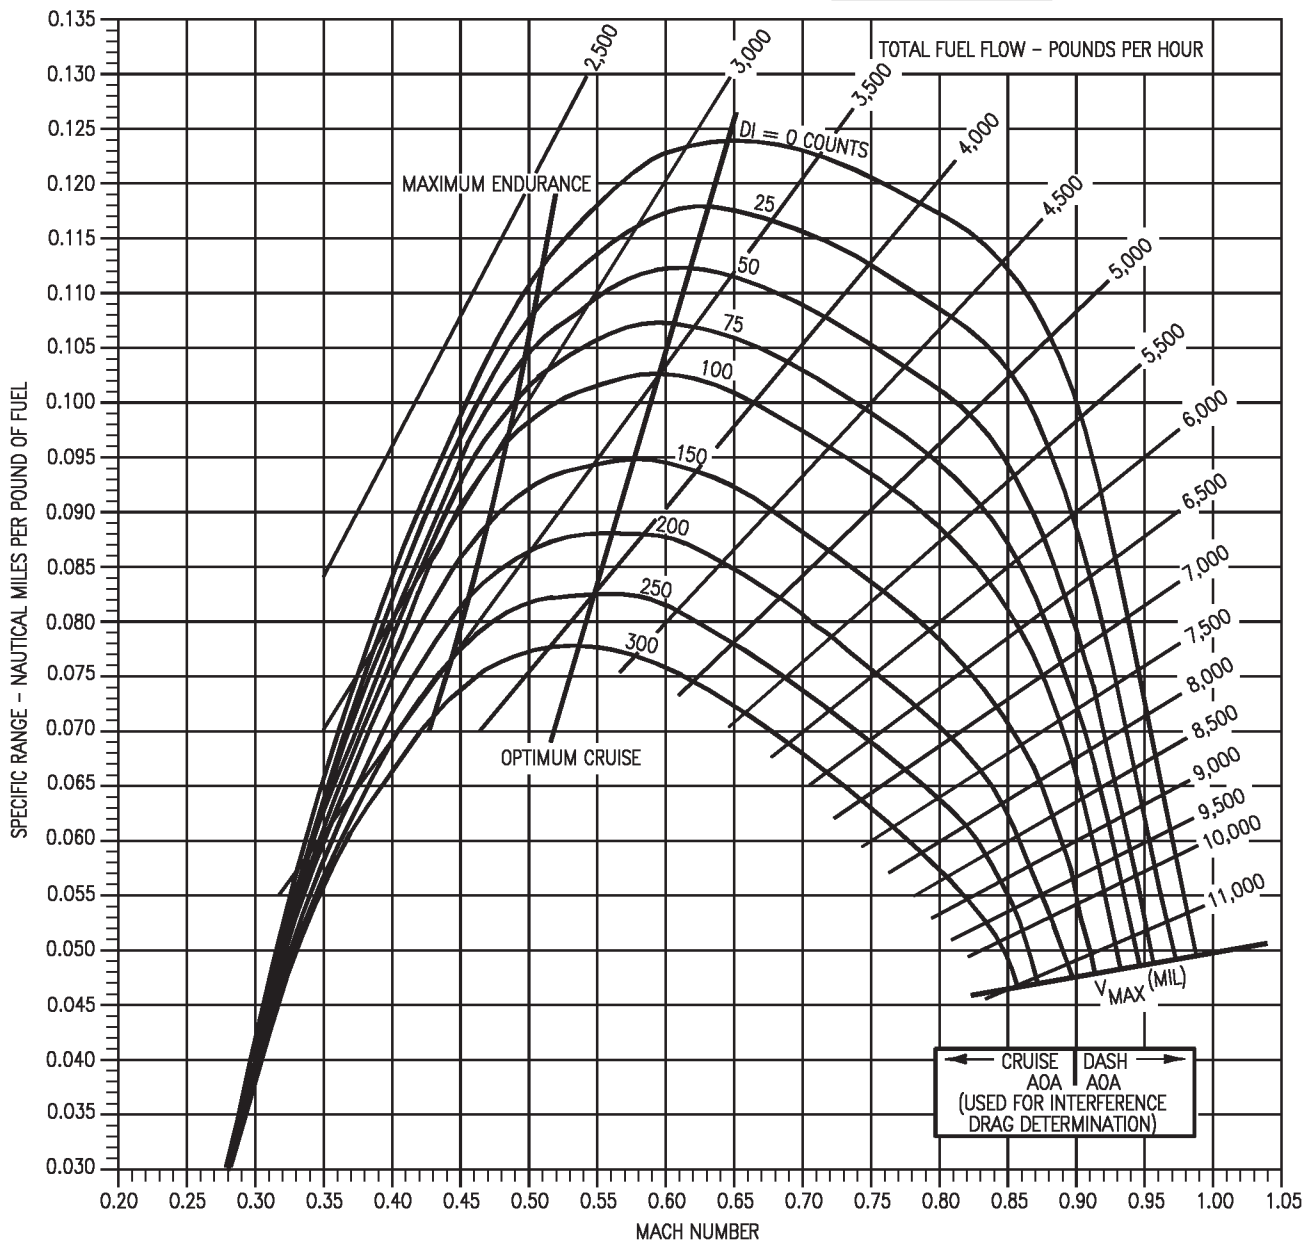


Figure 11-71. Specific Range - 25,000 Feet - 26,000 Pounds - F404-GE-400

18AC-NFM-20-(287-1)12-CAT1

# SPECIFIC RANGE

## F404-GE-400

### 25,000 FEET - 30,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -35°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

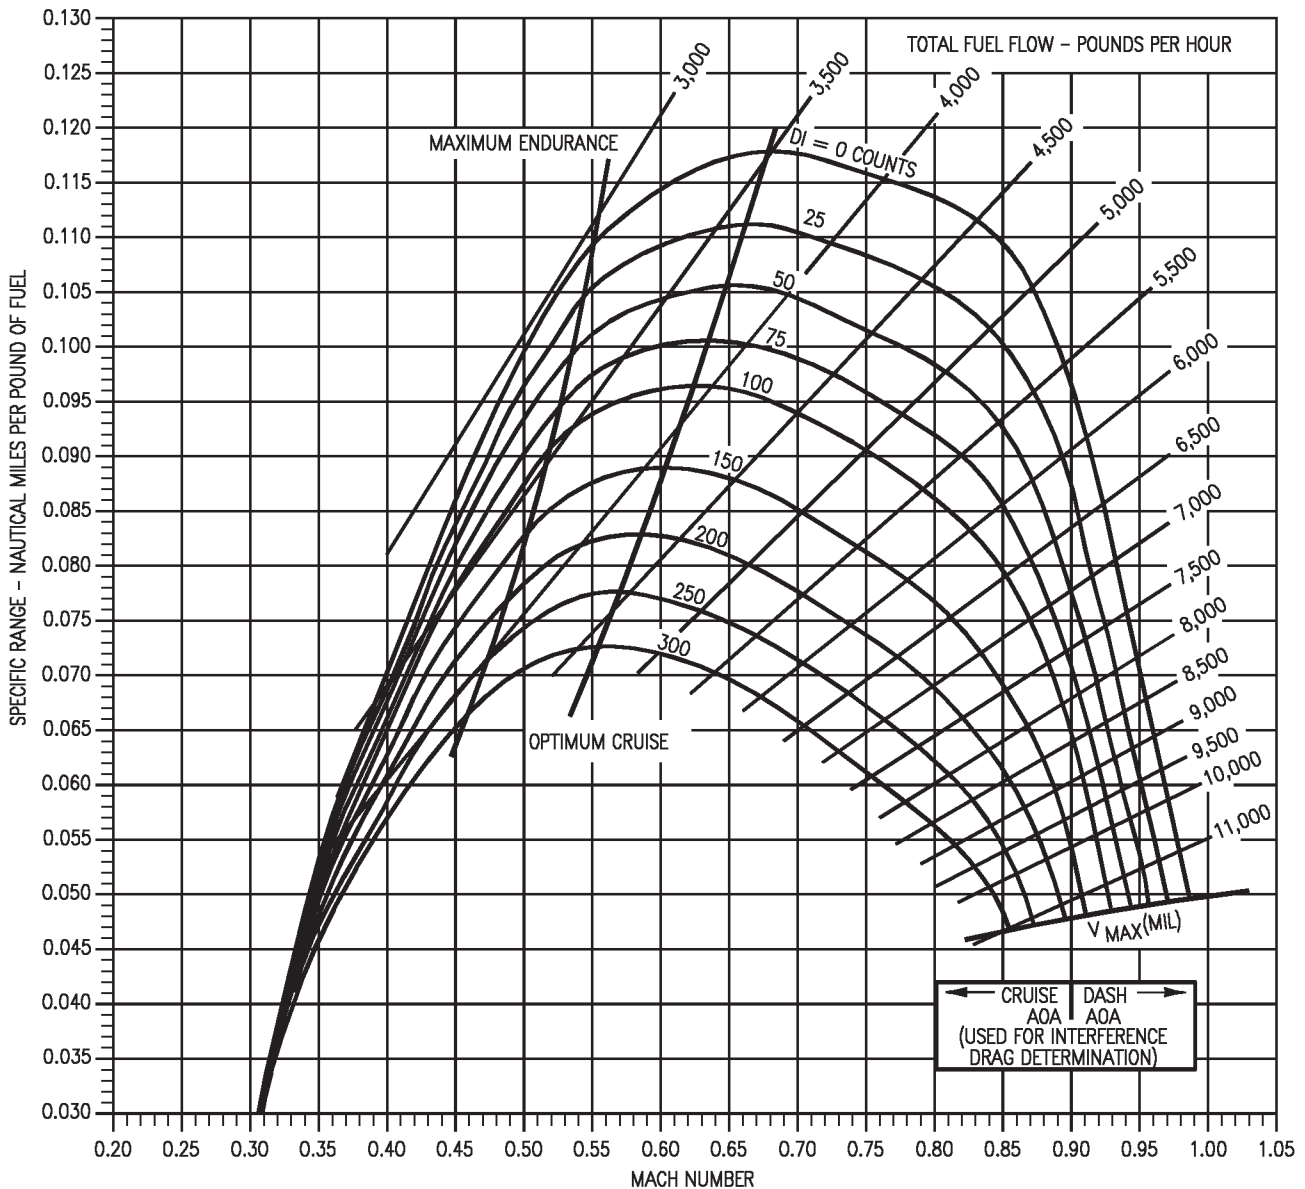

18AC-NFM-20-(288-1)12-CAT1

Figure 11-72. Specific Range - 25,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 25,000 FEET - 34,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -35°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

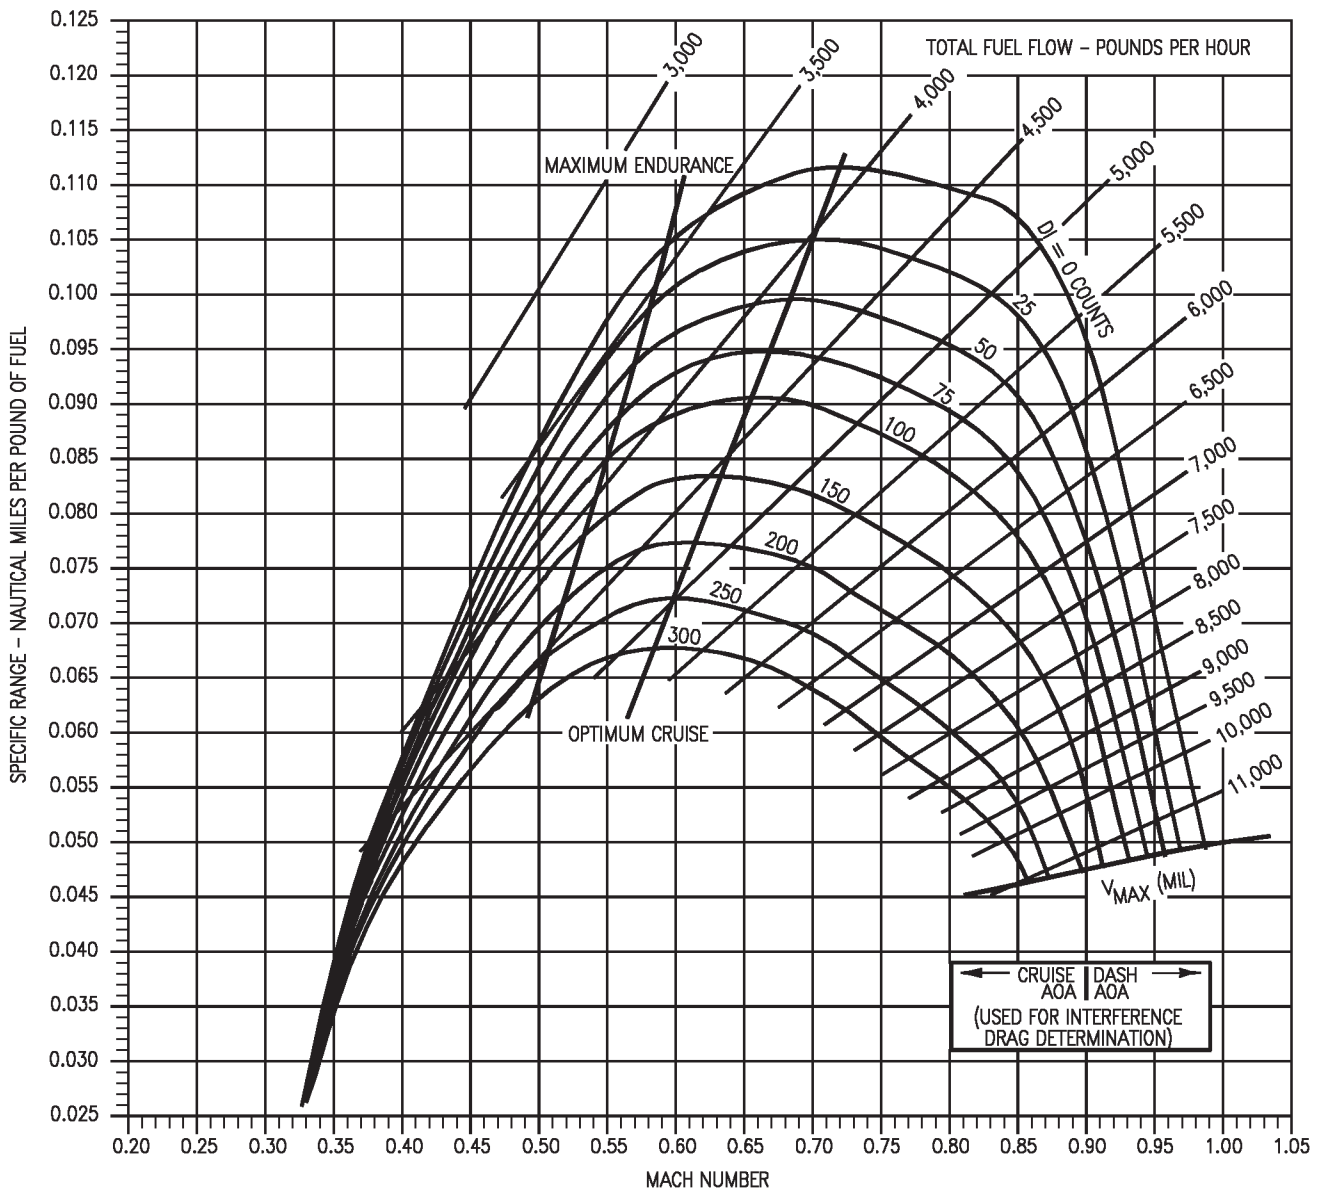

18AC-NFM-20-(289-1)12-CATI

Figure 11-73. Specific Range - 25,000 Feet - 34,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400

### 25,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -35°C


GUIDE

| TEMPERATURE EFFECTS           |                  |
|-------------------------------|------------------|
| $\Delta T$ - °C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                           | 1.02             |
| -10                           | 1.01             |
| 0                             | 1.00             |
| +10                           | .98              |
| +20                           | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

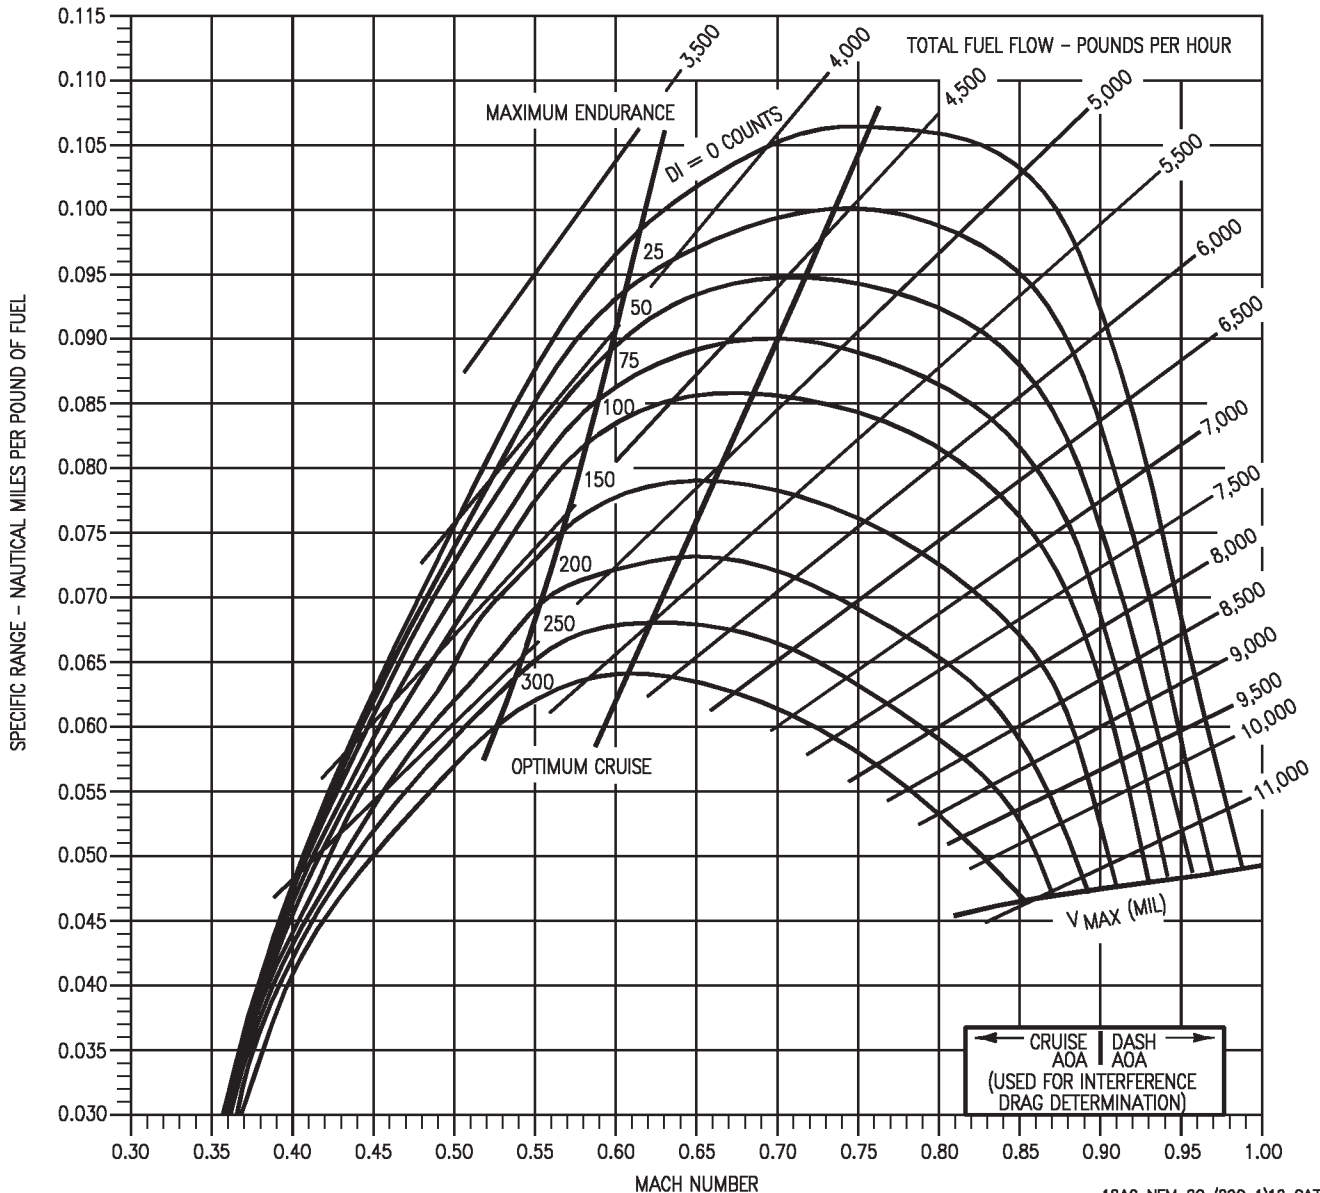

18AC-NFM-20-(290-1)12-CAT1

Figure 11-74. Specific Range - 25,000 Feet - 38,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400


### 25,000 FEET - 42,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -35°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

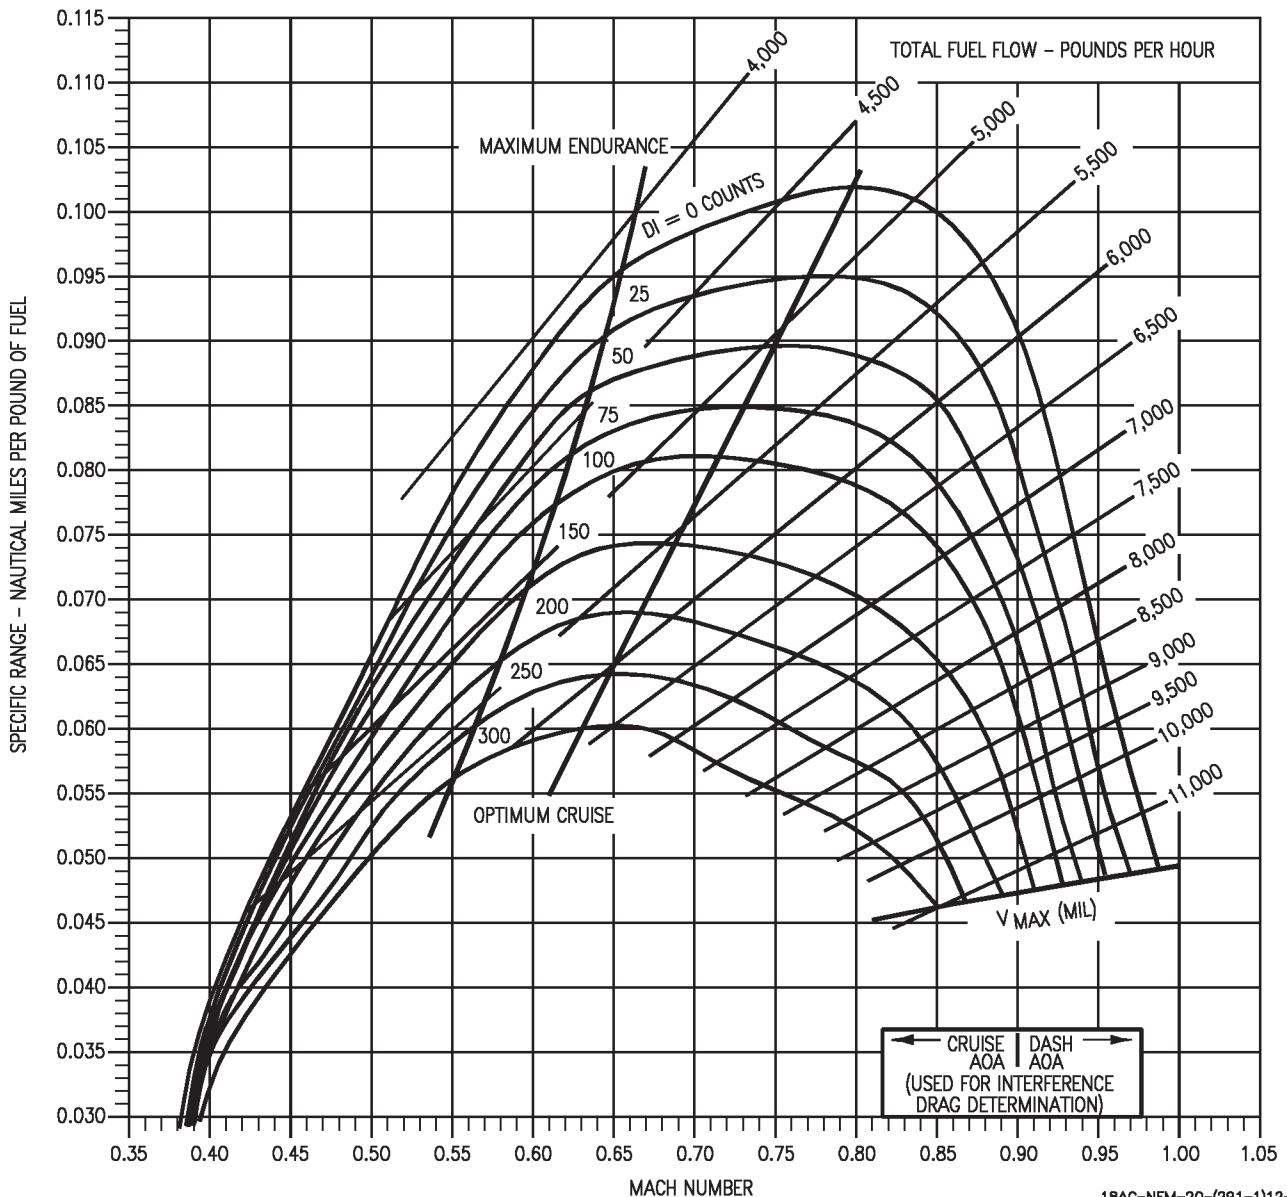


Figure 11-75. Specific Range - 25,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 25,000 FEET - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -35°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

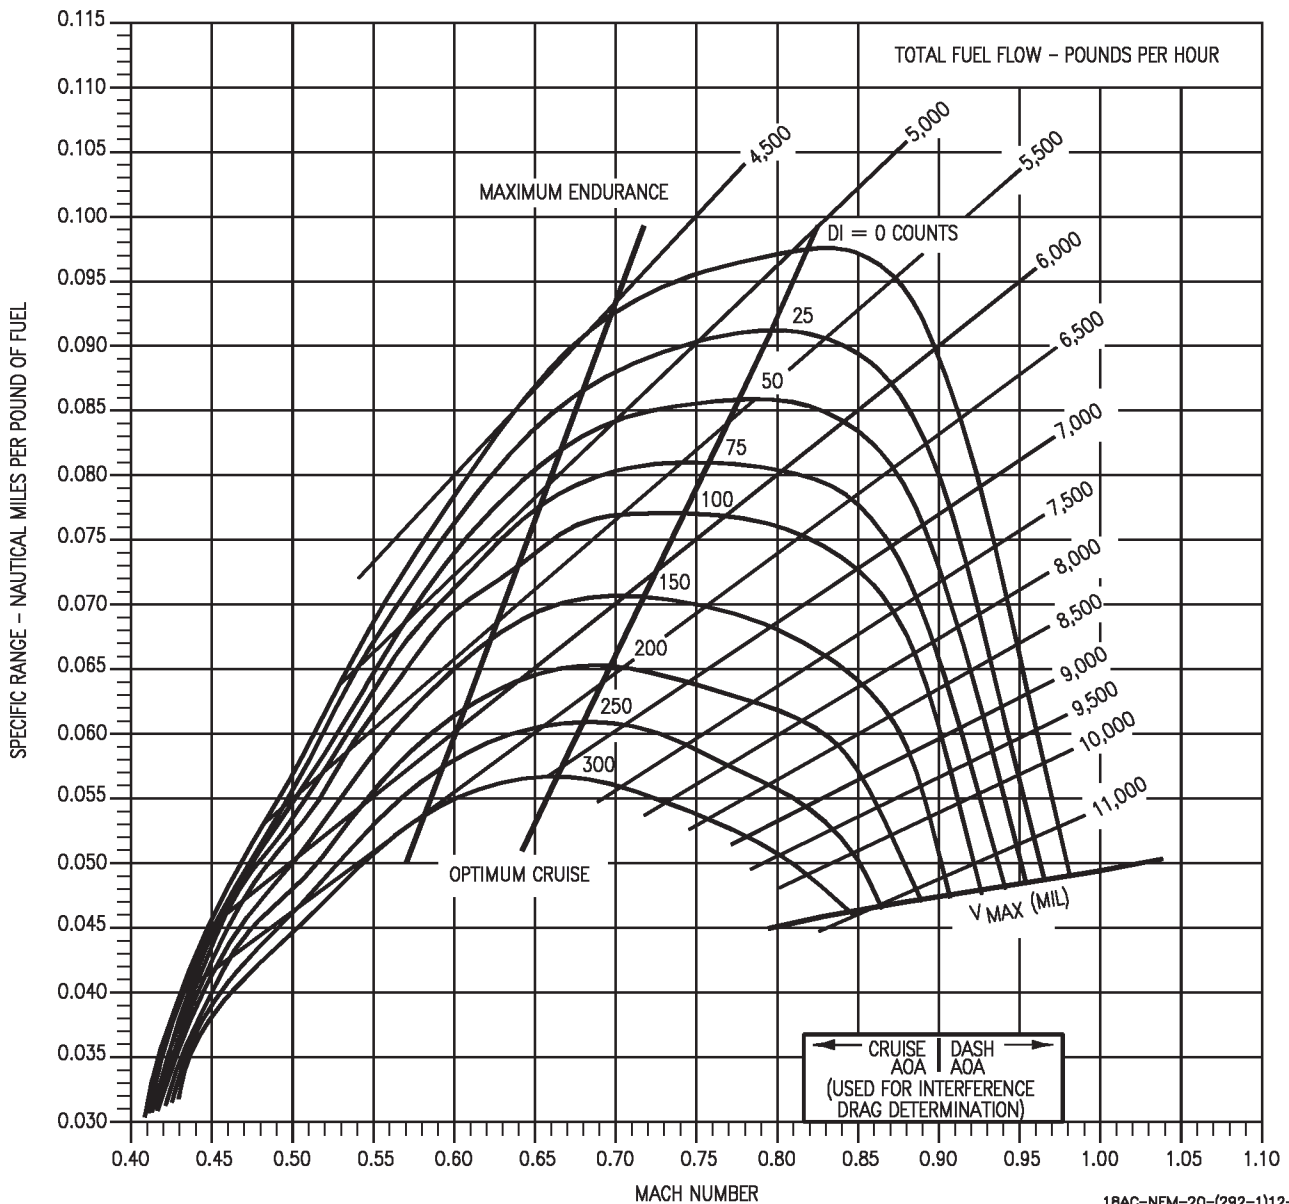

18AC-NFM-20-(292-1)12-CAT1

Figure 11-76. Specific Range - 25,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400


### 25,000 FEET - 50,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -35°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

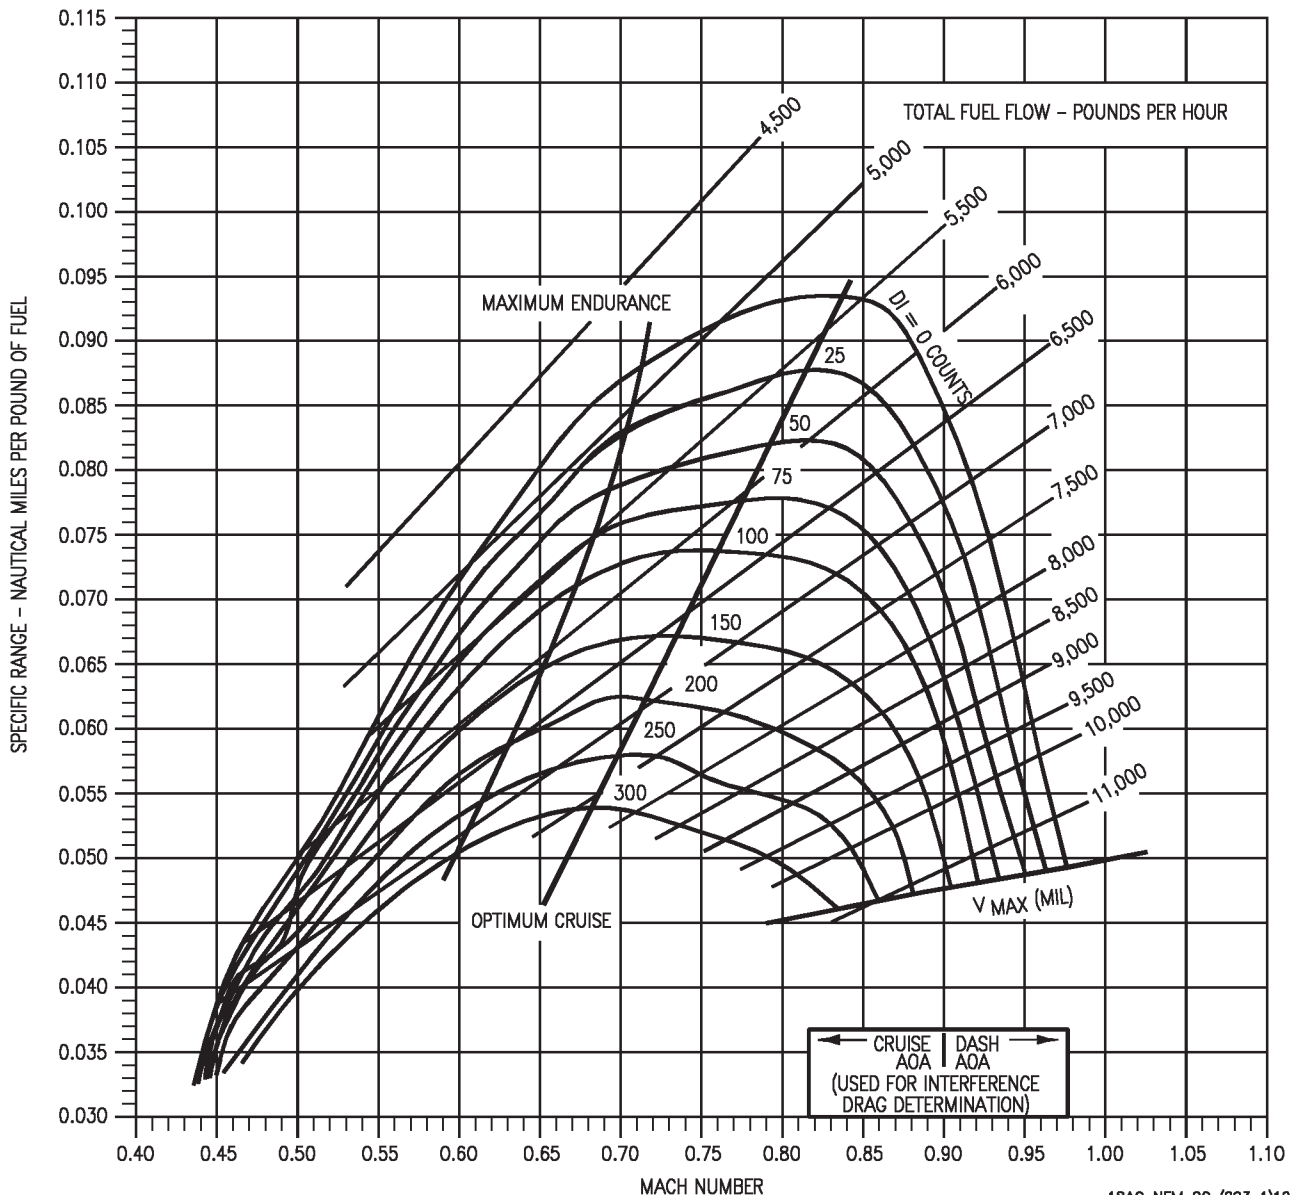

18AC-NFM-20-(293-1)12-CAT1

Figure 11-77. Specific Range - 25,000 Feet - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 30,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -44°C

GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

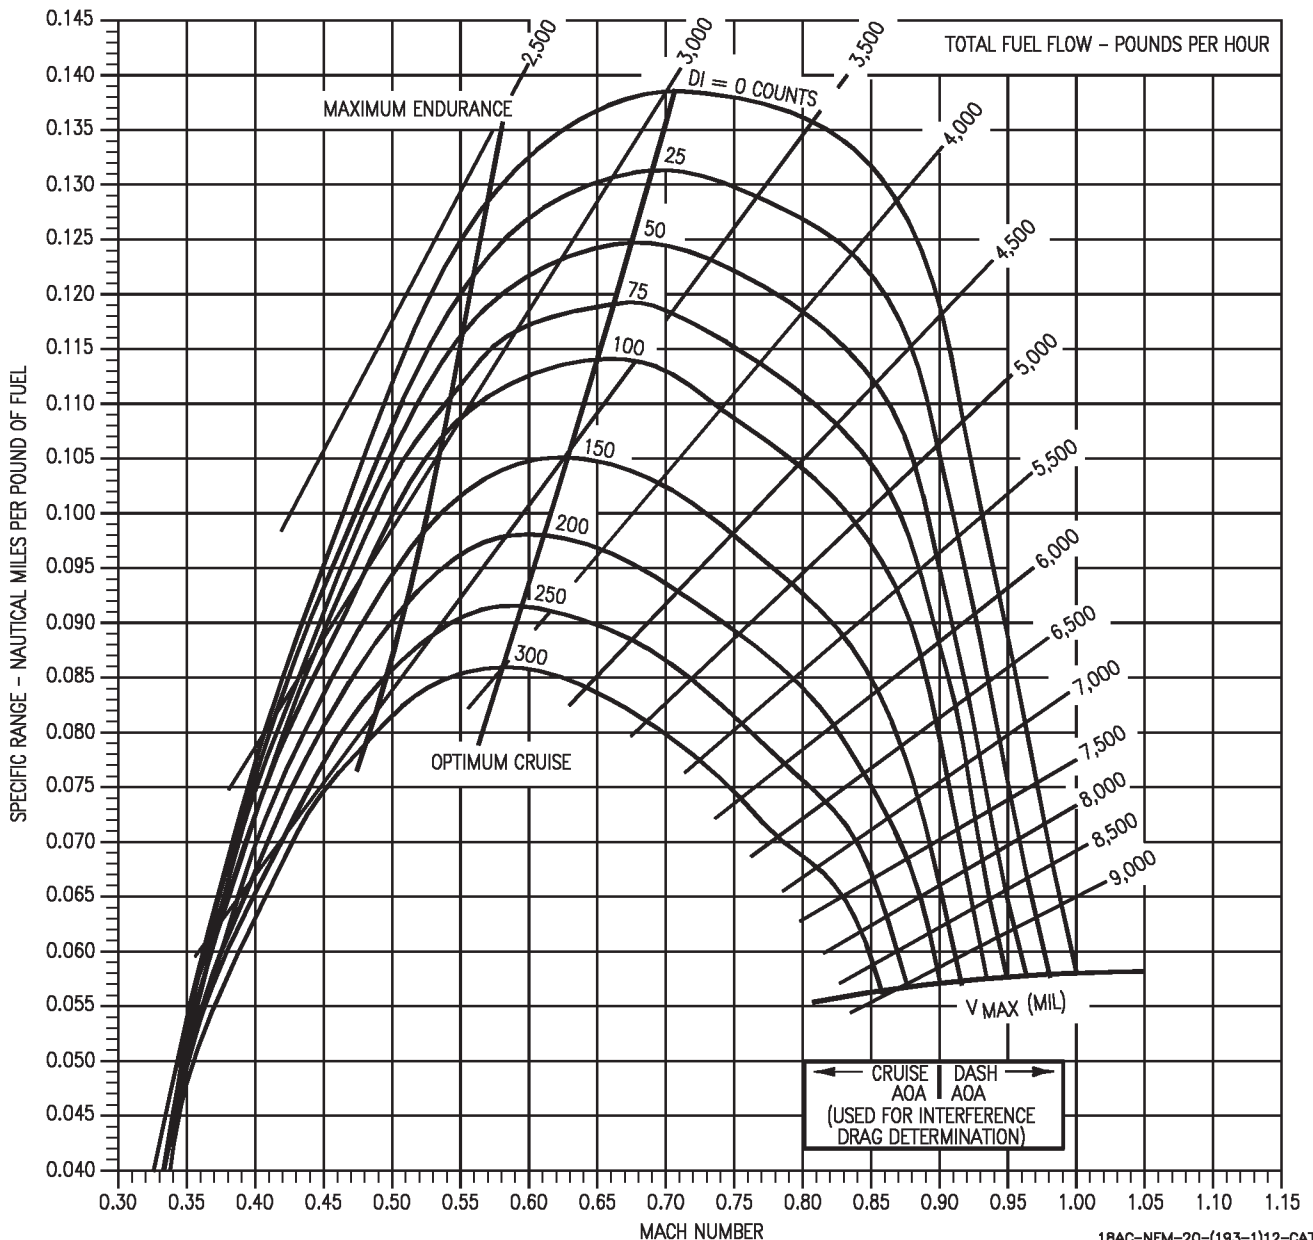


Figure 11-78. Specific Range - 30,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 30,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -44°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

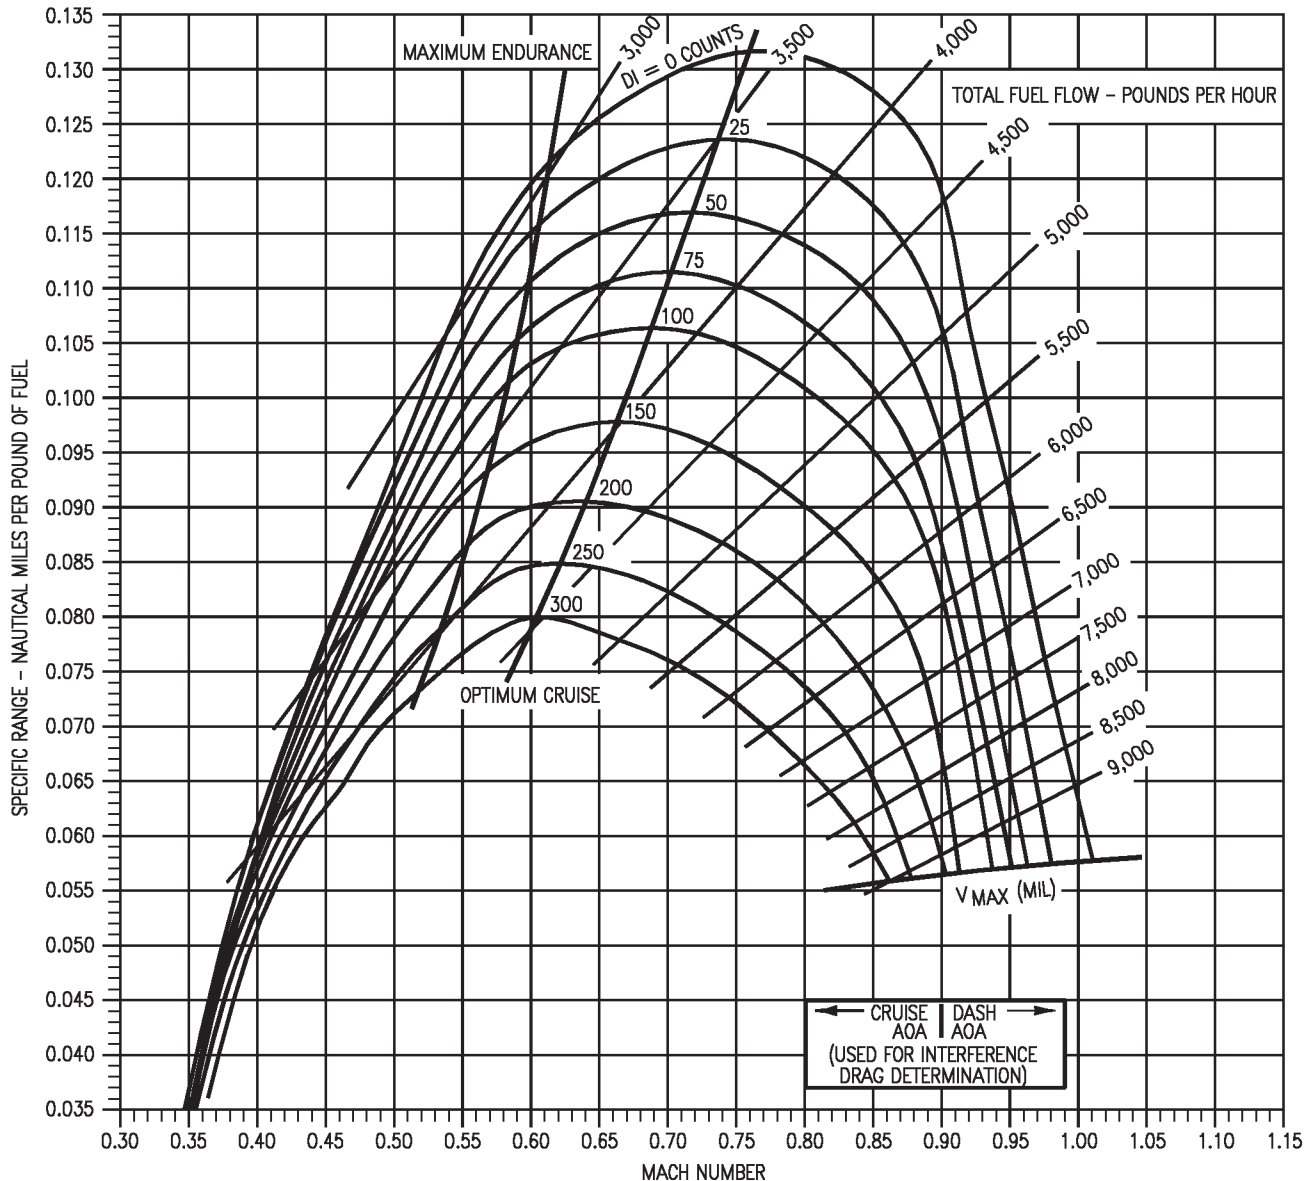

18AC-NFM-20-(194-1)12-CAT1

Figure 11-79. Specific Range - 30,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400


### 30,000 FEET - 34,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -44°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

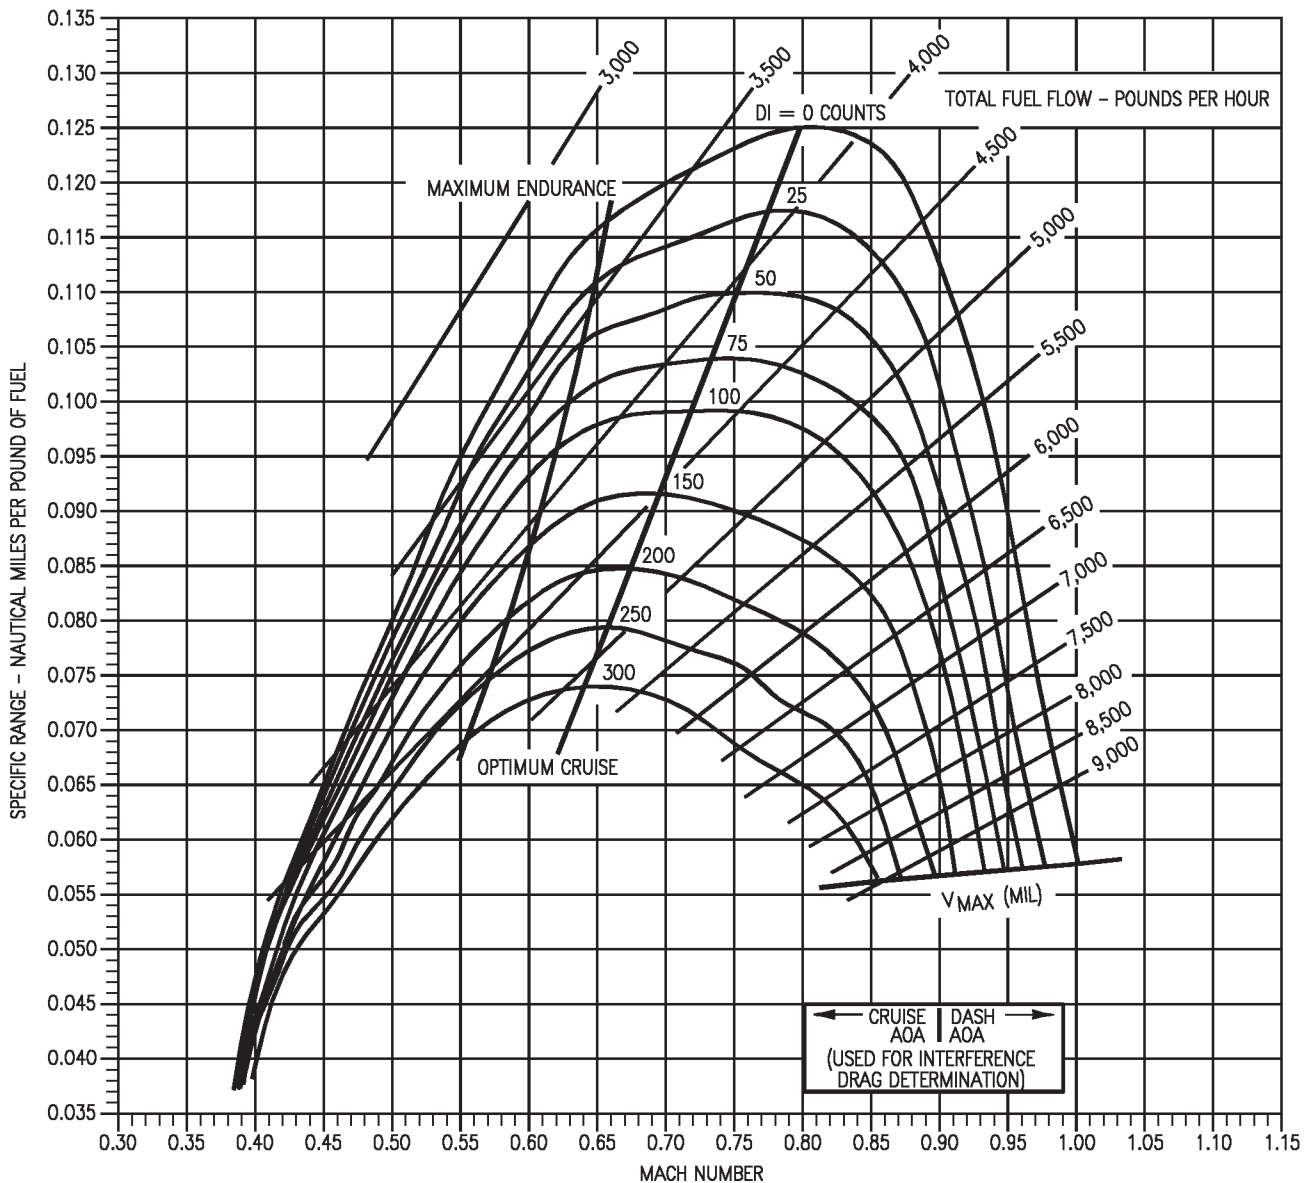

18AC-NFM-20-(195-1)12-CAT1

Figure 11-80. Specific Range - 30,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
30,000 FEET - 38,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -44°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

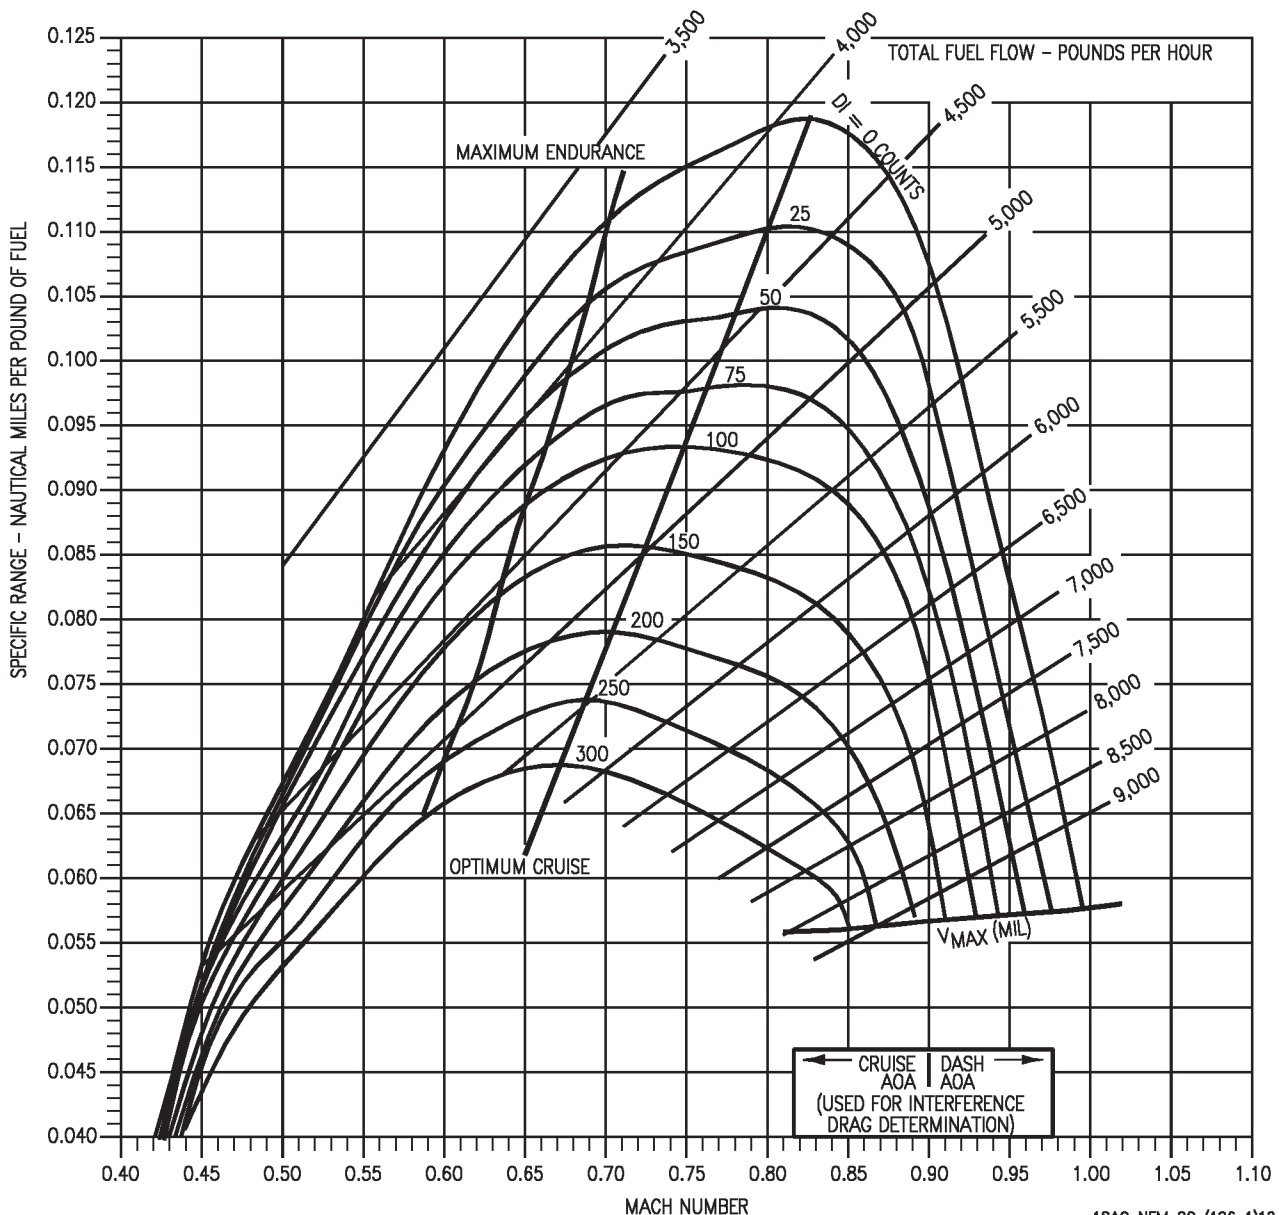

18AC-NFM-20-(196-1)12-CAT1

Figure 11-81. Specific Range - 30,000 Feet - 38,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400

### 30,000 FEET - 42,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -44°C


| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

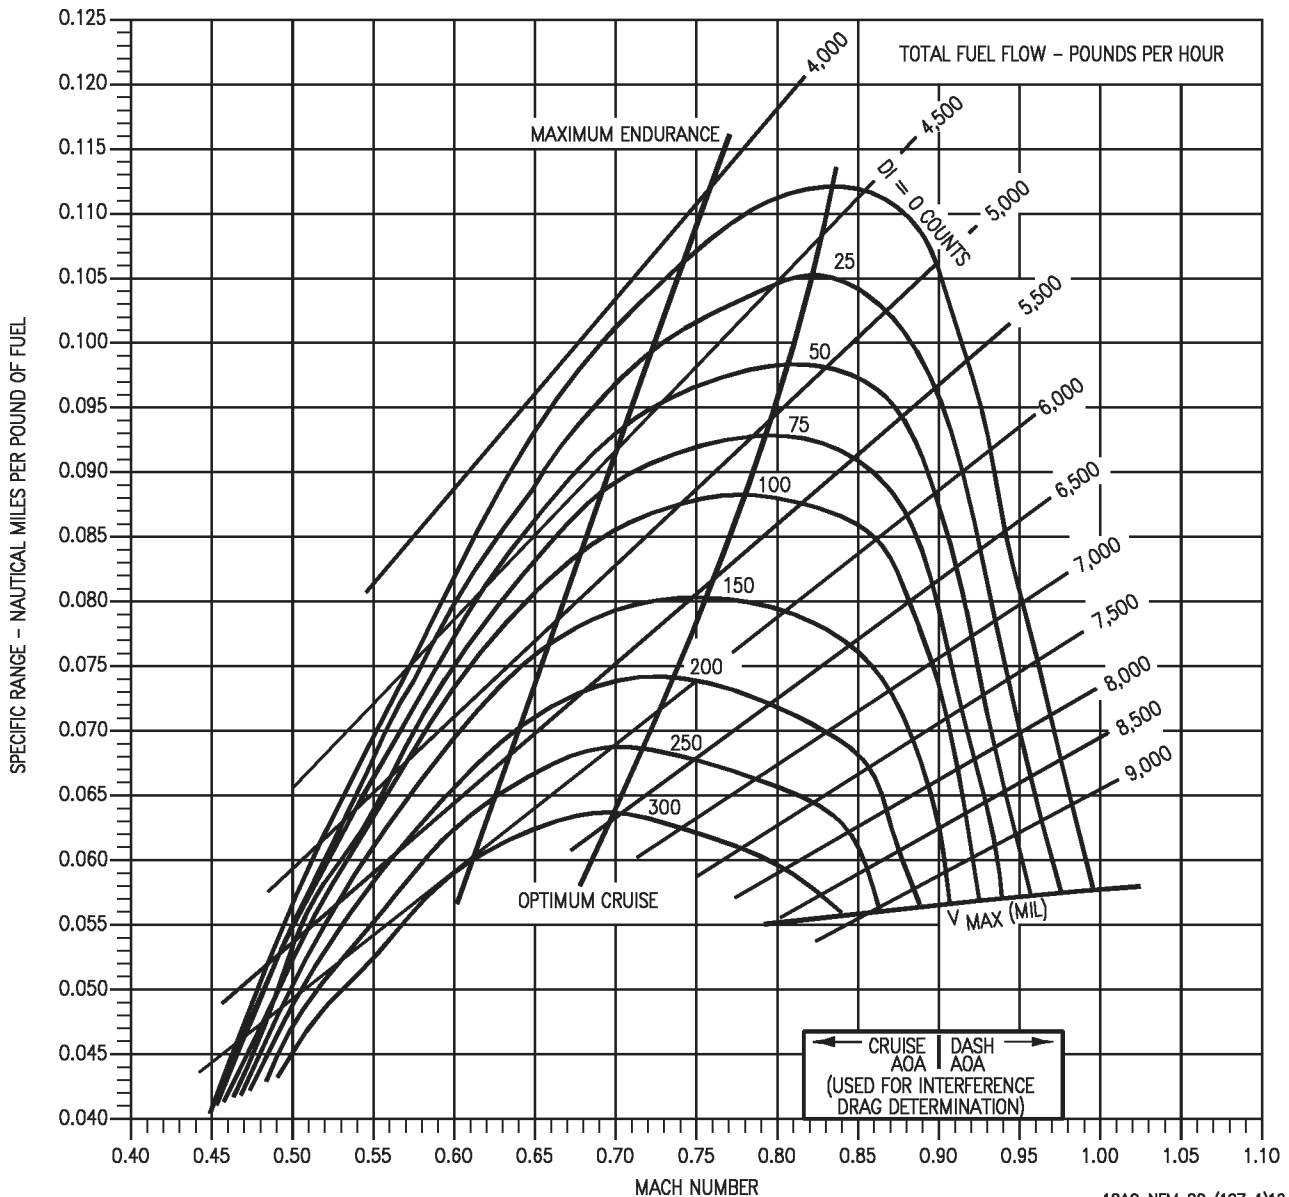

18AC-NFM-20-(197-1)12-CAT1

Figure 11-82. Specific Range - 30,000 Feet - 42,000 Pounds - F404-GE-400



# SPECIFIC RANGE

## F404-GE-400


### 30,000 FEET - 46,000 POUND

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -44°C

| TEMPERATURE EFFECTS           |                  |
|-------------------------------|------------------|
| $\Delta T$ - °C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                           | 1.02             |
| -10                           | 1.01             |
| 0                             | 1.00             |
| +10                           | .98              |
| +20                           | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

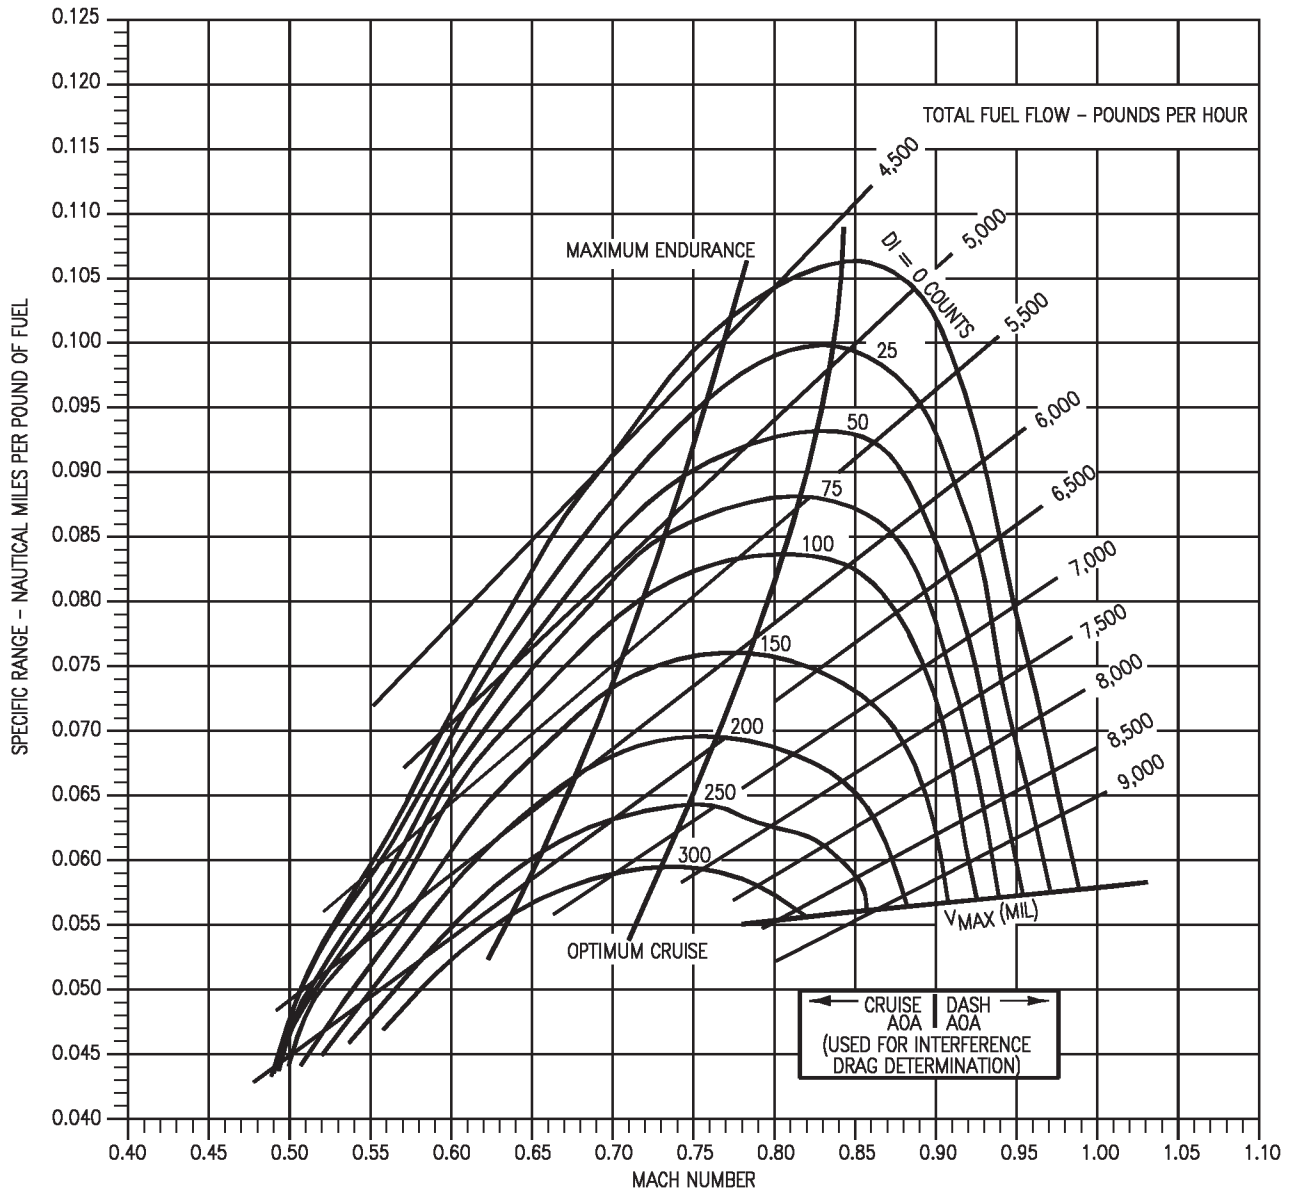

18AC-NFM-20-(198-1)12-CAT1

Figure 11-83. Specific Range - 30,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 30,000 FEET - 50,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -44°C

GUIDE

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

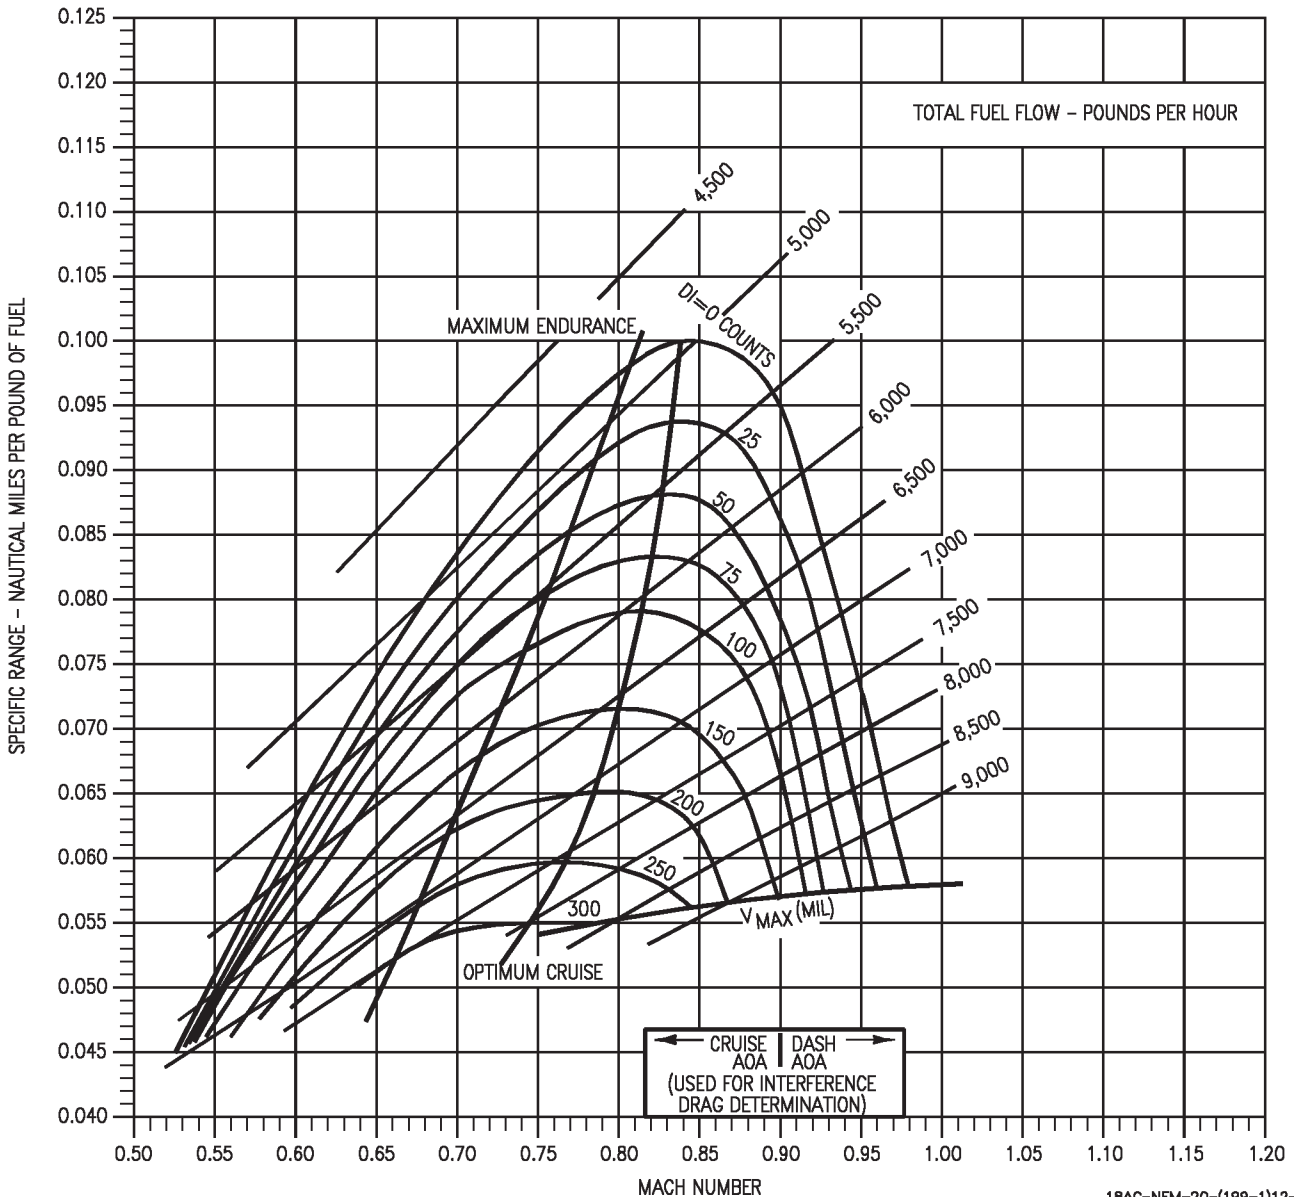


Figure 11-84. Specific Range - 30,000 Feet - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400

35,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -54°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

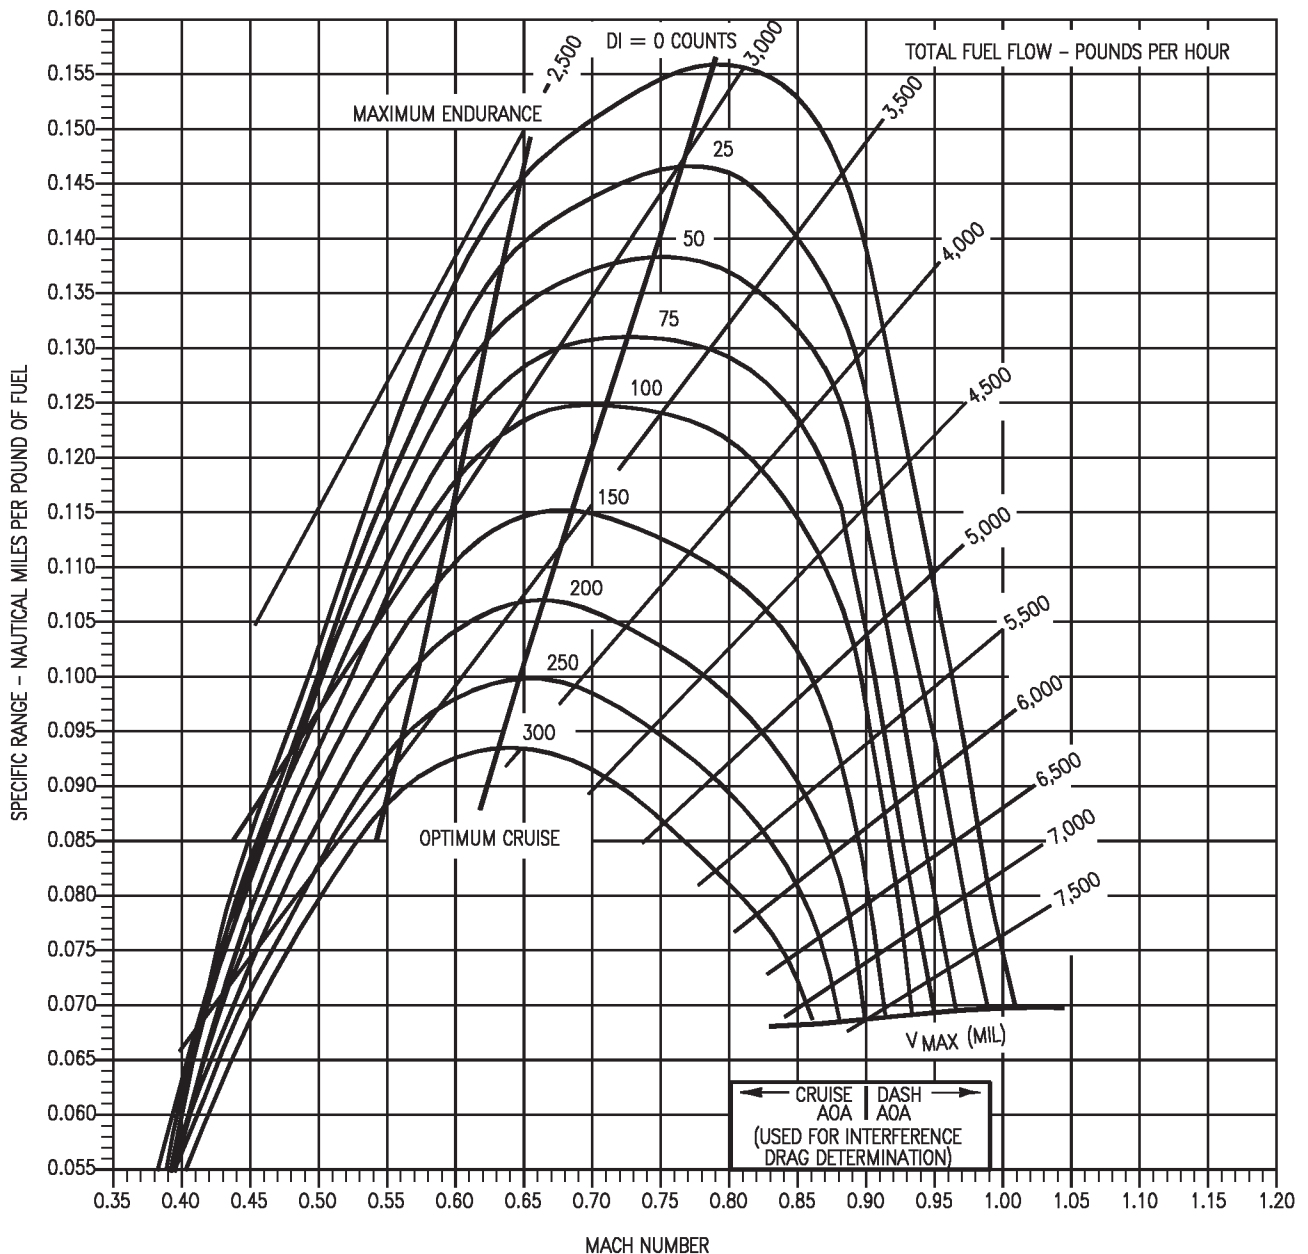

18AC-NFM-20-(200-1)12-CAT1

Figure 11-85. Specific Range - 35,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
35,000 FEET - 30,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -54°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

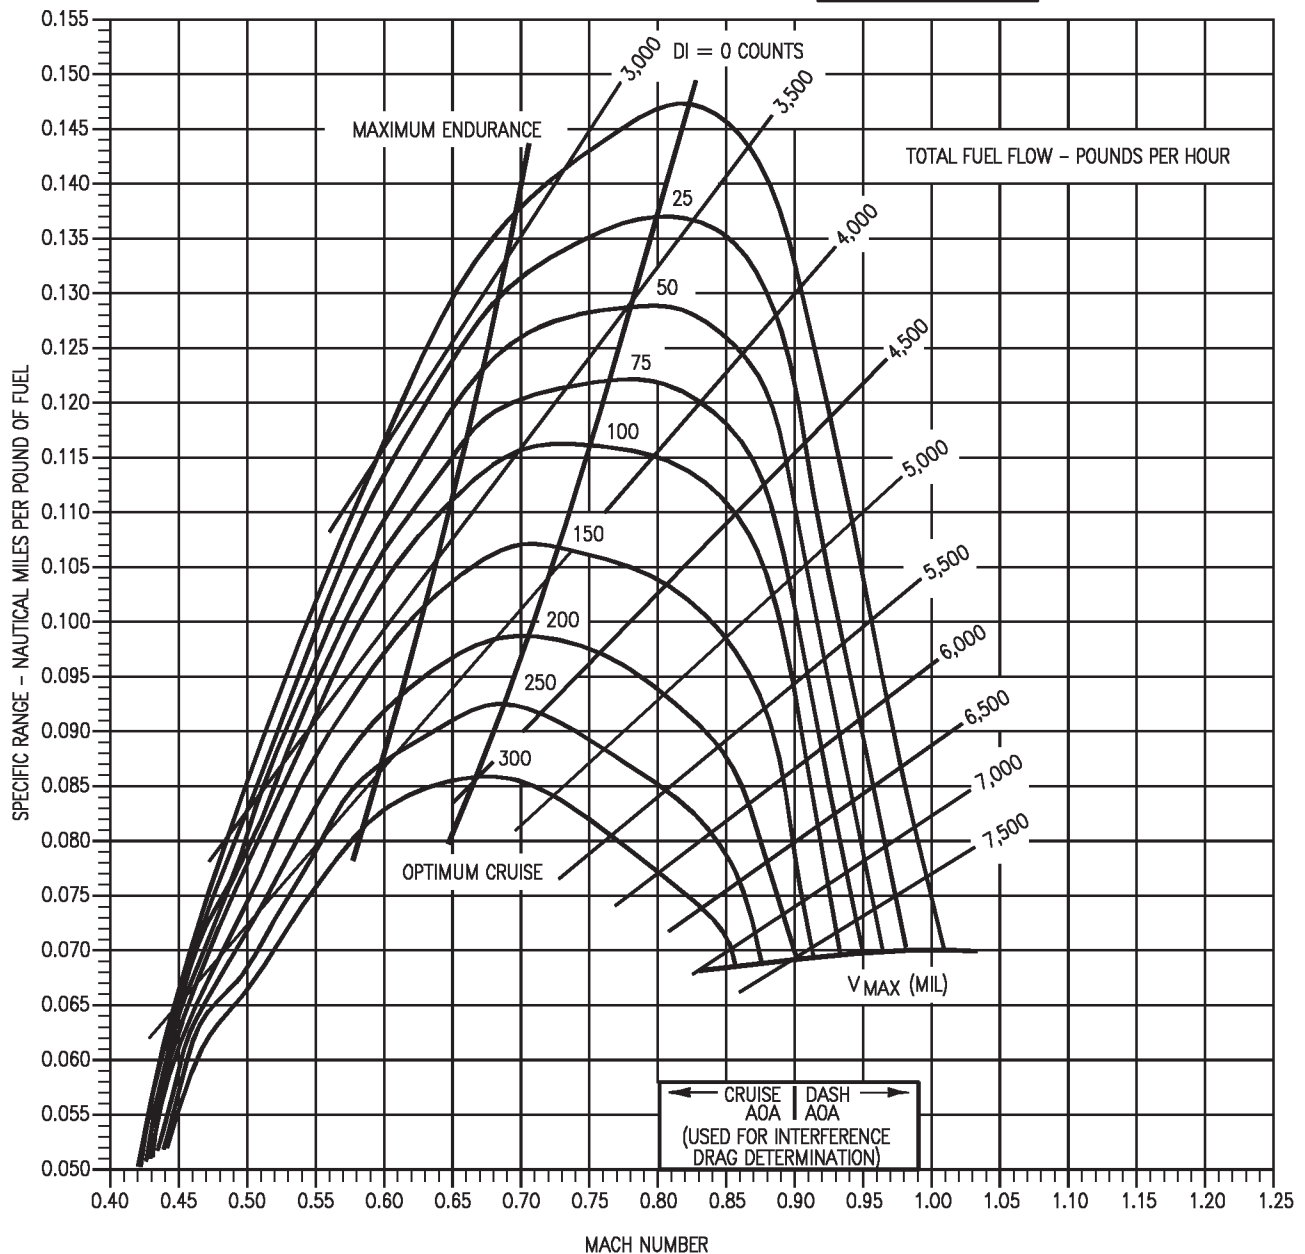

18AC-NFM-20-(201-1)12-CAT1

Figure 11-86. Specific Range - 35,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
35,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -54°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

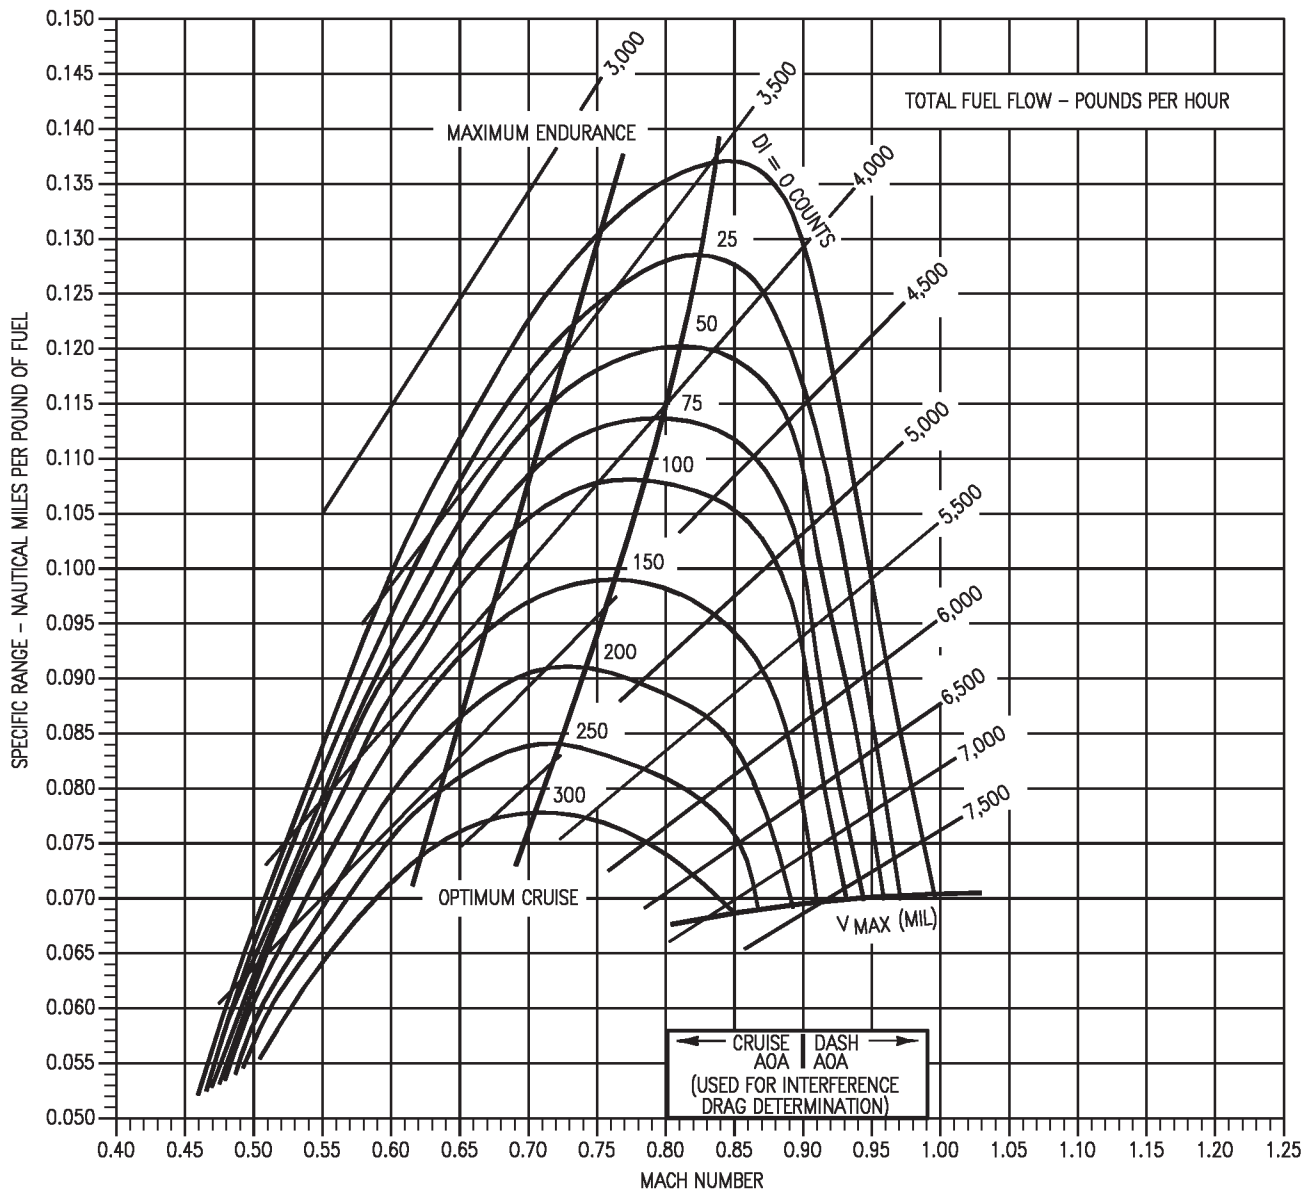

18AC-NFM-20-(202-1)12-CAT1

Figure 11-87. Specific Range - 35,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
35,000 FEET - 38,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -54°C

GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

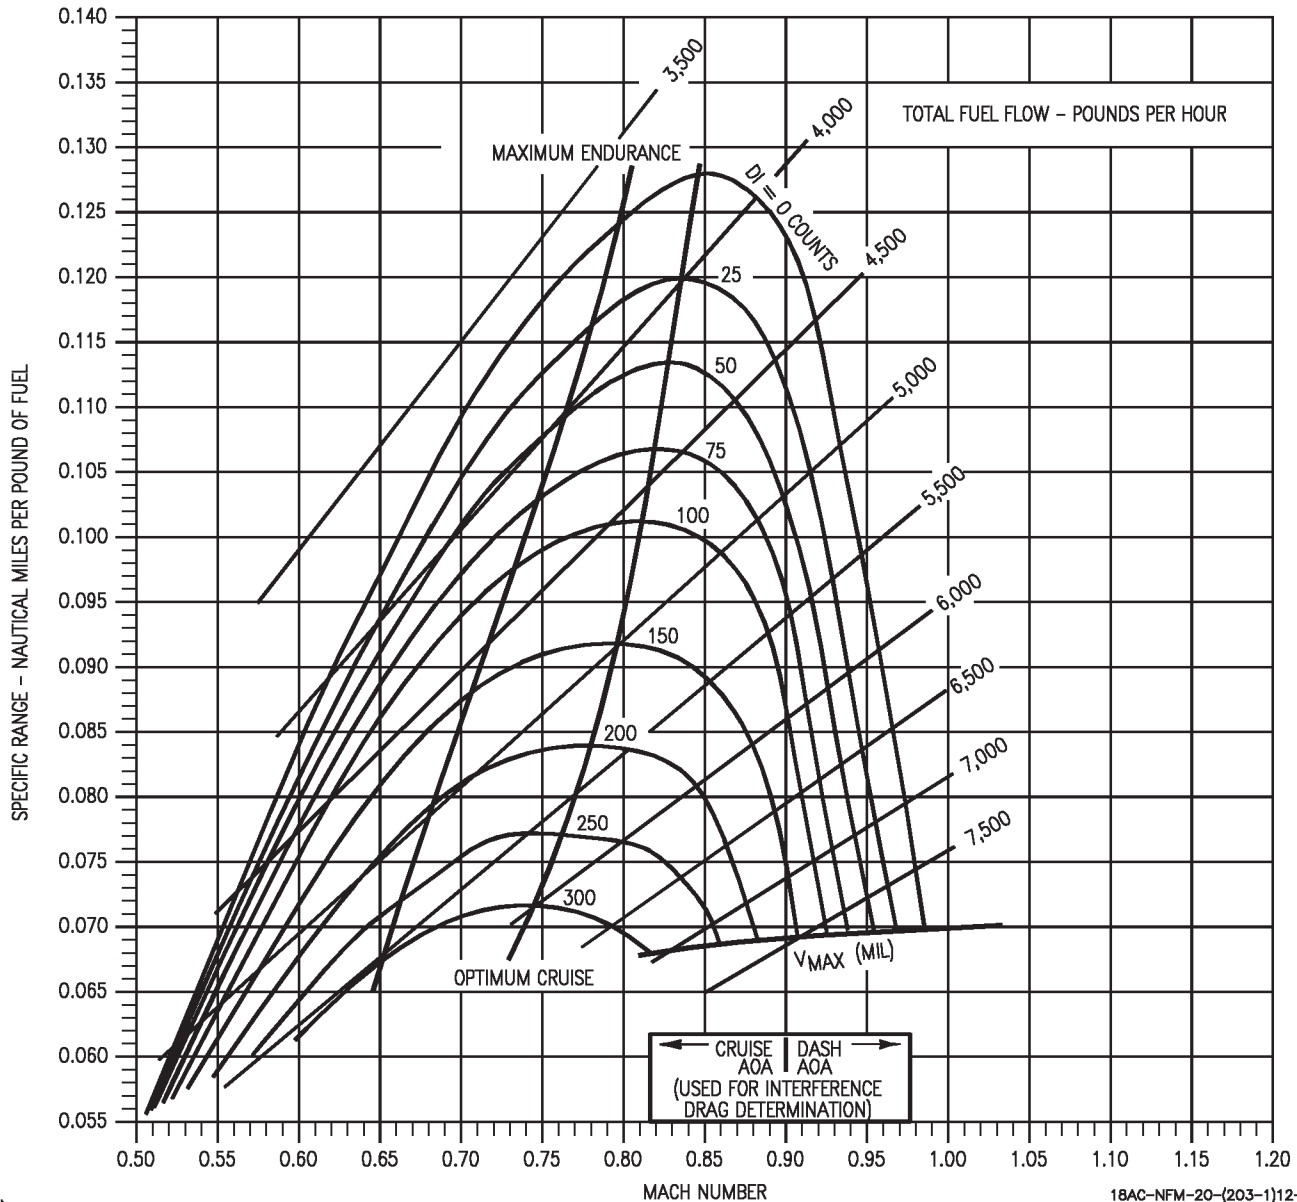


Figure 11-88. Specific Range - 35,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
35,000 FEET - 42,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -54°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

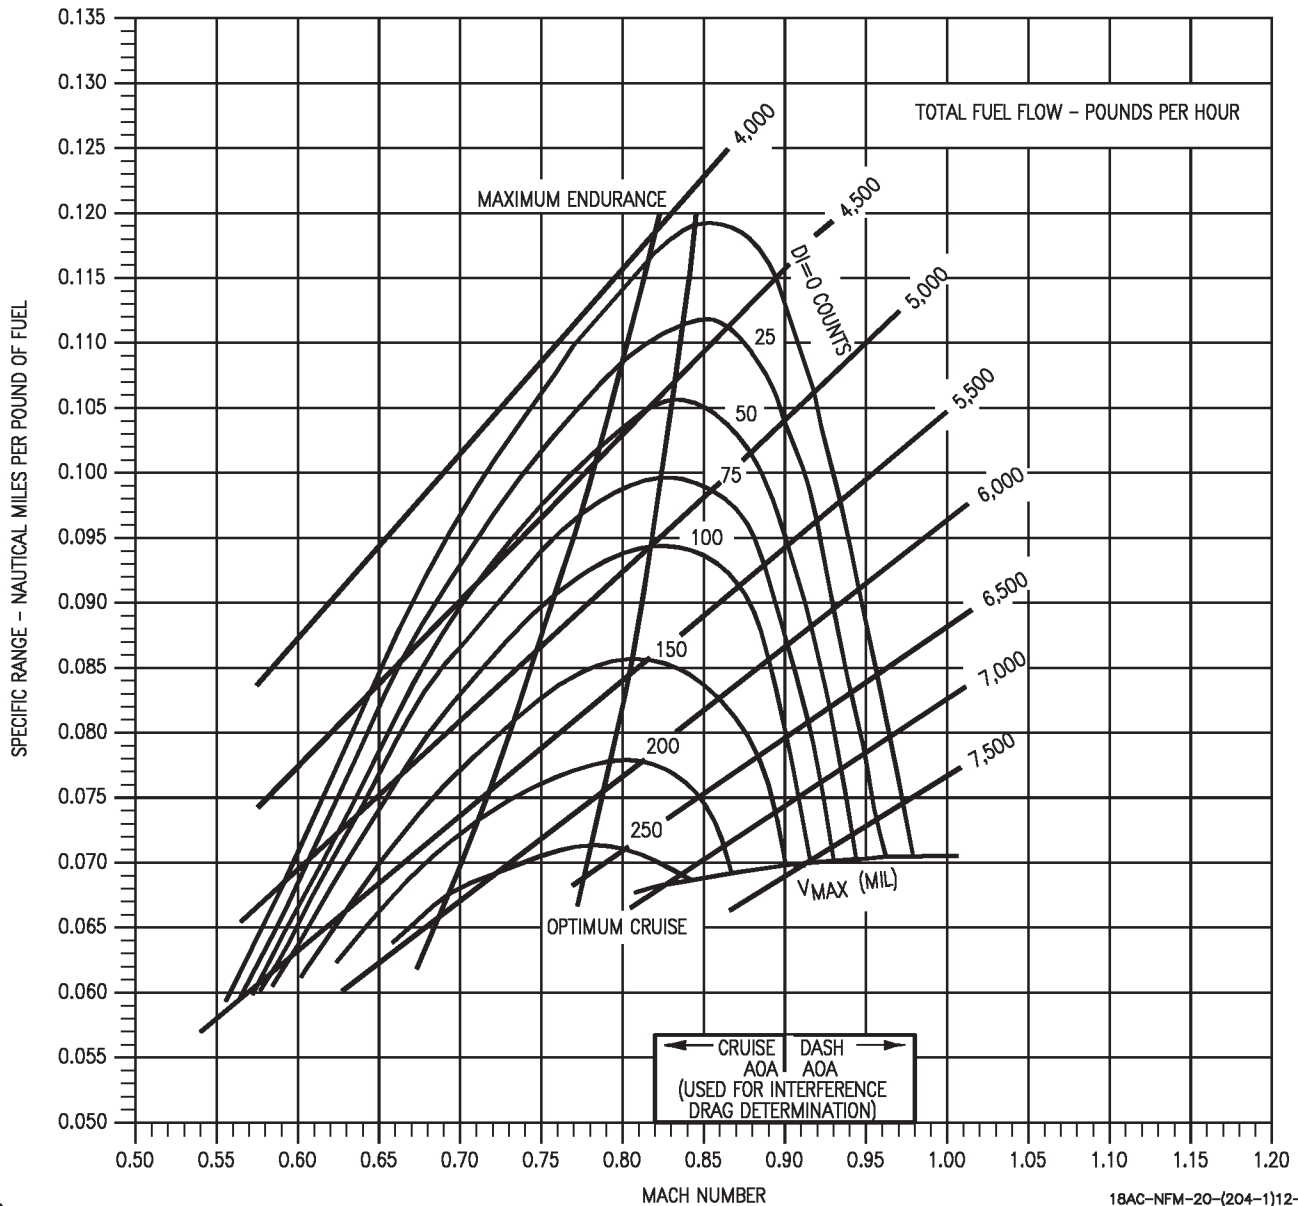

18AC-NFM-20-(204-1)12-CAT1

Figure 11-89. Specific Range - 35,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
35,000 FEET - 46,000 POUND

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -54°C

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

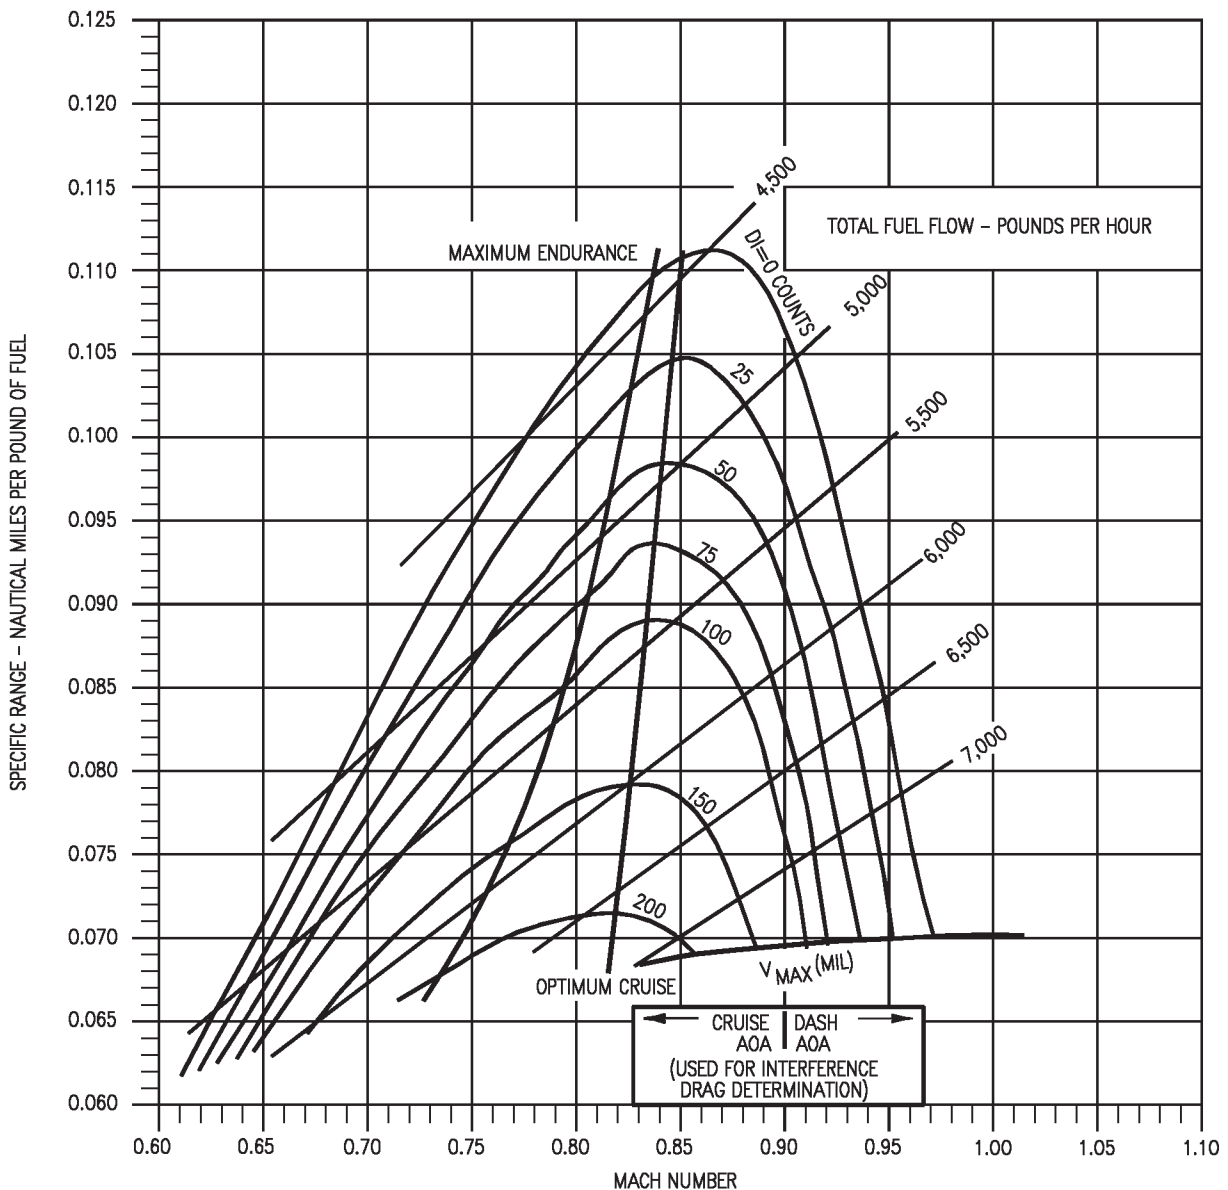

18AC-NFM-20-(205-1)12-CAT1

Figure 11-90. Specific Range - 35,000 Feet - 46,000 Pounds - F404-GE-400



# SPECIFIC RANGE


F404-GE-400  
35,000 FEET - 50,000 POUND

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -54°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

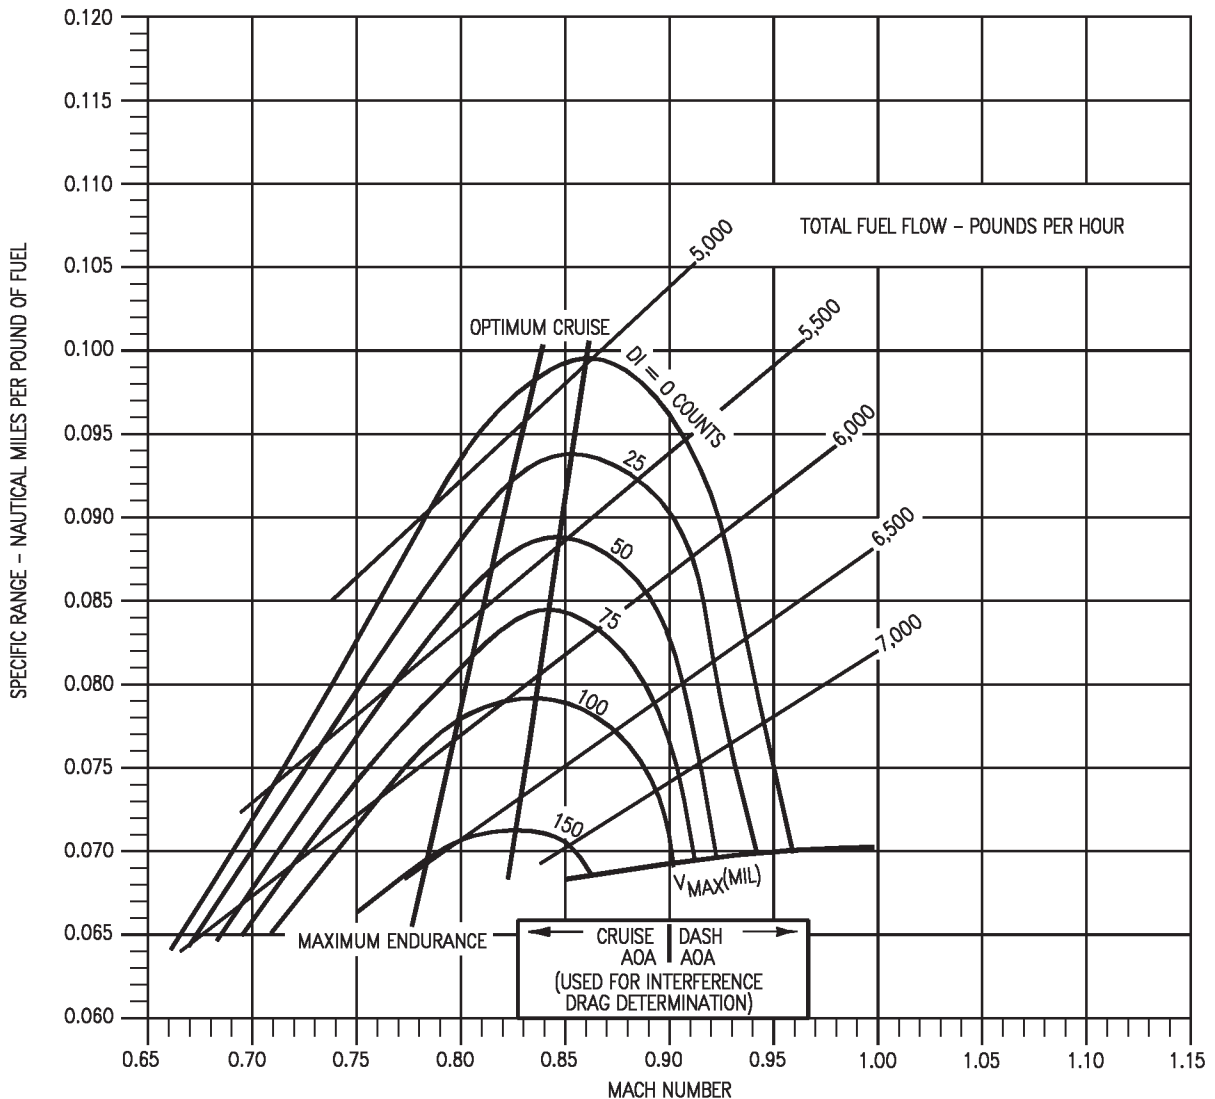

18AC-NFM-20-(206-1)12-CATI

Figure 11-91. Specific Range - 35,000 Feet - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
40,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -57°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

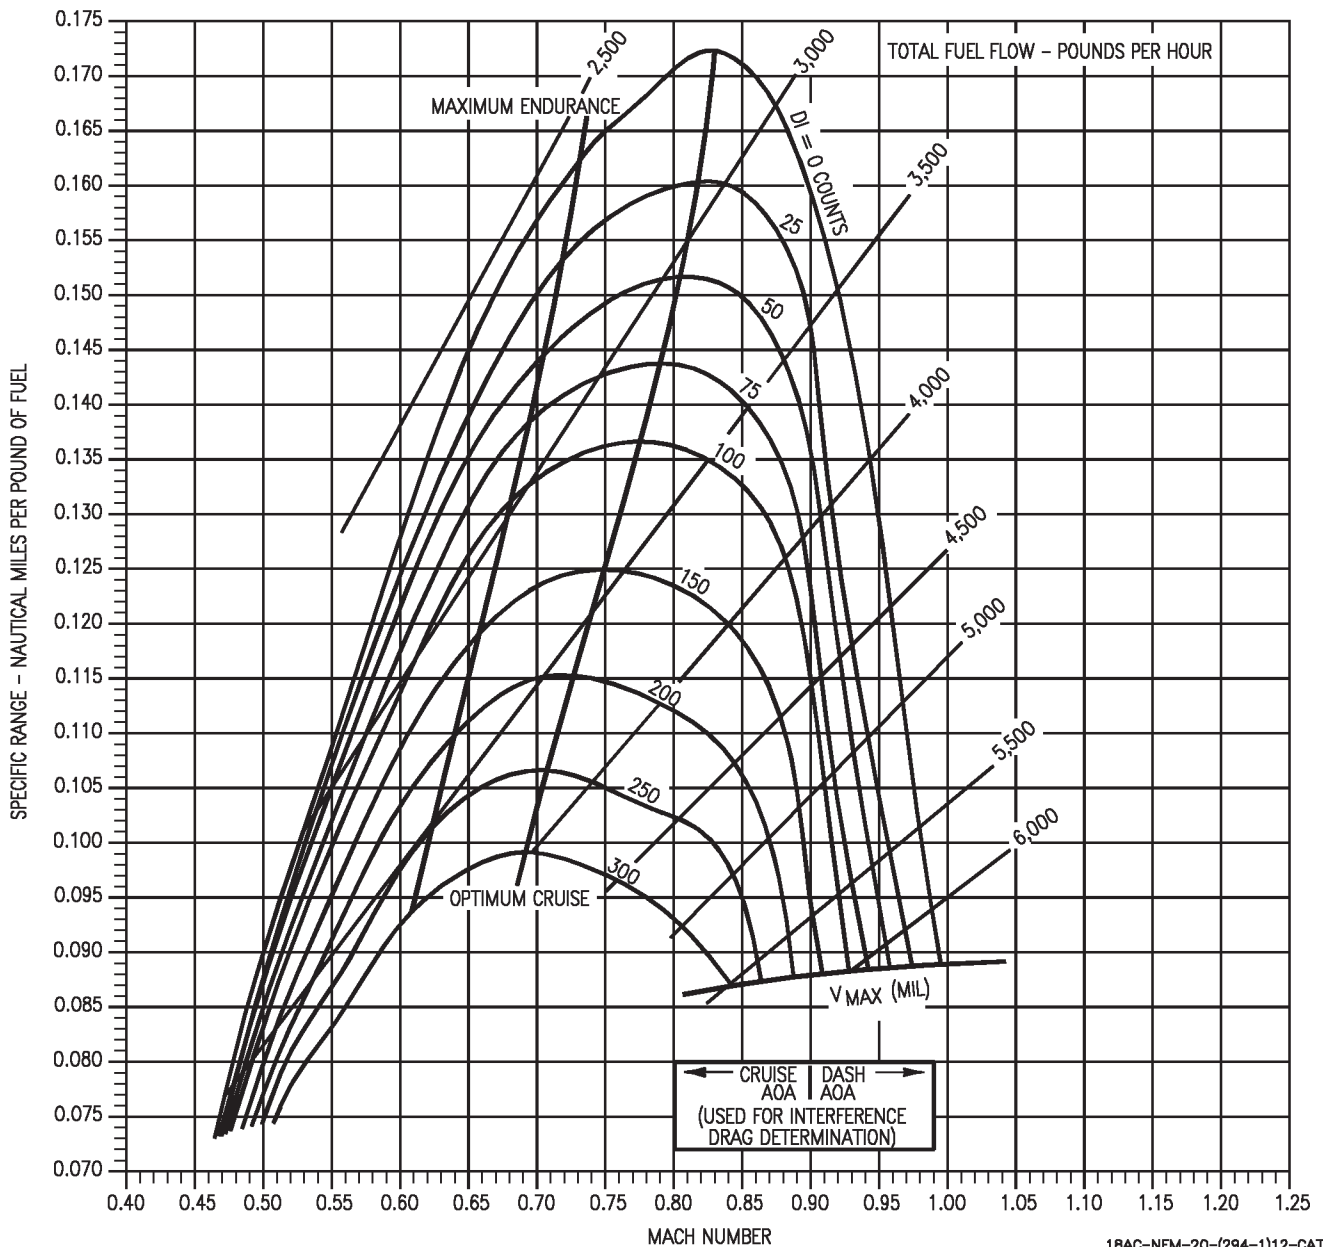

18AC-NFM-20-(294-1)12-CAT1

Figure 11-92. Specific Range - 40,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400


### 40,000 FEET - 30,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -57°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

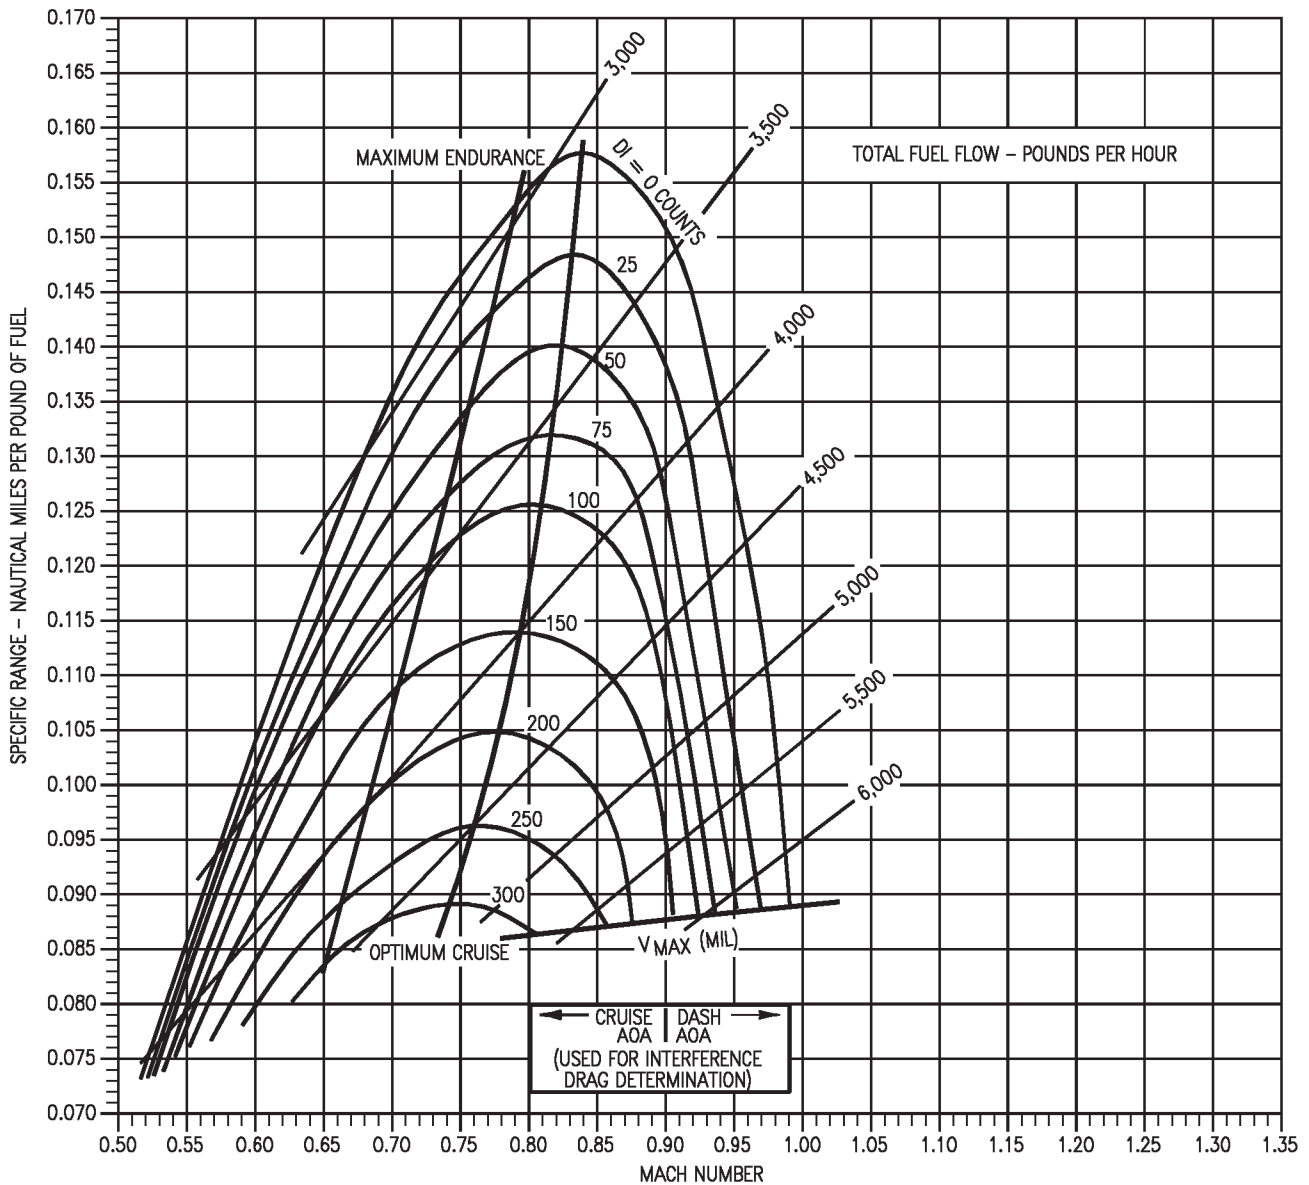

18AC-NFM-20-(295-1)12-CAT1

Figure 11-93. Specific Range - 40,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400


### 40,000 FEET - 34,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -57°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

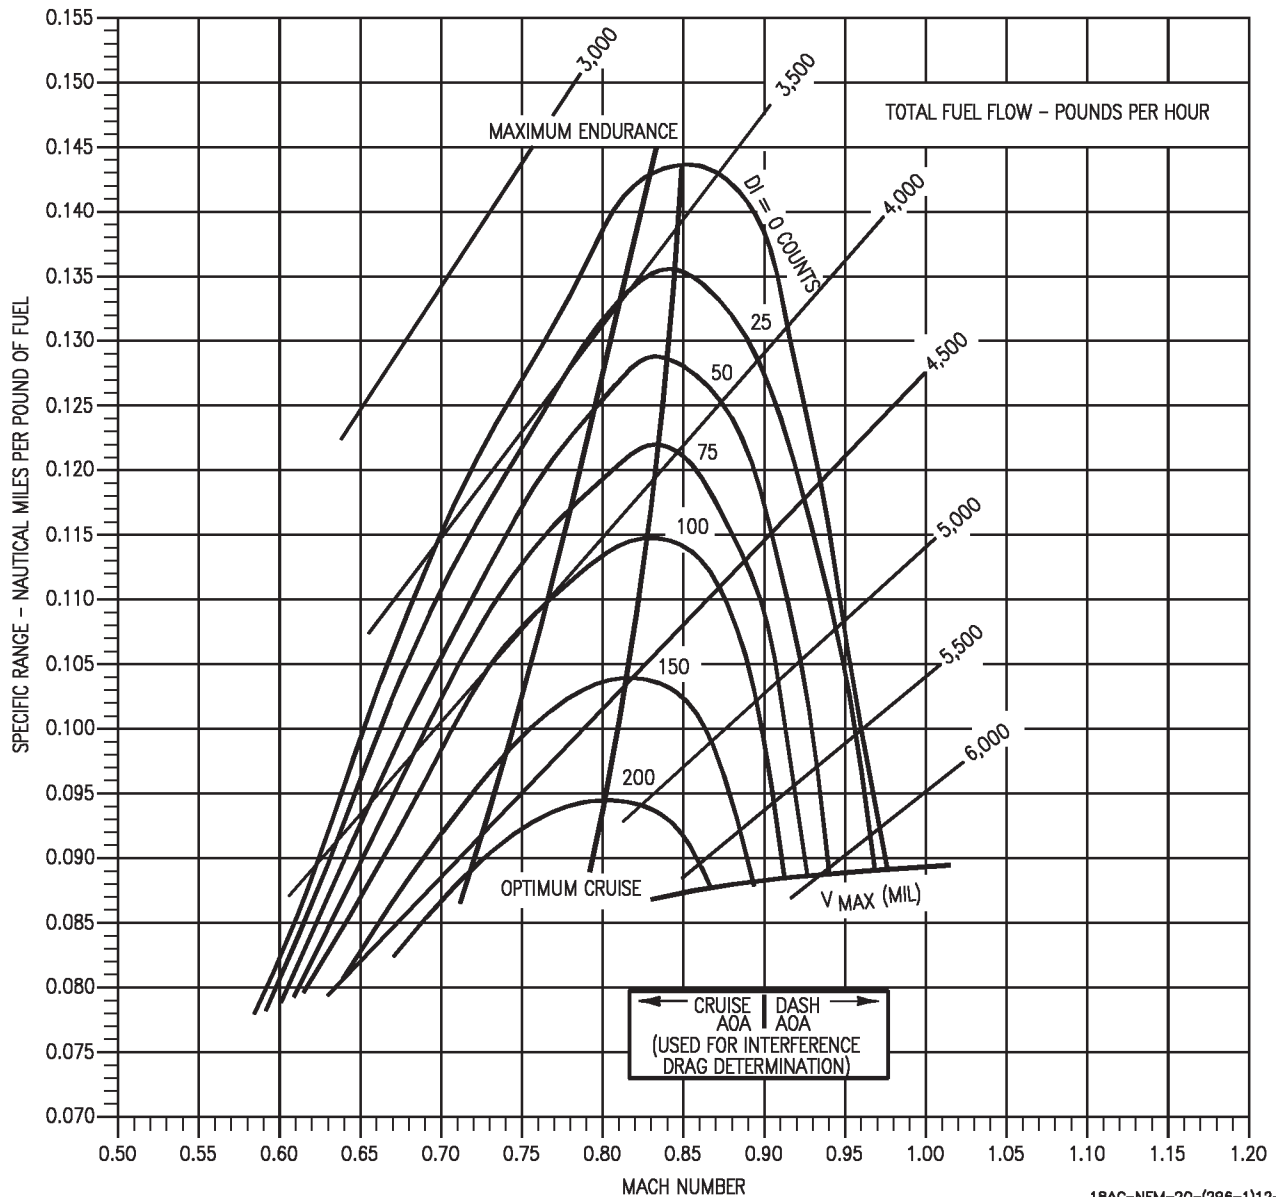

18AC-NFM-20-(296-1)12-CAT1

Figure 11-94. Specific Range - 40,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
40,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -57°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

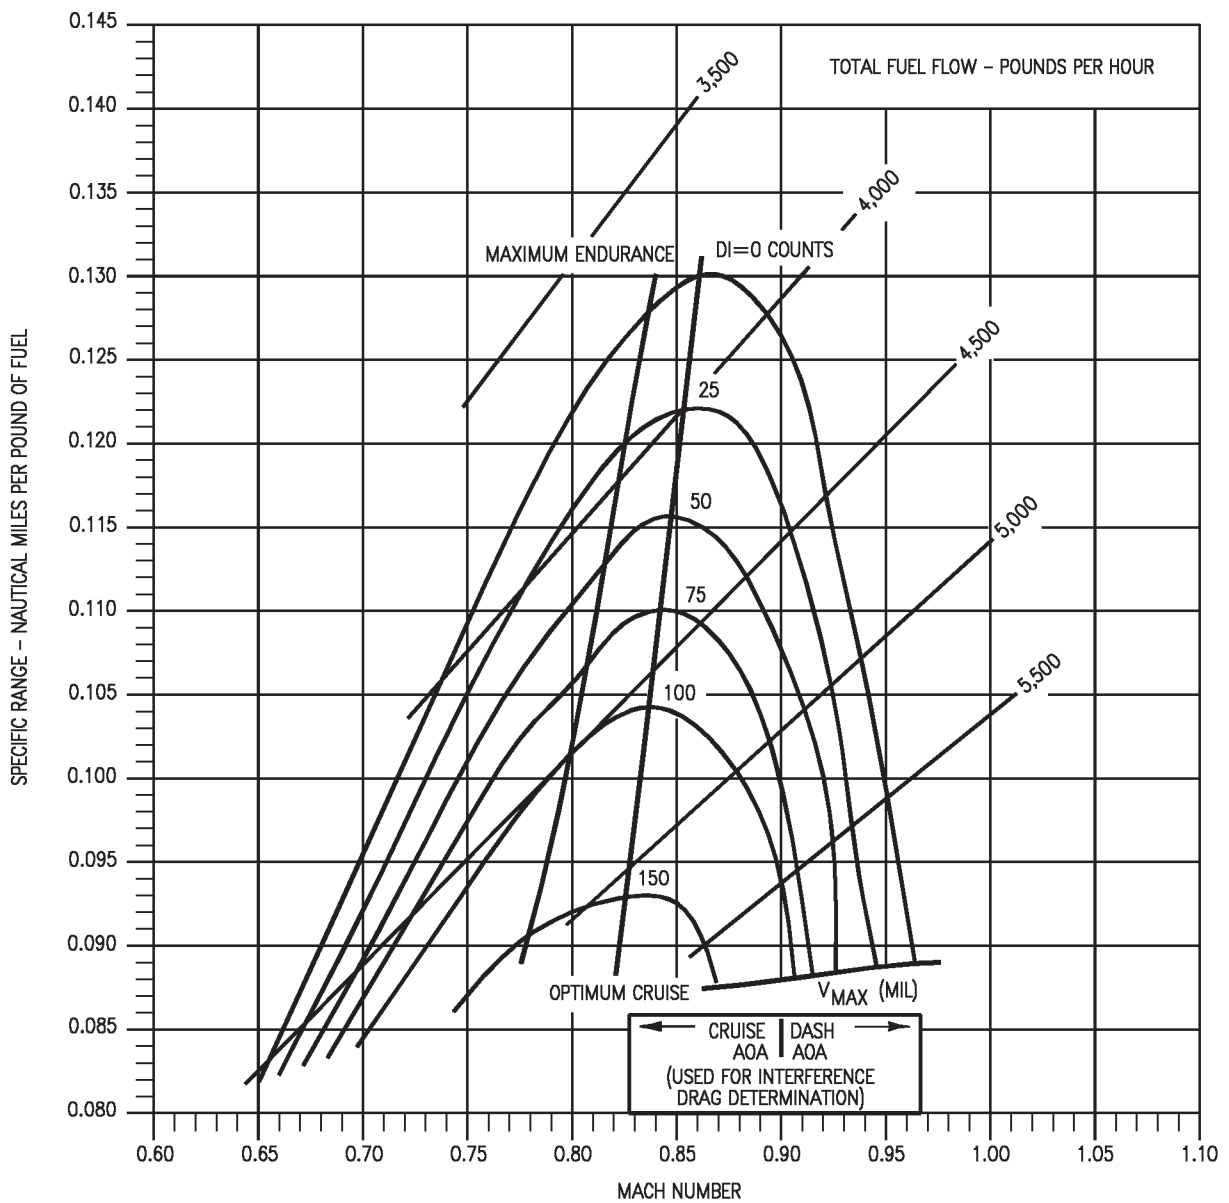

18AC-NFM-20-(297-1)12-CATI

Figure 11-95. Specific Range - 40,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
40,000 FEET - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP.= -57°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

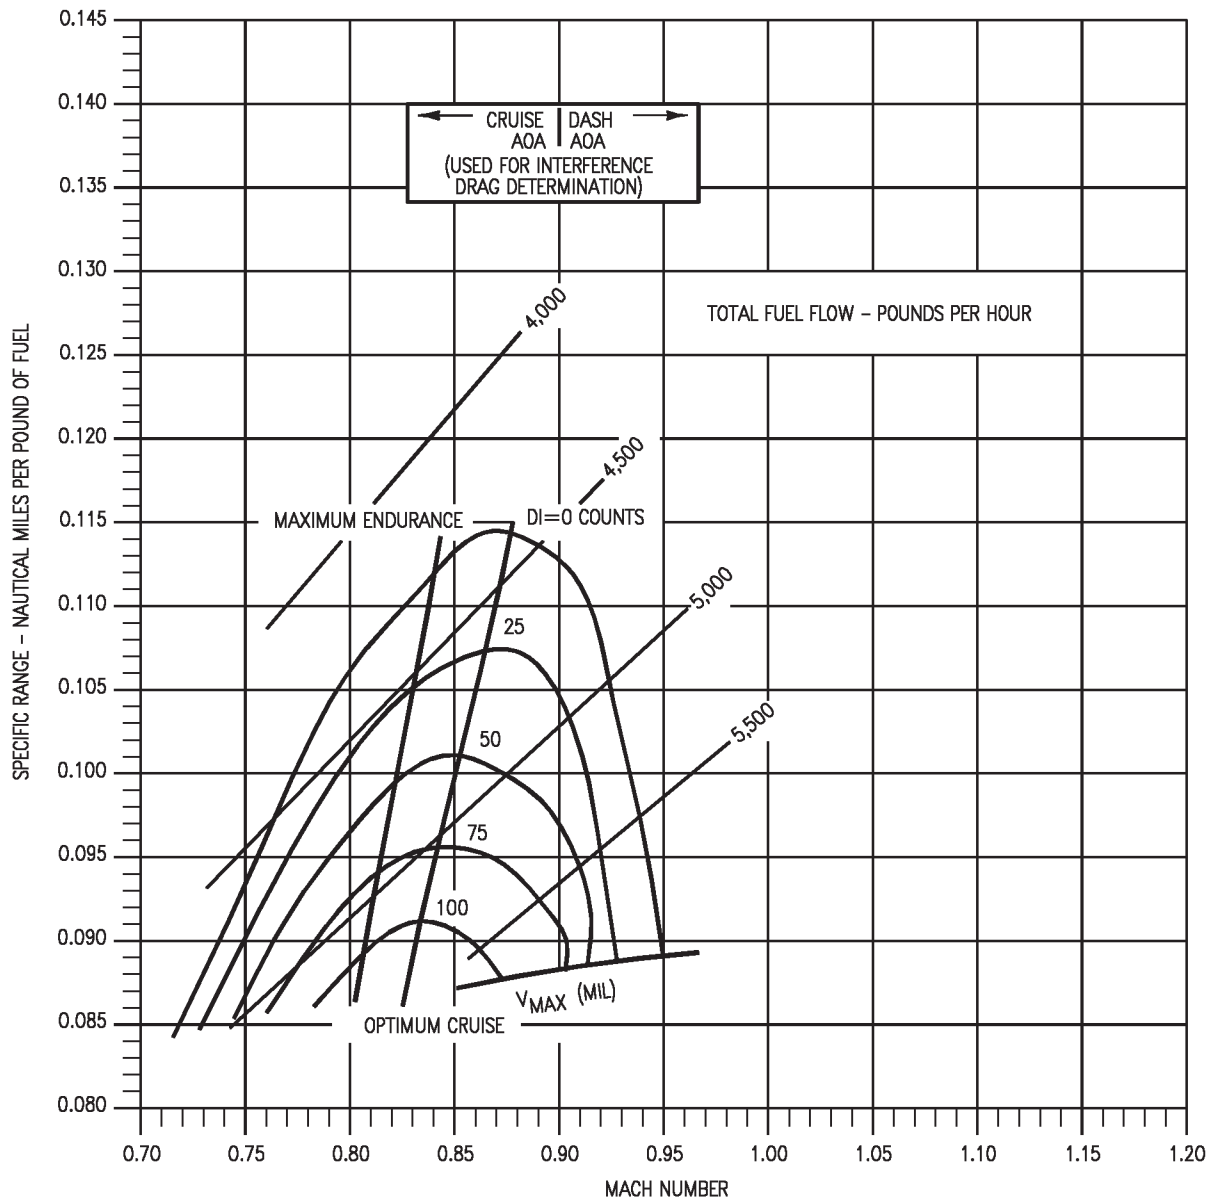

18AC-NFM-20-(298-1)12-CAT1

Figure 11-96. Specific Range - 40,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

## F404-GE-400

### 40,000 FEET - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -57°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

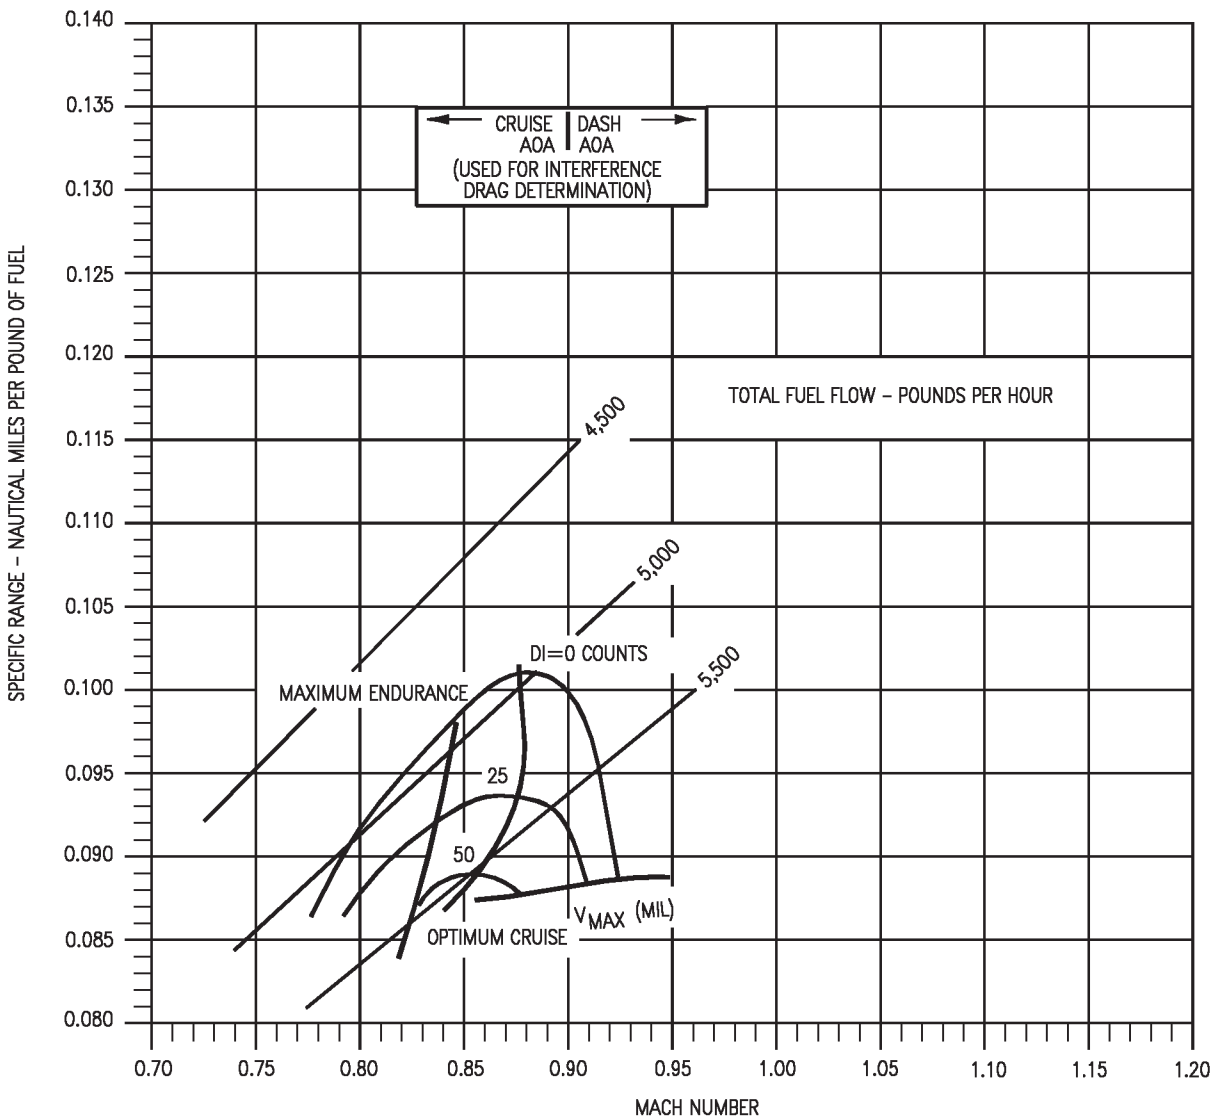

18AC-NFM-20-(299-1)12-CAT1

Figure 11-97. Specific Range - 40,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
45,000 FEET - 26,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -57°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

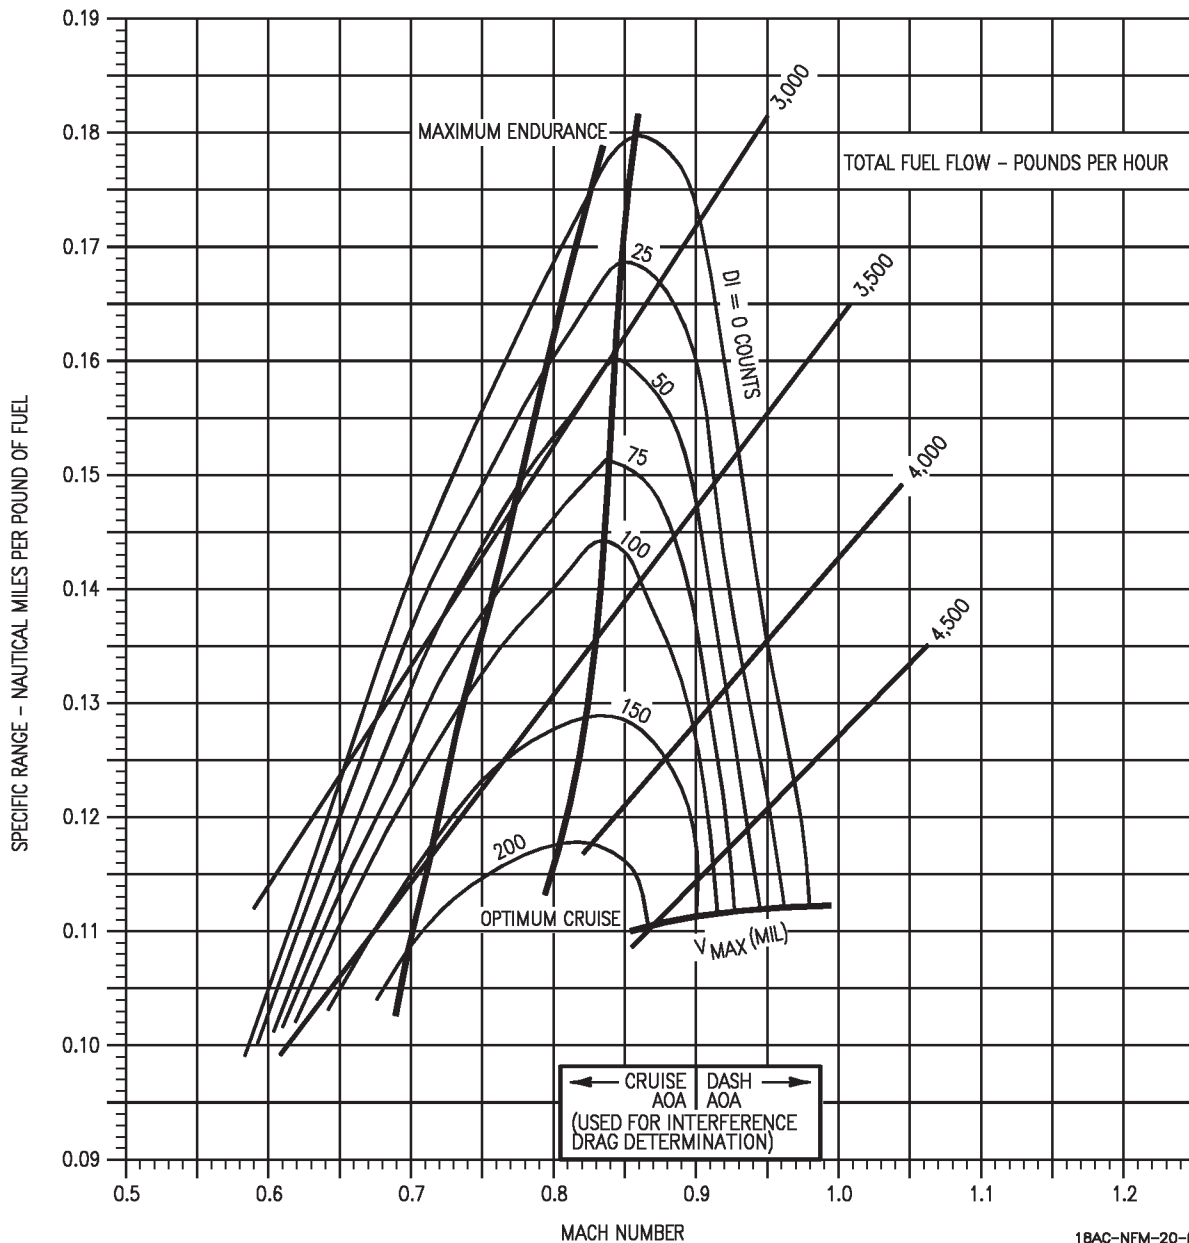

18AC-NFM-20-(319-1)12-CAT1

Figure 11-98. Specific Range - 45,000 Feet - 26,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400

45,000 FEET - 30,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -57°C


GUIDE

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.02                    |
| -10                 | 1.01                    |
| 0                   | 1.00                    |
| +10                 | .98                     |
| +20                 | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

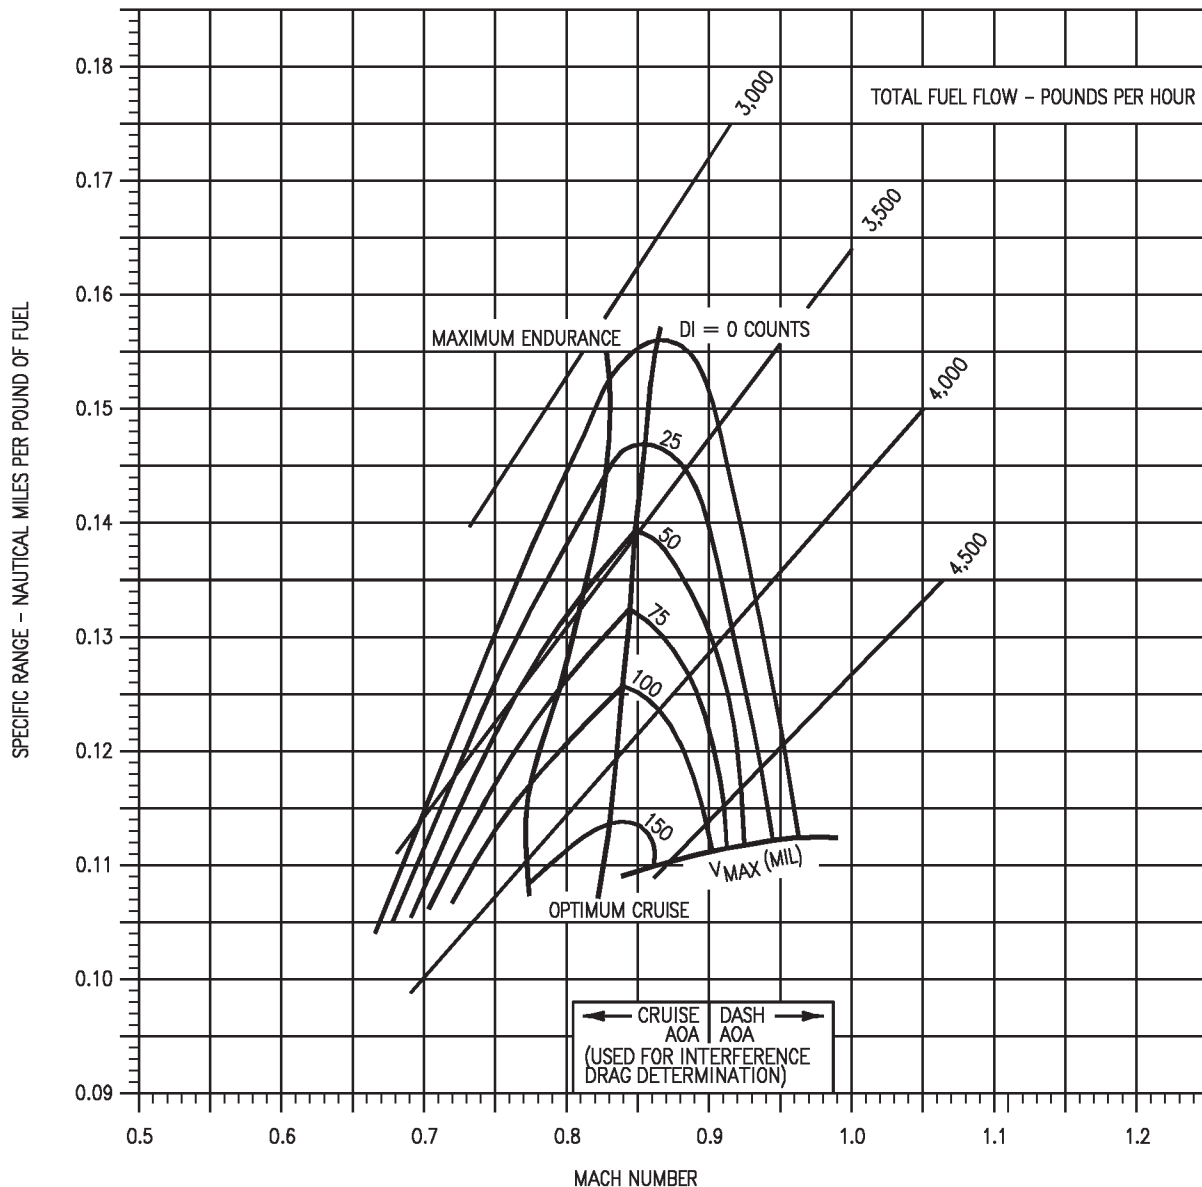

18AC-NFM-20-(320-1)12-CAT1

Figure 11-99. Specific Range - 45,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400

45,000 FEET - 34,000 POUND


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE: STD TEMP. = -57°C

GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.02             |
| -10                          | 1.01             |
| 0                            | 1.00             |
| +10                          | .98              |
| +20                          | .96              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

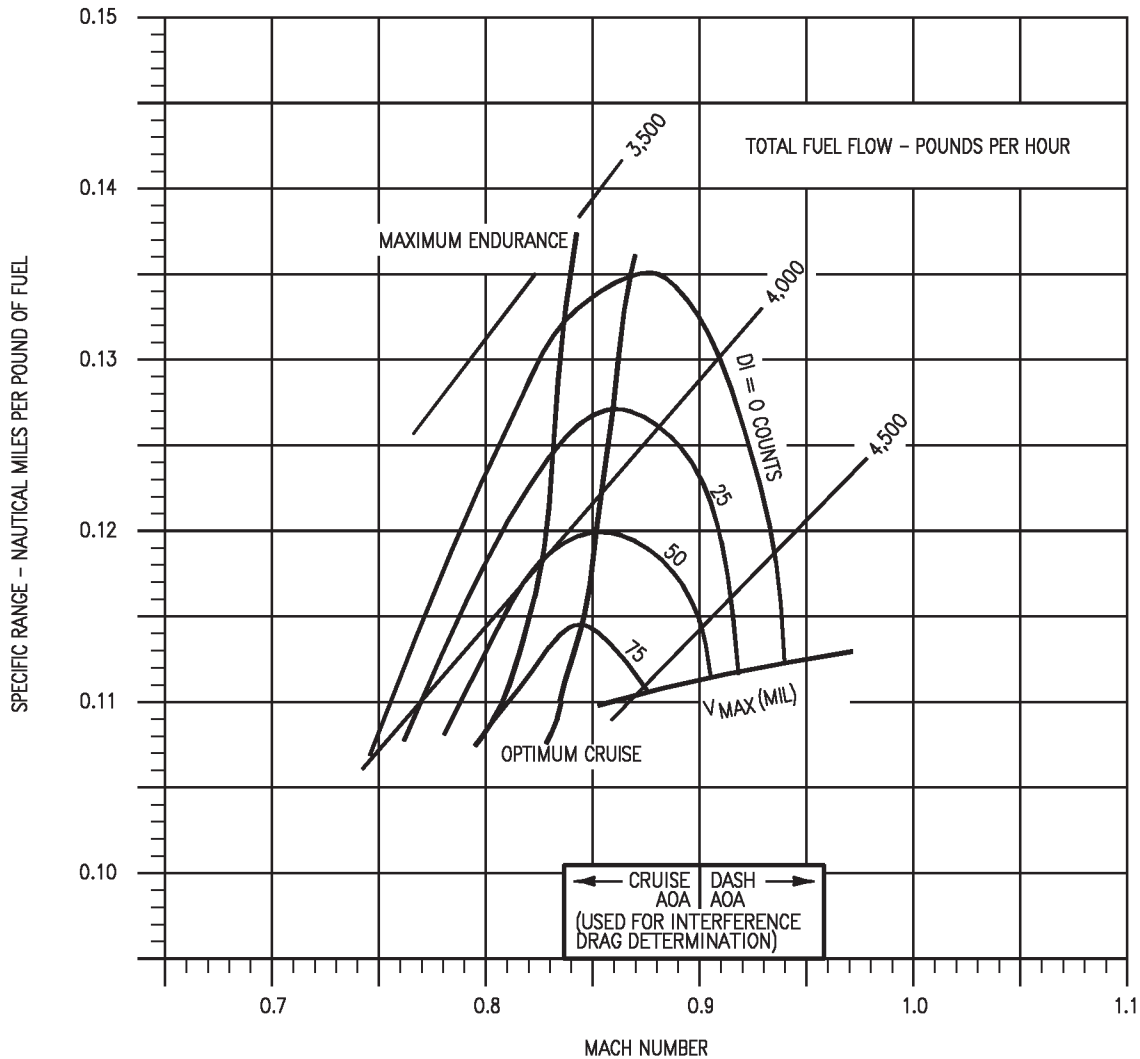


Figure 11-100. Specific Range - 45,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400


45,000 FEET - 38,000 POUND

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE: STD TEMP. = -57°C

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.02                    |
| -10                          | 1.01                    |
| 0                            | 1.00                    |
| +10                          | .98                     |
| +20                          | .96                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

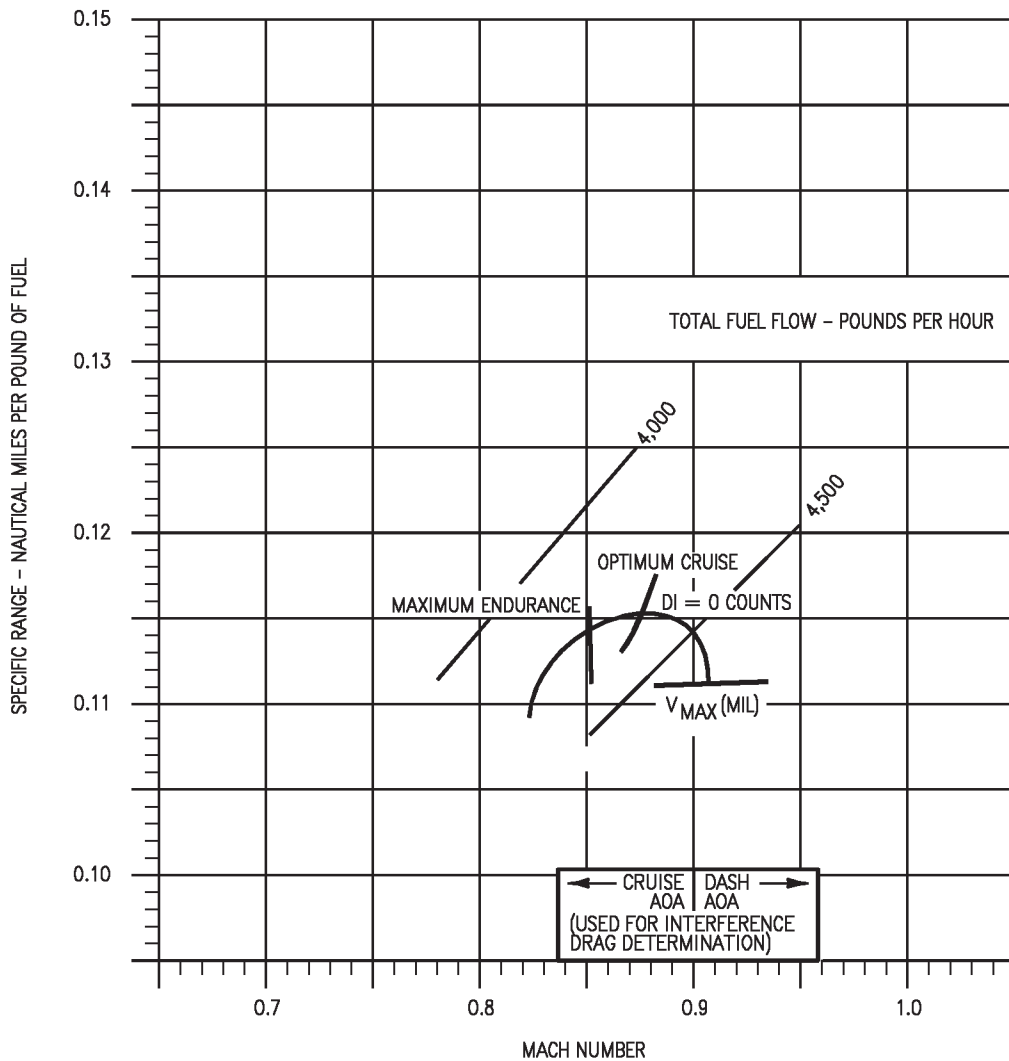

18AC-NFM-20-(322-1)12-CATI

Figure 11-101. Specific Range - 45,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400

ONE ENGINE OPERATING  
SEA LEVEL - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

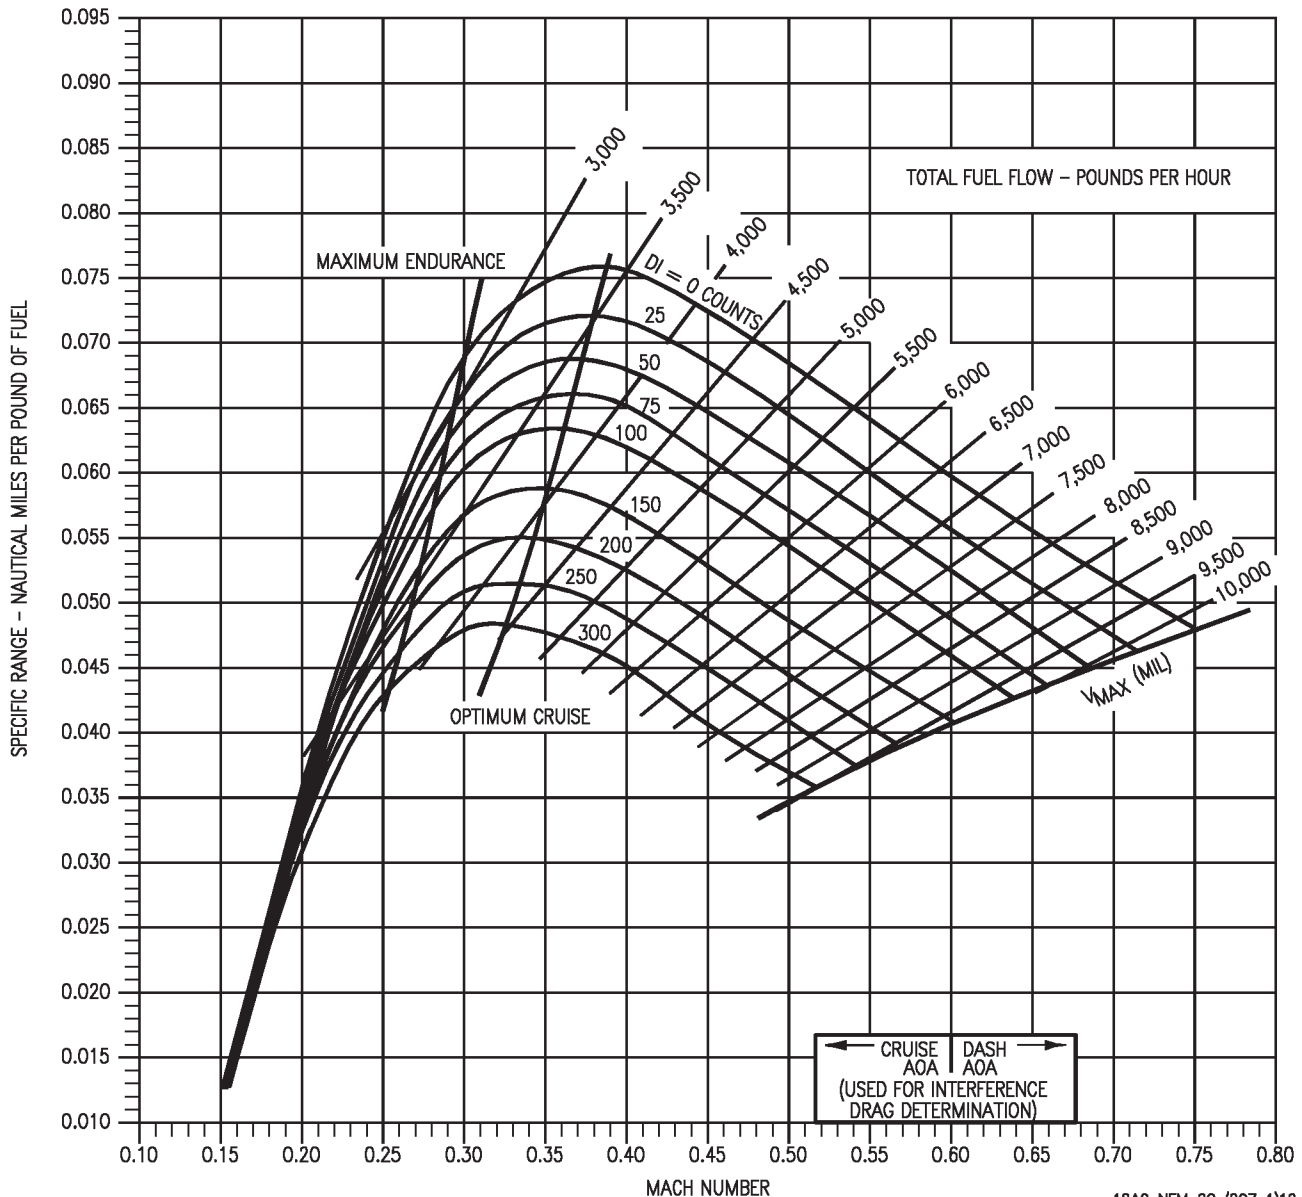

18AC-NFM-20-(207-1)12-CAT1

Figure 11-102. Specific Range - One Engine Operating - Sea Level - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400

ONE ENGINE OPERATING  
SEA LEVEL - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 15°C


GUIDE

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

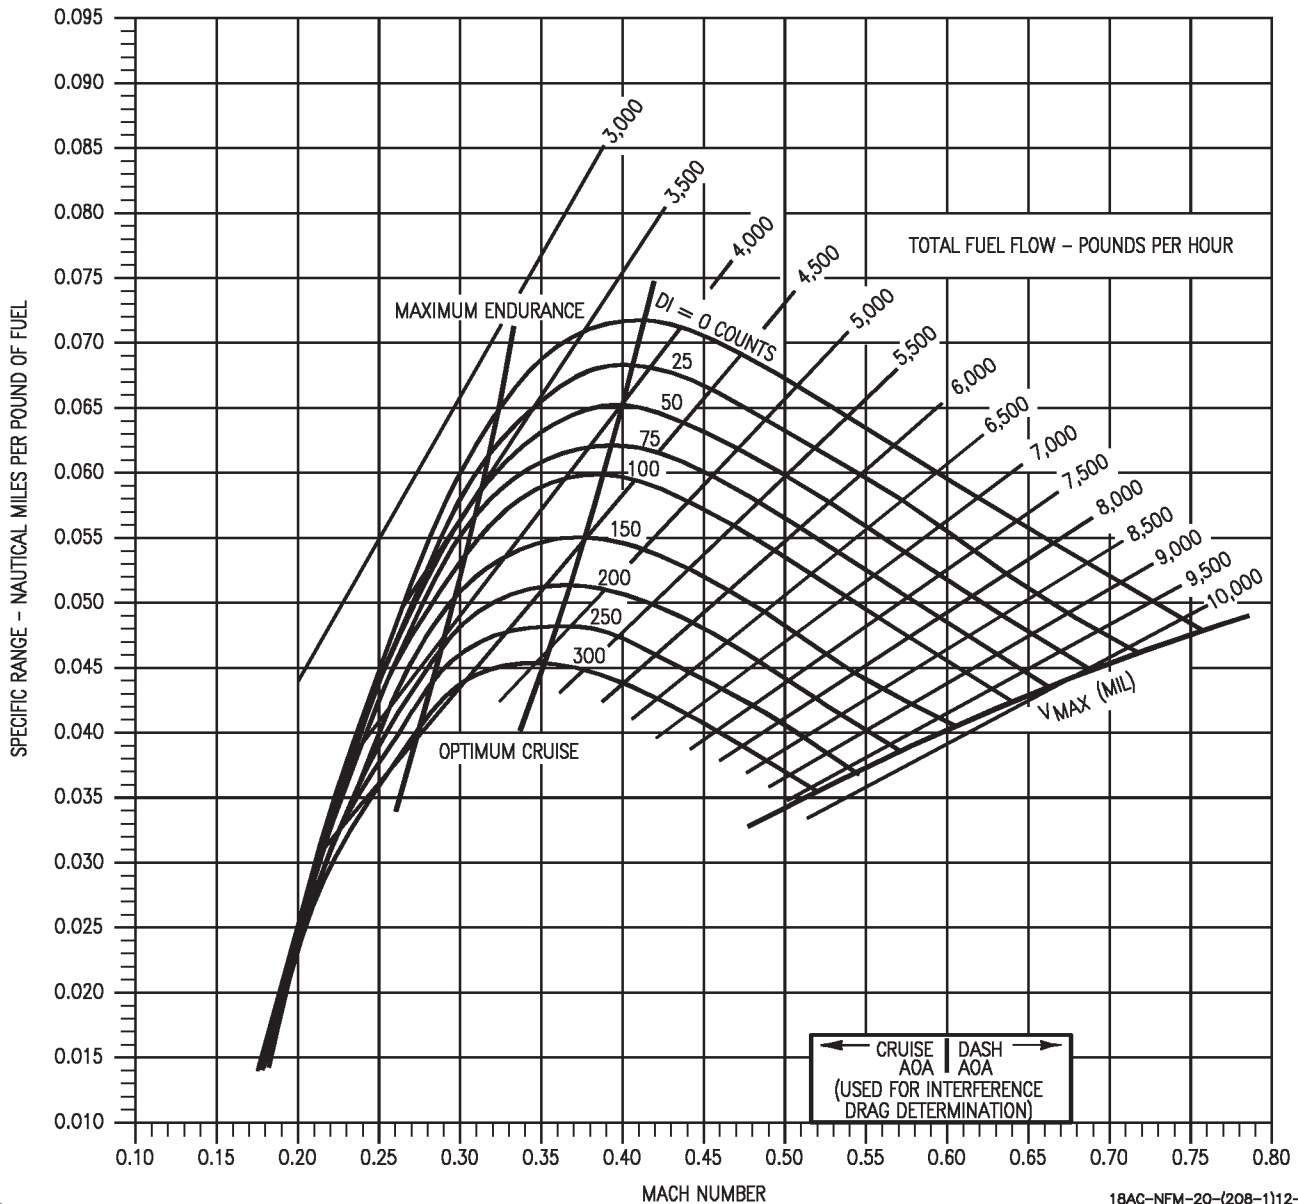

18AC-NFM-20-(208-1)12-CAT1

Figure 11-103. Specific Range - One Engine Operating - Sea Level - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
ONE ENGINE OPERATING  
SEA LEVEL - 34,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP.= 15°C

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

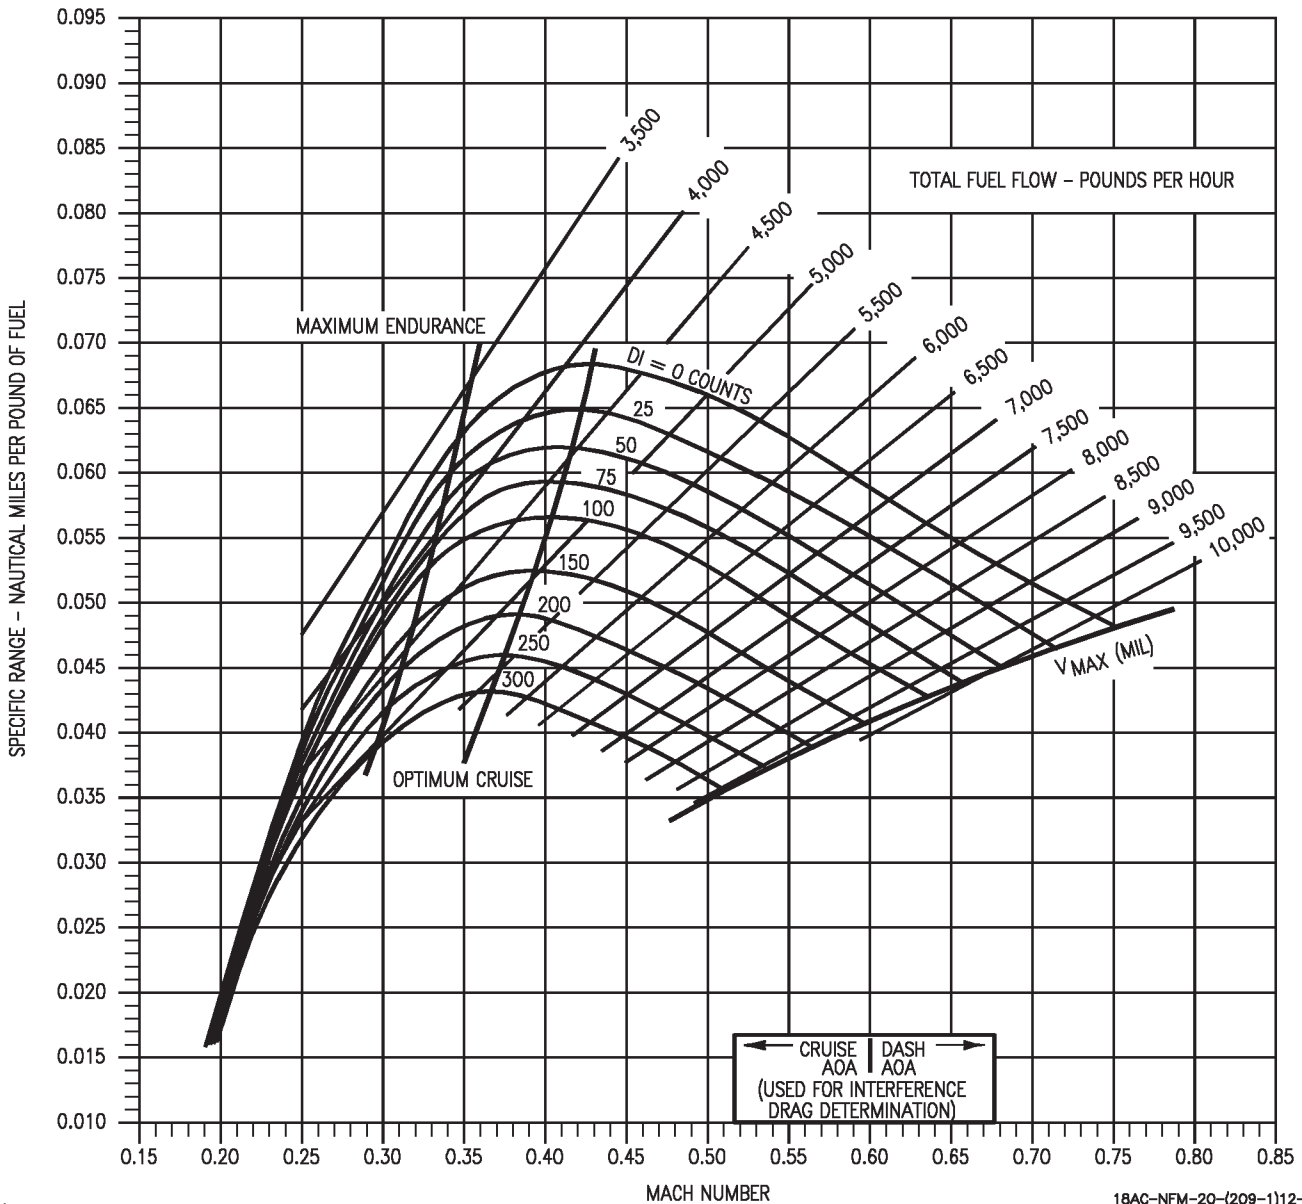


Figure 11-104. Specific Range - One Engine Operating - Sea Level - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400


ONE ENGINE OPERATING  
SEA LEVEL - 38,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 15°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

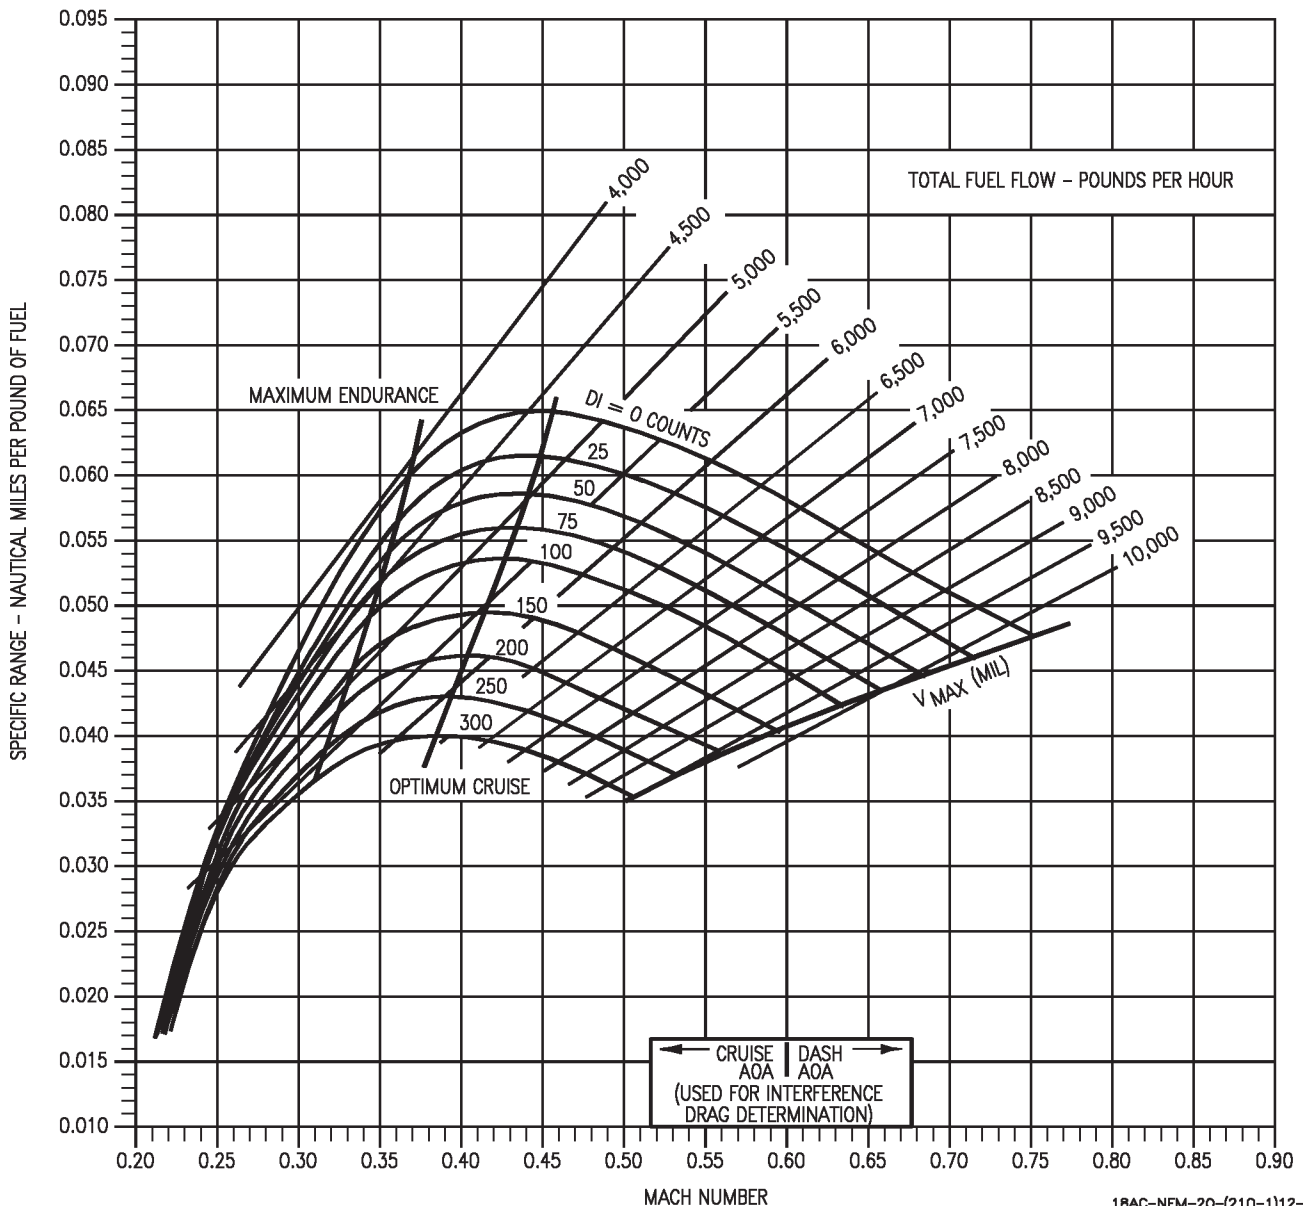


Figure 11-105. Specific Range - One Engine Operating - Sea Level - 38,000 Pounds - F404-GE-400

18AC-NFM-20-(210-1)12-CAT1

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
SEA LEVEL - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

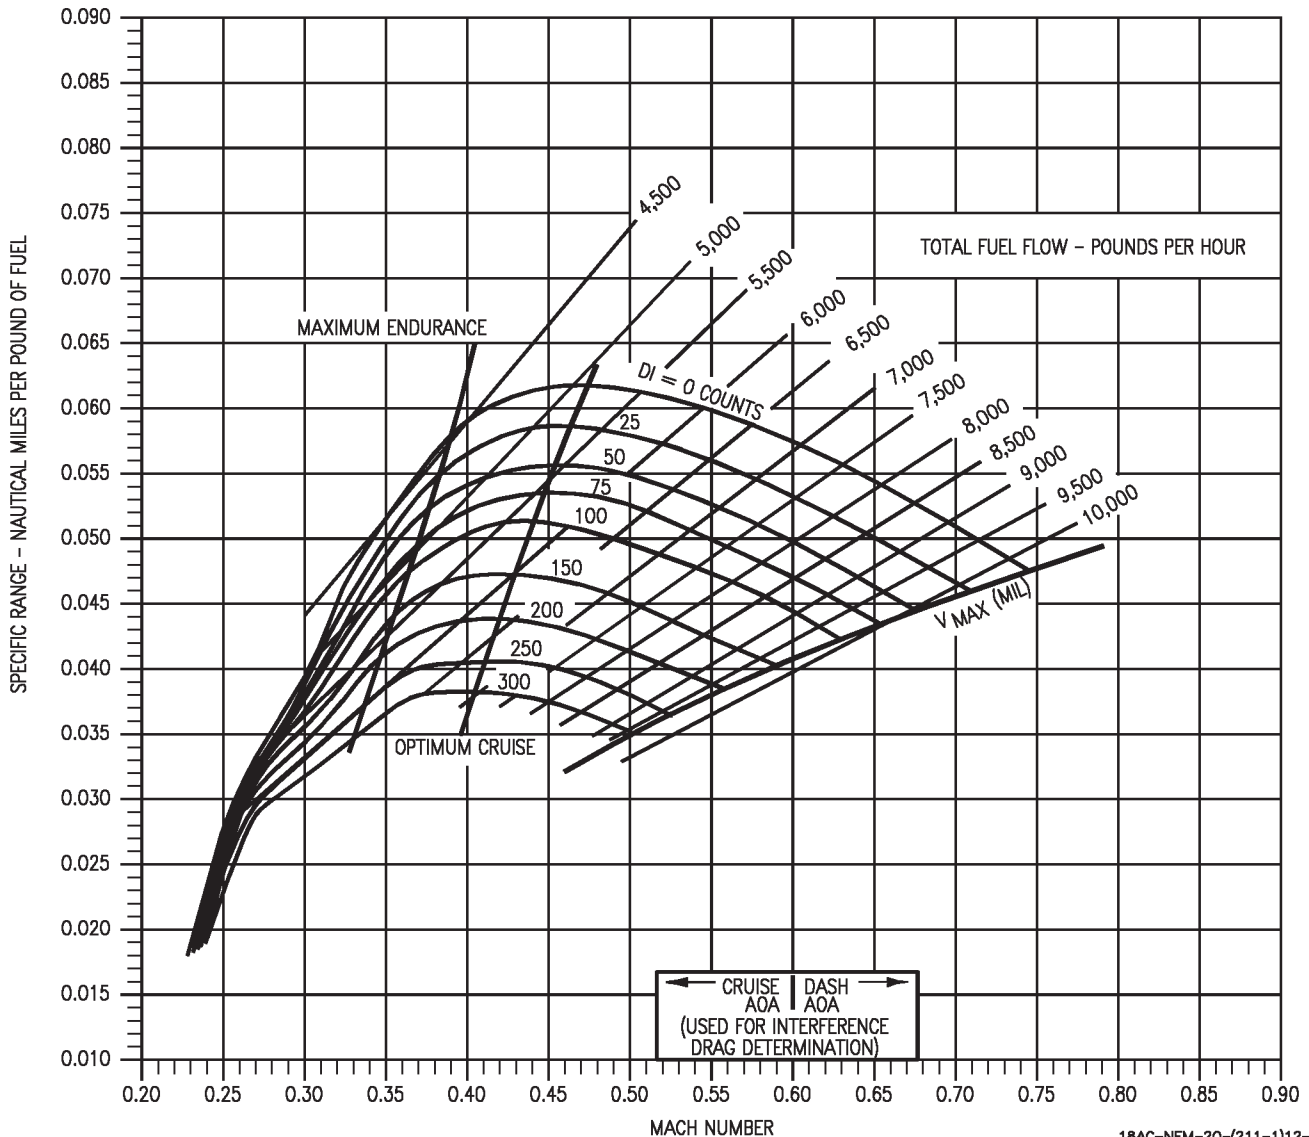

18AC-NFM-20-(211-1)12-CATI

Figure 11-106. Specific Range - One Engine Operating - Sea Level - 42,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400

ONE ENGINE OPERATING  
SEA LEVEL - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 15°C


GUIDE

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

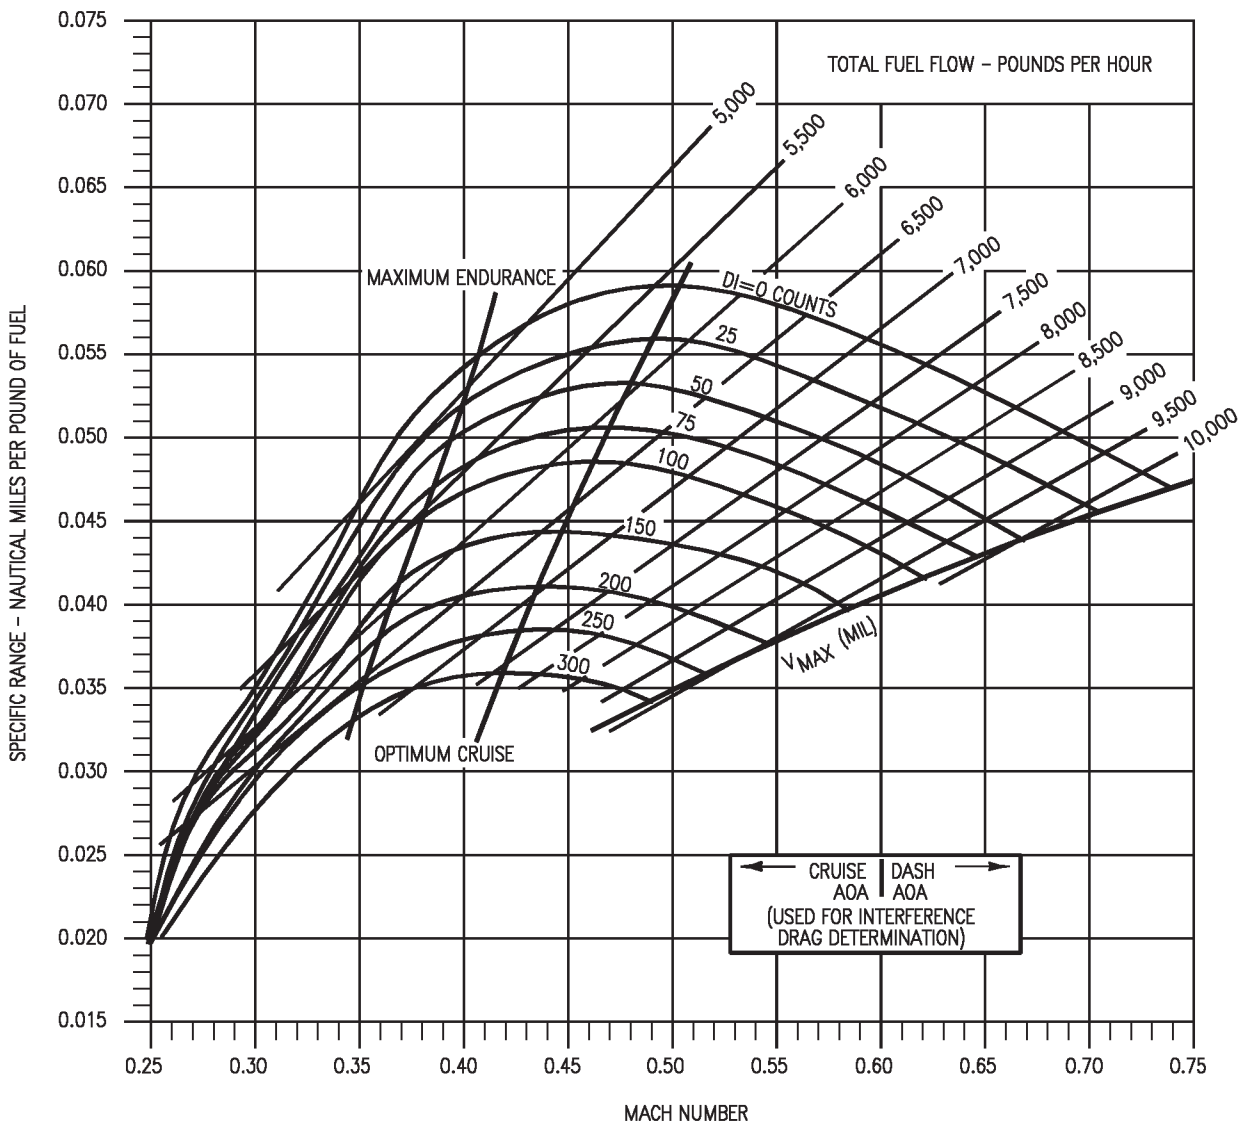

18AC-NFM-20-(212-1)12-CAT1

Figure 11-107. Specific Range - One Engine Operating - Sea Level - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
SEA LEVEL - 50,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

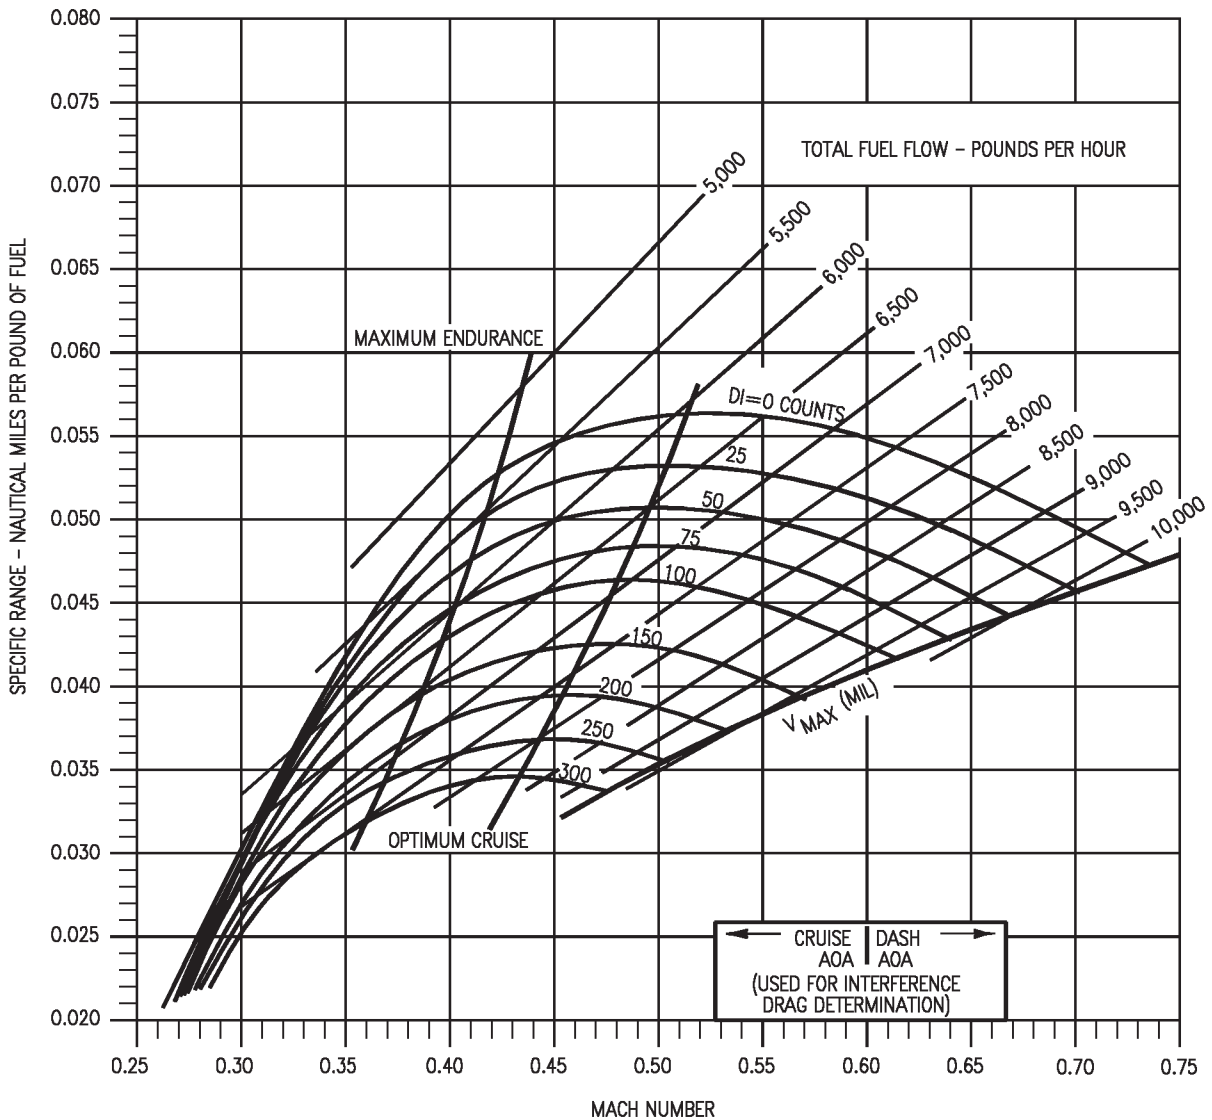

18AC-NFM-20-(213-1)12-CAT1

Figure 11-108. Specific Range - One Engine Operating - Sea Level - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
ONE ENGINE OPERATING  
5,000 FEET - 26,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING


NOTE: STD TEMP. = 5°C

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

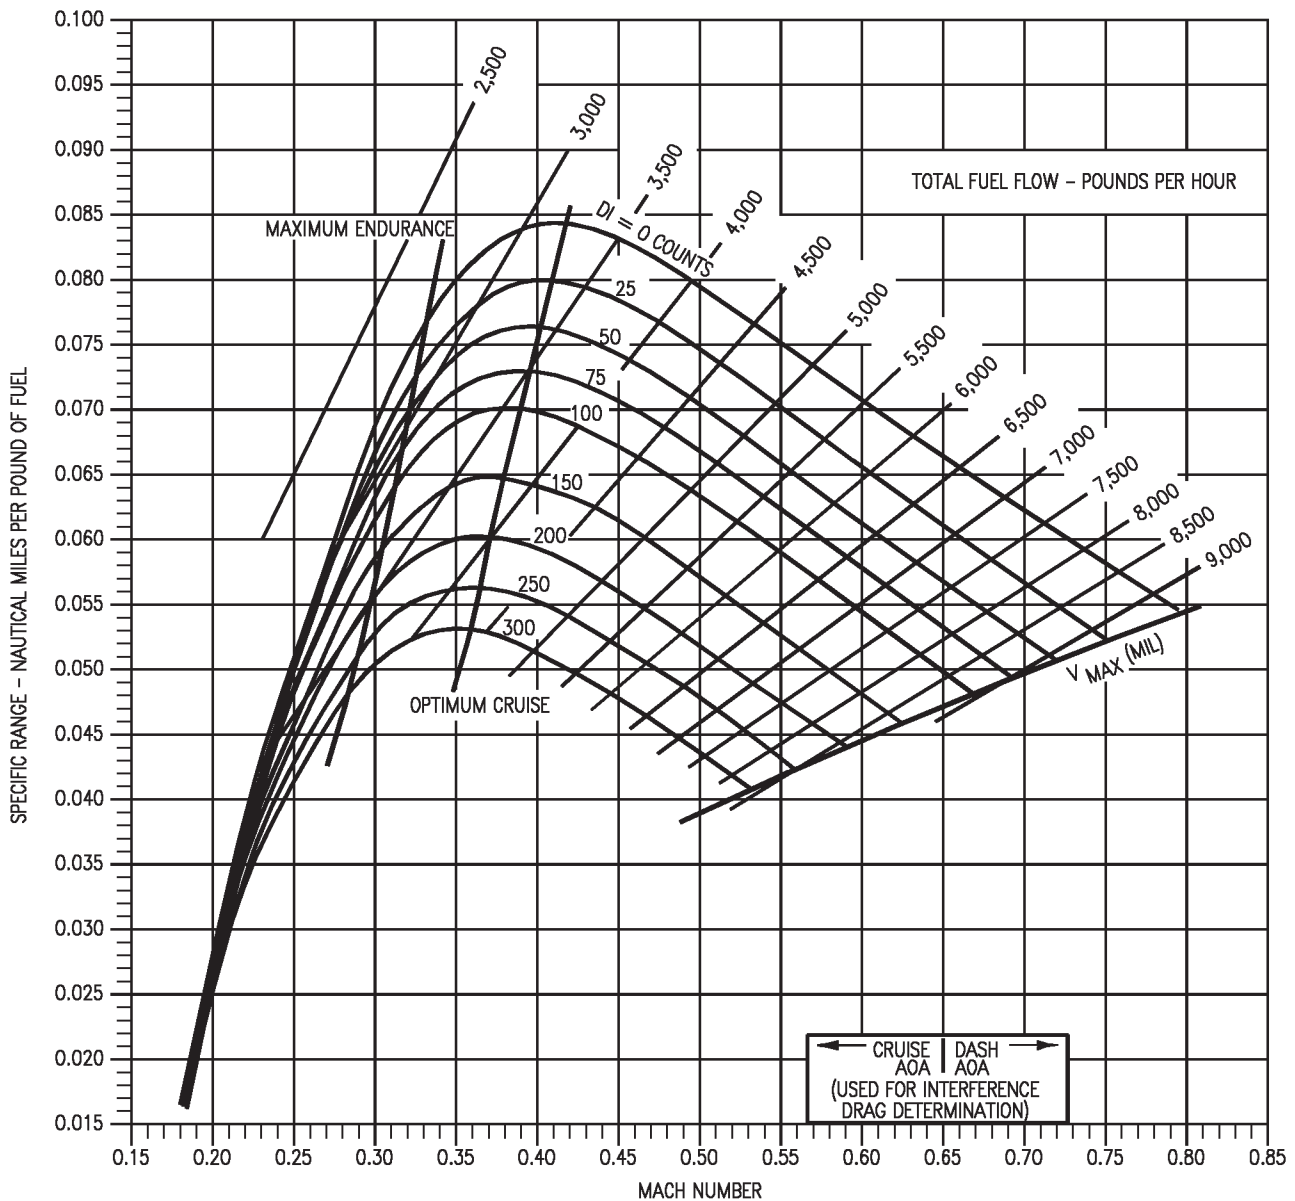

18AC-NFM-20-(214-1)12-CATI

Figure 11-109. Specific Range - One Engine Operating - 5,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400

ONE ENGINE OPERATING  
5,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 5°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

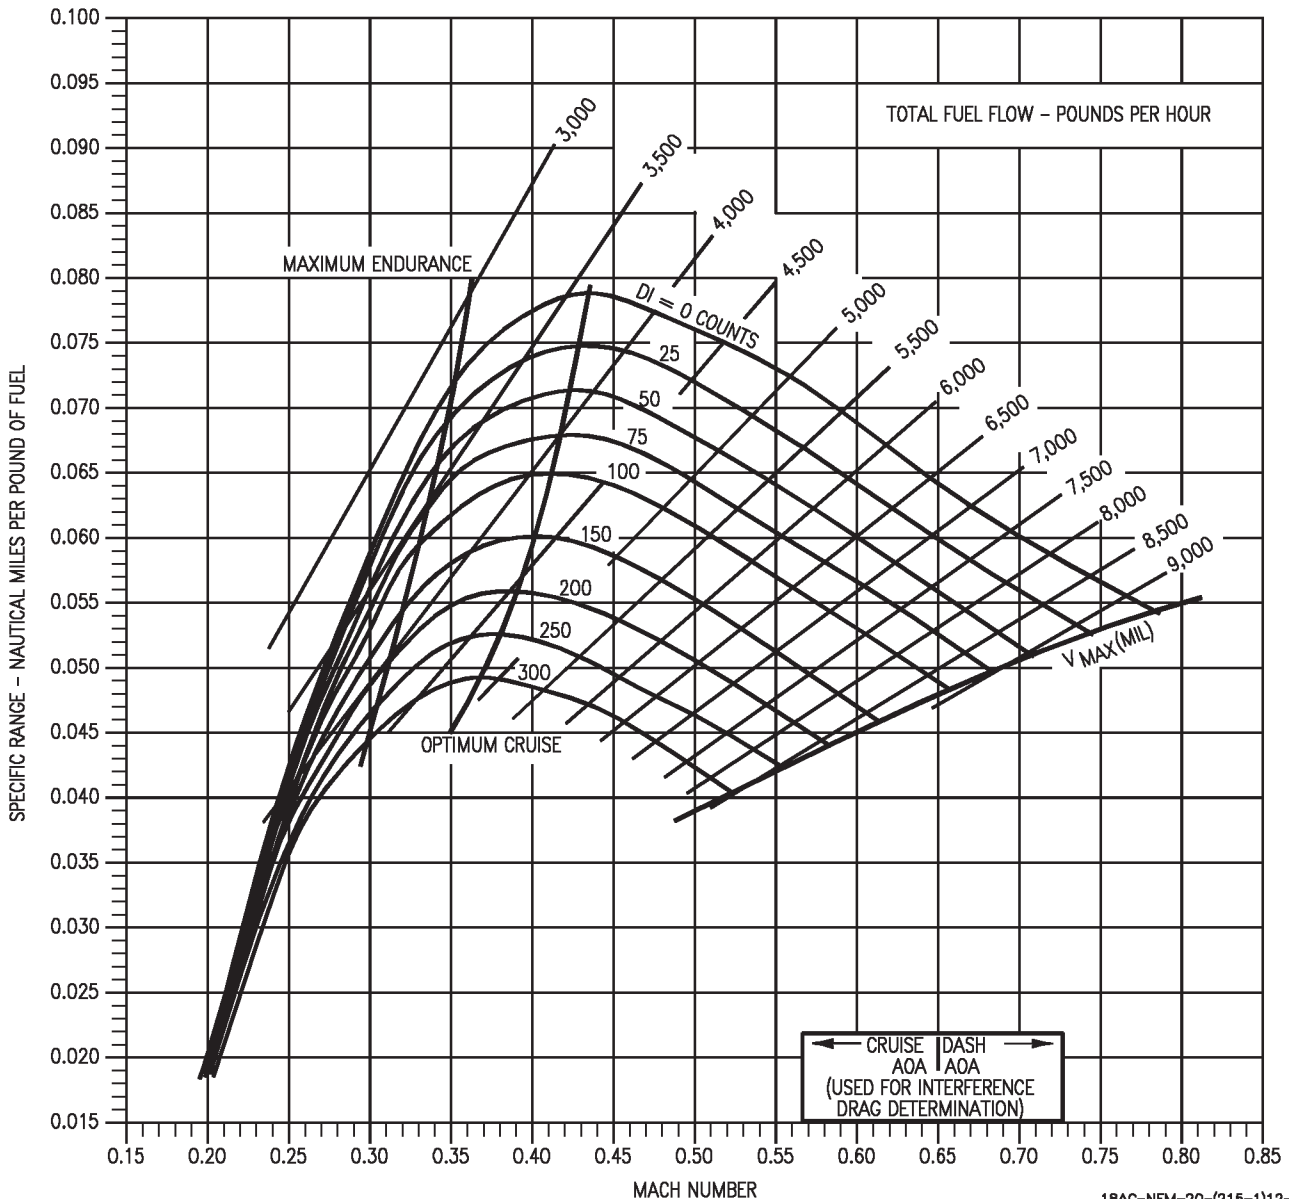

18AC-NFM-20-(215-1)12-CAT1

Figure 11-110. Specific Range - One Engine Operating - 5,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
5,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 5°C


| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

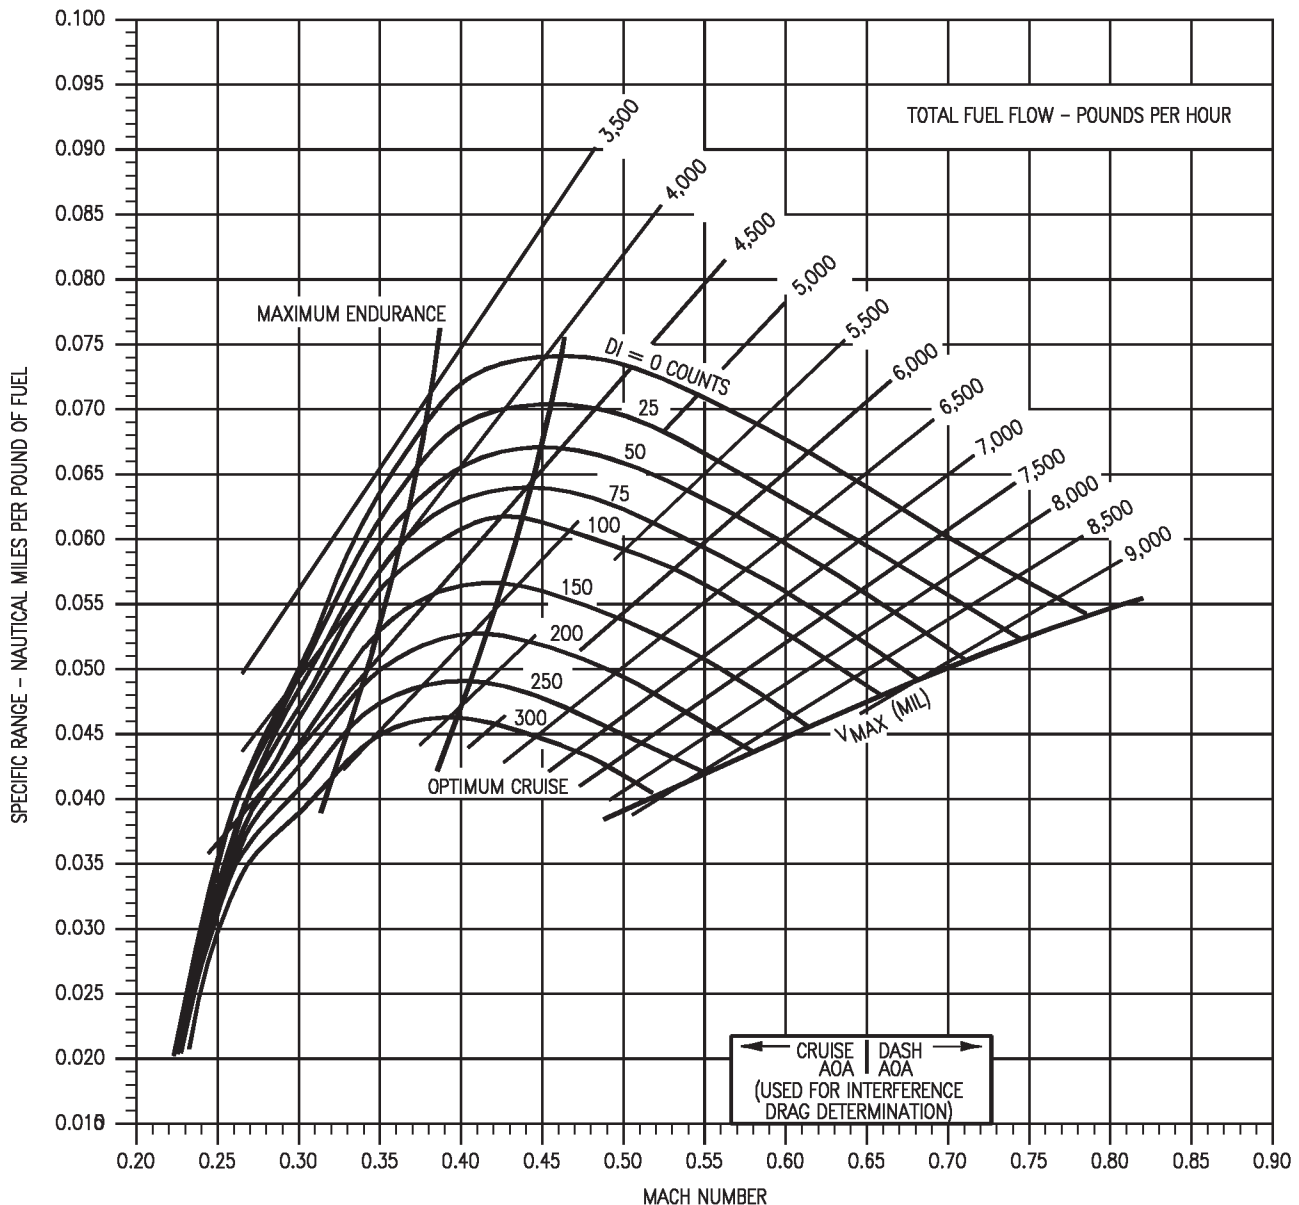

18AC-NFM-20-(216-1)12-CAT1

Figure 11-111. Specific Range - One Engine Operating - 5,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
5,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = 5°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

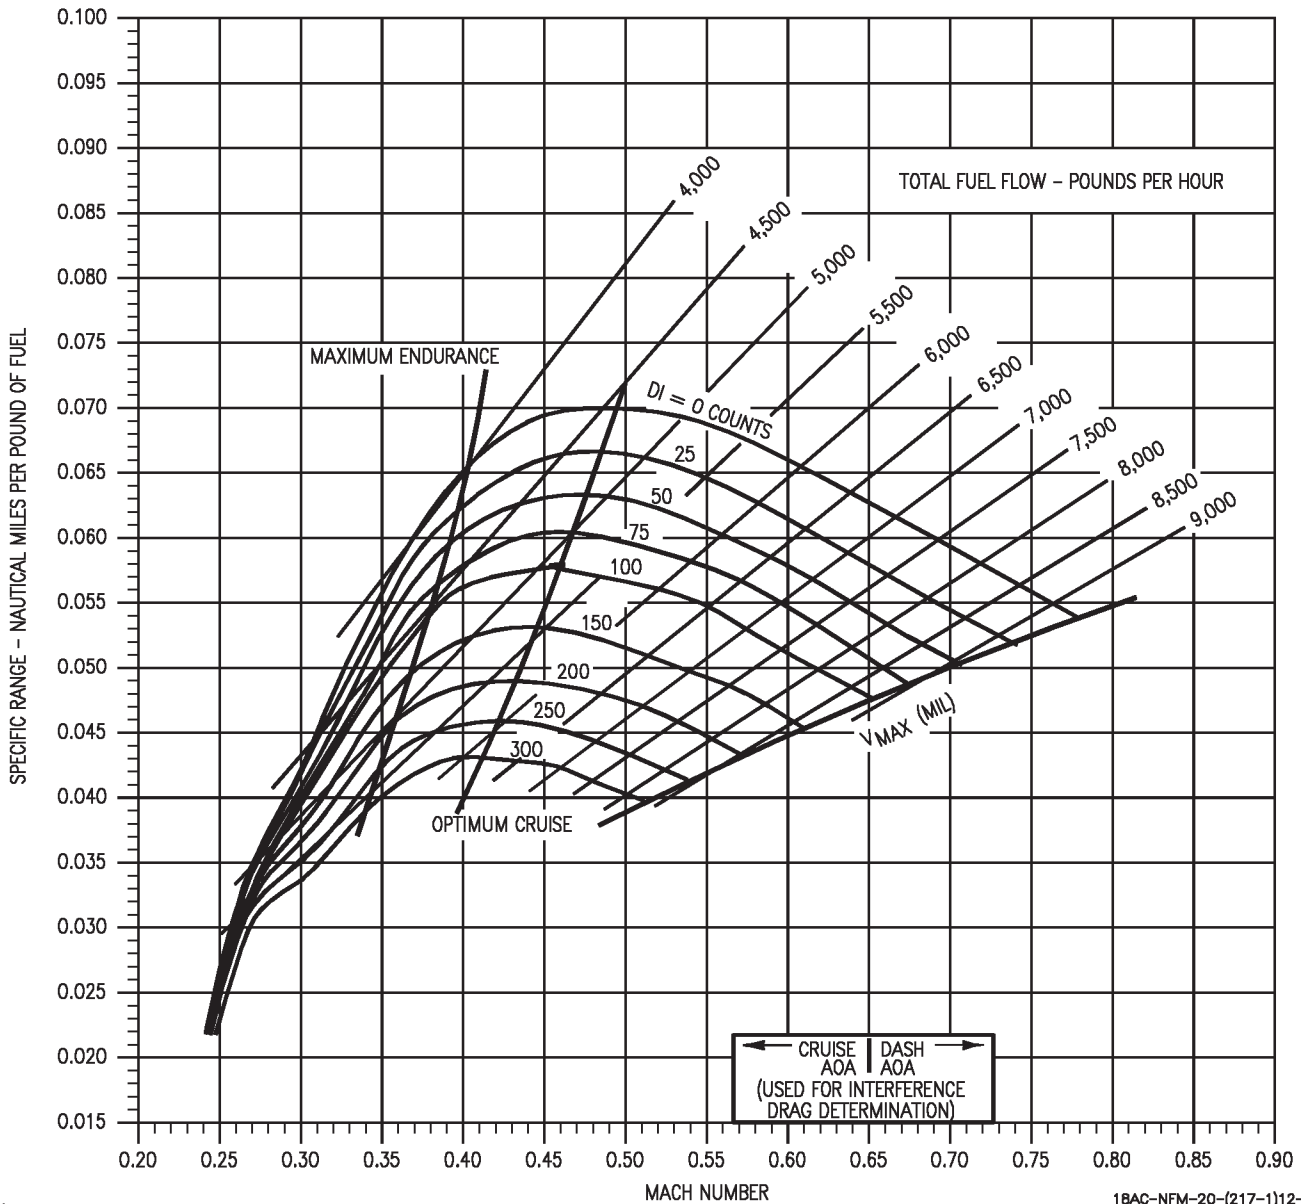


Figure 11-112. Specific Range - One Engine Operating - 5,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
5,000 FEET - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP.= 5°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

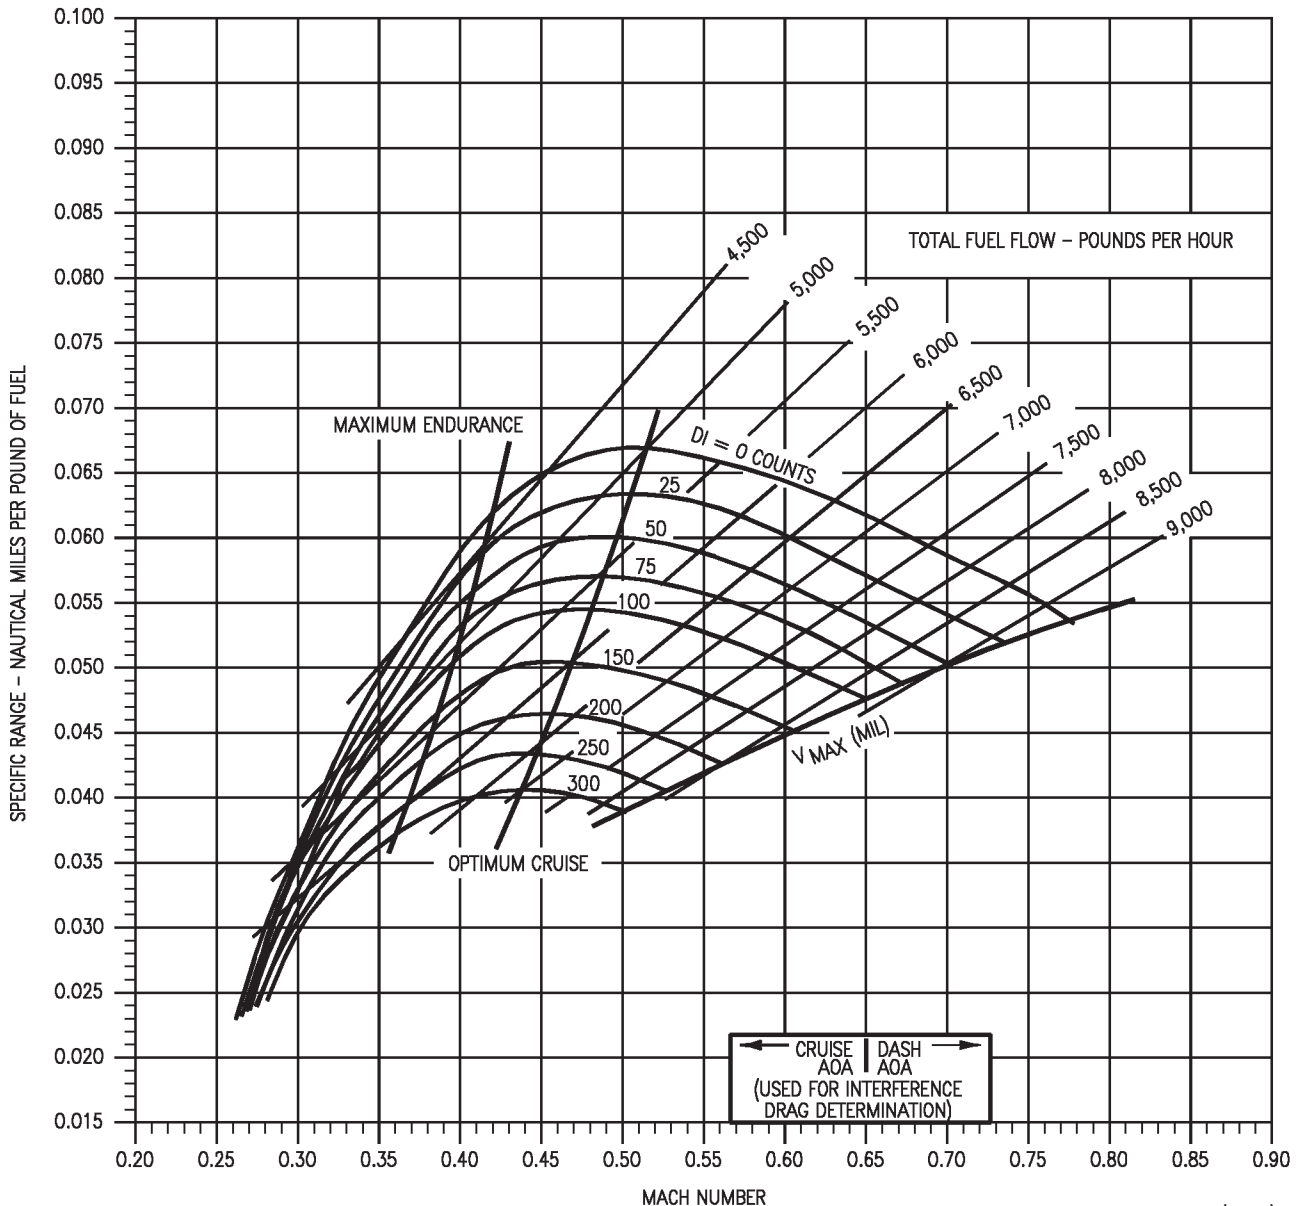

18AC-NFM-20-(218-1)12-CAT1

Figure 11-113. Specific Range - One Engine Operating - 5,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
5,000 FEET - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP.= 5°C


GUIDE

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

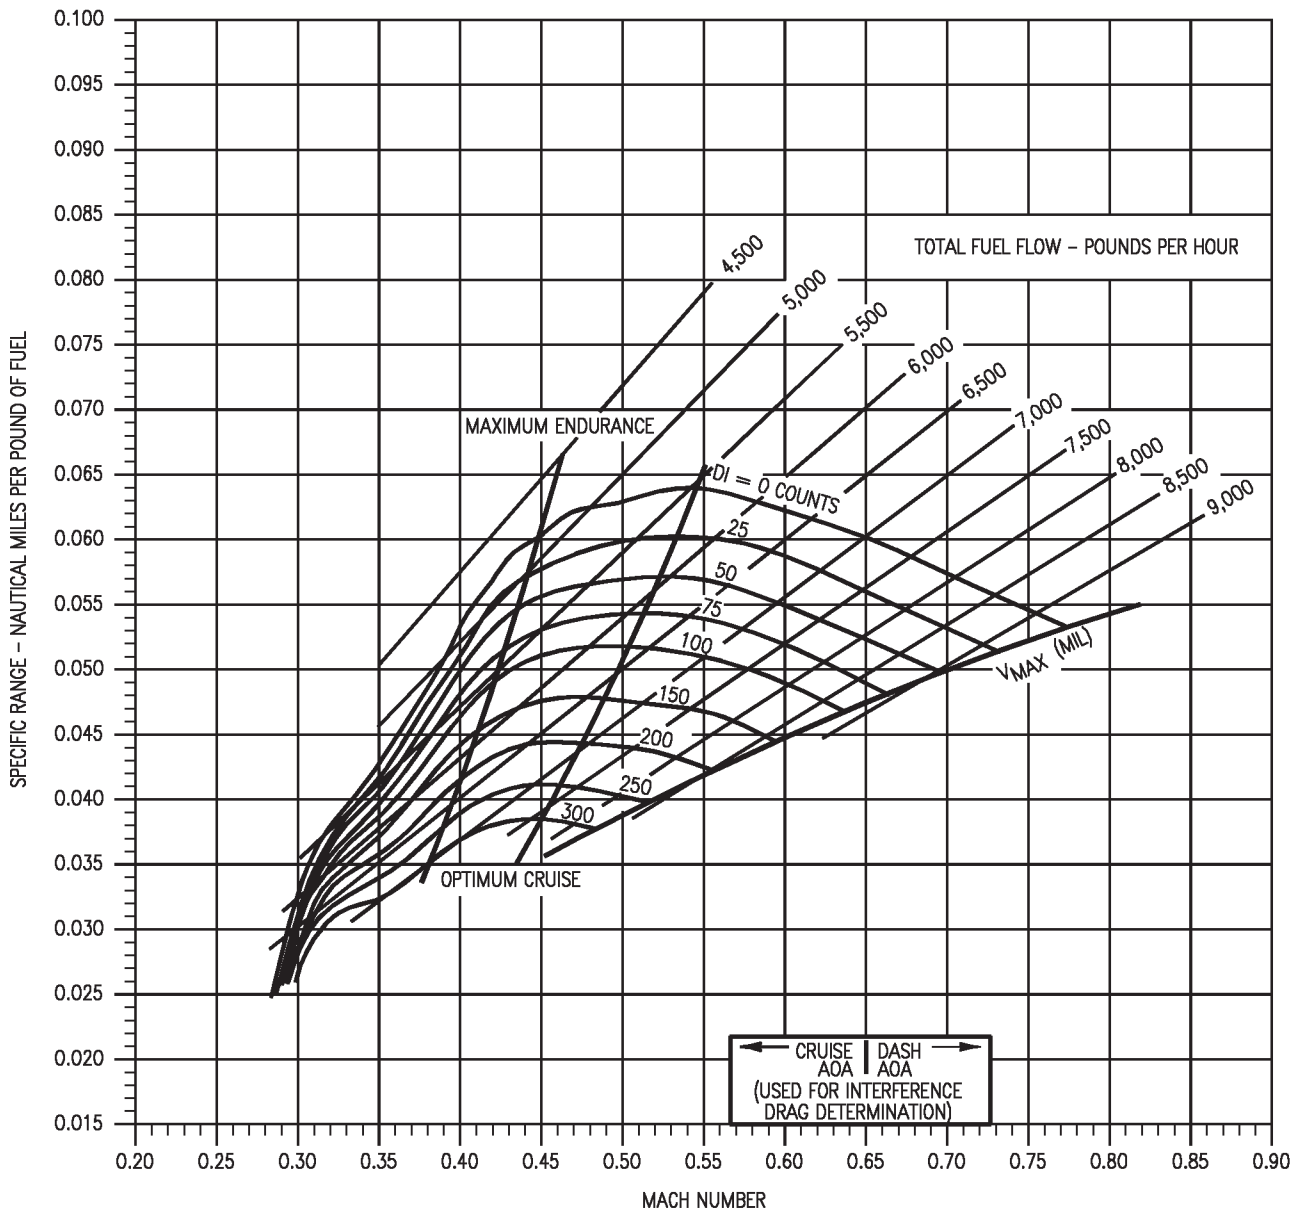

18AC-NFM-20-(219-1)12-CATI

Figure 11-114. Specific Range - One Engine Operating - 5,000 Feet - 46,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
5,000 FEET - 50,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP.= 5°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

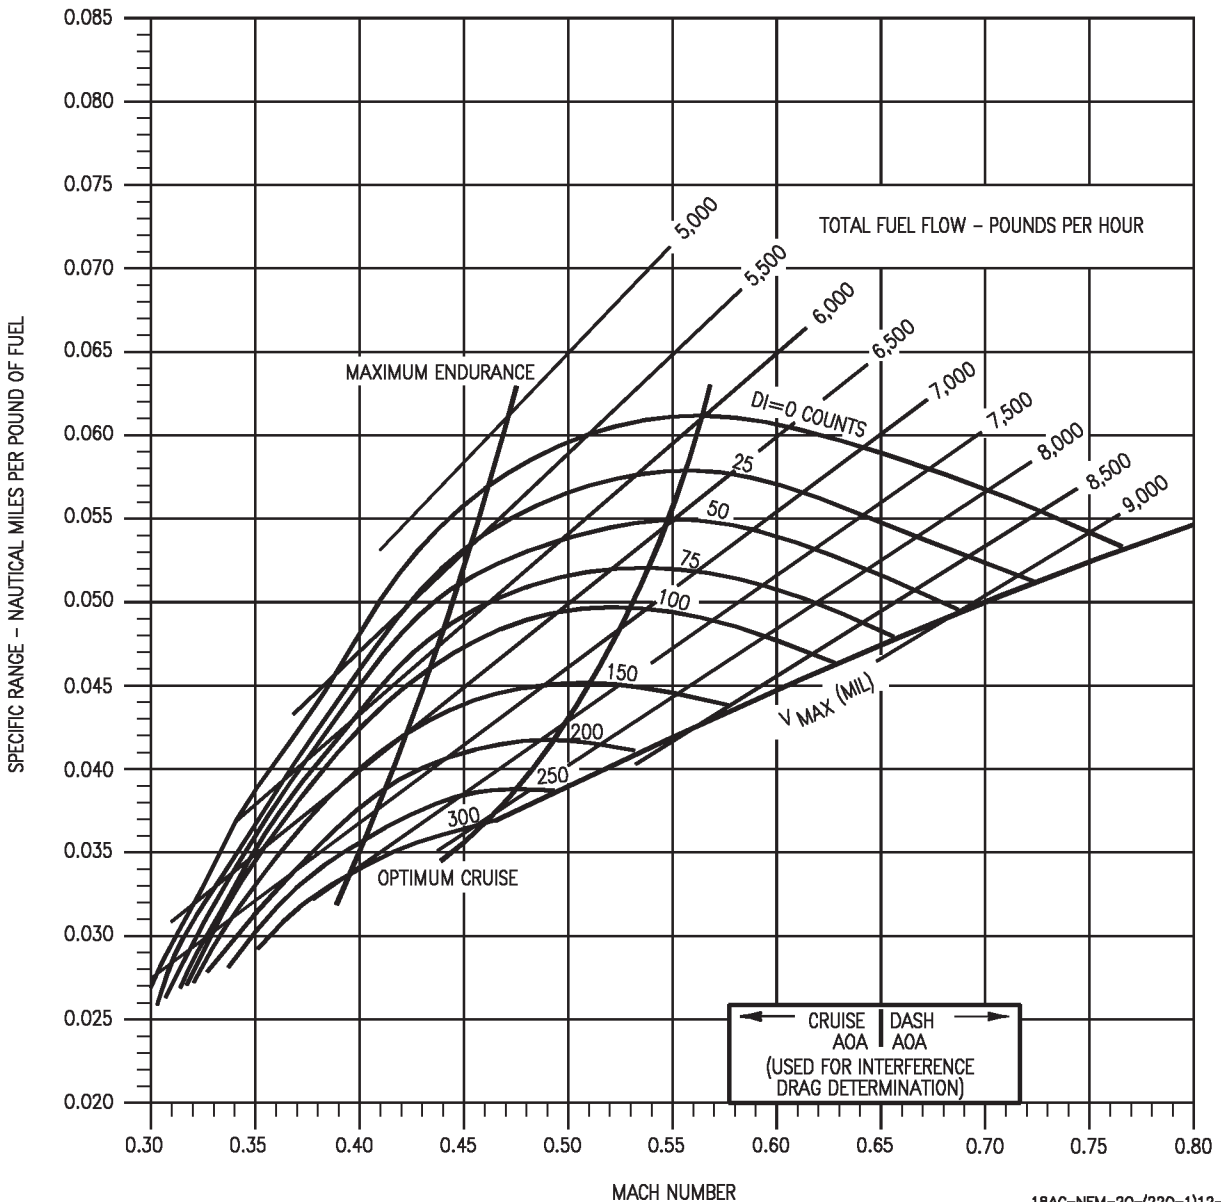

18AC-NFM-20-(220-1)12-CAT1

Figure 11-115. Specific Range - One Engine Operating - 5,000 Feet - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
10,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -5°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

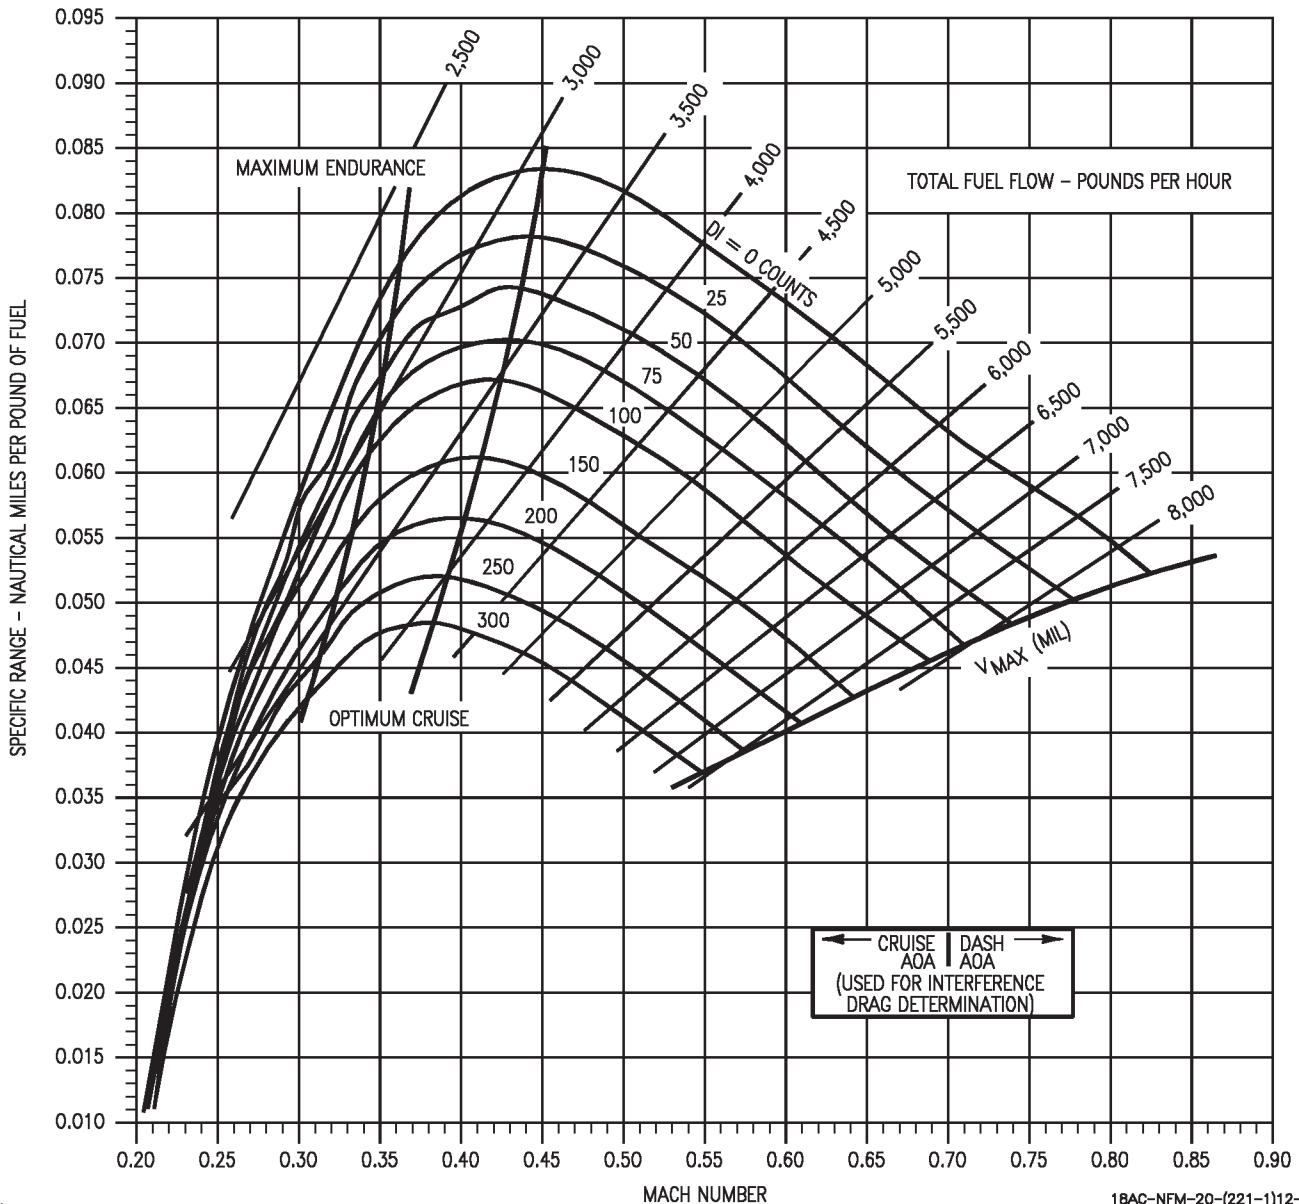


Figure 11-116. Specific Range - One Engine Operating - 10,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
10,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -5°C


| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

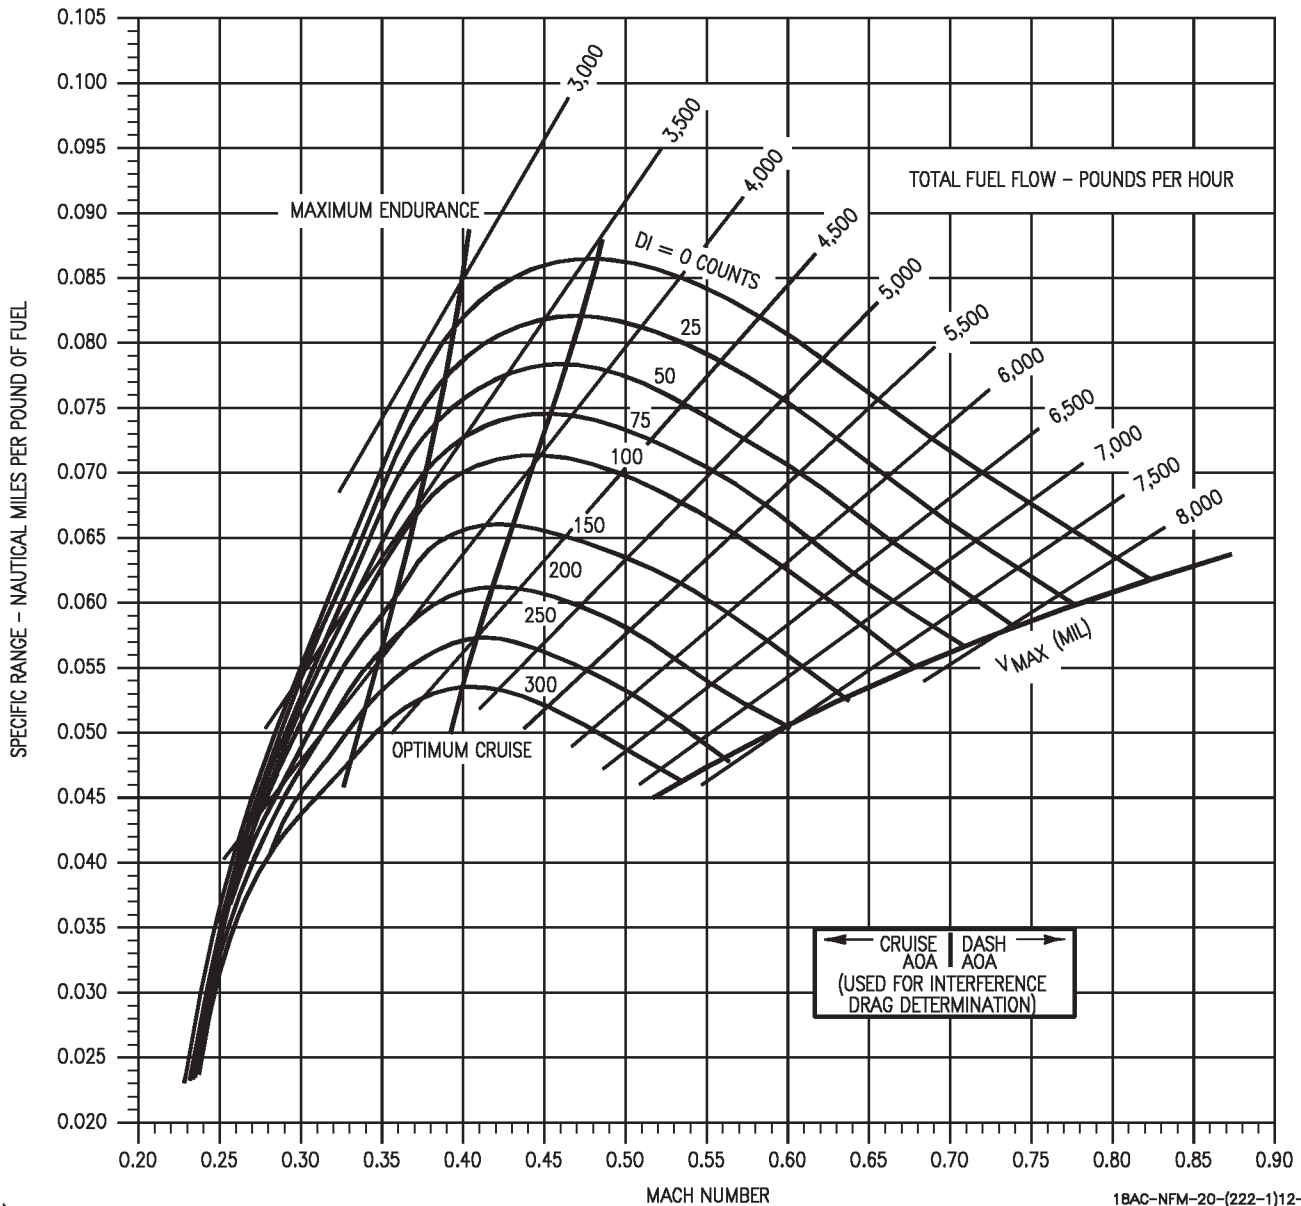

18AC-NFM-20-(222-1)12-CAT1

Figure 11-117. Specific Range - One Engine Operating - 10,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
10,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -5°C

GUIDE

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

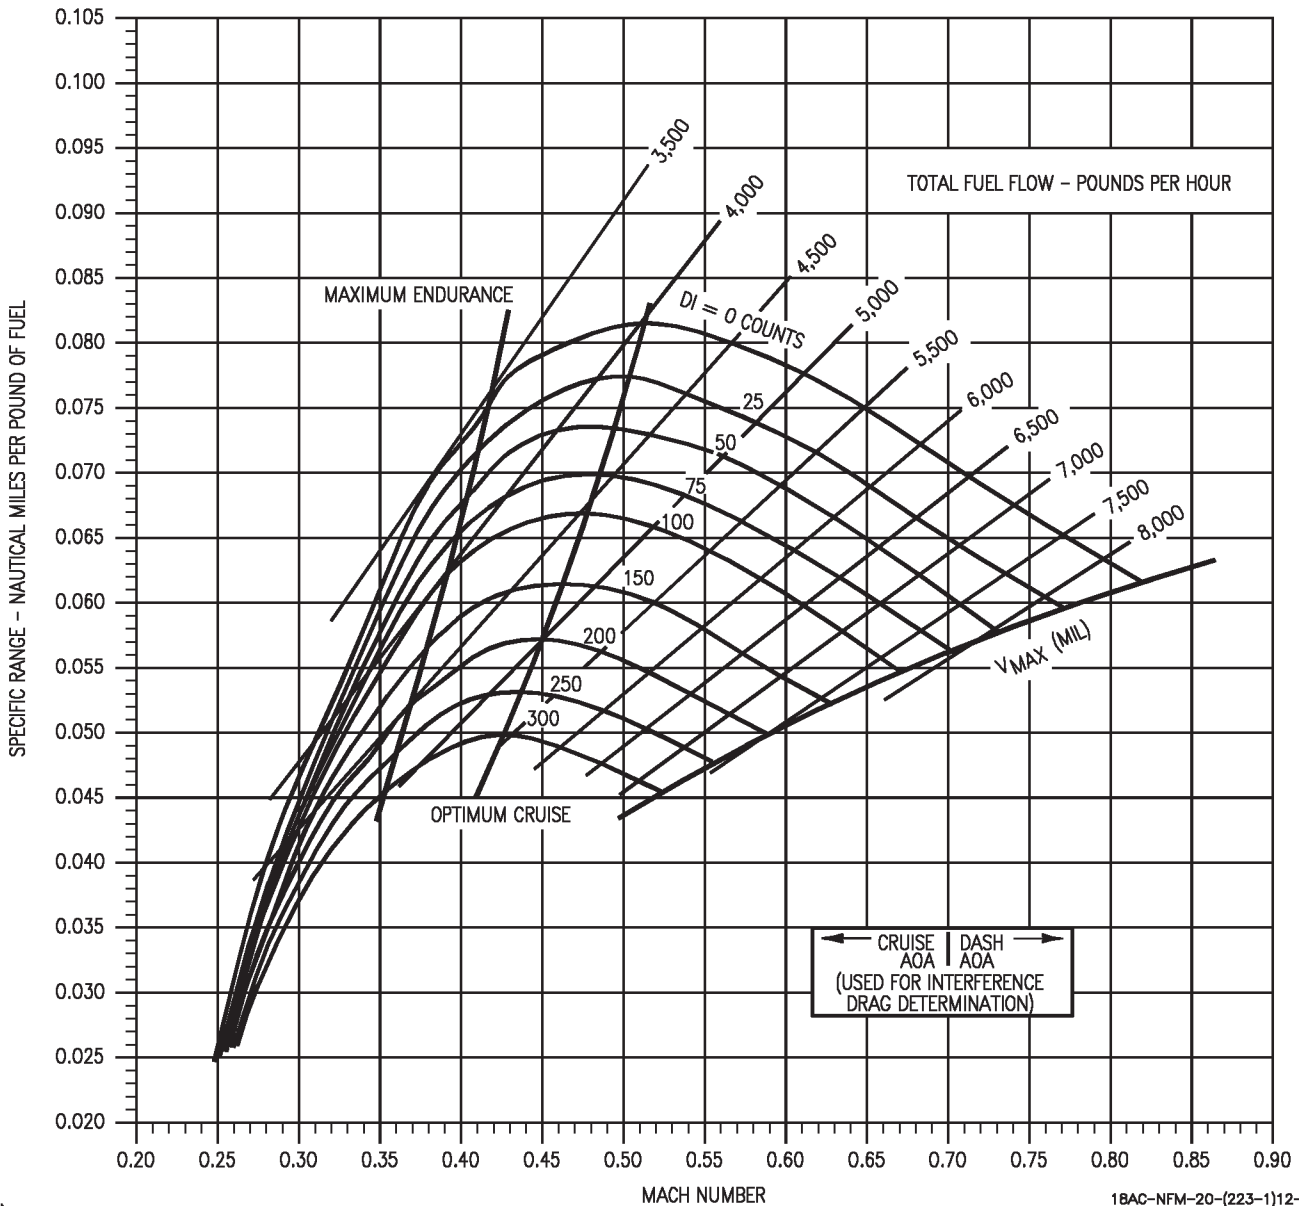


Figure 11-118. Specific Range - One Engine Operating - 10,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
10,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -5°C


| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

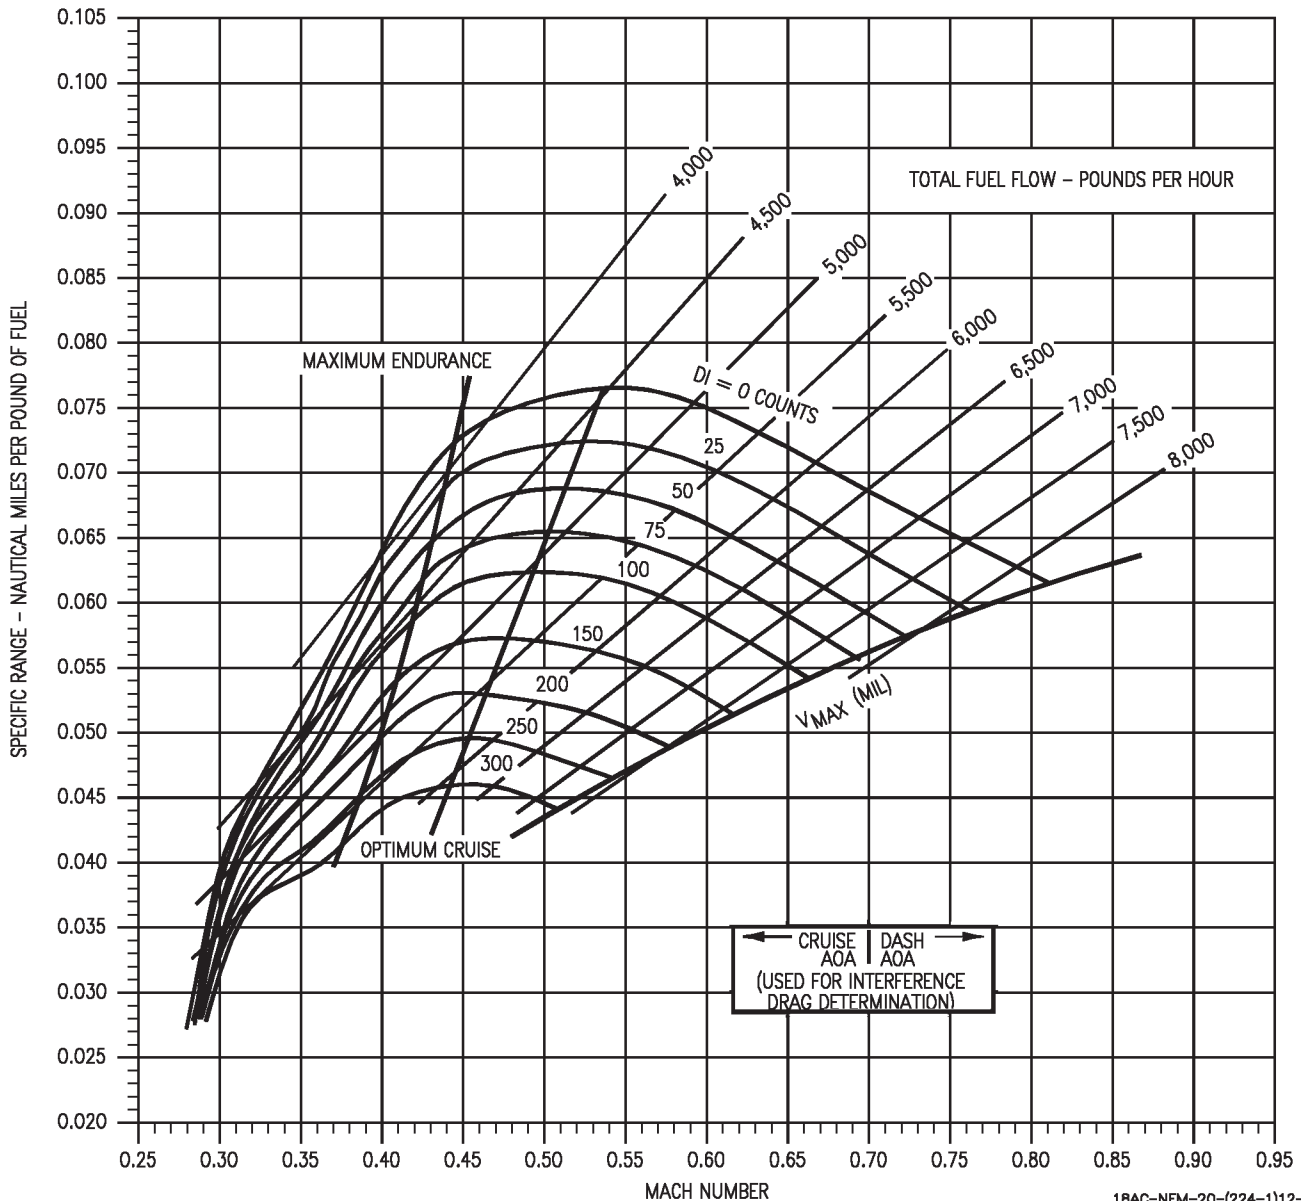

18AC-NFM-20-(224-1)12-CAT1

Figure 11-119. Specific Range - One Engine Operating - 10,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
10,000 FEET - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -5°C


GUIDE

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

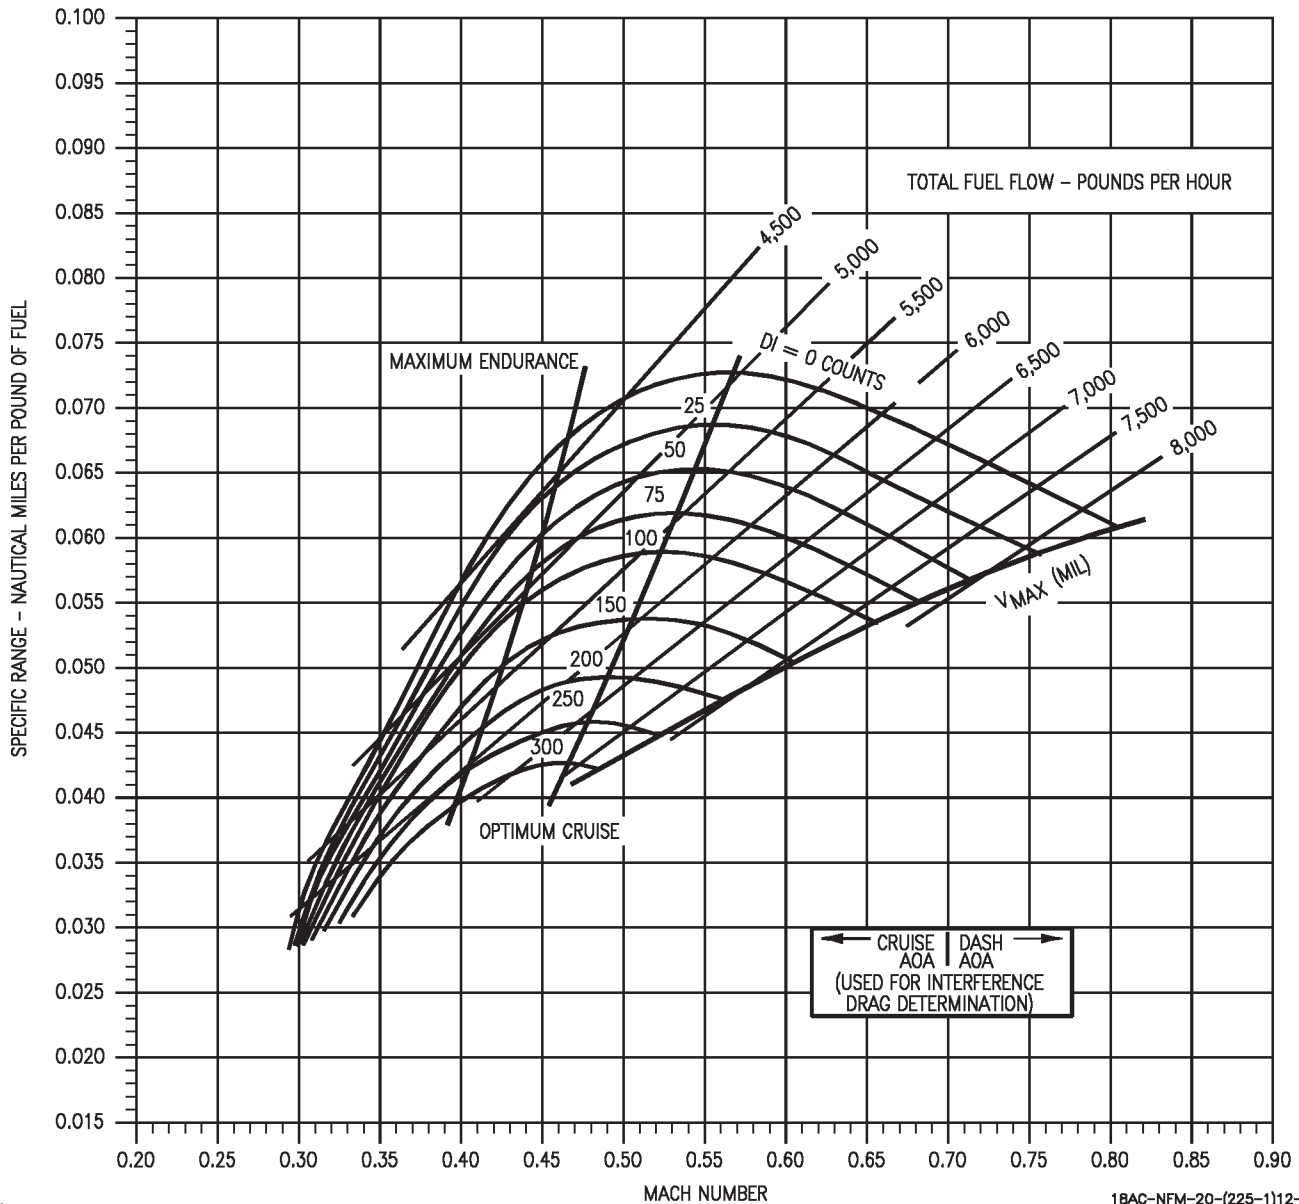

18AC-NFM-20-(225-1)12-CAT1

Figure 11-120. Specific Range - One Engine Operating - 10,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
ONE ENGINE OPERATING  
10,000 FEET - 46,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING


NOTE: STD TEMP.= -5°C

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

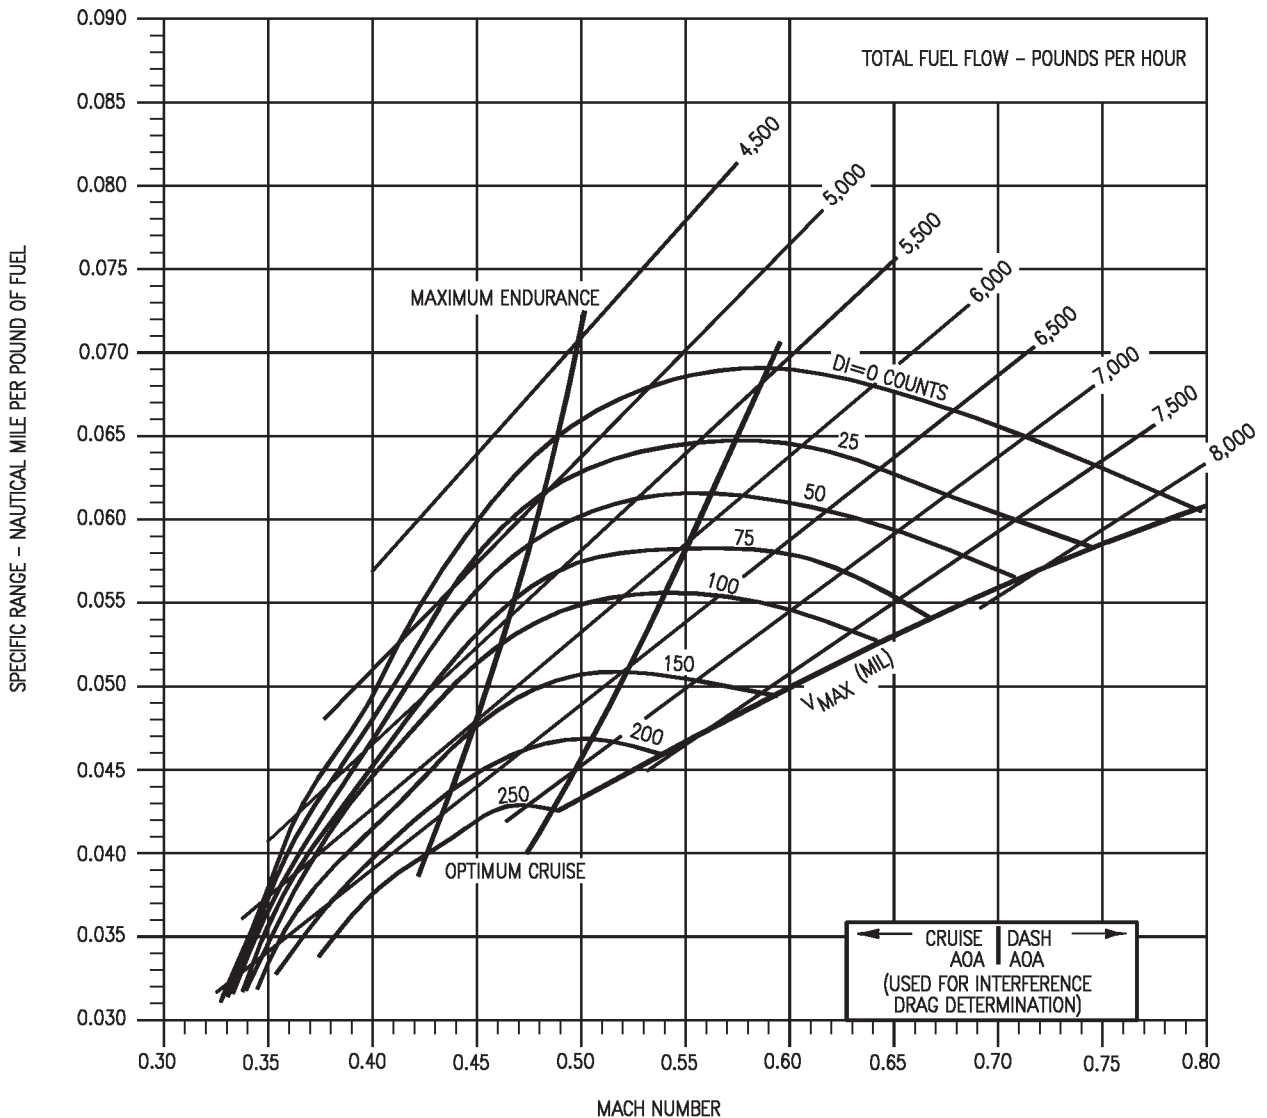

18AC-NFM-20-(226-1)12-CAT1

Figure 11-121. Specific Range - One Engine Operating - 10,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
ONE ENGINE OPERATING  
10,000 FEET - 50,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING


NOTE: STD TEMP. = -5°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

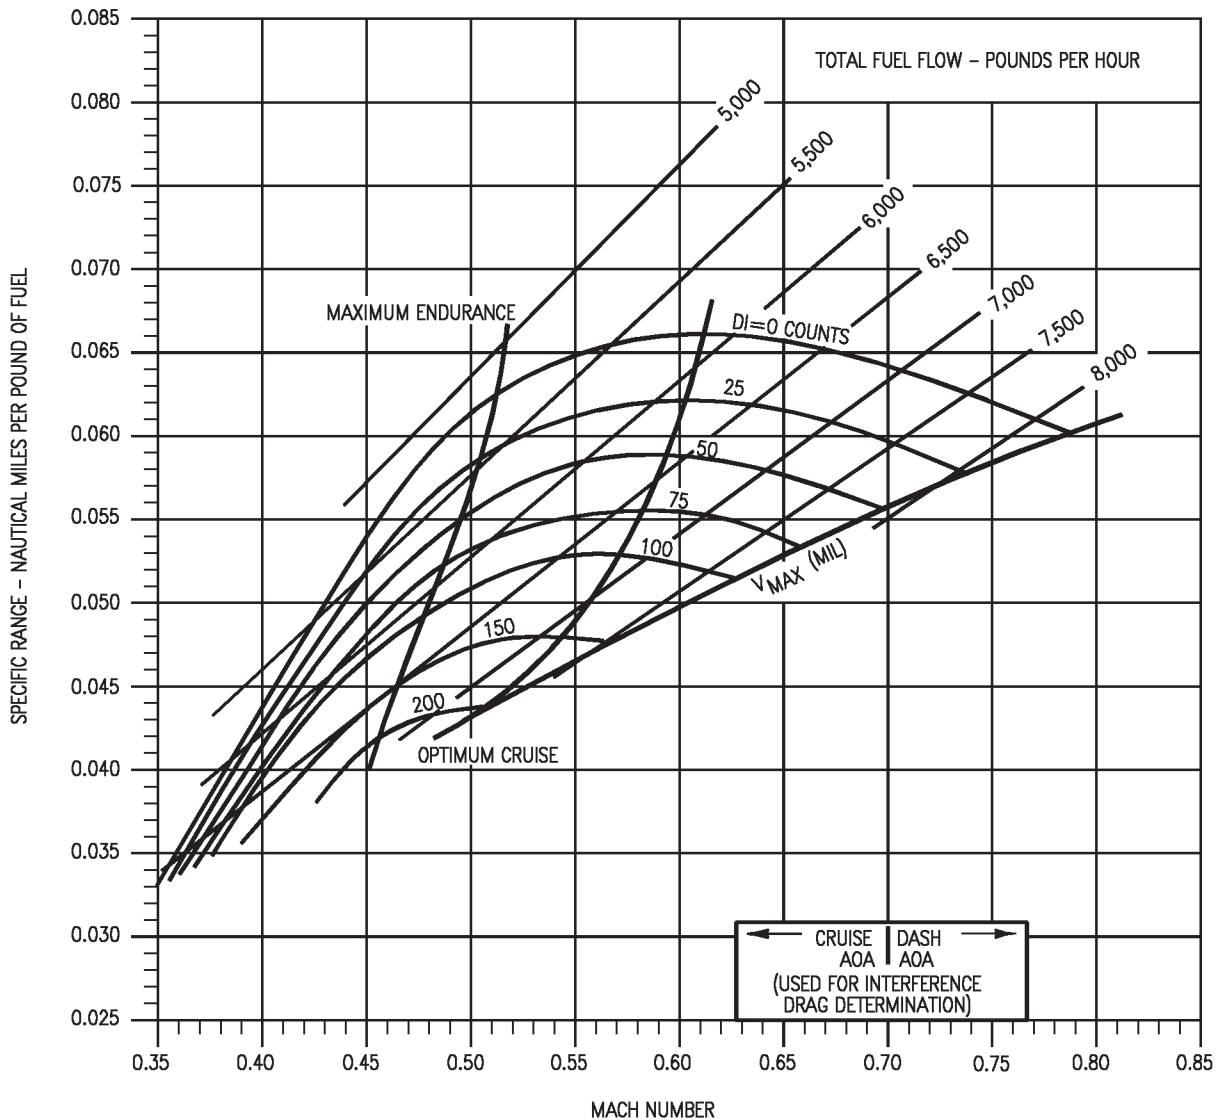

18AC-NFM-20-(227-1)12-CAT1

Figure 11-122. Specific Range - One Engine Operating - 10,000 Feet - 50,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
15,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

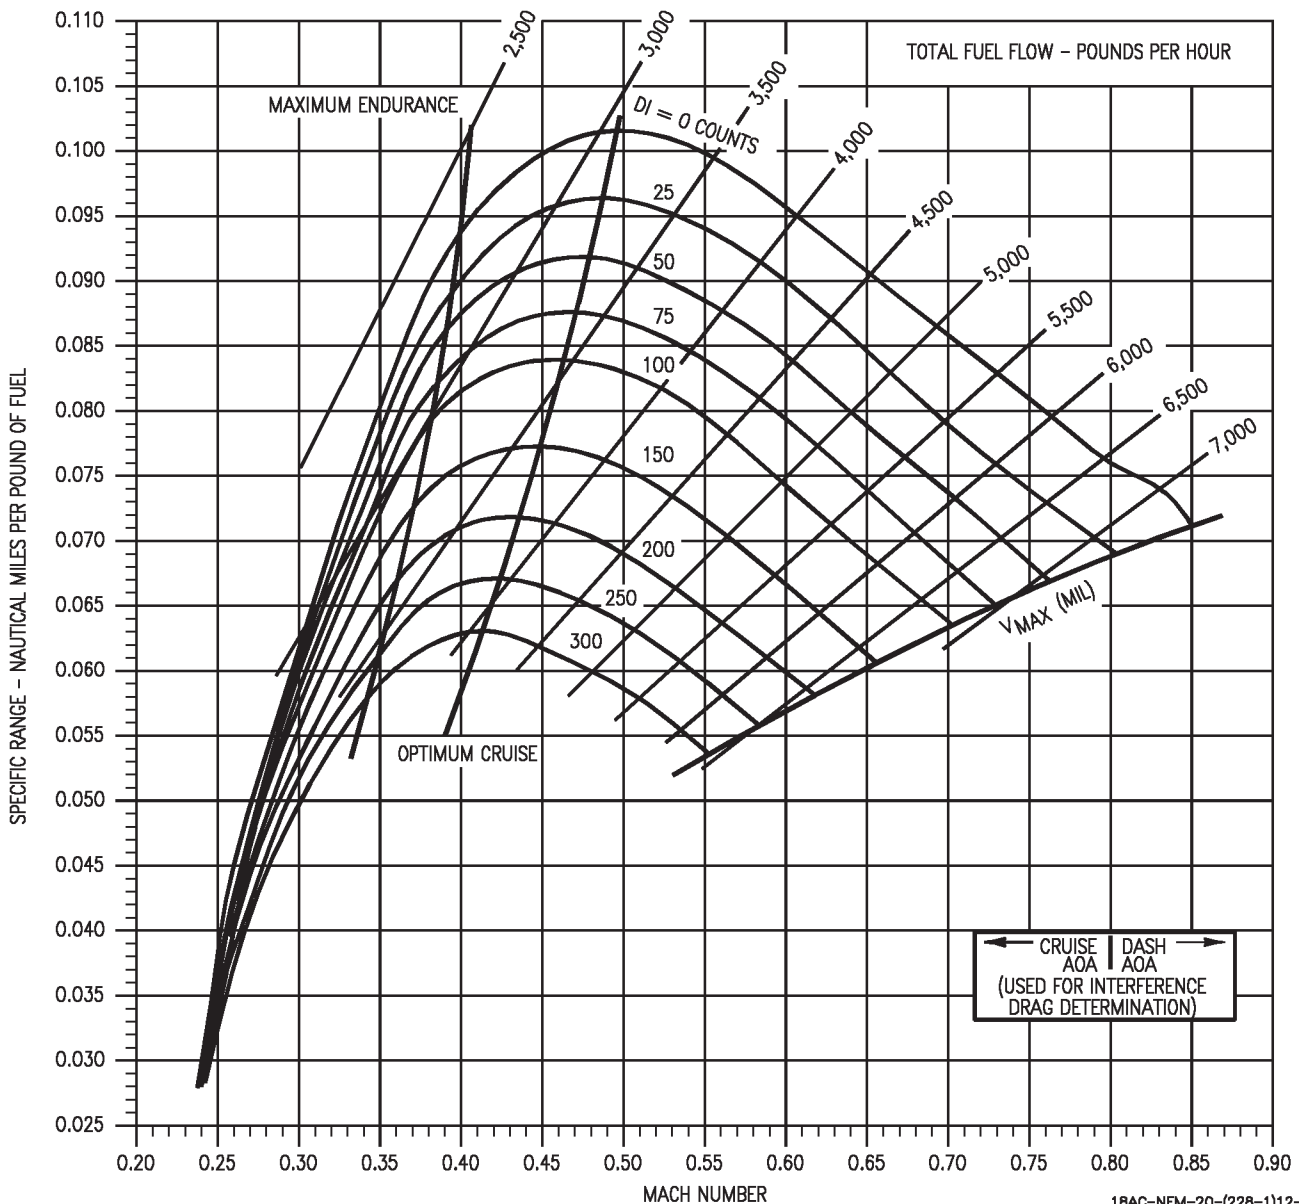

18AC-NFM-20-(228-1)12-CAT1

Figure 11-123. Specific Range - One Engine Operating - 15,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
15,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

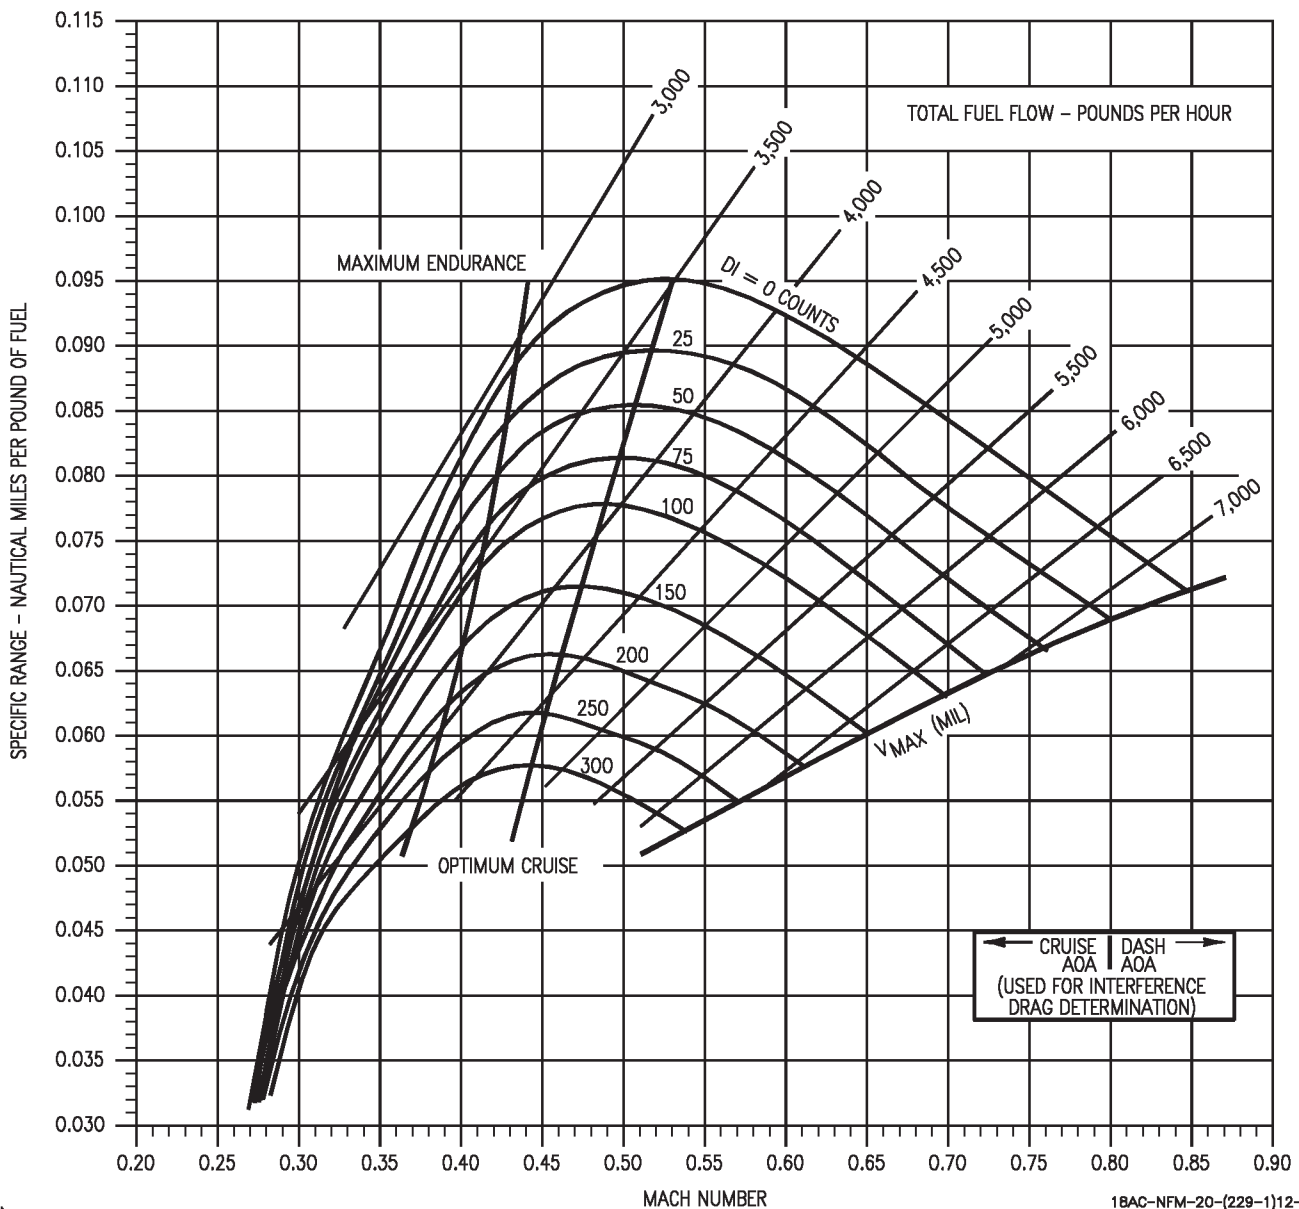

18AC-NFM-20-(229-1)12-CAT1

Figure 11-124. Specific Range - One Engine Operating - 15,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
15,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -15°C


| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

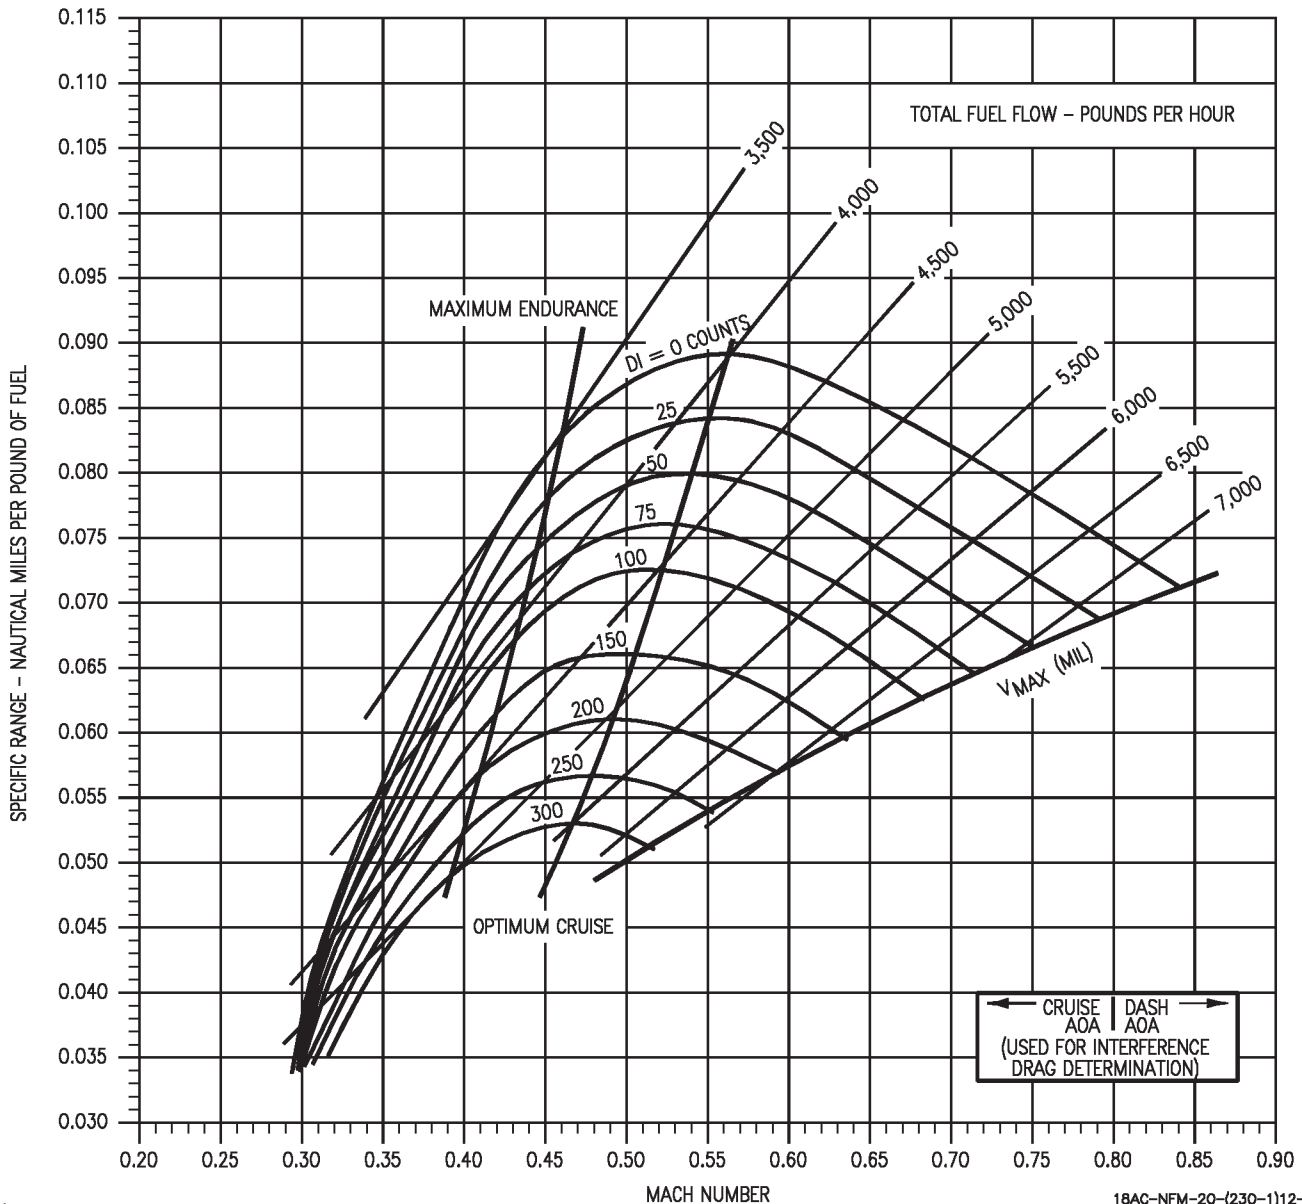

18AC-NFM-20-(230-1)12-CAT1

Figure 11-125. Specific Range - One Engine Operating - 15,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
15,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

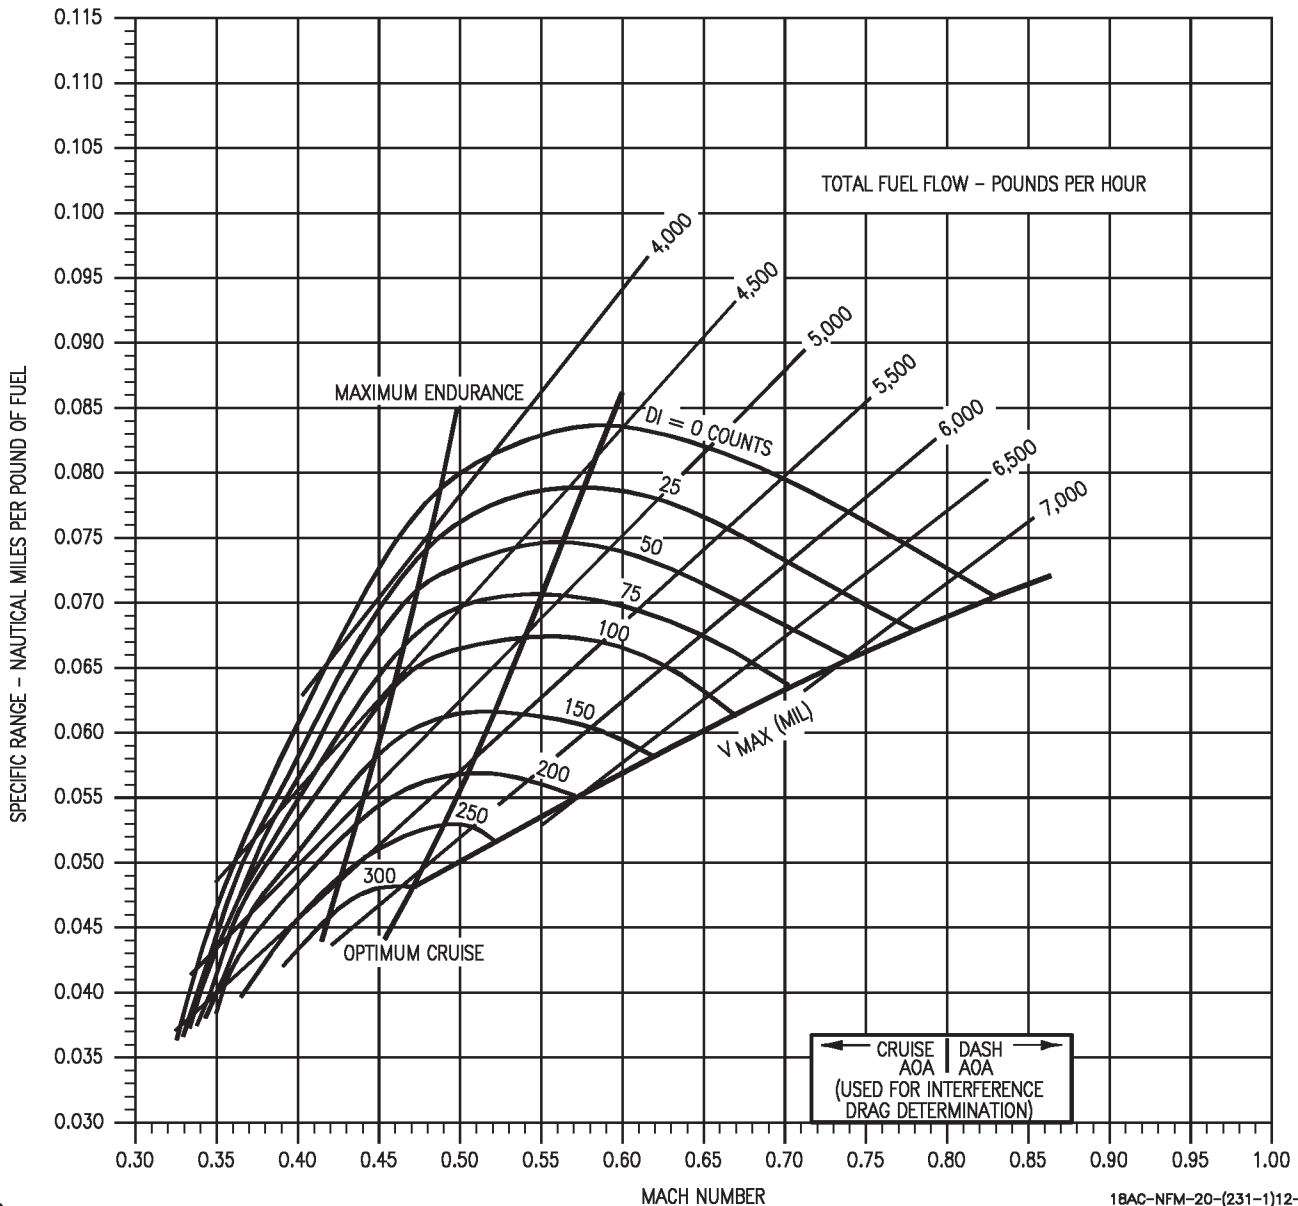

18AC-NFM-20-(231-1)12-CAT1

Figure 11-126. Specific Range - One Engine Operating - 15,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE


F404-GE-400  
ONE ENGINE OPERATING  
15,000 FEET - 42,000 POUNDS

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING


NOTE: STD TEMP. = -15°C

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

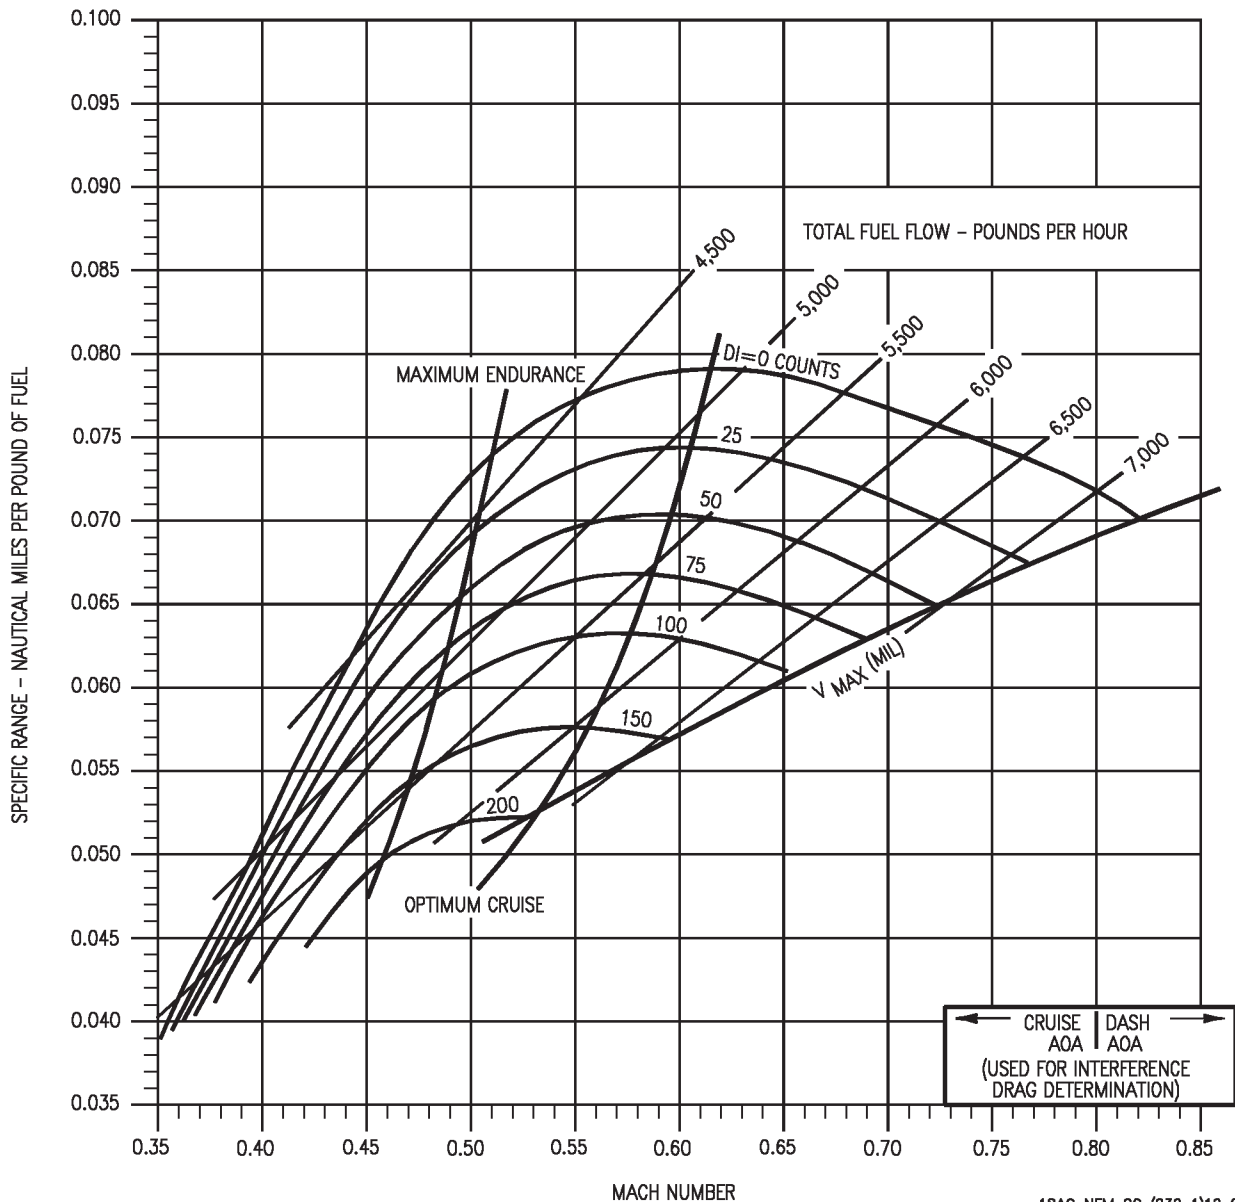

18AC-NFM-20-(232-1)12-CAT1

Figure 11-127. Specific Range - One Engine Operating - 15,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
15,000 FEET - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

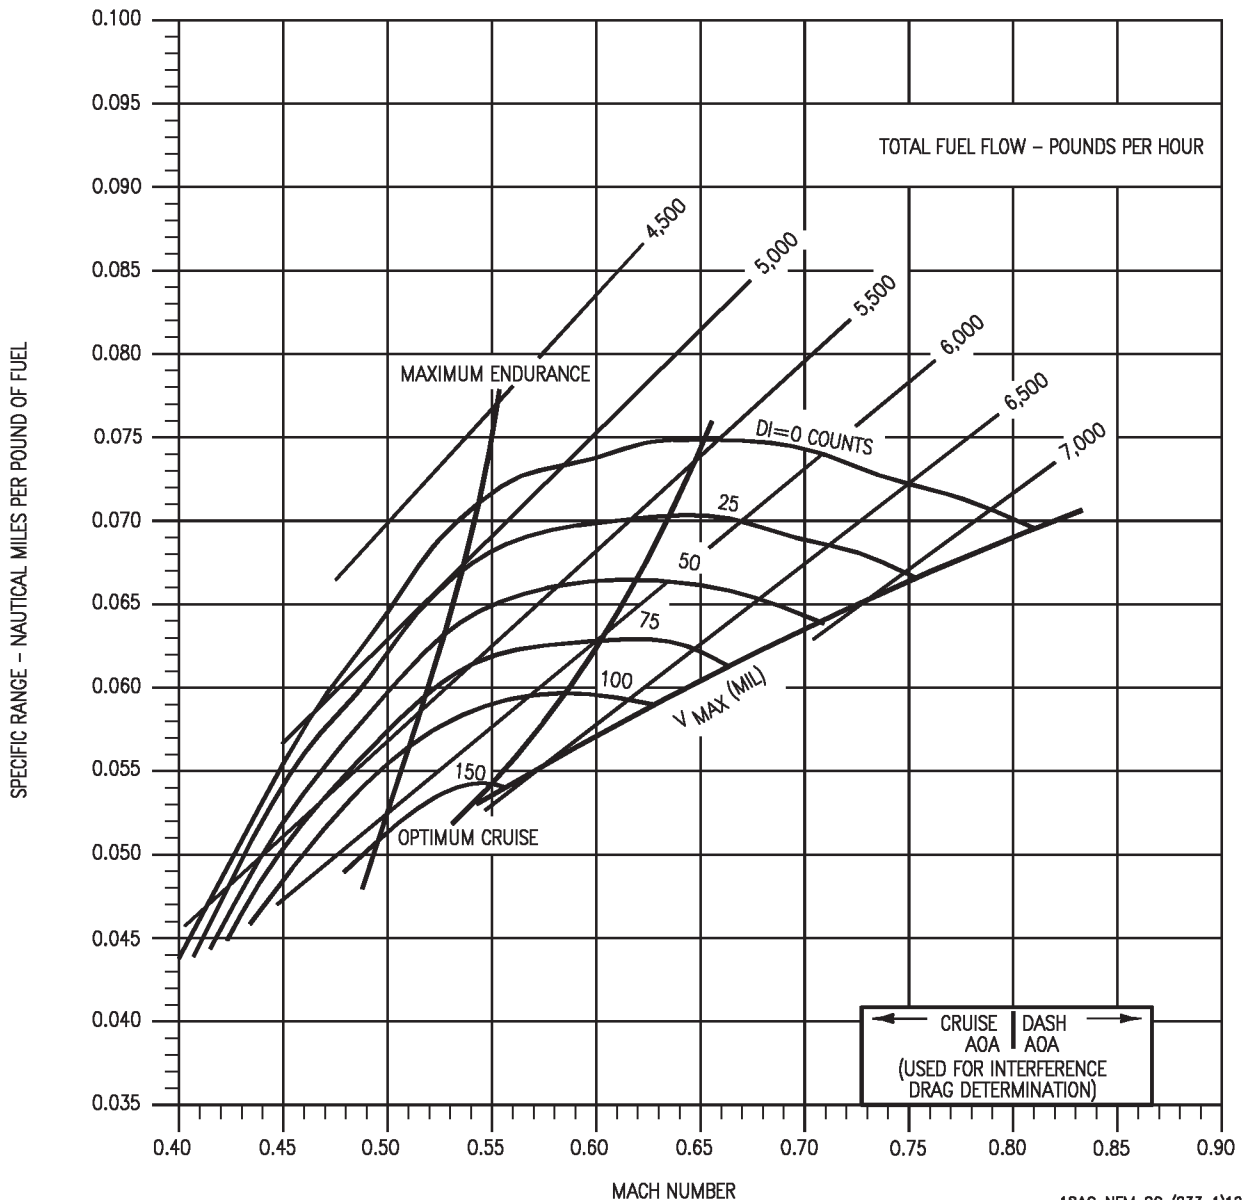

18AC-NFM-20-(233-1)12-CATI

Figure 11-128. Specific Range - One Engine Operating - 15,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
15,000 FEET - 50,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -15°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

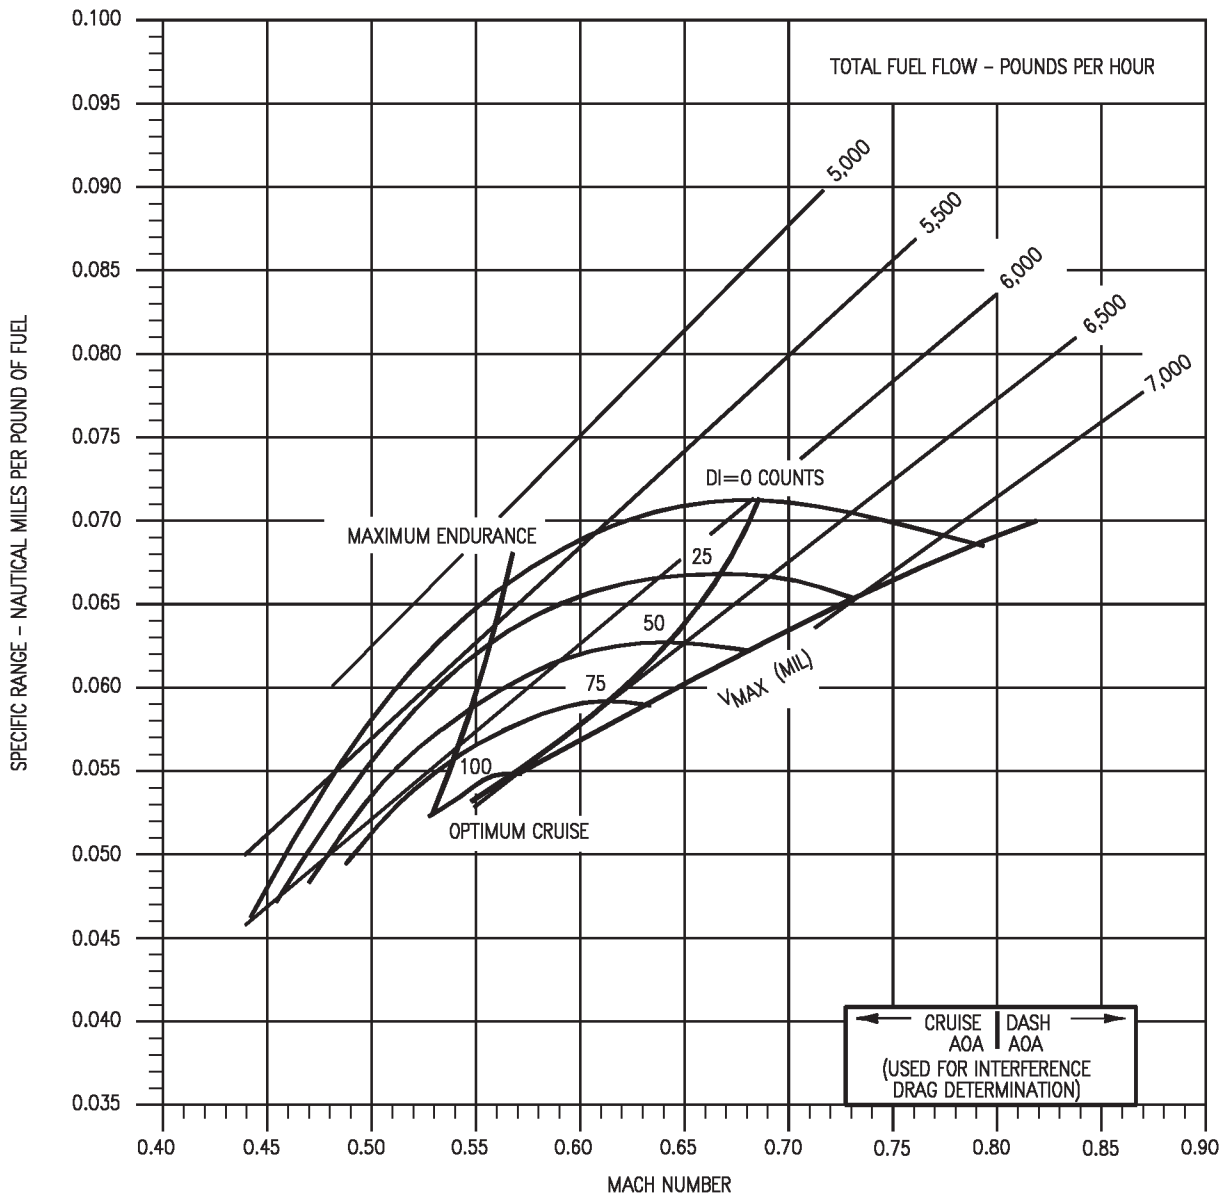

18AC-NFM-20-(234-1)12-CATI

Figure 11-129. Specific Range - One Engine Operating - 15,000 Feet - 50,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
20,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

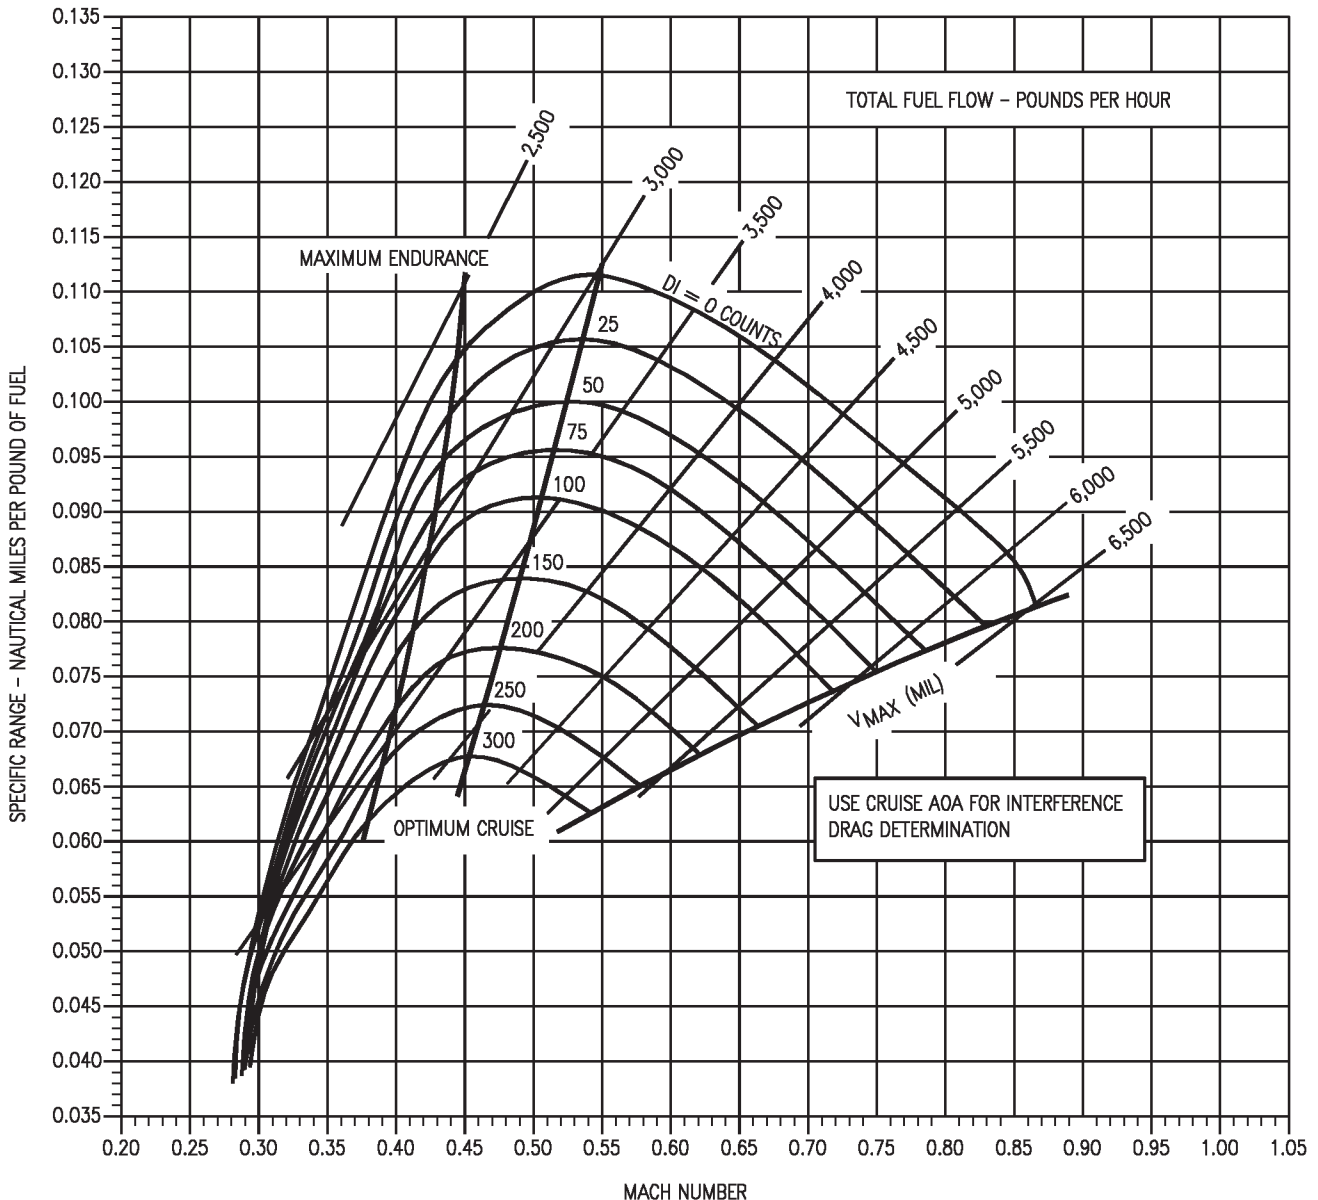

18AC-NFM-20-(235-1)12-CAT1

Figure 11-130. Specific Range - One Engine Operating - 20,000 Feet - 26,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
20,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS |                         |
|---------------------|-------------------------|
| ΔT-°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                 | 1.07                    |
| -10                 | 1.04                    |
| 0                   | 1.00                    |
| +10                 | .95                     |
| +20                 | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

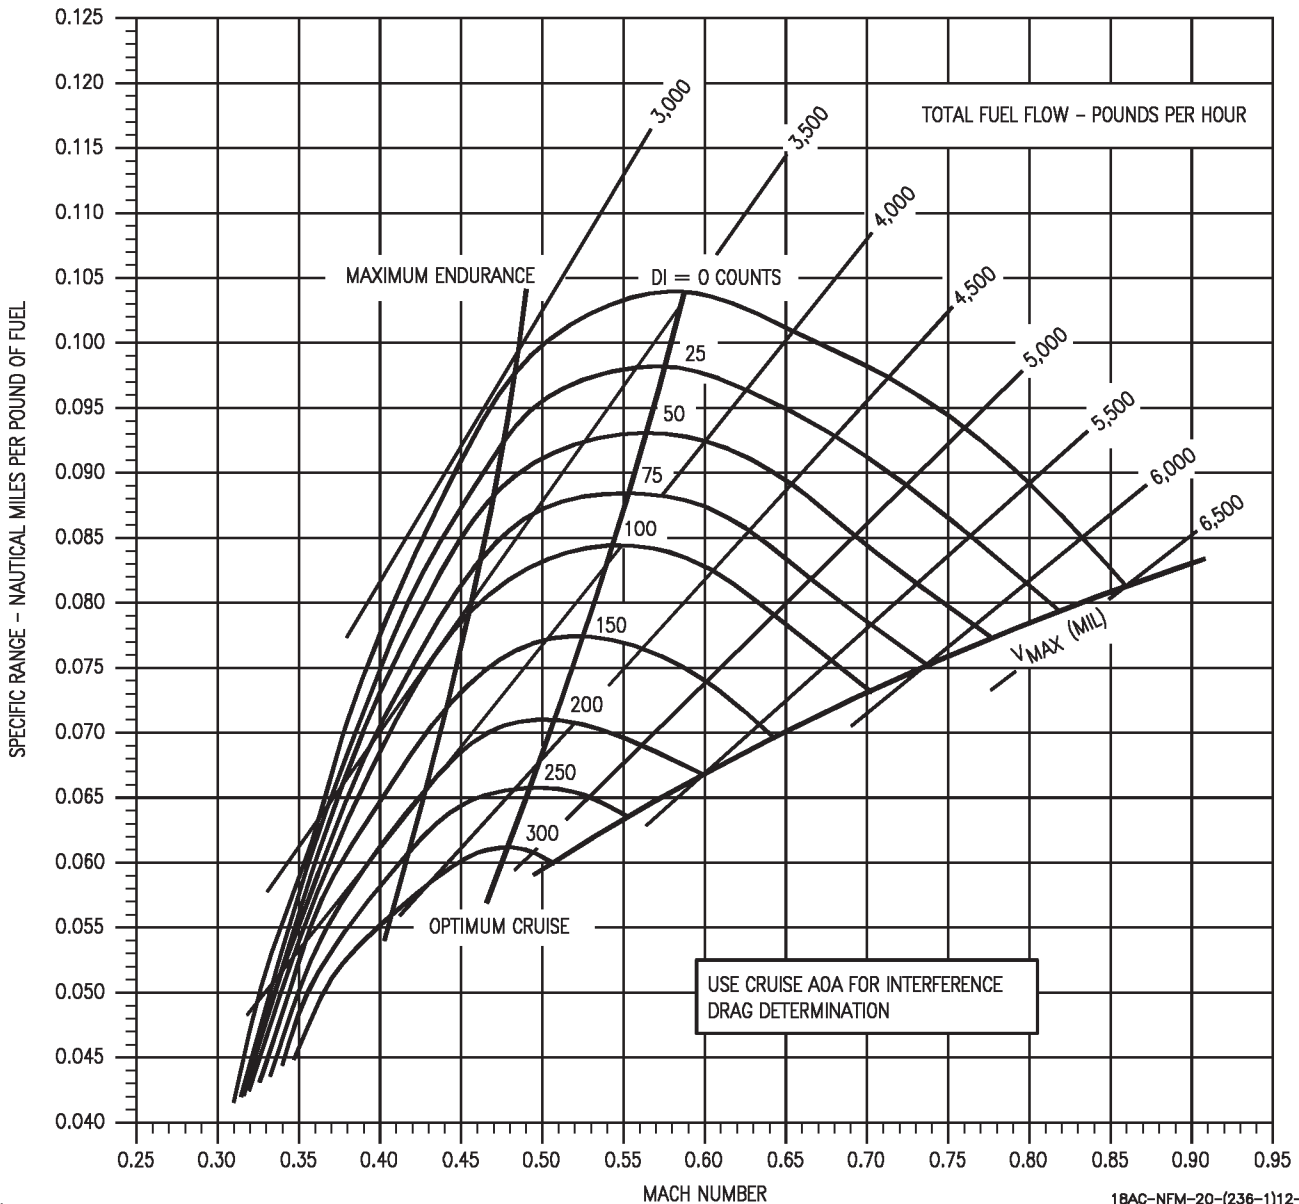

18AC-NFM-20-(236-1)12-CAT1

Figure 11-131. Specific Range - One Engine Operating - 20,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
20,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

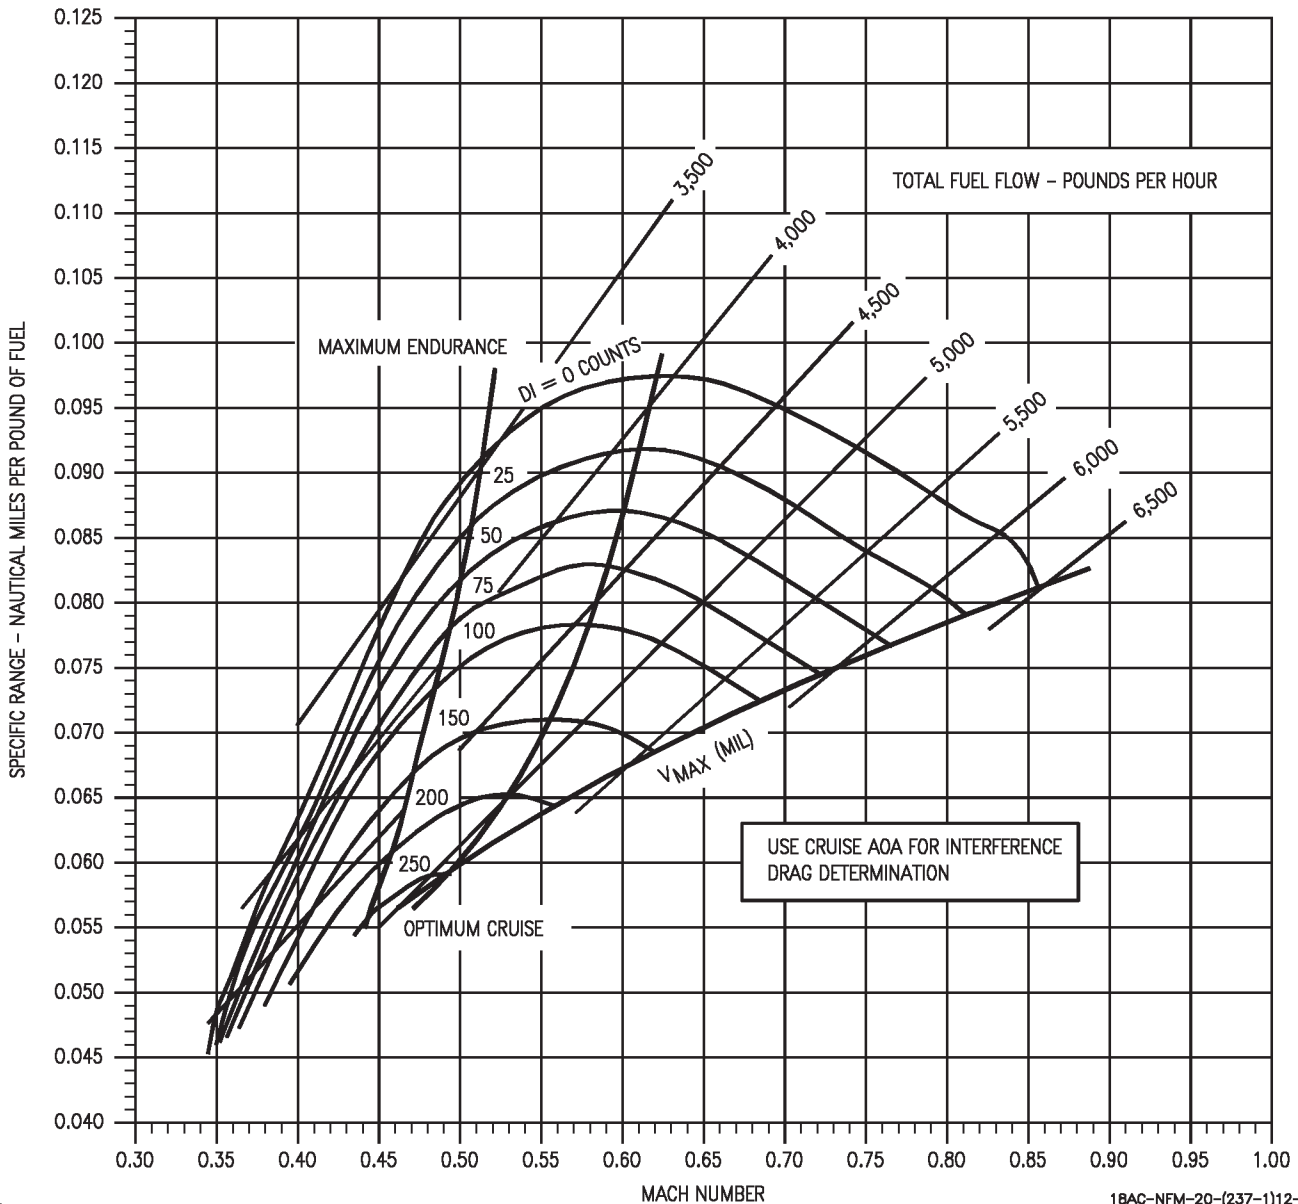

18AC-NFM-20-(237-1)12-CAT1

Figure 11-132. Specific Range - One Engine Operating - 20,000 Feet - 34,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
20,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

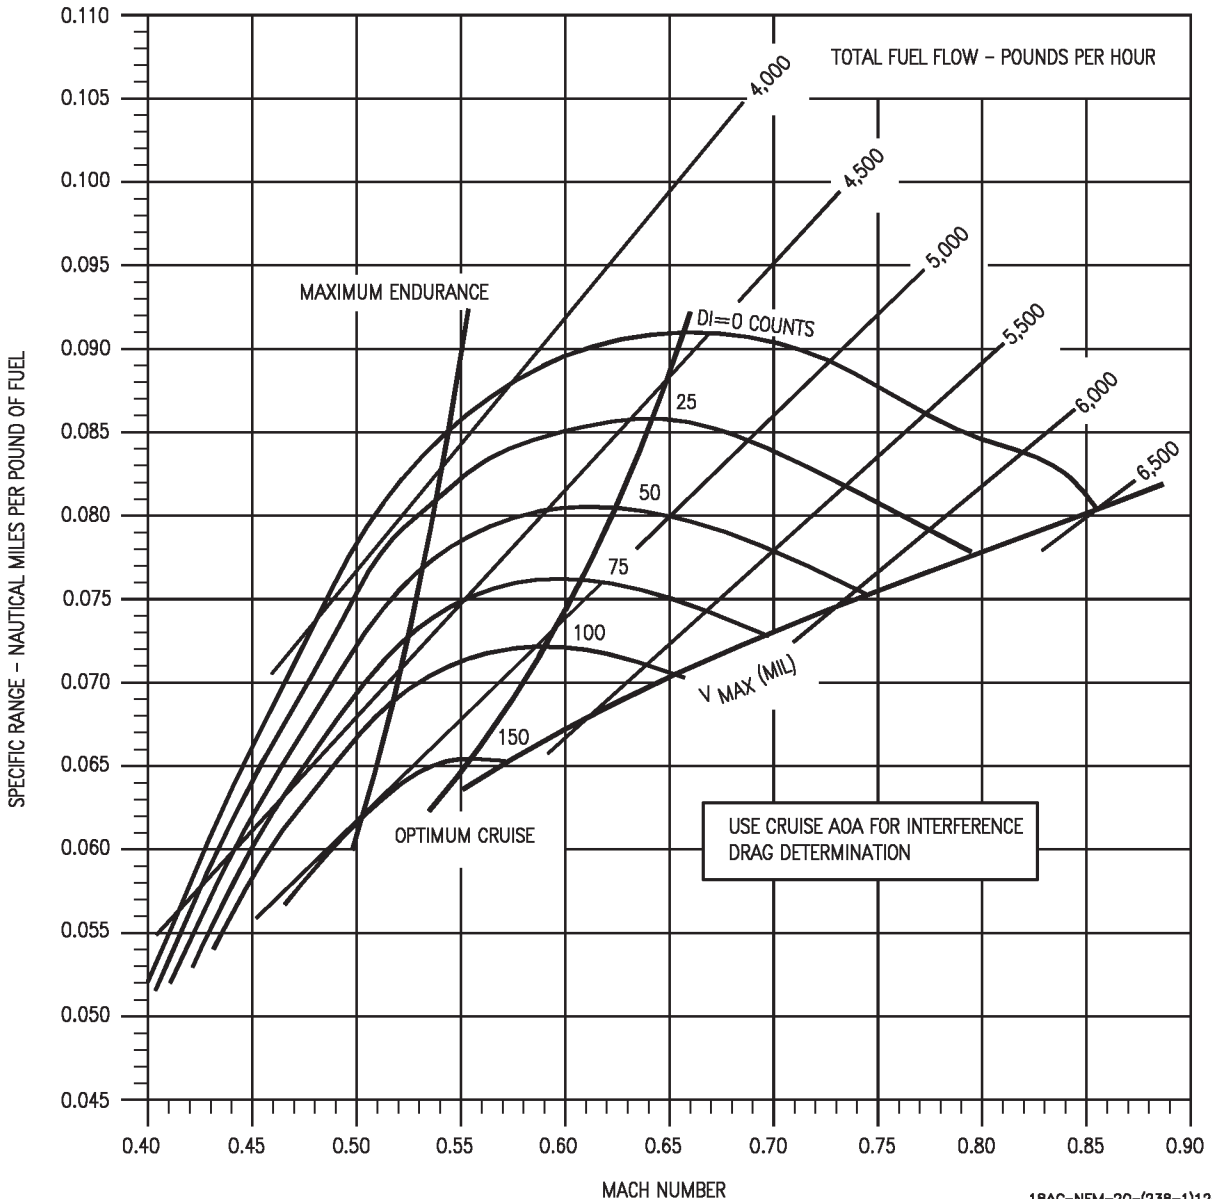

18AC-NFM-20-(238-1)12-CAT1

Figure 11-133. Specific Range - One Engine Operating - 20,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
20,000 FEET - 42,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

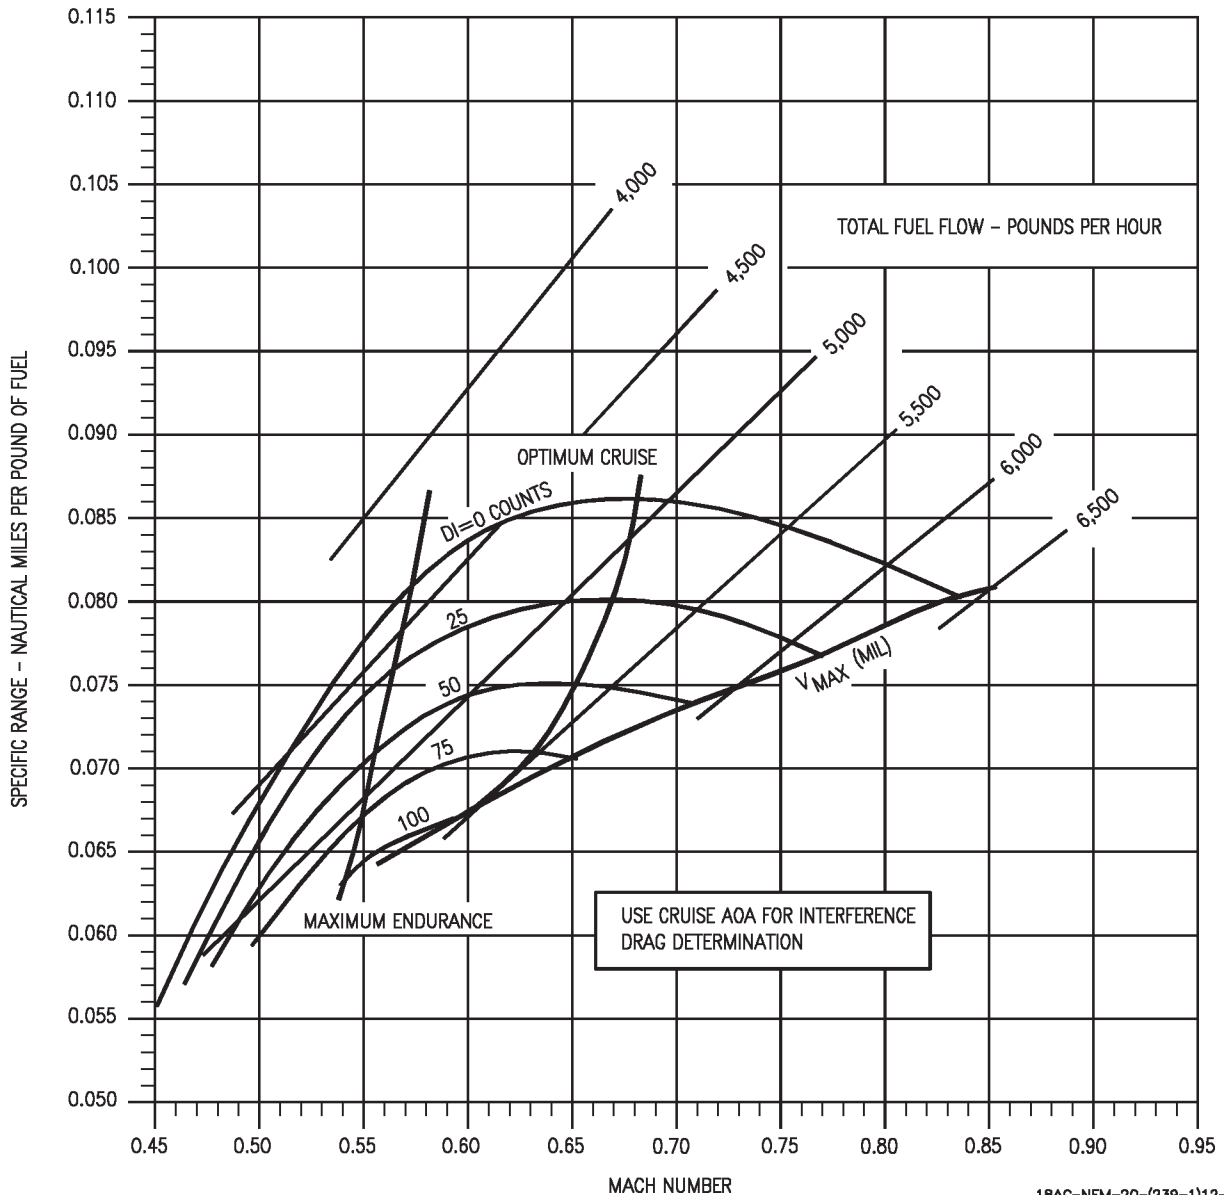

18AC-NFM-20-(239-1)12-CAT1

Figure 11-134. Specific Range - One Engine Operating - 20,000 Feet - 42,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400

ONE ENGINE OPERATING  
20,000 FEET - 46,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -25°C


GUIDE

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

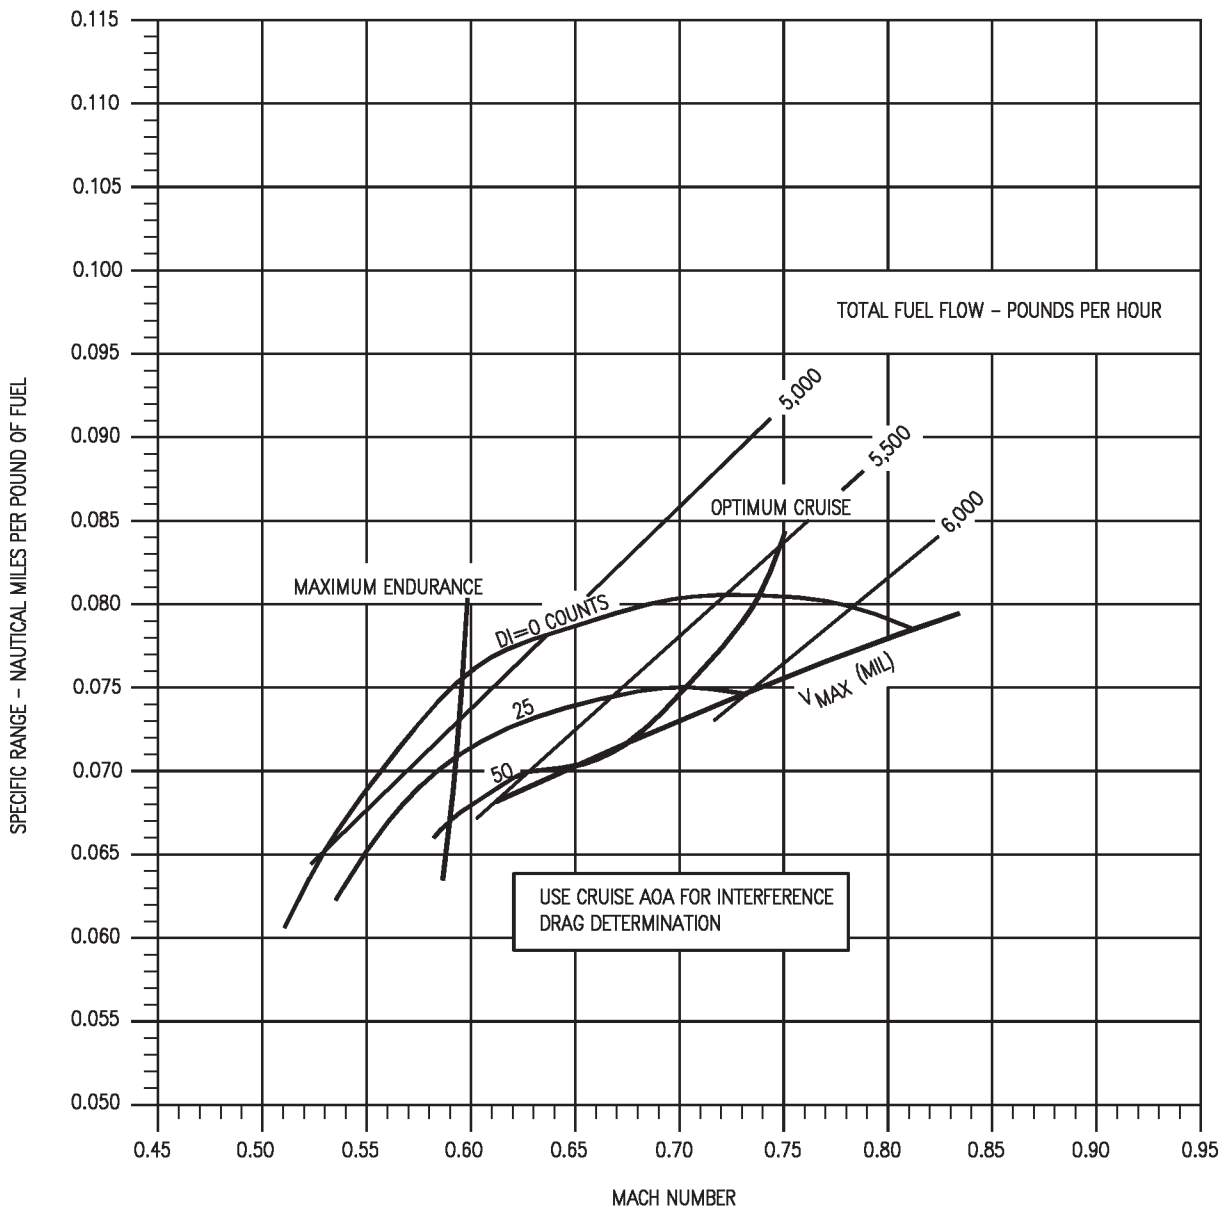

18AC-NFM-20-(240-1)12-CAT1

Figure 11-135. Specific Range - One Engine Operating - 20,000 Feet - 46,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
25,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -35°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

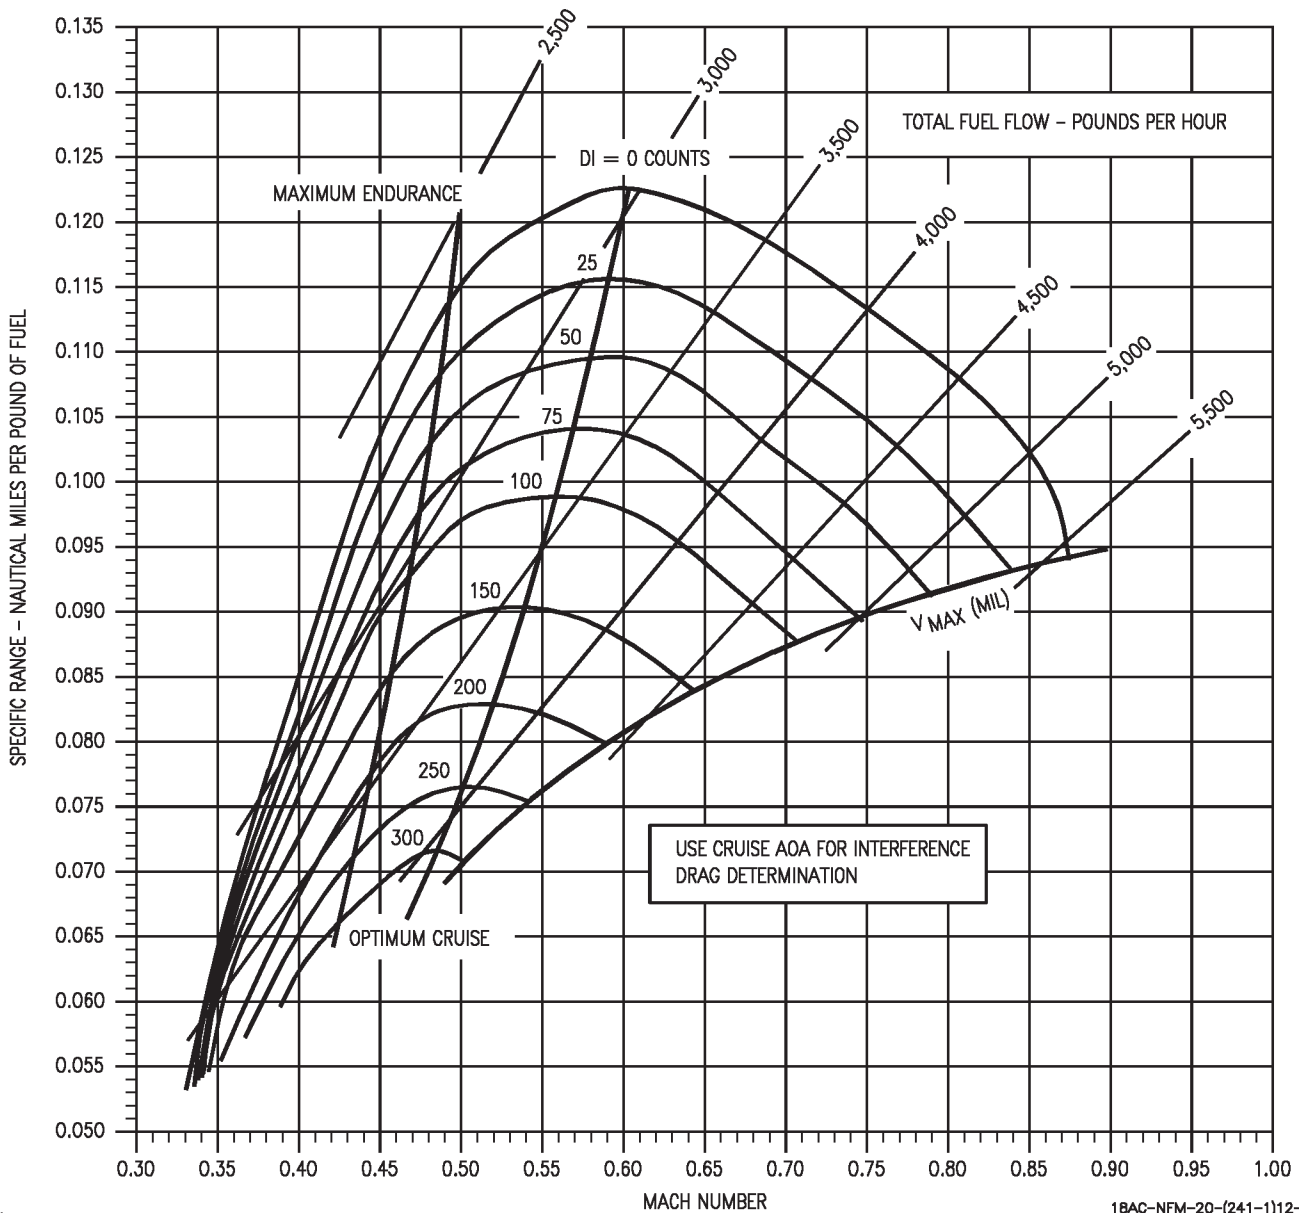

18AC-NFM-20-(241-1)12-CAT1

Figure 11-136. Specific Range - One Engine Operating - 25,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
25,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -35°C

GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

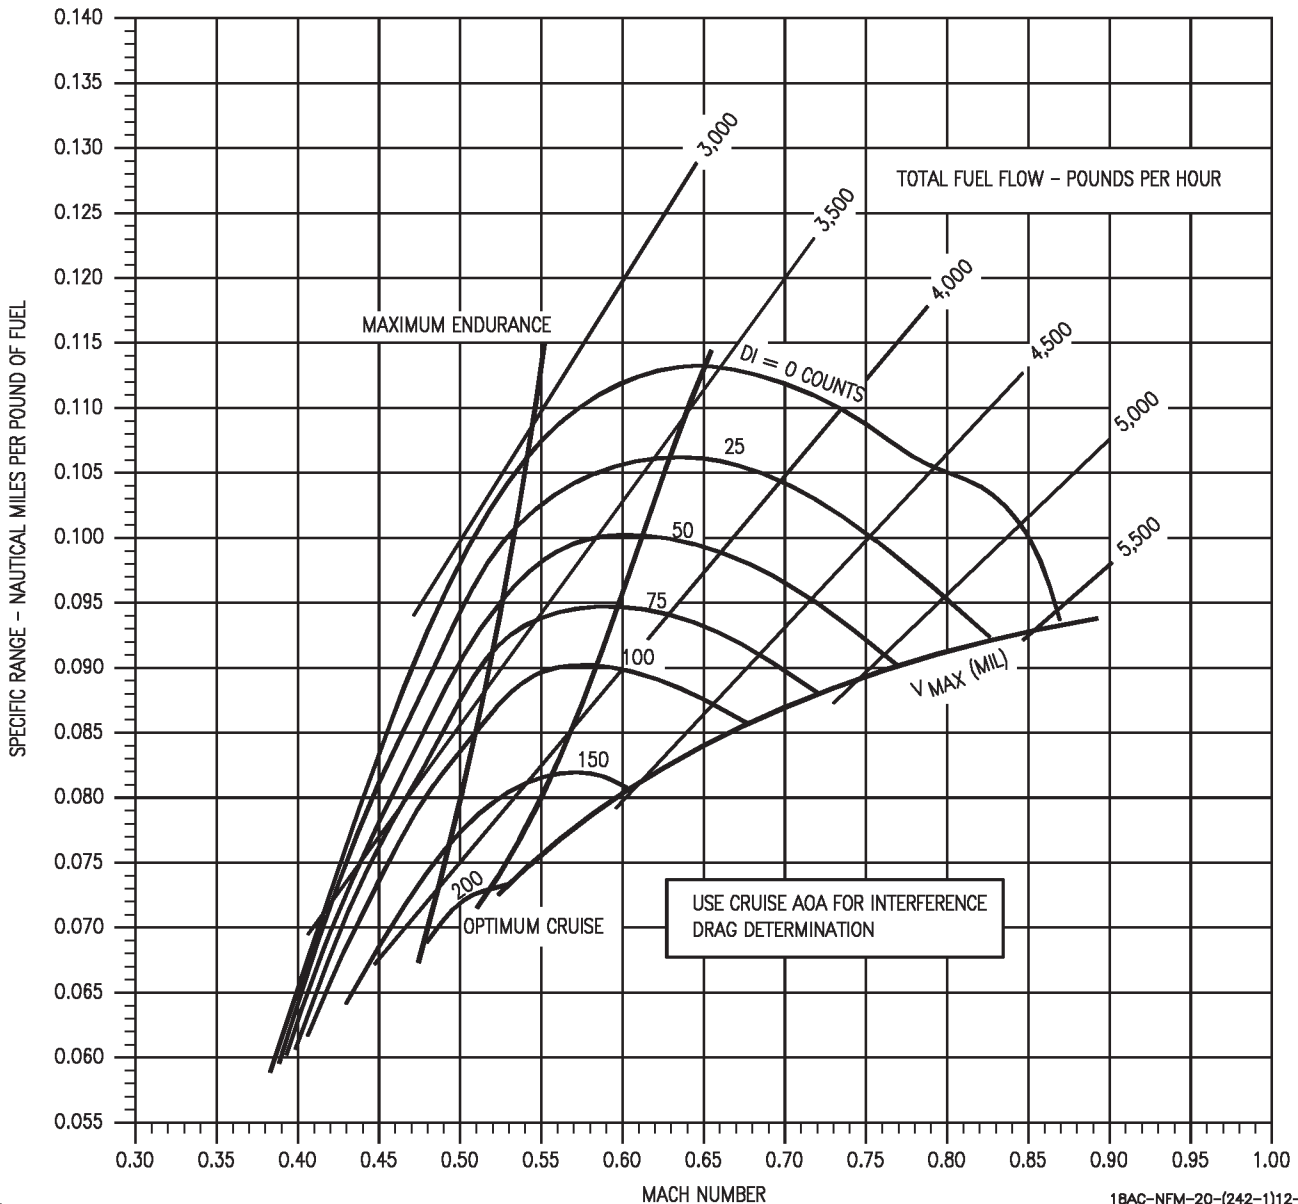


Figure 11-137. Specific Range - One Engine Operating - 25,000 Feet - 30,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
25,000 FEET - 34,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -35°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

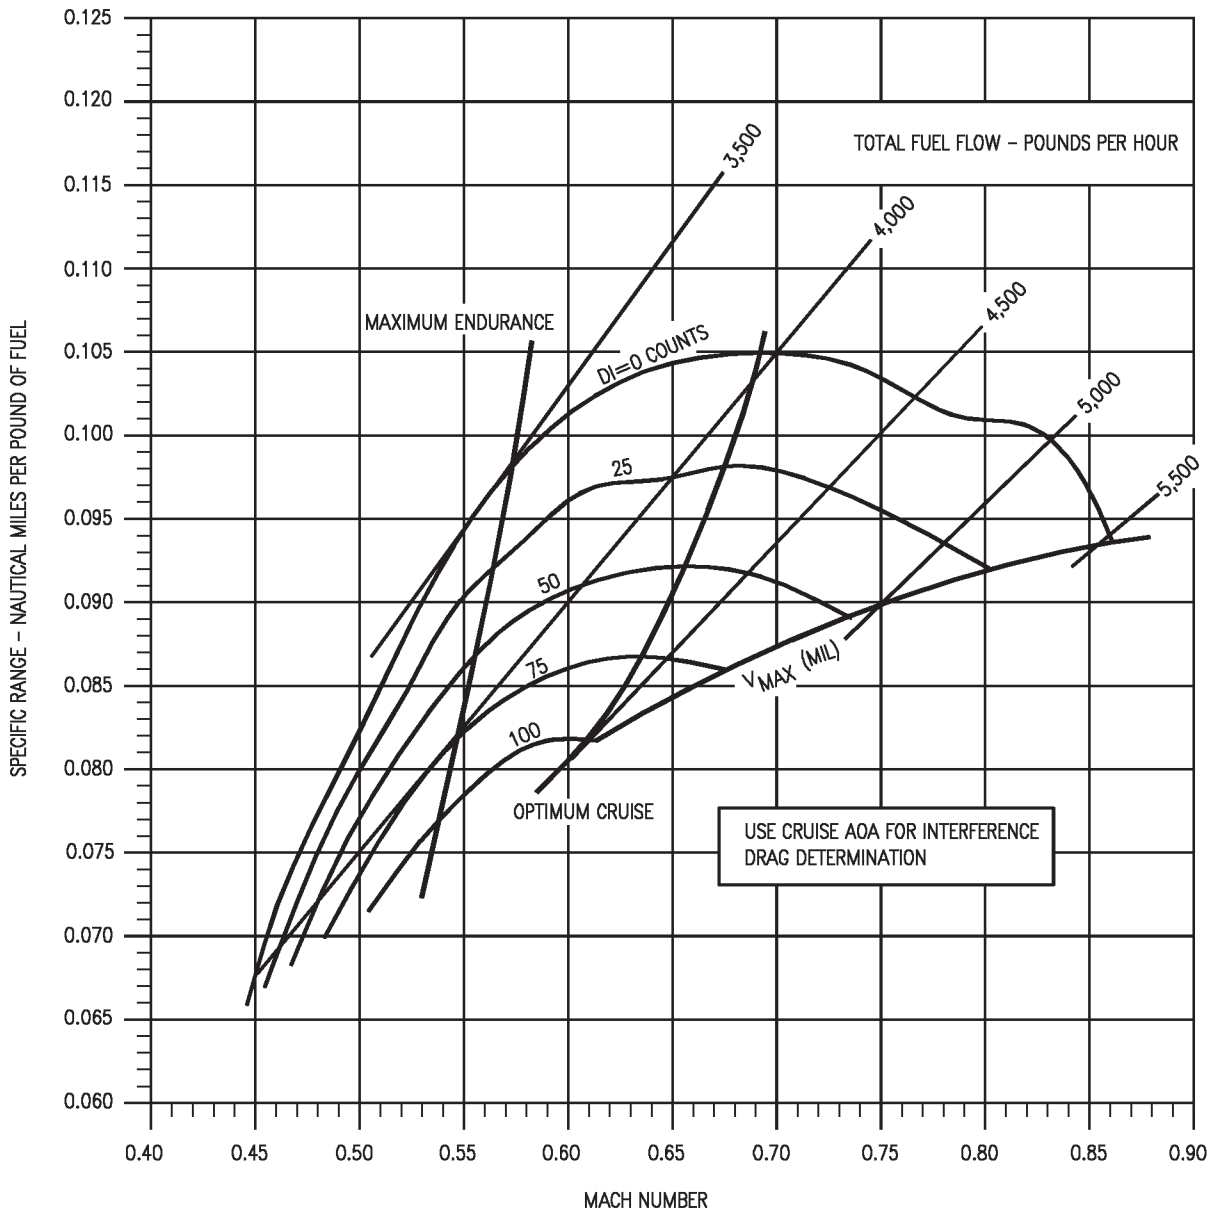

18AC-NFM-20-(243-1)12-CAT1

Figure 11-138. Specific Range - One Engine Operating - 25,000 Feet - 34,000 Pounds - F404-GE-400



# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
25,000 FEET - 38,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -35°C


GUIDE

| TEMPERATURE EFFECTS          |                         |
|------------------------------|-------------------------|
| $\Delta T$ -°C FROM STD. DAY | V <sub>MAX</sub> FACTOR |
| -20                          | 1.07                    |
| -10                          | 1.04                    |
| 0                            | 1.00                    |
| +10                          | .95                     |
| +20                          | .89                     |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

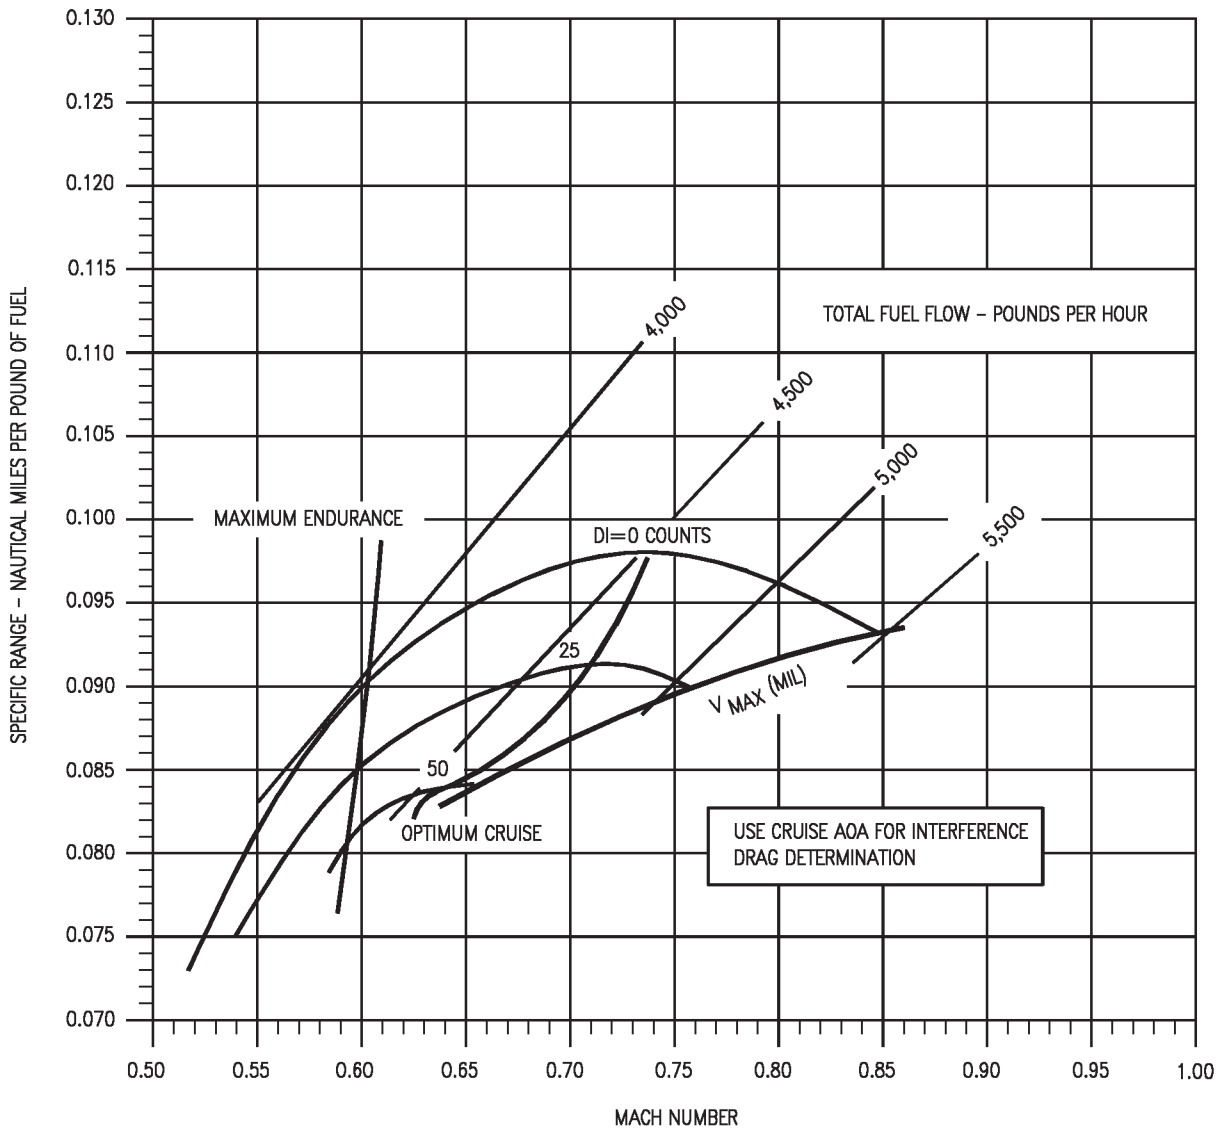

18AC-NFM-20-(244-1)12-CAT1

Figure 11-139. Specific Range - One Engine Operating - 25,000 Feet - 38,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
30,000 FEET - 26,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -44°C


GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

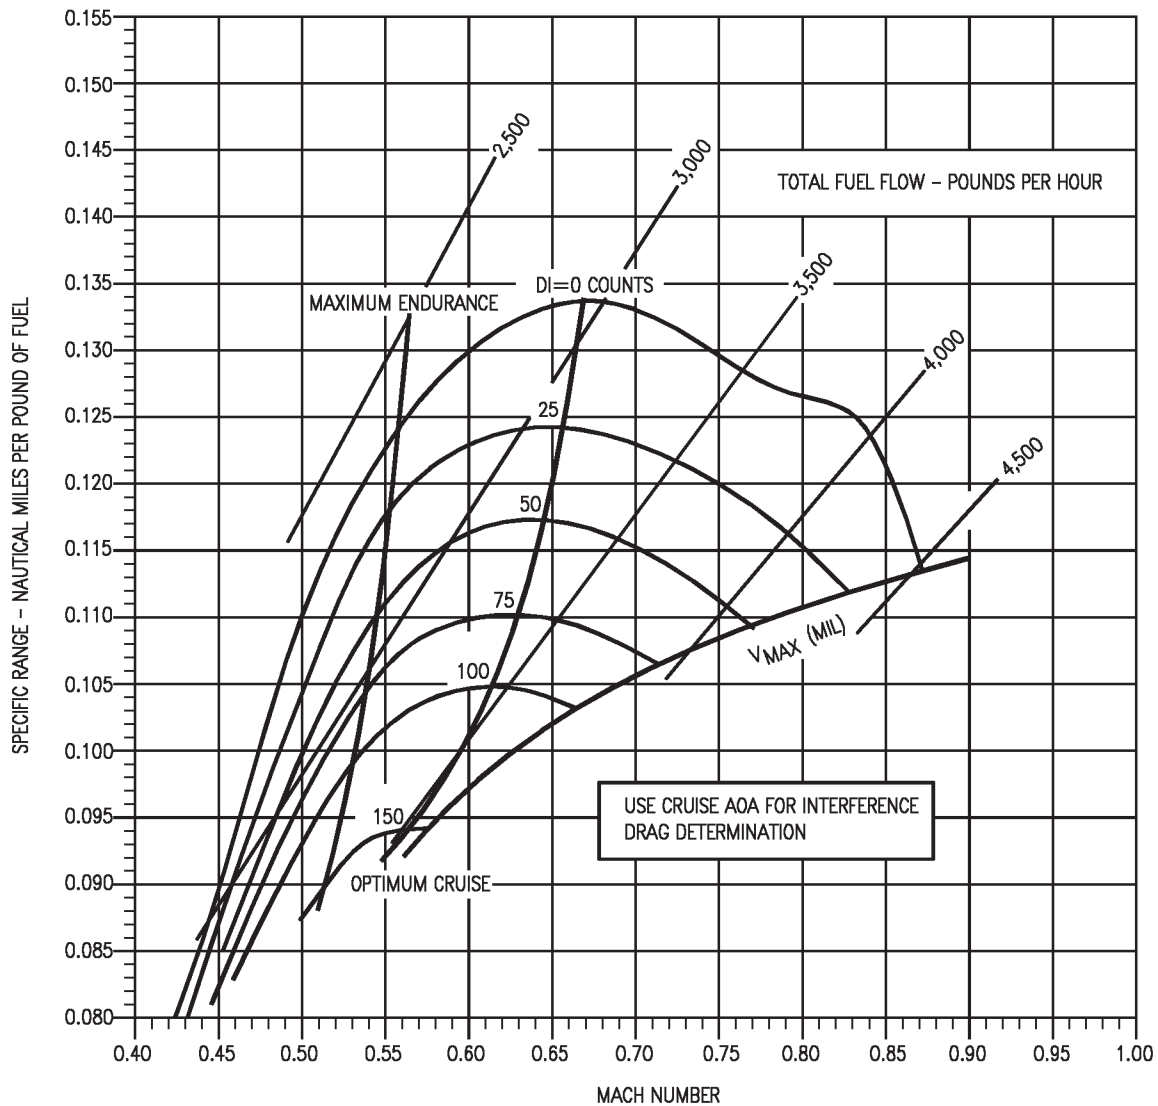

18AC-NFM-20-(245-1)12-CAT1

Figure 11-140. Specific Range - One Engine Operating - 30,000 Feet - 26,000 Pounds - F404-GE-400

# SPECIFIC RANGE

F404-GE-400  
ONE ENGINE OPERATING  
30,000 FEET - 30,000 POUNDS


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

NOTE: STD TEMP. = -44°C

GUIDE

| TEMPERATURE EFFECTS          |                  |
|------------------------------|------------------|
| $\Delta T$ -°C FROM STD. DAY | $V_{MAX}$ FACTOR |
| -20                          | 1.07             |
| -10                          | 1.04             |
| 0                            | 1.00             |
| +10                          | .95              |
| +20                          | .89              |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

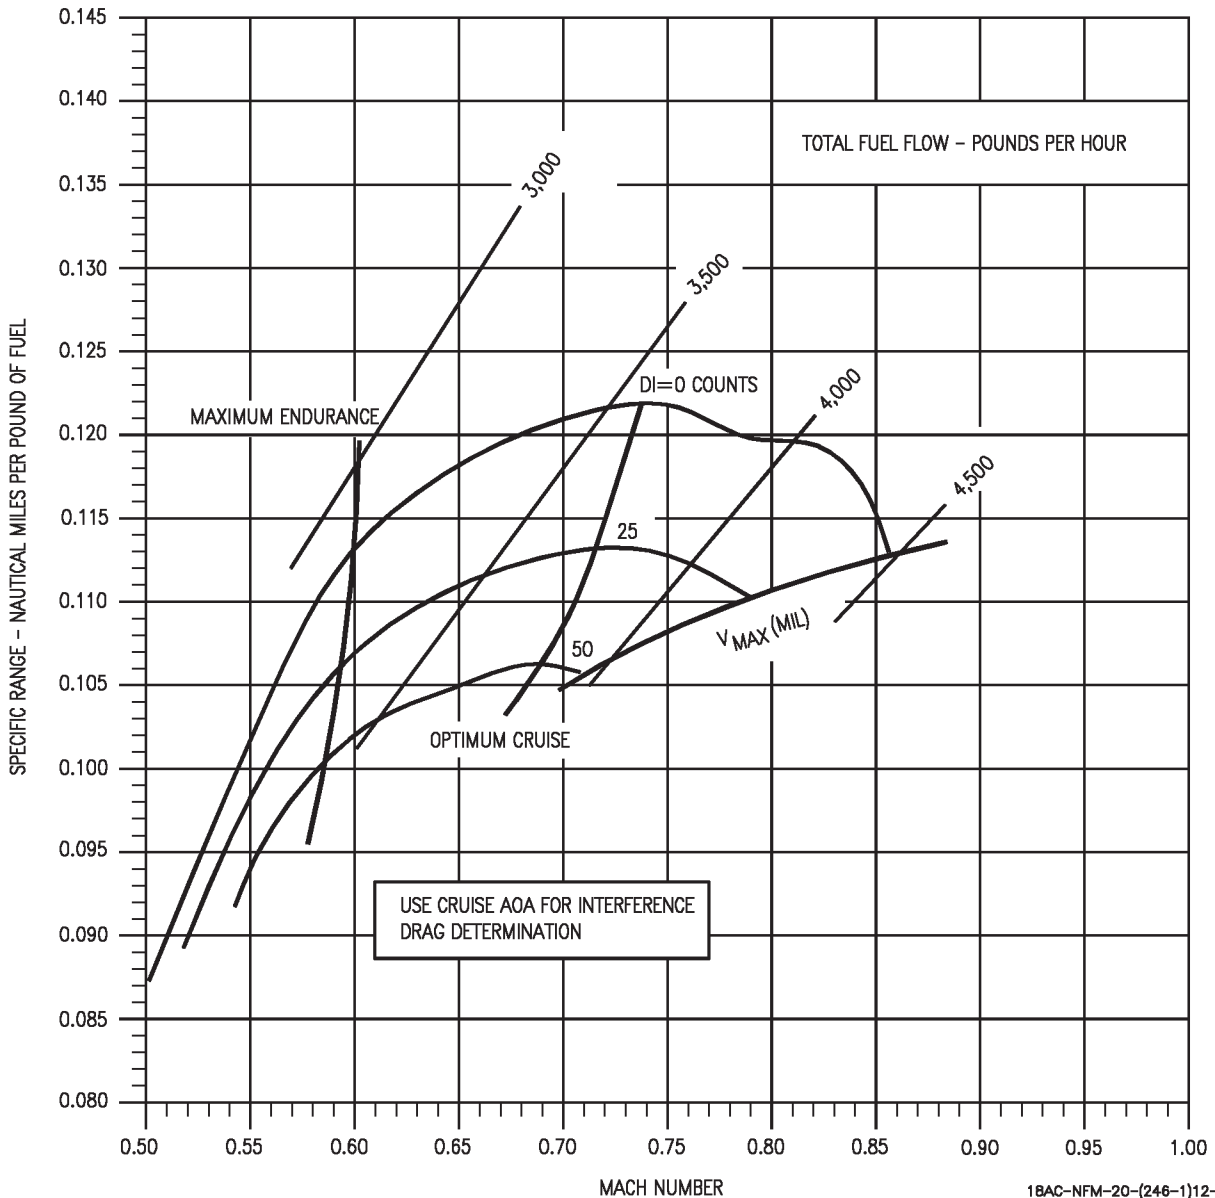


Figure 11-141. Specific Range - One Engine Operating - 30,000 Feet - 30,000 Pounds - F404-GE-400

# COMBAT SPECIFIC RANGE


F404-GE-400  
STABILIZED LEVEL FLIGHT  
GROSS WEIGHT = 34,000 POUNDS

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE  
CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW  
——— STANDARD DAY  
- - - - STANDARD DAY + 10° C

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

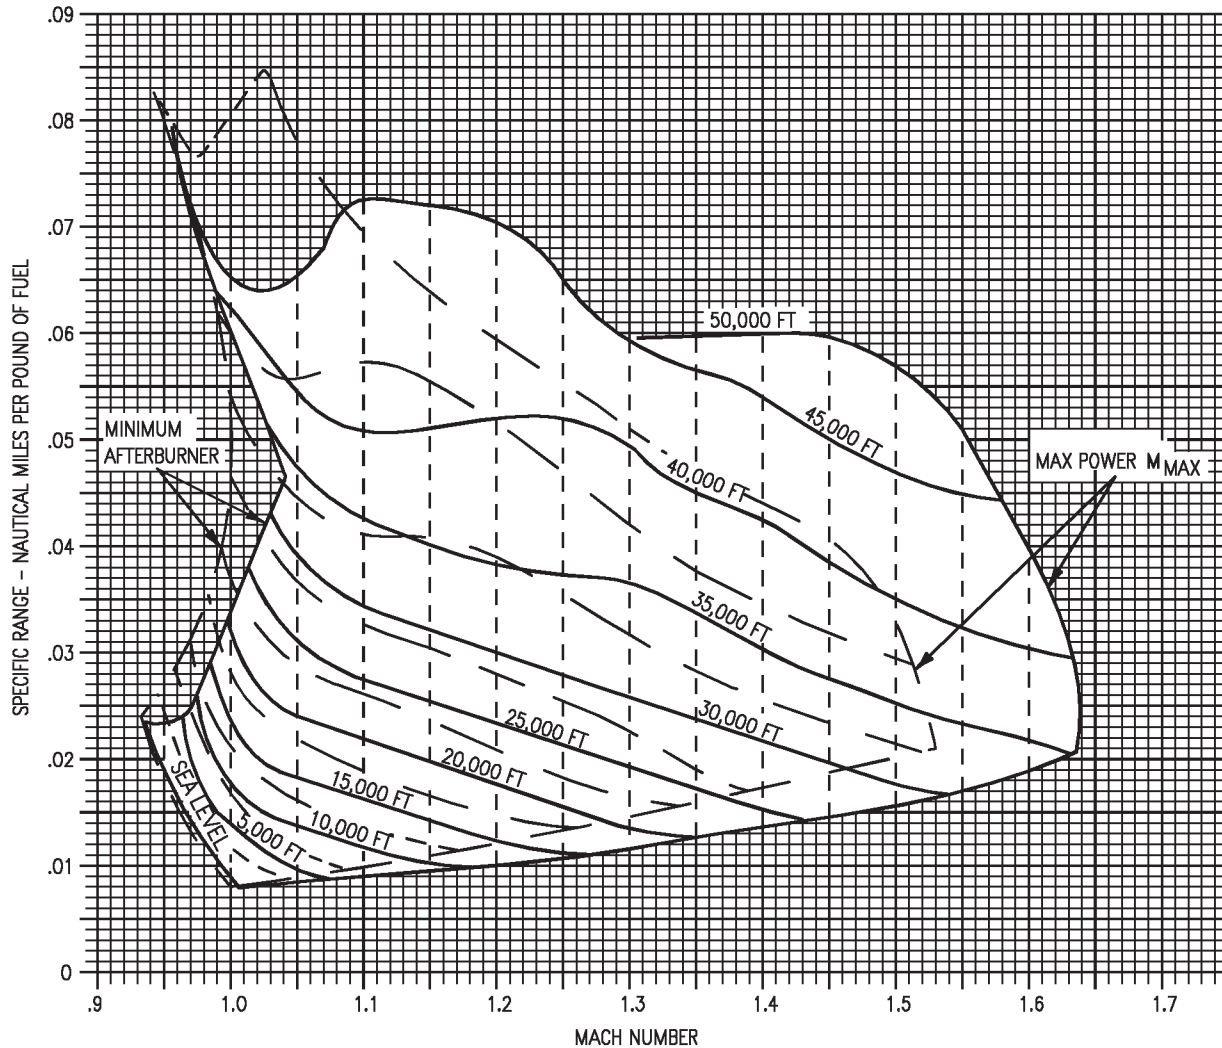

18AC-NFM-20-(315-2)12-CAT1

Figure 11-142. Combat Specific Range - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 1 of 4)

# COMBAT SPECIFIC RANGE


F404-GE-400  
STABILIZED LEVEL FLIGHT  
GROSS WEIGHT = 34,000 POUNDS

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7  
+ C TANK

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE  
CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW  
————— STANDARD DAY  
- - - - - STANDARD DAY + 10° C

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

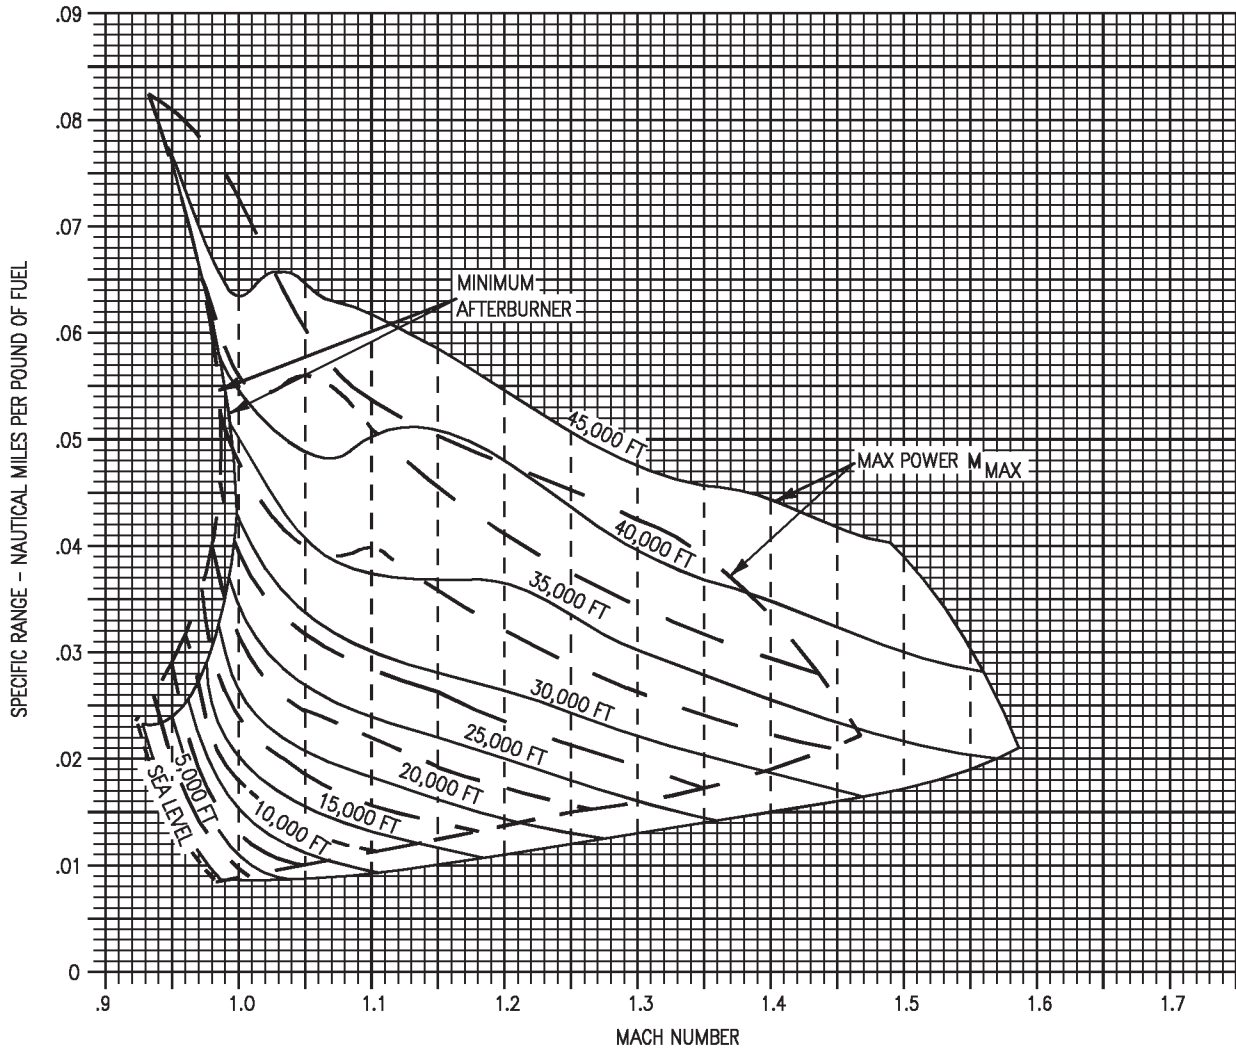

18AC-NFM-20-(315-3)12-CAT1

Figure 11-142. Combat Specific Range - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 2 of 4)

# COMBAT SPECIFIC RANGE

F404-GE-400

STABILIZED LEVEL FLIGHT

GROSS WEIGHT = 34,000 POUNDS

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ FLIR

REMARKS

ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE

CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW

————— STANDARD DAY  
- - - - - STANDARD DAY + 10° C


| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -13 |
| 25,000               | -35 | -31 |
| 30,000               | -44 | -47 |
| 35,000               | -54 | -65 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

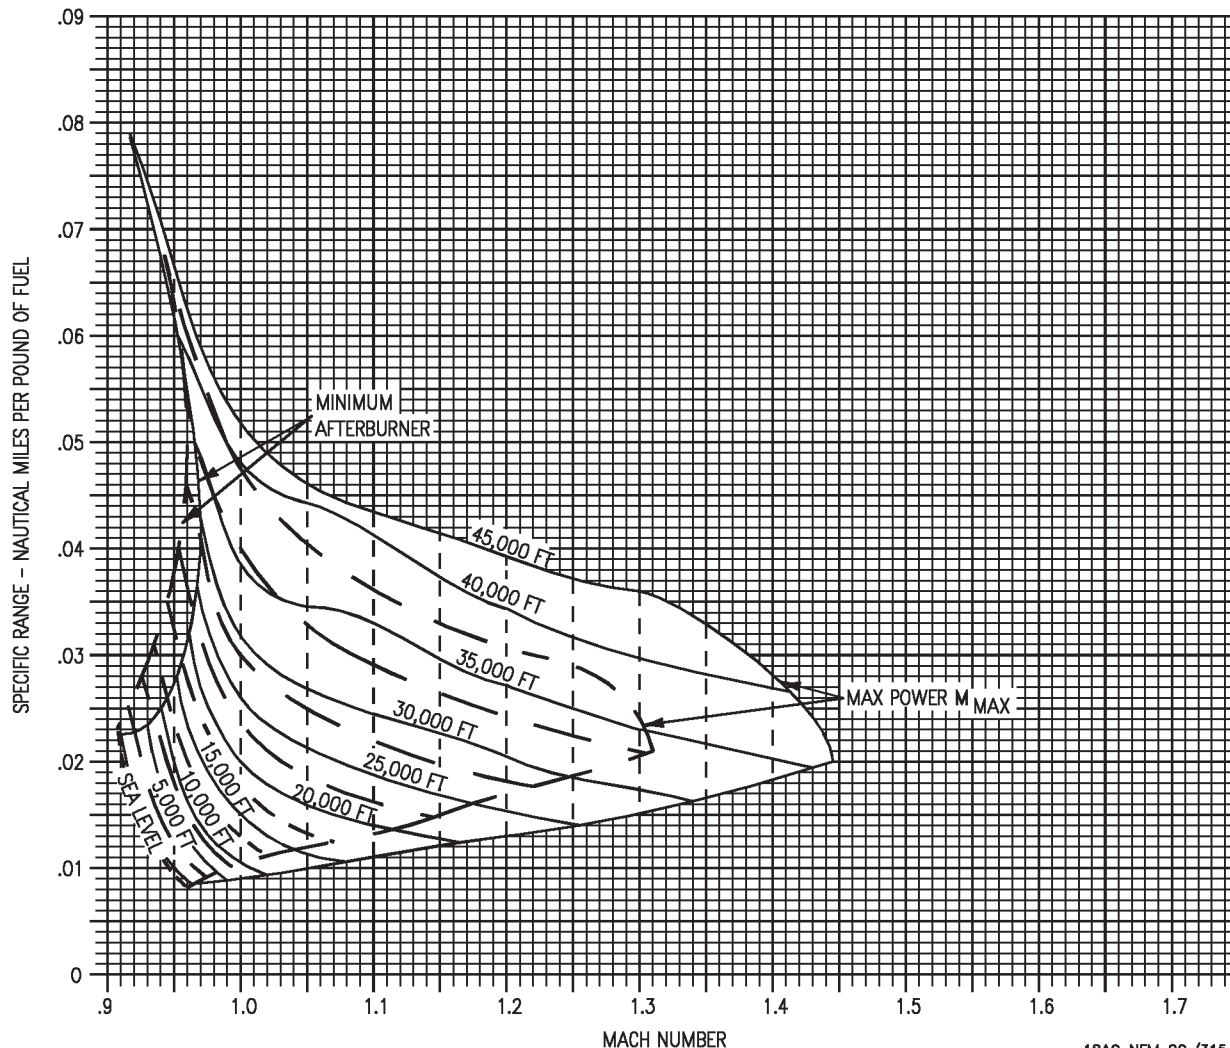

18AC-NFM-20-(315-4)12-CAT1

Figure 11-142. Combat Specific Range - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 3 of 4)

# COMBAT SPECIFIC RANGE


F404-GE-400  
STABILIZED LEVEL FLIGHT  
GROSS WEIGHT = 34,000 POUNDS

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ C TANK + FLIR

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE  
CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW  
— STANDARD DAY  
- - - STANDARD DAY + 10° C

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -13 |
| 25,000               | -35 | -31 |
| 30,000               | -44 | -47 |
| 35,000               | -54 | -65 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

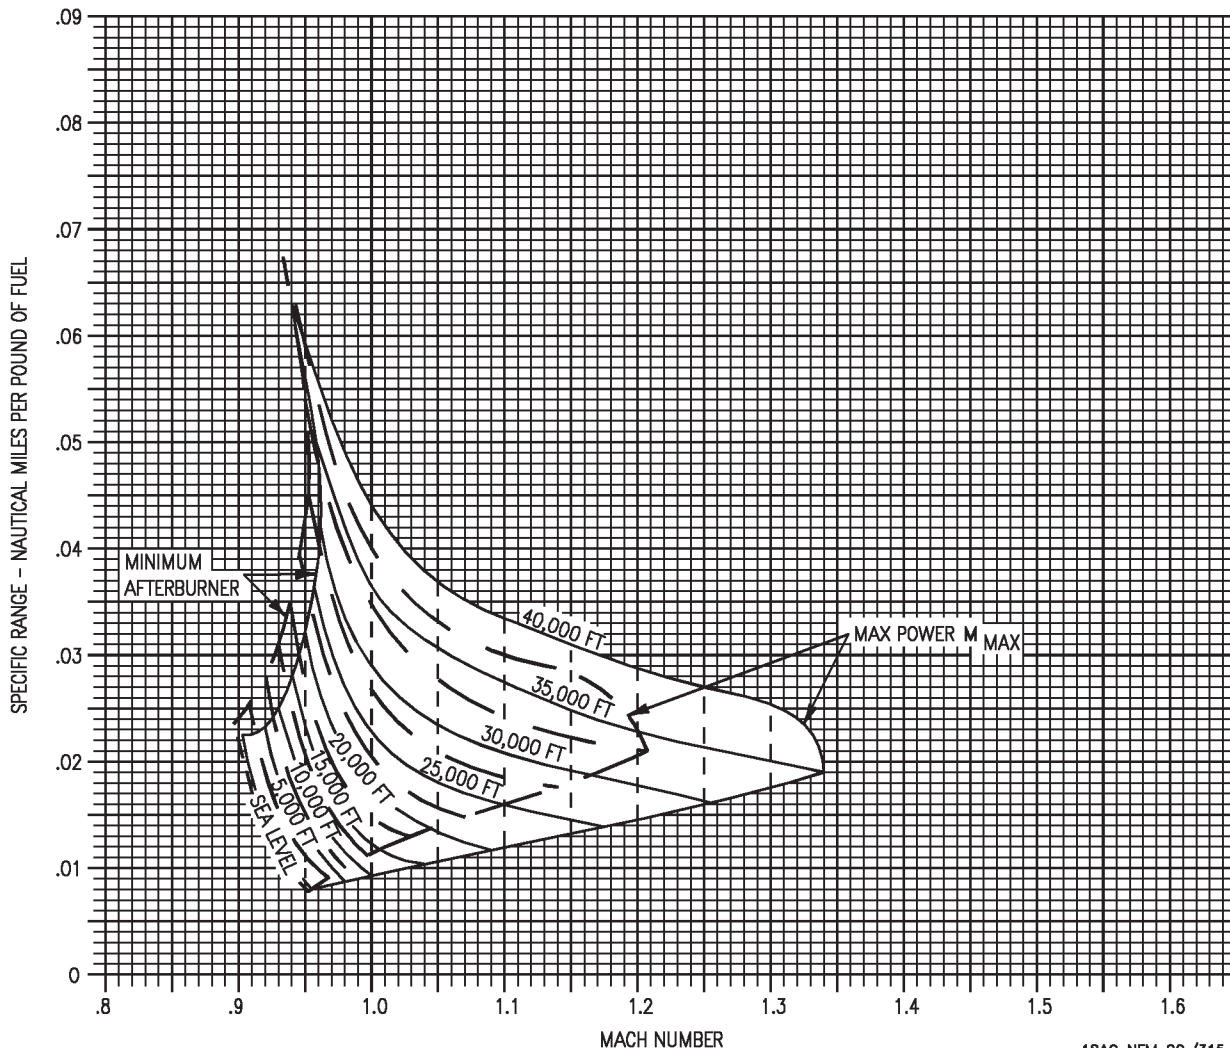

18AC-NFM-20-(315-5)12-CAT1

Figure 11-142. Combat Specific Range - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 4 of 4)

# COMBAT FUEL FLOW

F404-GE-400

STABILIZED LEVEL FLIGHT  
GROSS WEIGHT = 34,000 POUNDS

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7


**NOTE**

CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW

- STANDARD DAY
- - - STANDARD DAY + 10° C

**GUIDE**

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

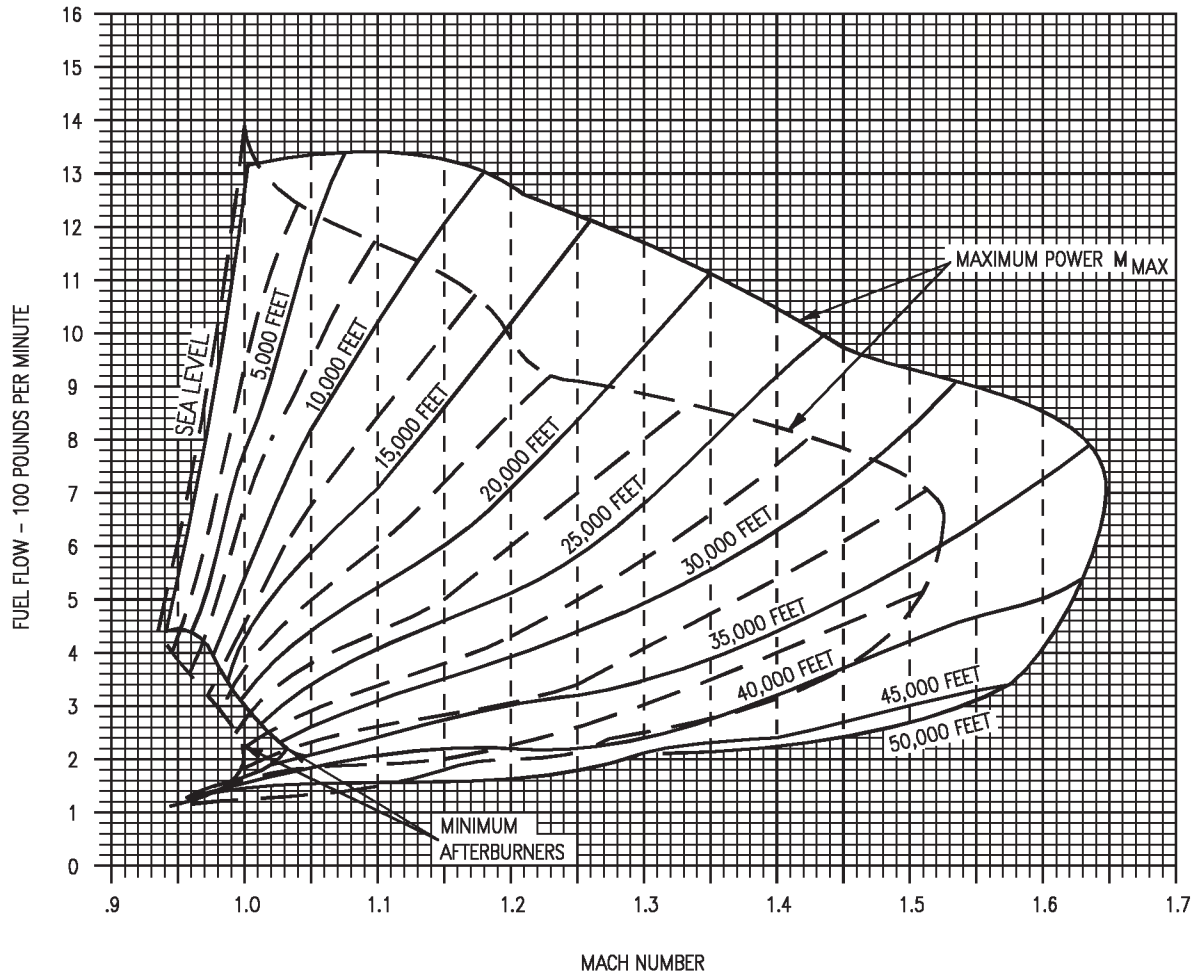


Figure 11-143. Combat Fuel Flow - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 1 of 4)



# COMBAT FUEL FLOW

F404-GE-400


STABILIZED LEVEL FLIGHT  
GROSS WEIGHT = 34,000 POUNDS

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7  
+ C TANK

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

GUIDE

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |




NOTE

CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW

- STANDARD DAY
- - - STANDARD DAY + 10° C

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

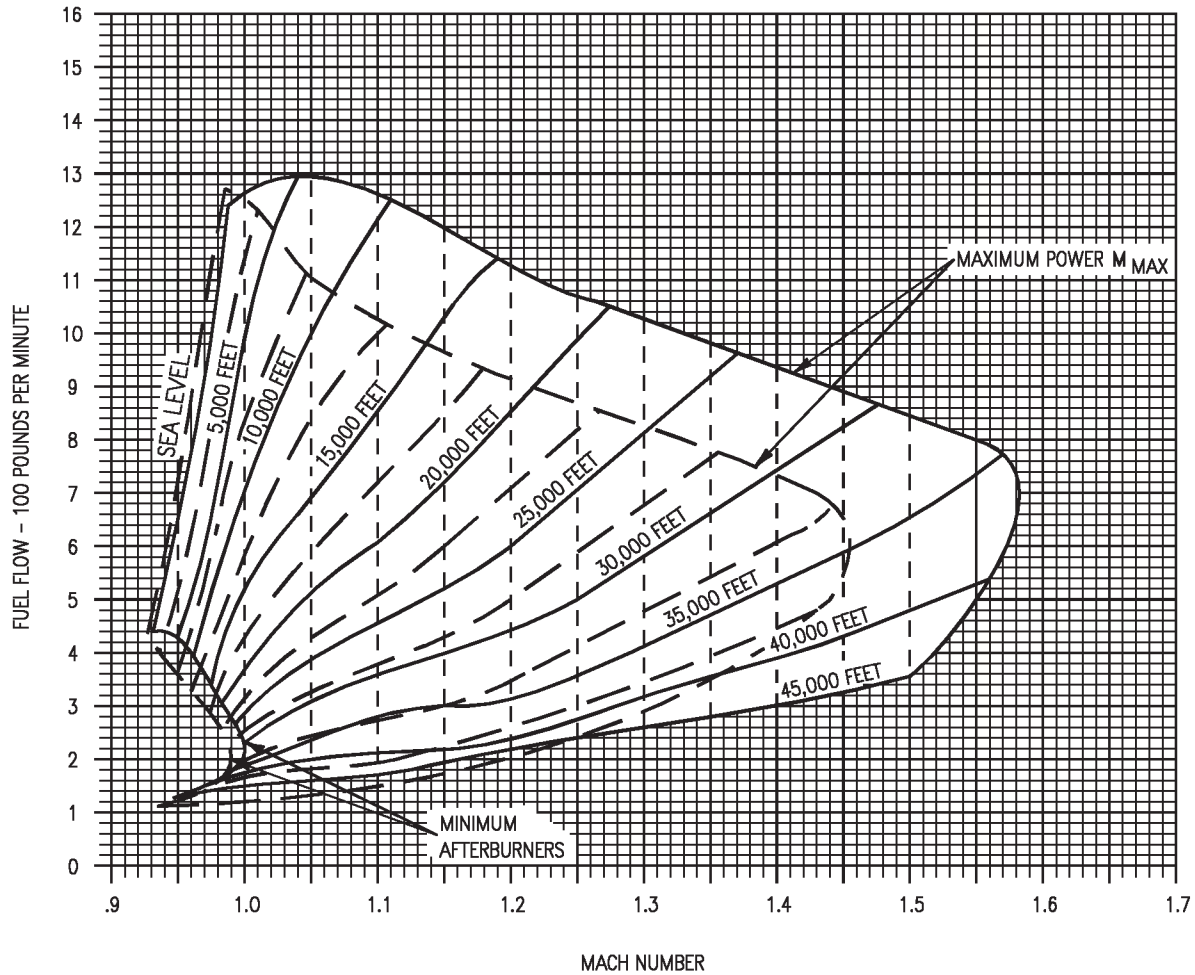

18AC-NFM-20-(316-3)12-CAT1

Figure 11-143. Combat Fuel Flow - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 2 of 4)

# COMBAT FUEL FLOW

F404-GE-400

STABILIZED LEVEL FLIGHT

GROSS WEIGHT = 34,000 POUNDS

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ FLIR

REMARKS

ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


NOTE

CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW

————— STANDARD DAY  
- - - - - STANDARD DAY + 10° C

GUIDE

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

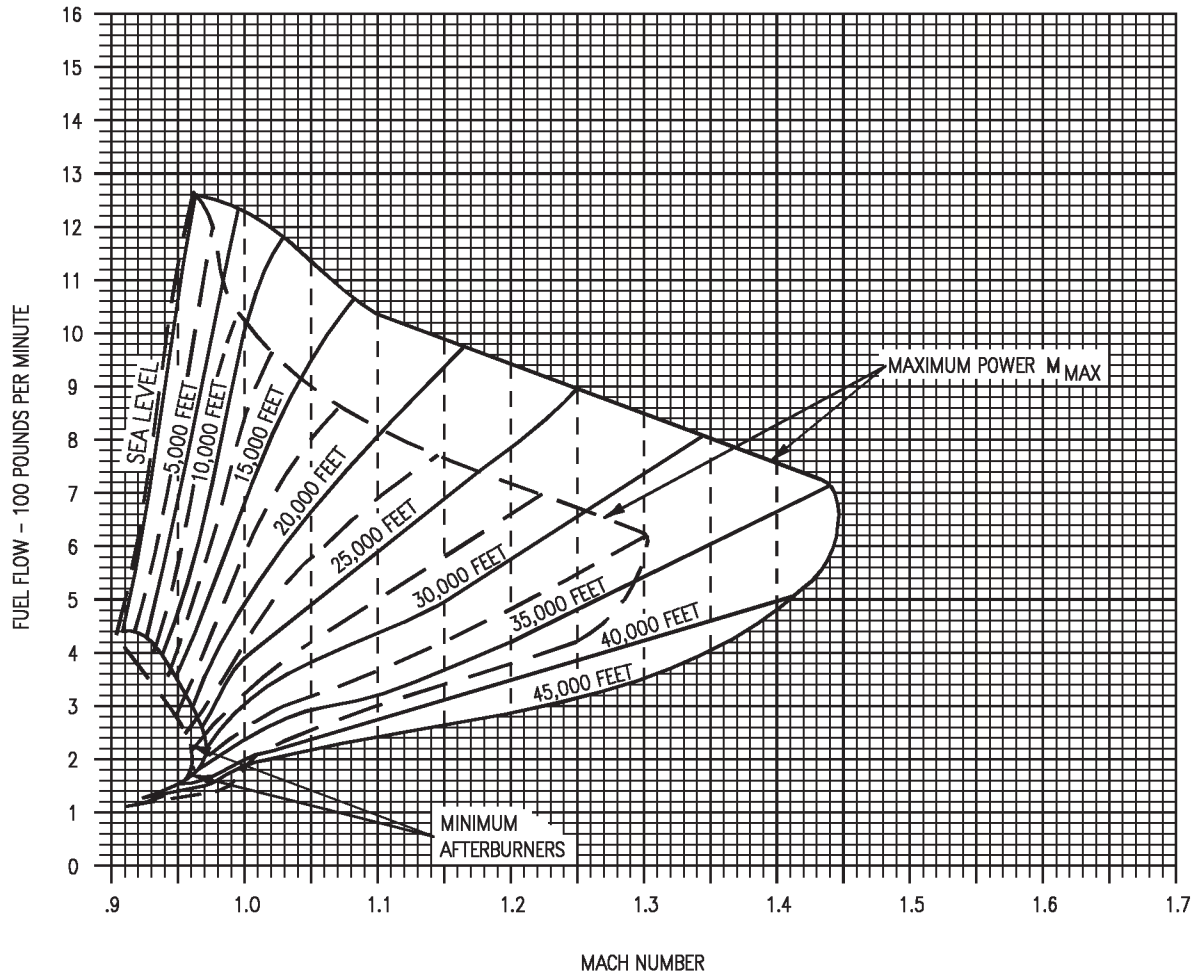


Figure 11-143. Combat Fuel Flow - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 3 of 4)

# COMBAT FUEL FLOW

F404-GE-400

STABILIZED LEVEL FLIGHT

GROSS WEIGHT = 34,000 POUNDS

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ FLIR + Q TANK

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962


**NOTE**

CHANGE IN GROSS WEIGHT HAS NO  
APPRECIABLE EFFECT ON FUEL FLOW

————— STANDARD DAY  
- - - - - STANDARD DAY + 10° C


| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

**GUIDE**



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

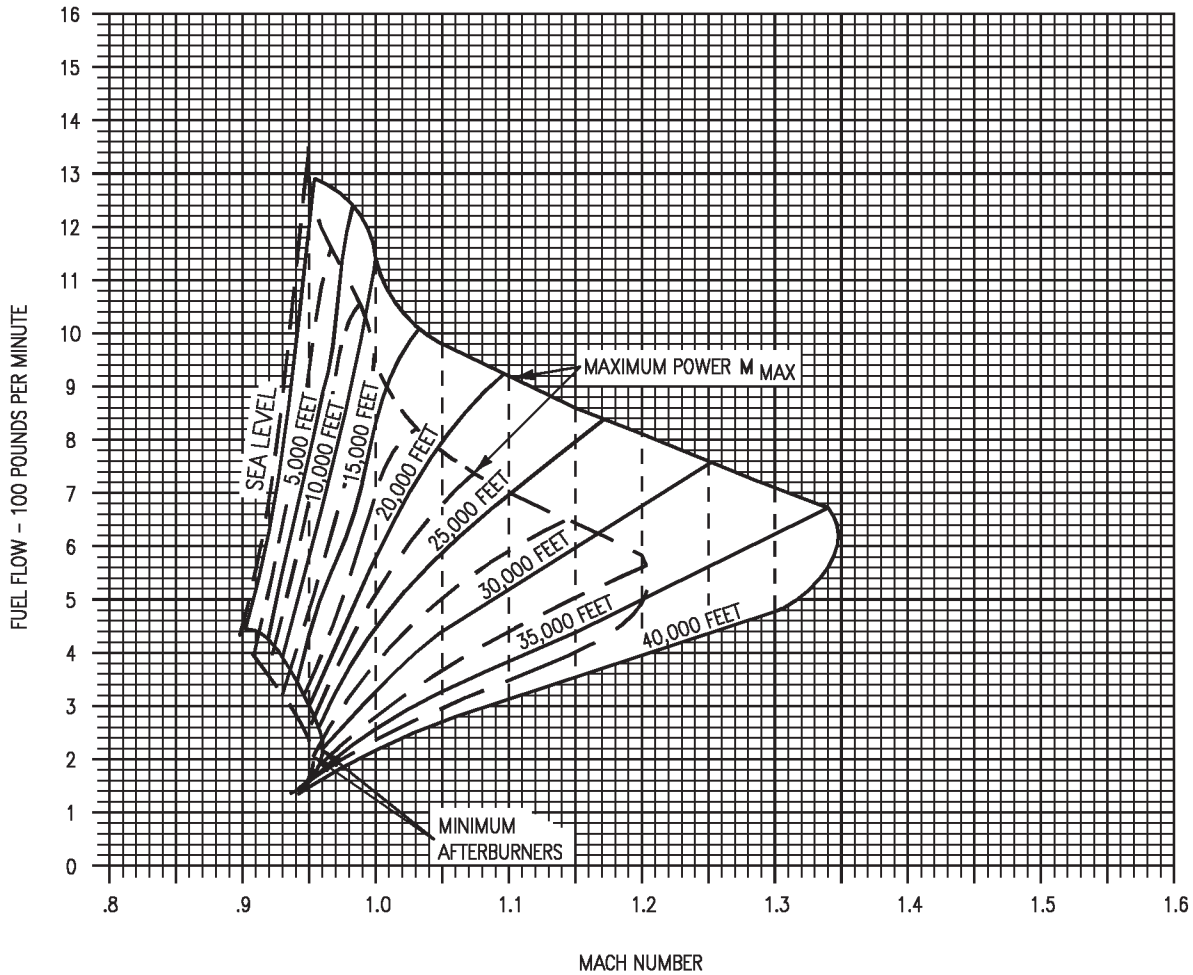

18AC-NFM-20-(316-5)12-CAT1

Figure 11-143. Combat Fuel Flow - Stabilized Level Flight - 34,000 Pounds - F404-GE-400  
(Sheet 4 of 4)


# CONSTANT ALTITUDE/LONG RANGE CRUISE

AIRCRAFT CONFIGURATION  
ALL DRAG INDEXES

SPEED - TIME - FUEL

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

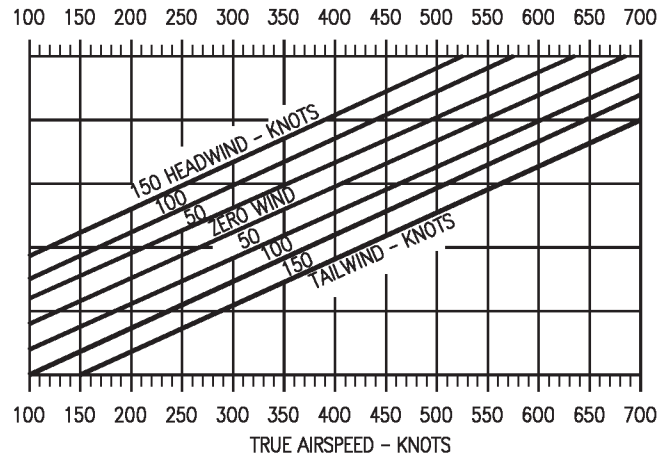
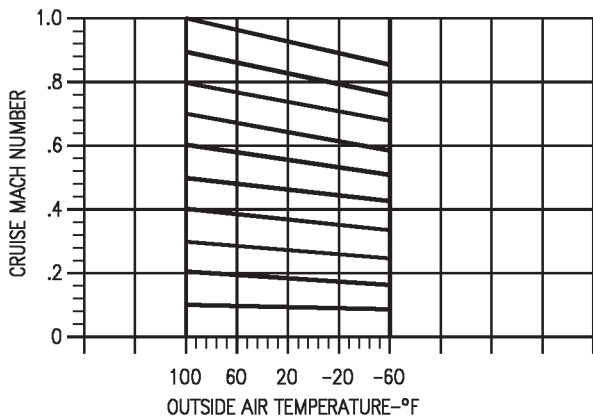
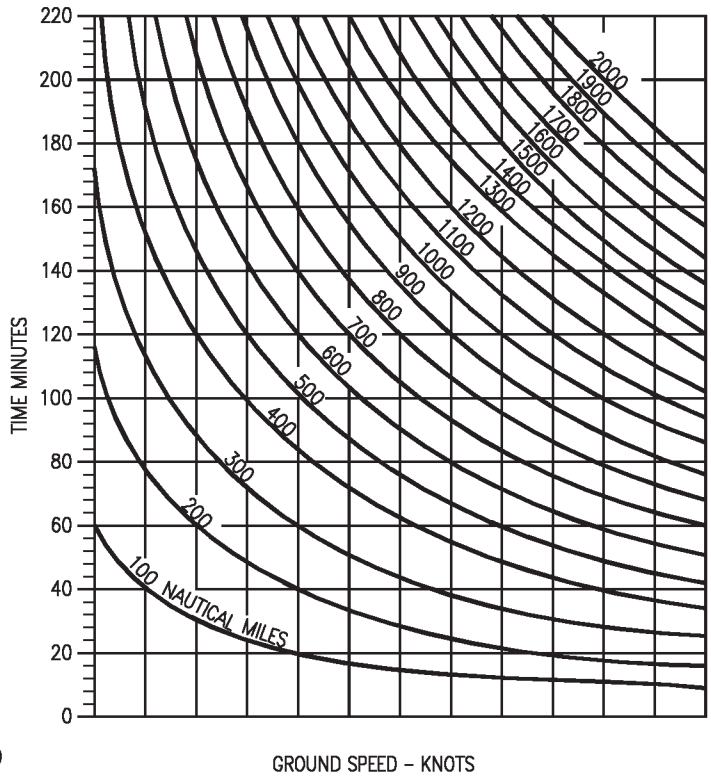
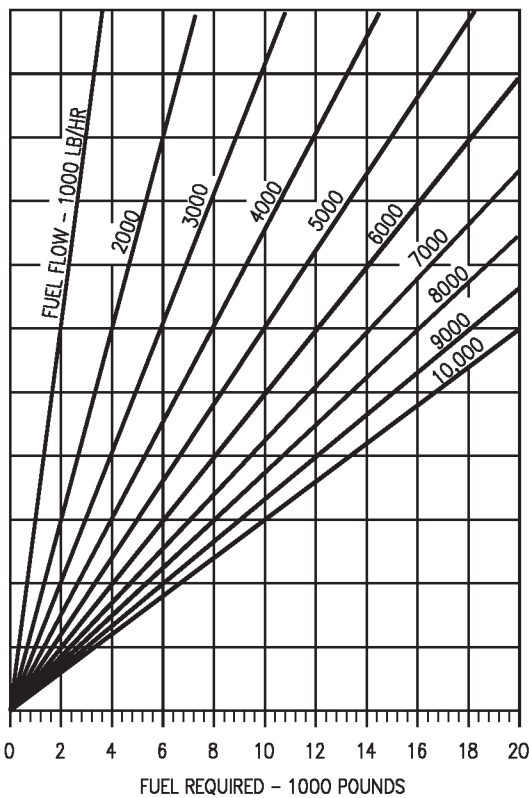


Figure 11-144. Constant Altitude/Long Range Cruise  
(Sheet 1 of 2)


18AC-NFM-20-(249-1)11-CAT1

# CONSTANT ALTITUDE/LONG RANGE CRUISE

## TRUE AIRSPEED AND FUEL FLOW

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
U.S. STANDARD DAY, 1962



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL


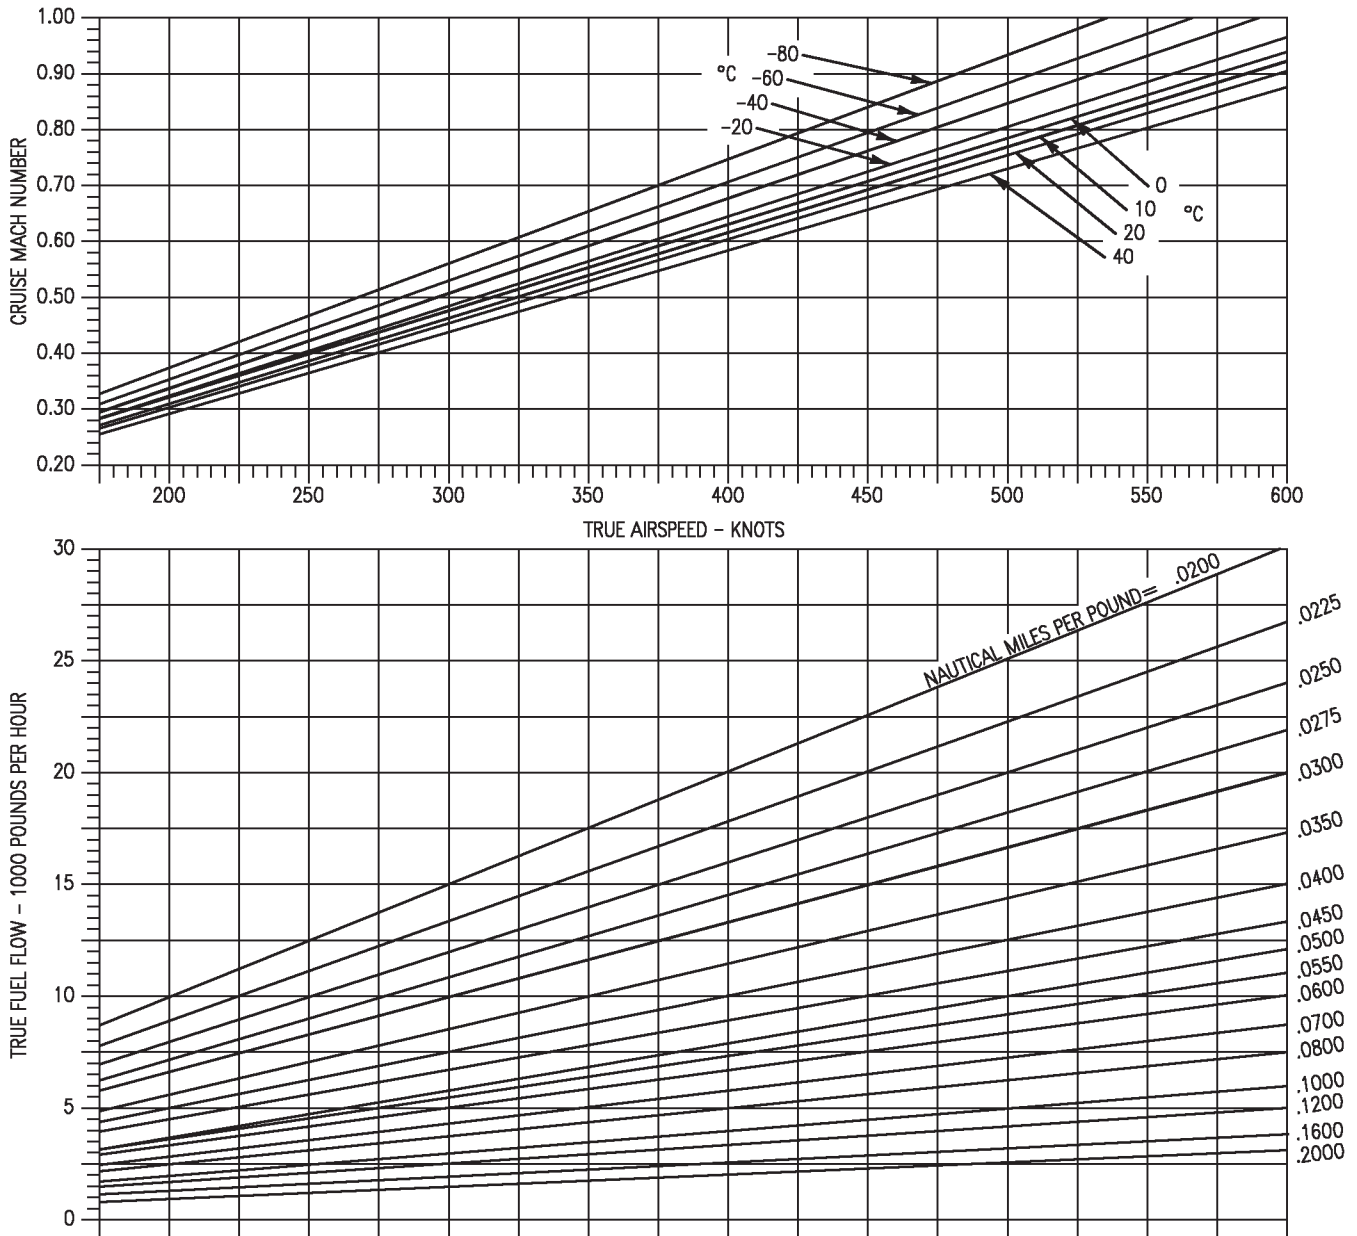


Figure 11-144. Constant Altitude/Long Range Cruise  
(Sheet 2 of 2)

18AC-NFM-20-(249-2)12-CATI


# RANGEWIND CORRECTION

AIRCRAFT CONFIGURATION  
ALL DRAG INDEXES



NOTE: RELATIVE WIND DIRECTION=ANGULAR  
DIFFERENCE MEASURED CLOCKWISE, BETWEEN  
AIRCRAFT HEADING AND TRUE WIND DIRECTION

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

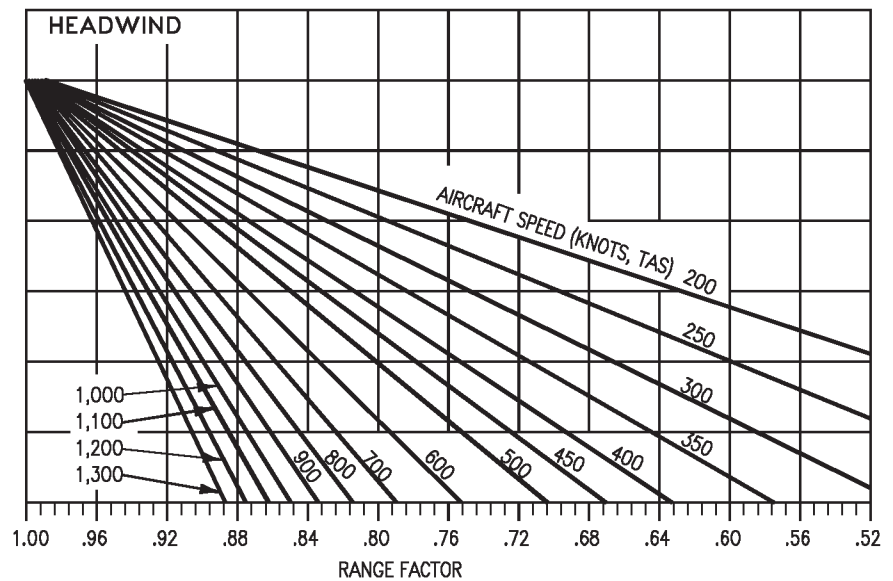
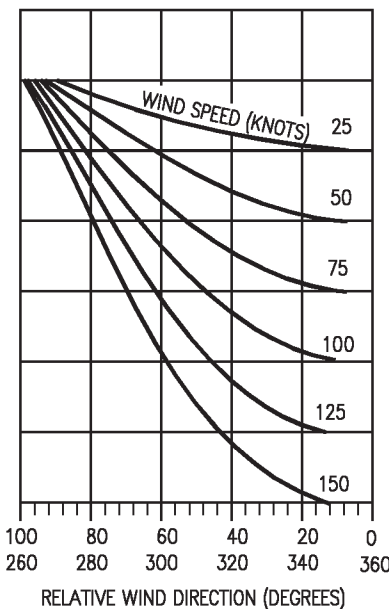
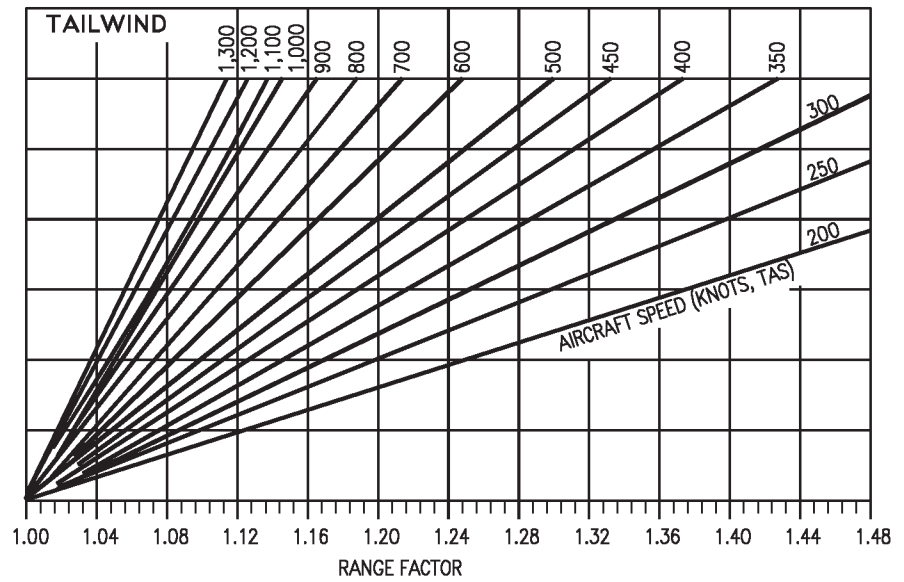
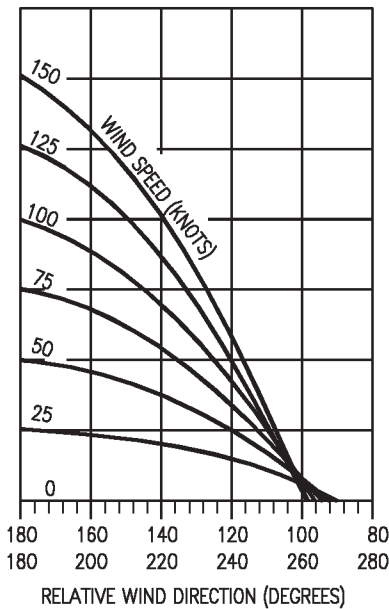


Figure 11-145. Rangewind Correction

18AC-NFM-20-(250-1)12-CAT1

# HEADWIND EFFECTS ON BINGO FUEL

F404-GE-400

CRUISE AT BEST ALTITUDE

REMARKS


ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962


DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

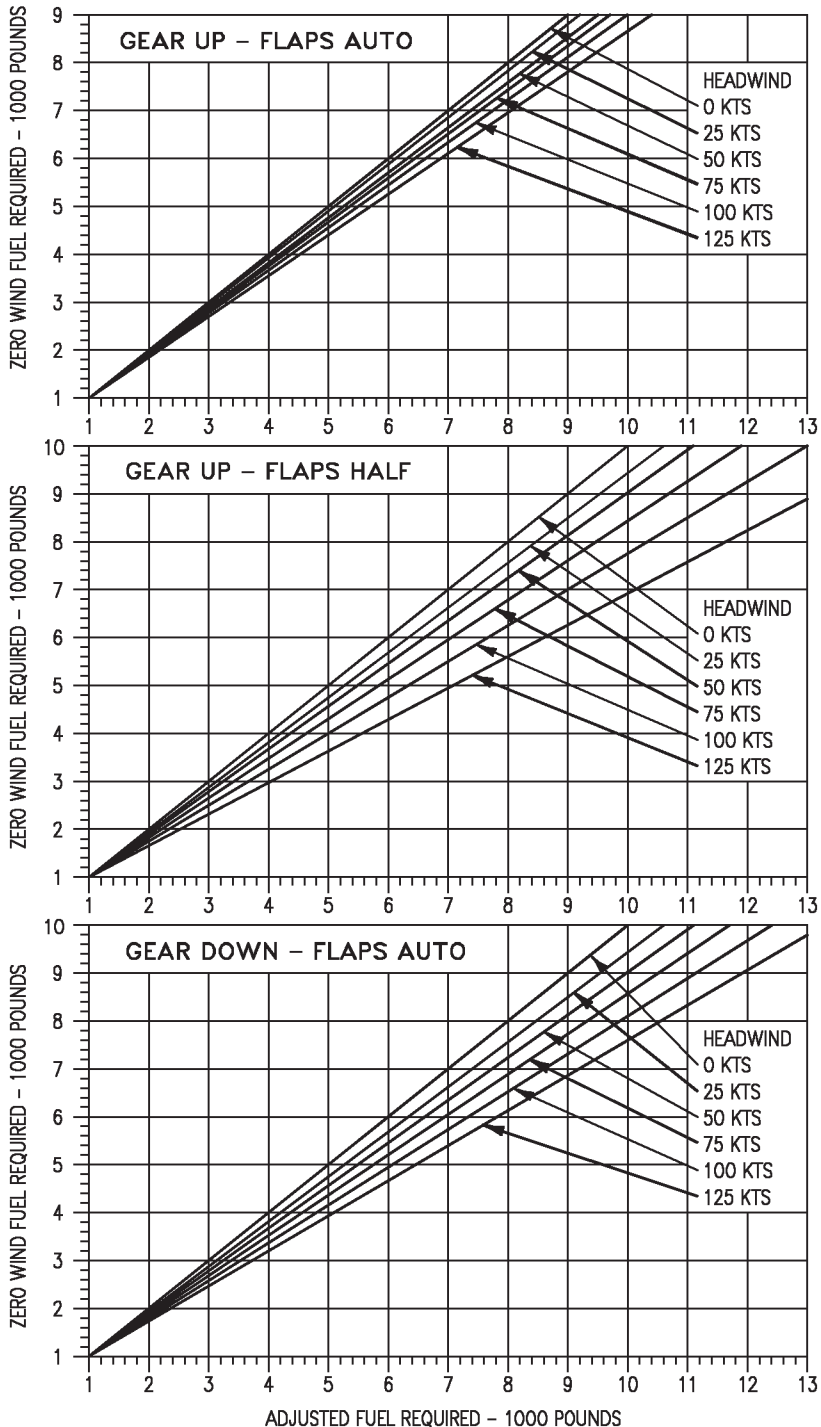

18AC-NFM-20-(486-1)13-CAT1

Figure 11-145a. Headwind Effects on Bingo Fuel - Cruise at Best Altitude - F404-GE-400



# HEADWIND EFFECTS ON BINGO FUEL

F404-GE-400

CRUISE AT SEA LEVEL

REMARKS


ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

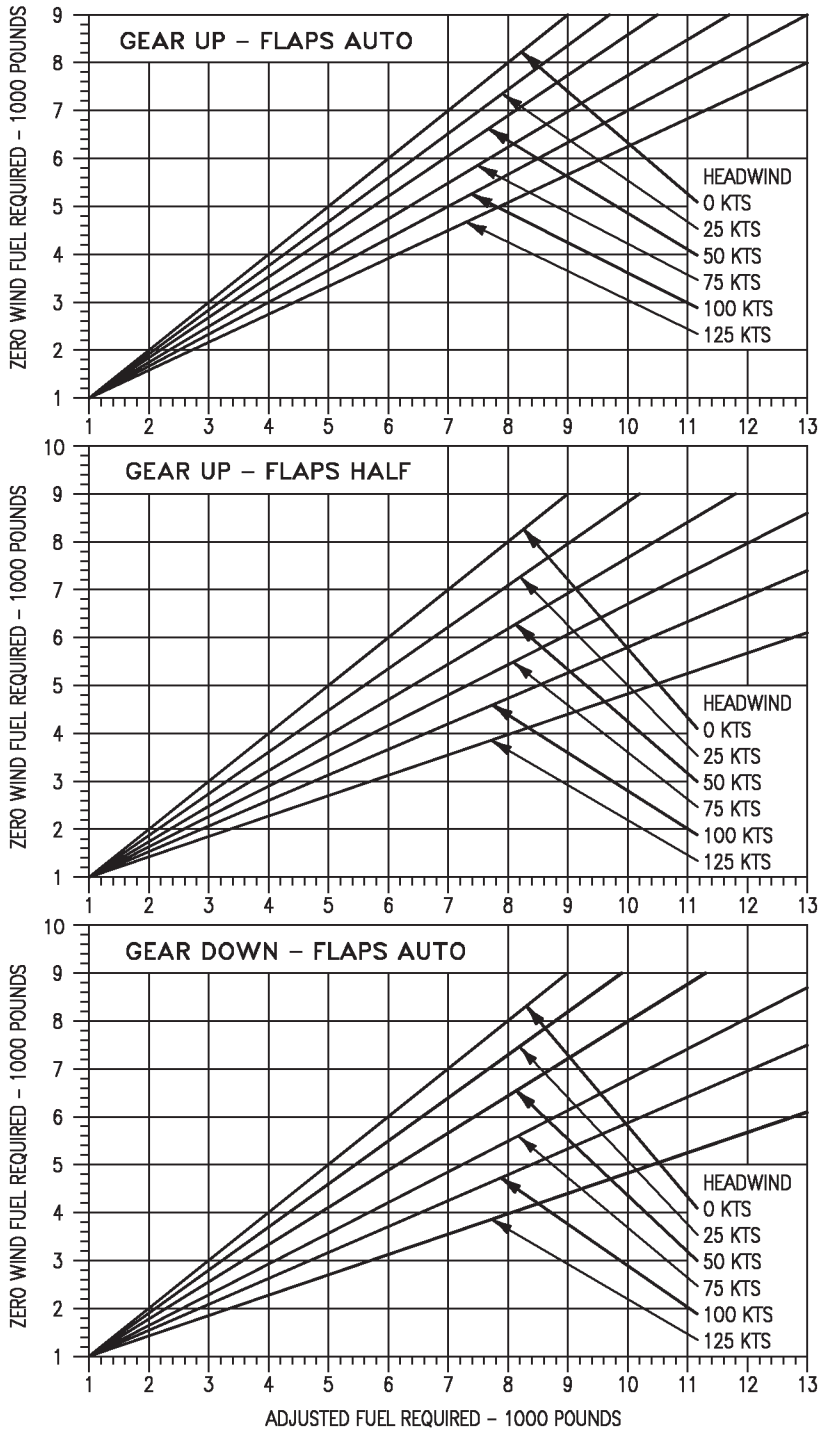


Figure 11-145b. Headwind Effects on Bingo Fuel - Cruise at Sea Level - F404-GE-400

18AC-NFM-20-(486-2)13-CATI



**BINGO**  
**F404-GE-400**  
GEAR UP - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                          | INBD DIST<br>NM | CLIMB<br>MACH OR KCAS | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------------|-----------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |                 |                       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |                 |                       | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200             | 505 KCAS to M = 0.86  | 40,000 | 258       | 73      | 3,090            | 29        | 4,480     | 279       | 43        |
|                          | 180             |                       | 40,000 | 258       | 73      | 2,970            | 26        | 4,170     | 279       | 39        |
|                          | 160             |                       | 40,000 | 258       | 73      | 2,840            | 24        | 3,880     | 279       | 34        |
|                          | 140             |                       | 40,000 | 258       | 73      | 2,720            | 21        | 3,580     | 278       | 30        |
|                          | 120             |                       | 39,000 | 263       | 71      | 2,600            | 19        | 3,280     | 278       | 26        |
|                          | 100             |                       | 37,000 | 272       | 66      | 2,470            | 16        | 2,980     | 278       | 22        |
|                          | 80              |                       | 33,000 | 280       | 58      | 2,340            | 14        | 2,680     | 277       | 17        |
|                          | 60              |                       | 26,000 | 278       | 44      | 2,190            | 11        | 2,390     | 277       | 13        |
|                          | 40              |                       | 18,000 | 277       | 30      | 2,010            | 8         | 2,090     | 277       | 9         |
|                          | 20              |                       | 7,000  | 278       | 12      | 1,790            | 4         | 1,800     | 276       | 4         |
| DRAG INDEX<br>50 COUNTS  | 200             | 475 KCAS to M = 0.82  | 40,000 | 254       | 65      | 3,270            | 29        | 4,760     | 275       | 44        |
|                          | 180             |                       | 40,000 | 254       | 65      | 3,130            | 26        | 4,430     | 275       | 39        |
|                          | 160             |                       | 40,000 | 253       | 65      | 2,990            | 24        | 4,100     | 274       | 35        |
|                          | 140             |                       | 40,000 | 253       | 65      | 2,850            | 21        | 3,770     | 274       | 31        |
|                          | 120             |                       | 40,000 | 253       | 65      | 2,710            | 19        | 3,450     | 274       | 26        |
|                          | 100             |                       | 39,000 | 258       | 62      | 2,570            | 16        | 3,120     | 273       | 22        |
|                          | 80              |                       | 33,000 | 268       | 51      | 2,430            | 13        | 2,800     | 273       | 18        |
|                          | 60              |                       | 28,000 | 268       | 42      | 2,260            | 11        | 2,470     | 272       | 13        |
|                          | 40              |                       | 18,000 | 269       | 27      | 2,070            | 7         | 2,150     | 272       | 9         |
|                          | 20              |                       | 3,000  | 270       | 5       | 1,820            | 4         | 1,830     | 272       | 4         |
| DRAG INDEX<br>100 COUNTS | 200             | 450 KCAS to M = 0.78  | 40,000 | 259       | 57      | 3,470            | 28        | 5,040     | 271       | 44        |
|                          | 180             |                       | 40,000 | 259       | 57      | 3,310            | 26        | 4,680     | 270       | 40        |
|                          | 160             |                       | 40,000 | 259       | 57      | 3,150            | 23        | 4,330     | 270       | 36        |
|                          | 140             |                       | 40,000 | 259       | 57      | 2,990            | 21        | 3,970     | 269       | 31        |
|                          | 120             |                       | 40,000 | 258       | 57      | 2,830            | 18        | 3,610     | 269       | 27        |
|                          | 100             |                       | 39,000 | 256       | 56      | 2,670            | 16        | 3,260     | 268       | 22        |
|                          | 80              |                       | 35,000 | 259       | 48      | 2,510            | 13        | 2,910     | 268       | 18        |
|                          | 60              |                       | 28,000 | 260       | 38      | 2,330            | 10        | 2,550     | 267       | 13        |
|                          | 40              |                       | 19,000 | 262       | 25      | 2,120            | 7         | 2,200     | 267       | 9         |
|                          | 20              |                       | 3,000  | 262       | 4       | 1,850            | 4         | 1,850     | 266       | 5         |
| DRAG INDEX<br>150 COUNTS | 200             | 330 KCAS to M = 0.76  | 40,000 | 243       | 52      | 3,660            | 29        | 5,330     | 266       | 45        |
|                          | 180             |                       | 40,000 | 243       | 52      | 3,490            | 27        | 4,940     | 265       | 41        |
|                          | 160             |                       | 40,000 | 243       | 52      | 3,310            | 24        | 4,550     | 265       | 36        |
|                          | 140             |                       | 40,000 | 242       | 52      | 3,140            | 21        | 4,160     | 264       | 32        |
|                          | 120             |                       | 40,000 | 242       | 52      | 2,960            | 19        | 3,780     | 264       | 27        |
|                          | 100             |                       | 39,000 | 245       | 50      | 2,790            | 16        | 3,400     | 263       | 23        |
|                          | 80              |                       | 35,000 | 248       | 44      | 2,610            | 14        | 3,020     | 263       | 18        |
|                          | 60              |                       | 29,000 | 252       | 35      | 2,410            | 11        | 2,640     | 262       | 14        |
|                          | 40              |                       | 17,000 | 256       | 20      | 2,160            | 8         | 2,260     | 262       | 9         |
|                          | 20              |                       | 7,000  | 254       | 8       | 1,860            | 4         | 1,880     | 261       | 5         |

- DATA BASED ON:
1. INITIAL ALTITUDE IS SEA LEVEL.
  2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
  3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
  4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
  5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-146. Bingo - Gear Up - Flaps Auto - 26,000 Pounds - F404-GE-400 (Sheet 1 of 2)

**BINGO**  
**F404-GE-400**  
GEAR UP - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

**REMARKS**  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                                  | INBD<br>DIST | CLIMB<br>MACH<br>OR<br>KCAS | CRUISE |              | DESCEND | SEA LEVEL CRUISE |              |              |              |              |
|----------------------------------|--------------|-----------------------------|--------|--------------|---------|------------------|--------------|--------------|--------------|--------------|
|                                  |              |                             | ALT    | SPEED<br>CAS | DIST    | FUEL<br>REQD     | TIME<br>REQD | FUEL<br>REQD | SPEED<br>CAS | TIME<br>REQD |
|                                  |              |                             | FEET   | KNOTS        | NM      | LB               | MIN          | LB           | KNOTS        | MIN          |
| <b>DRAG INDEX<br/>200 COUNTS</b> | 200          | <b>320 KCAS to M = 0.75</b> | 40,000 | 238          | 47      | 3,840            | 29           | 5,620        | 262          | 46           |
|                                  | 180          |                             | 40,000 | 238          | 47      | 3,650            | 27           | 5,200        | 261          | 41           |
|                                  | 160          |                             | 40,000 | 238          | 47      | 3,460            | 24           | 4,780        | 260          | 37           |
|                                  | 140          |                             | 40,000 | 237          | 47      | 3,260            | 21           | 4,360        | 260          | 32           |
|                                  | 120          |                             | 40,000 | 237          | 47      | 3,070            | 19           | 3,950        | 259          | 28           |
|                                  | 100          |                             | 40,000 | 237          | 47      | 2,880            | 16           | 3,540        | 258          | 23           |
|                                  | 80           |                             | 35,000 | 240          | 40      | 2,690            | 13           | 3,130        | 258          | 19           |
|                                  | 60           |                             | 28,000 | 246          | 31      | 2,470            | 11           | 2,720        | 257          | 14           |
|                                  | 40           |                             | 17,000 | 250          | 19      | 2,210            | 8            | 2,310        | 256          | 9            |
|                                  | 20           |                             | 7,000  | 250          | 8       | 1,890            | 4            | 1,910        | 256          | 5            |
| <b>DRAG INDEX<br/>250 COUNTS</b> | 200          | <b>300 KCAS to M = 0.72</b> | 40,000 | 232          | 43      | 4,030            | 30           | 5,910        | 258          | 47           |
|                                  | 180          |                             | 40,000 | 232          | 43      | 3,820            | 27           | 5,450        | 257          | 42           |
|                                  | 160          |                             | 40,000 | 232          | 43      | 3,600            | 25           | 5,010        | 256          | 37           |
|                                  | 140          |                             | 40,000 | 231          | 43      | 3,390            | 22           | 4,560        | 256          | 33           |
|                                  | 120          |                             | 40,000 | 231          | 43      | 3,180            | 19           | 4,120        | 255          | 28           |
|                                  | 100          |                             | 38,000 | 229          | 40      | 2,970            | 16           | 3,680        | 254          | 24           |
|                                  | 80           |                             | 34,000 | 236          | 35      | 2,760            | 14           | 3,240        | 253          | 19           |
|                                  | 60           |                             | 28,000 | 240          | 29      | 2,530            | 11           | 2,800        | 253          | 14           |
|                                  | 40           |                             | 17,000 | 244          | 17      | 2,250            | 8            | 2,370        | 252          | 10           |
|                                  | 20           |                             | 7,000  | 245          | 7       | 1,910            | 4            | 1,940        | 251          | 5            |
| <b>DRAG INDEX<br/>300 COUNTS</b> | 200          | <b>280 KCAS to M = 0.68</b> | 39,000 | 226          | 39      | 4,220            | 31           | 6,190        | 254          | 47           |
|                                  | 180          |                             | 39,000 | 226          | 39      | 3,990            | 28           | 5,710        | 253          | 43           |
|                                  | 160          |                             | 39,000 | 226          | 39      | 3,750            | 25           | 5,230        | 252          | 38           |
|                                  | 140          |                             | 39,000 | 225          | 39      | 3,520            | 23           | 4,750        | 252          | 33           |
|                                  | 120          |                             | 39,000 | 225          | 39      | 3,300            | 20           | 4,280        | 251          | 29           |
|                                  | 100          |                             | 38,000 | 225          | 37      | 3,070            | 17           | 3,810        | 250          | 24           |
|                                  | 80           |                             | 34,000 | 230          | 33      | 2,830            | 14           | 3,350        | 249          | 19           |
|                                  | 60           |                             | 28,000 | 235          | 26      | 2,590            | 11           | 2,880        | 248          | 15           |
|                                  | 40           |                             | 17,000 | 238          | 16      | 2,290            | 8            | 2,420        | 247          | 10           |
|                                  | 20           |                             | 7,000  | 241          | 6       | 1,940            | 5            | 1,960        | 246          | 5            |

**DATA BASED ON:**

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-146. Bingo - Gear Up - Flaps Auto - 26,000 Pounds -  
F404-GE-400 (Sheet 2 of 2)**

**BINGO**  
**F404-GE-400**  
GEAR UP - FLAPS AUTO  
WEIGHT - 30,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                          | INBD DIST<br>NM | CLIMB<br>MACH OR KCAS | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------------|-----------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |                 |                       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |                 |                       | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200             | 505 KCAS to M = 0.86  | 40,000 | 262       | 74      | 3,230            | 29        | 4,610     | 302       | 40        |
|                          | 180             |                       | 40,000 | 262       | 74      | 3,100            | 26        | 4,290     | 302       | 36        |
|                          | 160             |                       | 39,000 | 266       | 72      | 2,960            | 24        | 3,980     | 301       | 32        |
|                          | 140             |                       | 39,000 | 266       | 72      | 2,820            | 21        | 3,670     | 301       | 28        |
|                          | 120             |                       | 38,000 | 271       | 69      | 2,680            | 19        | 3,360     | 300       | 24        |
|                          | 100             |                       | 35,000 | 286       | 62      | 2,540            | 16        | 3,050     | 299       | 20        |
|                          | 80              |                       | 32,000 | 295       | 56      | 2,400            | 14        | 2,740     | 299       | 16        |
|                          | 60              |                       | 24,000 | 297       | 42      | 2,230            | 11        | 2,430     | 298       | 12        |
|                          | 40              |                       | 17,000 | 294       | 29      | 2,040            | 8         | 2,120     | 297       | 8         |
|                          | 20              |                       | 3,000  | 296       | 5       | 1,800            | 4         | 1,810     | 297       | 4         |
| DRAG INDEX<br>50 COUNTS  | 200             | 475 KCAS to M = 0.82  | 40,000 | 256       | 66      | 3,430            | 29        | 4,920     | 293       | 41        |
|                          | 180             |                       | 40,000 | 256       | 66      | 3,280            | 26        | 4,570     | 292       | 37        |
|                          | 160             |                       | 40,000 | 256       | 66      | 3,120            | 24        | 4,230     | 291       | 33        |
|                          | 140             |                       | 39,000 | 261       | 64      | 2,970            | 21        | 3,880     | 290       | 29        |
|                          | 120             |                       | 38,000 | 286       | 62      | 2,810            | 19        | 3,540     | 289       | 25        |
|                          | 100             |                       | 36,000 | 278       | 58      | 2,650            | 16        | 3,200     | 289       | 21        |
|                          | 80              |                       | 32,000 | 288       | 50      | 2,490            | 13        | 2,860     | 288       | 17        |
|                          | 60              |                       | 26,000 | 287       | 40      | 2,310            | 11        | 2,520     | 287       | 13        |
|                          | 40              |                       | 18,000 | 285       | 28      | 2,100            | 7         | 2,180     | 286       | 8         |
|                          | 20              |                       | 3,000  | 285       | 5       | 1,830            | 4         | 1,840     | 285       | 4         |
| DRAG INDEX<br>100 COUNTS | 200             | 450 KCAS to M = 0.78  | 40,000 | 253       | 60      | 3,630            | 29        | 5,220     | 282       | 43        |
|                          | 180             |                       | 40,000 | 253       | 60      | 3,460            | 26        | 4,830     | 281       | 38        |
|                          | 160             |                       | 40,000 | 253       | 60      | 3,280            | 24        | 4,460     | 280       | 34        |
|                          | 140             |                       | 40,000 | 254       | 60      | 3,110            | 21        | 4,080     | 280       | 30        |
|                          | 120             |                       | 40,000 | 254       | 60      | 2,940            | 19        | 3,710     | 279       | 26        |
|                          | 100             |                       | 36,000 | 269       | 52      | 2,760            | 16        | 3,340     | 279       | 22        |
|                          | 80              |                       | 33,000 | 273       | 47      | 2,580            | 13        | 2,970     | 279       | 17        |
|                          | 60              |                       | 27,000 | 277       | 38      | 2,380            | 10        | 2,600     | 278       | 13        |
|                          | 40              |                       | 18,000 | 278       | 25      | 2,150            | 7         | 2,230     | 278       | 9         |
|                          | 20              |                       | 3,000  | 278       | 4       | 1,860            | 4         | 1,870     | 277       | 4         |
| DRAG INDEX<br>150 COUNTS | 200             | 330 KCAS to M = 0.76  | 40,000 | 259       | 54      | 3,870            | 29        | 5,520     | 277       | 43        |
|                          | 180             |                       | 40,000 | 259       | 54      | 3,670            | 26        | 5,110     | 277       | 39        |
|                          | 160             |                       | 40,000 | 259       | 54      | 3,480            | 24        | 4,700     | 276       | 35        |
|                          | 140             |                       | 40,000 | 259       | 54      | 3,280            | 21        | 4,290     | 276       | 30        |
|                          | 120             |                       | 38,000 | 258       | 51      | 3,090            | 19        | 3,890     | 275       | 26        |
|                          | 100             |                       | 37,000 | 259       | 49      | 2,890            | 16        | 3,490     | 275       | 22        |
|                          | 80              |                       | 33,000 | 265       | 43      | 2,690            | 14        | 3,090     | 274       | 18        |
|                          | 60              |                       | 28,000 | 267       | 36      | 2,470            | 11        | 2,690     | 273       | 13        |
|                          | 40              |                       | 14,000 | 274       | 18      | 2,200            | 8         | 2,290     | 273       | 9         |
|                          | 20              |                       | 7,000  | 273       | 9       | 1,880            | 4         | 1,900     | 272       | 4         |

- DATA BASED ON:
1. INITIAL ALTITUDE IS SEA LEVEL.
  2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
  3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
  4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
  5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-147. Bingo - Gear Up - Flaps Auto - 30,000 Pounds - F404-GE-400 (Sheet 1 of 2)

**BINGO**  
**F404-GE-400**  
GEAR UP - FLAPS AUTO  
WEIGHT - 30,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

**REMARKS**  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                                  | INBD<br>DIST | CLIMB<br>MACH<br>OR<br>KCAS | CRUISE |              | DESCEND | SEA LEVEL CRUISE |              |              |              |              |
|----------------------------------|--------------|-----------------------------|--------|--------------|---------|------------------|--------------|--------------|--------------|--------------|
|                                  |              |                             | ALT    | SPEED<br>CAS | DIST    | FUEL<br>REQD     | TIME<br>REQD | FUEL<br>REQD | SPEED<br>CAS | TIME<br>REQD |
|                                  |              |                             | FEET   | KNOTS        | NM      | LB               | MIN          | LB           | KNOTS        | MIN          |
| <b>DRAG INDEX<br/>200 COUNTS</b> | 200          | <b>320 KCAS to M = 0.75</b> | 40,000 | 243          | 50      | 4,070            | 29           | 5,820        | 274          | 44           |
|                                  | 180          |                             | 40,000 | 243          | 50      | 3,860            | 27           | 5,380        | 273          | 40           |
|                                  | 160          |                             | 40,000 | 243          | 50      | 3,640            | 24           | 4,940        | 272          | 35           |
|                                  | 140          |                             | 39,000 | 247          | 48      | 3,430            | 22           | 4,500        | 272          | 31           |
|                                  | 120          |                             | 38,000 | 250          | 47      | 3,210            | 19           | 4,070        | 271          | 27           |
|                                  | 100          |                             | 37,000 | 253          | 45      | 3,000            | 16           | 3,640        | 270          | 22           |
|                                  | 80           |                             | 33,000 | 256          | 40      | 2,770            | 14           | 3,210        | 270          | 18           |
|                                  | 60           |                             | 27,000 | 259          | 32      | 2,540            | 11           | 2,780        | 269          | 13           |
|                                  | 40           |                             | 14,000 | 266          | 16      | 2,250            | 8            | 2,350        | 269          | 9            |
|                                  | 20           |                             | 7,000  | 267          | 8       | 1,910            | 4            | 1,930        | 268          | 4            |
| <b>DRAG INDEX<br/>250 COUNTS</b> | 200          | <b>300 KCAS to M = 0.72</b> | 39,000 | 242          | 45      | 4,280            | 30           | 6,120        | 270          | 45           |
|                                  | 180          |                             | 39,000 | 242          | 45      | 4,050            | 27           | 5,650        | 269          | 40           |
|                                  | 160          |                             | 39,000 | 242          | 45      | 3,810            | 25           | 5,180        | 268          | 36           |
|                                  | 140          |                             | 38,000 | 245          | 43      | 3,570            | 22           | 4,710        | 268          | 31           |
|                                  | 120          |                             | 38,000 | 245          | 43      | 3,340            | 19           | 4,240        | 267          | 27           |
|                                  | 100          |                             | 36,000 | 248          | 40      | 3,100            | 17           | 3,780        | 266          | 23           |
|                                  | 80           |                             | 33,000 | 248          | 37      | 2,860            | 14           | 3,320        | 266          | 18           |
|                                  | 60           |                             | 28,000 | 254          | 31      | 2,600            | 11           | 2,860        | 265          | 14           |
|                                  | 40           |                             | 14,000 | 261          | 15      | 2,300            | 8            | 2,410        | 265          | 9            |
|                                  | 20           |                             | 7,000  | 261          | 7       | 1,930            | 4            | 1,960        | 264          | 5            |
| <b>DRAG INDEX<br/>300 COUNTS</b> | 200          | <b>280 KCAS to M = 0.68</b> | 37,000 | 240          | 39      | 4,510            | 31           | 6,410        | 266          | 45           |
|                                  | 180          |                             | 37,000 | 240          | 39      | 4,240            | 28           | 5,910        | 265          | 41           |
|                                  | 160          |                             | 37,000 | 240          | 39      | 3,980            | 25           | 5,410        | 265          | 36           |
|                                  | 140          |                             | 37,000 | 240          | 39      | 3,720            | 23           | 4,910        | 264          | 32           |
|                                  | 120          |                             | 36,000 | 241          | 37      | 3,460            | 20           | 4,420        | 263          | 27           |
|                                  | 100          |                             | 36,000 | 241          | 37      | 3,210            | 17           | 3,930        | 262          | 23           |
|                                  | 80           |                             | 33,000 | 243          | 34      | 2,940            | 14           | 3,440        | 262          | 18           |
|                                  | 60           |                             | 27,000 | 249          | 27      | 2,670            | 11           | 2,950        | 261          | 14           |
|                                  | 40           |                             | 15,000 | 255          | 15      | 2,350            | 8            | 2,470        | 260          | 9            |
|                                  | 20           |                             | 7,000  | 255          | 7       | 1,960            | 4            | 1,980        | 260          | 5            |

- DATA BASED ON:**
1. INITIAL ALTITUDE IS SEA LEVEL.
  2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
  3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
  4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
  5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-147. Bingo - Gear Up - Flaps Auto - 30,000 Pounds -  
F404-GE-400 (Sheet 2 of 2)**

**BINGO**  
**F404-GE-400**  
GEAR UP - HALF FLAPS  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                                  | INBD DIST<br>NM | CLIMB                       | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|----------------------------------|-----------------|-----------------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                                  |                 | MACH OR KCAS                | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                                  |                 |                             | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| <b>DRAG INDEX<br/>0 COUNTS</b>   | 200             | <b>225 KCAS to M = 0.47</b> | 34,000 | 198       | 22      | 5,360            | 38        | 7,680     | 207       | 58        |
|                                  | 180             |                             | 34,000 | 198       | 22      | 5,020            | 34        | 7,040     | 207       | 52        |
|                                  | 160             |                             | 34,000 | 198       | 22      | 4,670            | 31        | 6,400     | 206       | 47        |
|                                  | 140             |                             | 34,000 | 198       | 22      | 4,330            | 27        | 5,770     | 206       | 41        |
|                                  | 120             |                             | 34,000 | 198       | 22      | 3,990            | 24        | 5,150     | 205       | 35        |
|                                  | 100             |                             | 32,000 | 198       | 20      | 3,660            | 20        | 4,530     | 205       | 29        |
|                                  | 80              |                             | 30,000 | 198       | 19      | 3,310            | 16        | 3,920     | 204       | 24        |
|                                  | 60              |                             | 28,000 | 197       | 17      | 2,960            | 13        | 3,310     | 204       | 18        |
|                                  | 40              |                             | 18,000 | 197       | 11      | 2,570            | 9         | 2,700     | 203       | 12        |
|                                  | 20              |                             | 7,000  | 200       | 4       | 2,090            | 5         | 2,100     | 203       | 6         |
| <b>DRAG INDEX<br/>50 COUNTS</b>  | 200             | <b>225 KCAS to M = 0.46</b> | 33,000 | 192       | 20      | 5,580            | 39        | 7,910     | 206       | 58        |
|                                  | 180             |                             | 33,000 | 193       | 20      | 5,200            | 35        | 7,240     | 205       | 53        |
|                                  | 160             |                             | 33,000 | 194       | 20      | 4,830            | 32        | 6,570     | 204       | 47        |
|                                  | 140             |                             | 33,000 | 194       | 20      | 4,460            | 28        | 5,920     | 204       | 41        |
|                                  | 120             |                             | 33,000 | 195       | 20      | 4,100            | 24        | 5,280     | 203       | 35        |
|                                  | 100             |                             | 33,000 | 195       | 20      | 3,740            | 20        | 4,640     | 203       | 30        |
|                                  | 80              |                             | 30,000 | 196       | 18      | 3,380            | 17        | 4,010     | 202       | 24        |
|                                  | 60              |                             | 27,000 | 195       | 16      | 3,010            | 13        | 3,370     | 202       | 18        |
|                                  | 40              |                             | 19,000 | 194       | 11      | 2,600            | 9         | 2,750     | 201       | 12        |
|                                  | 20              |                             | 7,000  | 197       | 4       | 2,110            | 5         | 2,120     | 201       | 6         |
| <b>DRAG INDEX<br/>100 COUNTS</b> | 200             | <b>220 KCAS to M = 0.46</b> | 32,000 | 187       | 18      | 5,780            | 40        | 8,140     | 204       | 59        |
|                                  | 180             |                             | 32,000 | 187       | 18      | 5,390            | 37        | 7,440     | 203       | 53        |
|                                  | 160             |                             | 32,000 | 187       | 18      | 5,000            | 33        | 6,750     | 202       | 47        |
|                                  | 140             |                             | 32,000 | 187       | 18      | 4,610            | 29        | 6,080     | 202       | 42        |
|                                  | 120             |                             | 32,000 | 187       | 18      | 4,230            | 25        | 5,410     | 201       | 36        |
|                                  | 100             |                             | 32,000 | 187       | 18      | 3,850            | 21        | 4,750     | 201       | 30        |
|                                  | 80              |                             | 30,000 | 191       | 17      | 3,460            | 17        | 4,090     | 200       | 24        |
|                                  | 60              |                             | 27,000 | 190       | 15      | 3,070            | 13        | 3,440     | 200       | 18        |
|                                  | 40              |                             | 18,000 | 192       | 10      | 2,650            | 9         | 2,790     | 199       | 12        |
|                                  | 20              |                             | 7,000  | 194       | 4       | 2,130            | 5         | 2,140     | 199       | 6         |
| <b>DRAG INDEX<br/>150 COUNTS</b> | 200             | <b>210 KCAS to M = 0.43</b> | 30,000 | 196       | 16      | 6,000            | 40        | 8,360     | 202       | 60        |
|                                  | 180             |                             | 30,000 | 194       | 16      | 5,580            | 37        | 7,640     | 201       | 54        |
|                                  | 160             |                             | 30,000 | 192       | 16      | 5,170            | 33        | 6,930     | 200       | 48        |
|                                  | 140             |                             | 30,000 | 190       | 16      | 4,760            | 29        | 6,230     | 200       | 42        |
|                                  | 120             |                             | 30,000 | 189       | 16      | 4,350            | 25        | 5,540     | 199       | 36        |
|                                  | 100             |                             | 30,000 | 187       | 16      | 3,940            | 21        | 4,850     | 199       | 30        |
|                                  | 80              |                             | 29,000 | 186       | 15      | 3,540            | 18        | 4,170     | 198       | 24        |
|                                  | 60              |                             | 27,000 | 186       | 14      | 3,130            | 13        | 3,500     | 198       | 18        |
|                                  | 40              |                             | 18,000 | 190       | 9       | 2,690            | 10        | 2,830     | 197       | 12        |
|                                  | 20              |                             | 7,000  | 191       | 4       | 2,160            | 6         | 2,170     | 197       | 6         |

- DATA BASED ON:
1. INITIAL ALTITUDE IS SEA LEVEL
  2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE
  3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED)
  4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL
  5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-148. Bingo - Gear Up - Half Flaps - 26,000 Pounds - F404-GE-400 (Sheet 1 of 2)**

**BINGO**  
**F404-GE-400**  
GEAR UP - HALF FLAPS  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                                  | INBD DIST<br>NM                  | CLIMB<br>MACH OR KCAS       | CRUISE                      |                             | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|----------------------------------|----------------------------------|-----------------------------|-----------------------------|-----------------------------|---------|------------------|-----------|-----------|-----------|-----------|
|                                  |                                  |                             | ALT                         | SPEED CAS                   | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                                  |                                  |                             | FEET                        | KNOTS                       | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| <b>DRAG INDEX<br/>200 COUNTS</b> | 200                              | <b>210 KCAS to M = 0.43</b> | 30,000                      | 194                         | 15      | 6,170            | 41        | 8,530     | 199       | 60        |
|                                  | 180                              |                             | 30,000                      | 192                         | 15      | 5,730            | 37        | 7,840     | 199       | 54        |
|                                  | 160                              |                             | 30,000                      | 189                         | 15      | 5,300            | 33        | 7,100     | 198       | 48        |
|                                  | 140                              |                             | 30,000                      | 187                         | 15      | 4,880            | 30        | 6,370     | 198       | 43        |
|                                  | 120                              |                             | 30,000                      | 184                         | 15      | 4,450            | 26        | 5,660     | 197       | 37        |
|                                  | 100                              |                             | 30,000                      | 182                         | 15      | 4,030            | 22        | 4,960     | 197       | 31        |
|                                  | 80                               |                             | 29,000                      | 181                         | 15      | 3,610            | 18        | 4,260     | 196       | 25        |
|                                  | 60                               |                             | 27,000                      | 181                         | 14      | 3,180            | 14        | 3,560     | 195       | 18        |
|                                  | 40                               |                             | 18,000                      | 187                         | 9       | 2,720            | 10        | 2,870     | 195       | 12        |
|                                  | 20                               |                             | 7,000                       | 189                         | 3       | 2,180            | 6         | 2,190     | 194       | 6         |
|                                  | <b>DRAG INDEX<br/>250 COUNTS</b> |                             | 200                         | <b>200 KCAS to M = 0.43</b> | 30,000  | 175              | 15        | 6,360     | 44        | 8,810     |
| 180                              |                                  | 30,000                      | 173                         |                             | 15      | 5,900            | 40        | 8,030     | 197       | 55        |
| 160                              |                                  | 30,000                      | 173                         |                             | 15      | 5,450            | 36        | 7,270     | 196       | 49        |
| 140                              |                                  | 30,000                      | 174                         |                             | 15      | 5,000            | 31        | 6,520     | 196       | 43        |
| 120                              |                                  | 30,000                      | 174                         |                             | 15      | 4,560            | 27        | 5,790     | 195       | 37        |
| 100                              |                                  | 30,000                      | 174                         |                             | 15      | 4,120            | 22        | 5,060     | 194       | 31        |
| 80                               |                                  | 29,000                      | 175                         |                             | 14      | 3,690            | 18        | 4,340     | 194       | 25        |
| 60                               |                                  | 26,000                      | 176                         |                             | 13      | 3,240            | 14        | 3,620     | 193       | 19        |
| 40                               |                                  | 18,000                      | 184                         |                             | 9       | 2,770            | 10        | 2,910     | 192       | 12        |
| 20                               |                                  | 3,000                       | 188                         |                             | 1       | 2,200            | 6         | 2,210     | 192       | 6         |
| <b>DRAG INDEX<br/>300 COUNTS</b> |                                  | 200                         | <b>200 KCAS to M = 0.42</b> |                             | 30,000  | 172              | 14        | 6,520     | 45        | 9,020     |
|                                  | 180                              | 30,000                      |                             | 171                         | 14      | 6,050            | 40        | 8,230     | 194       | 56        |
|                                  | 160                              | 30,000                      |                             | 171                         | 14      | 5,580            | 36        | 7,440     | 194       | 49        |
|                                  | 140                              | 30,000                      |                             | 171                         | 14      | 5,120            | 32        | 6,670     | 194       | 43        |
|                                  | 120                              | 30,000                      |                             | 171                         | 14      | 4,660            | 27        | 5,910     | 193       | 37        |
|                                  | 100                              | 30,000                      |                             | 171                         | 14      | 4,210            | 23        | 5,160     | 192       | 31        |
|                                  | 80                               | 29,000                      |                             | 172                         | 13      | 3,750            | 19        | 4,420     | 192       | 25        |
|                                  | 60                               | 26,000                      |                             | 173                         | 12      | 3,290            | 14        | 3,680     | 191       | 19        |
|                                  | 40                               | 18,000                      |                             | 180                         | 8       | 2,800            | 10        | 2,950     | 190       | 13        |
|                                  | 20                               | 3,000                       |                             | 185                         | 1       | 2,220            | 6         | 2,230     | 190       | 6         |

- DATA BASED ON:
1. INITIAL ALTITUDE IS SEA LEVEL
  2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE
  3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED)
  4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL
  5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-148. Bingo - Gear Up - Half Flaps - 26,000 Pounds -  
F404-GE-400 (Sheet 2 of 2)

**BINGO**  
**F404-GE-400**  
GEAR UP - HALF FLAPS  
WEIGHT - 30,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                          | INBD DIST<br>NM | CLIMB              | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------------|--------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |                 | MACH OR KCAS       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |                 |                    | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200             | 225 KCAS to M=0.47 | 30,000 | 211       | 21      | 5,840            | 38        | 8,080     | 226       | 53        |
|                          | 180             |                    | 30,000 | 210       | 21      | 5,440            | 35        | 7,400     | 225       | 48        |
|                          | 160             |                    | 30,000 | 209       | 21      | 5,040            | 31        | 6,730     | 224       | 43        |
|                          | 140             |                    | 30,000 | 208       | 21      | 4,640            | 27        | 6,060     | 222       | 38        |
|                          | 120             |                    | 30,000 | 207       | 21      | 4,250            | 24        | 5,390     | 220       | 33        |
|                          | 100             |                    | 30,000 | 206       | 21      | 3,860            | 20        | 4,730     | 219       | 27        |
|                          | 80              |                    | 28,000 | 207       | 19      | 3,470            | 16        | 4,080     | 217       | 22        |
|                          | 60              |                    | 26,000 | 207       | 18      | 3,070            | 13        | 3,420     | 215       | 17        |
|                          | 40              |                    | 17,000 | 206       | 11      | 2,640            | 9         | 2,770     | 213       | 11        |
|                          | 20              |                    | 4,000  | 213       | 3       | 2,120            | 5         | 2,140     | 212       | 6         |
| DRAG INDEX<br>50 COUNTS  | 200             | 225 KCAS to M=0.46 | 30,000 | 208       | 20      | 6,040            | 39        | 8,330     | 224       | 54        |
|                          | 180             |                    | 30,000 | 207       | 20      | 5,620            | 35        | 7,620     | 222       | 49        |
|                          | 160             |                    | 30,000 | 206       | 20      | 5,200            | 31        | 6,920     | 221       | 44        |
|                          | 140             |                    | 30,000 | 206       | 20      | 4,780            | 28        | 6,220     | 219       | 38        |
|                          | 120             |                    | 30,000 | 205       | 20      | 4,370            | 24        | 5,530     | 217       | 33        |
|                          | 100             |                    | 29,000 | 205       | 19      | 3,960            | 20        | 4,840     | 215       | 28        |
|                          | 80              |                    | 27,000 | 206       | 18      | 3,550            | 17        | 4,160     | 213       | 23        |
|                          | 60              |                    | 26,000 | 206       | 17      | 3,130            | 13        | 3,490     | 212       | 17        |
|                          | 40              |                    | 18,000 | 205       | 12      | 2,680            | 9         | 2,820     | 210       | 11        |
|                          | 20              |                    | 4,000  | 211       | 3       | 2,140            | 5         | 2,160     | 209       | 6         |
| DRAG INDEX<br>100 COUNTS | 200             | 220 KCAS to M=0.46 | 29,000 | 207       | 18      | 6,260            | 39        | 8,580     | 221       | 54        |
|                          | 180             |                    | 29,000 | 206       | 18      | 5,810            | 36        | 7,840     | 219       | 49        |
|                          | 160             |                    | 29,000 | 205       | 18      | 5,370            | 32        | 7,120     | 217       | 44        |
|                          | 140             |                    | 29,000 | 205       | 18      | 4,930            | 28        | 6,390     | 216       | 39        |
|                          | 120             |                    | 29,000 | 204       | 18      | 4,490            | 24        | 5,670     | 214       | 34        |
|                          | 100             |                    | 29,000 | 203       | 18      | 4,060            | 21        | 4,960     | 212       | 28        |
|                          | 80              |                    | 27,000 | 204       | 17      | 3,630            | 17        | 4,250     | 211       | 23        |
|                          | 60              |                    | 24,000 | 204       | 15      | 3,190            | 13        | 3,550     | 209       | 17        |
|                          | 40              |                    | 17,000 | 202       | 10      | 2,720            | 9         | 2,860     | 208       | 12        |
|                          | 20              |                    | 4,000  | 208       | 2       | 2,170            | 5         | 2,180     | 207       | 6         |
| DRAG INDEX<br>150 COUNTS | 200             | 210 KCAS to M=0.43 | 28,000 | 202       | 17      | 6,510            | 41        | 8,830     | 217       | 55        |
|                          | 180             |                    | 28,000 | 201       | 17      | 6,030            | 37        | 8,070     | 215       | 50        |
|                          | 160             |                    | 28,000 | 201       | 17      | 5,560            | 33        | 7,310     | 213       | 45        |
|                          | 140             |                    | 28,000 | 201       | 17      | 5,090            | 29        | 6,560     | 212       | 40        |
|                          | 120             |                    | 28,000 | 201       | 17      | 4,630            | 25        | 5,810     | 210       | 34        |
|                          | 100             |                    | 28,000 | 201       | 17      | 4,180            | 21        | 5,070     | 208       | 29        |
|                          | 80              |                    | 26,000 | 202       | 15      | 3,720            | 17        | 4,340     | 207       | 23        |
|                          | 60              |                    | 22,000 | 202       | 13      | 3,250            | 13        | 3,620     | 206       | 17        |
|                          | 40              |                    | 18,000 | 201       | 10      | 2,770            | 9         | 2,910     | 205       | 12        |
|                          | 20              |                    | 4,000  | 206       | 2       | 2,190            | 5         | 2,200     | 204       | 6         |

- DATA BASED ON:
1. INITIAL ALTITUDE IS SEA LEVEL
  2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE
  3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED)
  4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL
  5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-149. Bingo - Gear Up - Half Flaps - 30,000 Pounds -  
F404-GE-400 (Sheet 1 of 2)

A1-F18AC-NFM-200

**BINGO**  
**F404-GE-400**  
GEAR UP - HALF FLAPS  
WEIGHT - 30,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                          | INBD<br>DIST | CLIMB<br>MACH<br>OR<br>KCAS | CRUISE |              | DESCEND | SEA LEVEL CRUISE |              |              |              |              |
|--------------------------|--------------|-----------------------------|--------|--------------|---------|------------------|--------------|--------------|--------------|--------------|
|                          |              |                             | ALT    | SPEED<br>CAS | DIST    | FUEL<br>REQD     | TIME<br>REQD | FUEL<br>REQD | SPEED<br>CAS | TIME<br>REQD |
|                          |              |                             | FEET   | KNOTS        | NM      | LB               | MIN          | LB           | KNOTS        | MIN          |
| DRAG INDEX<br>200 COUNTS | 200          | 210 KCAS to M = 0.43        | 28,000 | 198          | 16      | 6,710            | 41           | 9,080        | 213          | 56           |
|                          | 180          |                             | 28,000 | 199          | 16      | 6,210            | 37           | 8,290        | 211          | 51           |
|                          | 160          |                             | 28,000 | 199          | 16      | 5,710            | 33           | 7,500        | 210          | 46           |
|                          | 140          |                             | 28,000 | 199          | 16      | 5,220            | 29           | 6,720        | 208          | 40           |
|                          | 120          |                             | 28,000 | 198          | 16      | 4,740            | 25           | 5,950        | 206          | 35           |
|                          | 100          |                             | 28,000 | 198          | 16      | 4,270            | 21           | 5,190        | 205          | 29           |
|                          | 80           |                             | 26,000 | 200          | 15      | 3,790            | 17           | 4,430        | 204          | 24           |
|                          | 60           |                             | 23,000 | 201          | 13      | 3,310            | 13           | 3,690        | 203          | 18           |
|                          | 40           |                             | 17,000 | 198          | 9       | 2,800            | 10           | 2,950        | 202          | 12           |
|                          | 20           |                             | 4,000  | 203          | 2       | 2,210            | 6            | 2,220        | 201          | 6            |
| DRAG INDEX<br>250 COUNTS | 200          | 200 KCAS to M = 0.43        | 27,000 | 192          | 15      | 6,950            | 43           | 9,330        | 209          | 57           |
|                          | 180          |                             | 27,000 | 193          | 15      | 6,430            | 39           | 8,510        | 207          | 52           |
|                          | 160          |                             | 27,000 | 194          | 15      | 5,910            | 34           | 7,690        | 206          | 47           |
|                          | 140          |                             | 27,000 | 195          | 15      | 5,400            | 30           | 6,880        | 204          | 41           |
|                          | 120          |                             | 27,000 | 195          | 15      | 4,890            | 26           | 6,080        | 203          | 35           |
|                          | 100          |                             | 27,000 | 196          | 15      | 4,390            | 22           | 5,300        | 202          | 30           |
|                          | 80           |                             | 26,000 | 198          | 14      | 3,900            | 18           | 4,520        | 201          | 24           |
|                          | 60           |                             | 22,000 | 199          | 12      | 3,390            | 14           | 3,750        | 200          | 18           |
|                          | 40           |                             | 17,000 | 196          | 9       | 2,860            | 10           | 2,990        | 199          | 12           |
|                          | 20           |                             | 3,000  | 201          | 2       | 2,240            | 6            | 2,240        | 198          | 6            |
| DRAG INDEX<br>300 COUNTS | 200          | 200 KCAS to M = 0.42        | 26,000 | 189          | 13      | 7,170            | 44           | 9,570        | 206          | 58           |
|                          | 180          |                             | 26,000 | 190          | 13      | 6,620            | 40           | 8,720        | 204          | 53           |
|                          | 160          |                             | 26,000 | 191          | 13      | 6,080            | 35           | 7,870        | 202          | 47           |
|                          | 140          |                             | 26,000 | 191          | 13      | 5,540            | 31           | 7,040        | 201          | 42           |
|                          | 120          |                             | 26,000 | 191          | 13      | 5,010            | 27           | 6,220        | 200          | 36           |
|                          | 100          |                             | 26,000 | 192          | 13      | 4,490            | 22           | 5,410        | 199          | 30           |
|                          | 80           |                             | 26,000 | 192          | 13      | 3,970            | 18           | 4,610        | 198          | 24           |
|                          | 60           |                             | 22,000 | 196          | 11      | 3,450            | 14           | 3,810        | 197          | 18           |
|                          | 40           |                             | 17,000 | 194          | 9       | 2,900            | 10           | 3,030        | 197          | 12           |
|                          | 20           |                             | 3,000  | 198          | 2       | 2,260            | 6            | 2,260        | 196          | 6            |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED)
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-149. Bingo - Gear Up - Half Flaps - 30,000 Pounds -  
F404-GE-400 (Sheet 2 of 2)



**BINGO**  
**F404-GE-400**  
GEAR DOWN - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                          | INBD DIST<br>NM | CLIMB              | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------------|--------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |                 | MACH OR KCAS       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |                 |                    | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200             | 220 KCAS to M=0.52 | 35,000 | 201       | 24      | 5,140            | 37        | 7,510     | 218       | 55        |
|                          | 180             |                    | 35,000 | 200       | 24      | 4,810            | 33        | 6,890     | 217       | 50        |
|                          | 160             |                    | 35,000 | 199       | 24      | 4,490            | 30        | 6,270     | 216       | 45        |
|                          | 140             |                    | 35,000 | 198       | 24      | 4,180            | 27        | 5,650     | 215       | 39        |
|                          | 120             |                    | 35,000 | 197       | 24      | 3,860            | 23        | 5,040     | 214       | 34        |
|                          | 100             |                    | 34,000 | 198       | 23      | 3,550            | 20        | 4,440     | 213       | 28        |
|                          | 80              |                    | 32,000 | 199       | 22      | 3,230            | 16        | 3,840     | 212       | 23        |
|                          | 60              |                    | 28,000 | 201       | 19      | 2,900            | 12        | 3,250     | 211       | 17        |
|                          | 40              |                    | 18,000 | 201       | 12      | 2,520            | 9         | 2,670     | 210       | 11        |
|                          | 20              |                    | 7,000  | 207       | 4       | 2,070            | 5         | 2,080     | 209       | 6         |
| DRAG INDEX<br>50 COUNTS  | 200             | 220 KCAS to M=0.51 | 33,000 | 198       | 21      | 5,340            | 38        | 7,760     | 204       | 59        |
|                          | 180             |                    | 33,000 | 198       | 21      | 4,990            | 34        | 7,090     | 209       | 52        |
|                          | 160             |                    | 33,000 | 197       | 21      | 4,650            | 31        | 6,430     | 213       | 45        |
|                          | 140             |                    | 33,000 | 196       | 21      | 4,310            | 27        | 5,800     | 212       | 40        |
|                          | 120             |                    | 33,000 | 195       | 21      | 3,970            | 23        | 5,170     | 211       | 34        |
|                          | 100             |                    | 33,000 | 195       | 21      | 3,630            | 20        | 4,450     | 210       | 29        |
|                          | 80              |                    | 32,000 | 195       | 20      | 3,300            | 16        | 3,930     | 210       | 23        |
|                          | 60              |                    | 28,000 | 197       | 18      | 2,950            | 13        | 3,320     | 209       | 17        |
|                          | 40              |                    | 18,000 | 197       | 11      | 2,560            | 9         | 2,710     | 208       | 12        |
|                          | 20              |                    | 7,000  | 203       | 4       | 2,090            | 5         | 2,100     | 207       | 6         |
| DRAG INDEX<br>100 COUNTS | 200             | 220 KCAS to M=0.50 | 33,000 | 194       | 20      | 5,510            | 39        | 7,940     | 212       | 57        |
|                          | 180             |                    | 33,000 | 194       | 20      | 5,140            | 35        | 7,280     | 211       | 51        |
|                          | 160             |                    | 33,000 | 193       | 20      | 4,780            | 31        | 6,620     | 211       | 46        |
|                          | 140             |                    | 33,000 | 193       | 20      | 4,420            | 27        | 5,960     | 210       | 40        |
|                          | 120             |                    | 33,000 | 192       | 20      | 4,070            | 24        | 5,310     | 209       | 34        |
|                          | 100             |                    | 32,000 | 193       | 19      | 3,720            | 20        | 4,660     | 208       | 29        |
|                          | 80              |                    | 32,000 | 192       | 19      | 3,360            | 16        | 4,020     | 207       | 23        |
|                          | 60              |                    | 27,000 | 194       | 16      | 3,000            | 13        | 3,380     | 206       | 17        |
|                          | 40              |                    | 18,000 | 194       | 10      | 2,600            | 9         | 2,750     | 205       | 12        |
|                          | 20              |                    | 7,000  | 200       | 4       | 2,110            | 5         | 2,130     | 204       | 6         |
| DRAG INDEX<br>150 COUNTS | 200             | 220 KCAS to M=0.47 | 32,000 | 186       | 18      | 5,720            | 40        | 8,170     | 210       | 57        |
|                          | 180             |                    | 32,000 | 186       | 18      | 5,330            | 36        | 7,480     | 209       | 52        |
|                          | 160             |                    | 32,000 | 187       | 18      | 4,940            | 32        | 6,800     | 209       | 46        |
|                          | 140             |                    | 32,000 | 187       | 18      | 4,560            | 29        | 6,120     | 208       | 40        |
|                          | 120             |                    | 32,000 | 188       | 18      | 4,180            | 25        | 5,440     | 207       | 35        |
|                          | 100             |                    | 32,000 | 188       | 18      | 3,810            | 21        | 4,770     | 206       | 29        |
|                          | 80              |                    | 30,000 | 190       | 17      | 3,430            | 17        | 4,110     | 205       | 23        |
|                          | 60              |                    | 27,000 | 191       | 15      | 3,050            | 13        | 3,450     | 204       | 18        |
|                          | 40              |                    | 18,000 | 191       | 10      | 2,630            | 9         | 2,790     | 203       | 12        |
|                          | 20              |                    | 7,000  | 197       | 4       | 2,130            | 5         | 2,150     | 202       | 6         |

- DATA BASED ON:
1. INITIAL ALTITUDE IS SEA LEVEL
  2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE
  3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED)
  4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL
  5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-150. Bingo - Gear Down - Flaps Auto - 26,000 Pounds - F404-GE-400 (Sheet 1 of 2)**

A1-F18AC-NFM-200

**BINGO**  
**F404-GE-400**  
GEAR DOWN - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                          | INBD DIST<br>NM          | CLIMB<br>MACH OR KCAS | CRUISE             |                    | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|--------------------------|-----------------------|--------------------|--------------------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |                          |                       | ALT                | SPEED CAS          | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |                          |                       | FEET               | KNOTS              | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>200 COUNTS | 200                      | 220 KCAS to M=0.45    | 30,000             | 189                | 16      | 5,920            | 41        | 8,400     | 208       | 58        |
|                          | 180                      |                       | 30,000             | 189                | 16      | 5,510            | 37        | 7,680     | 207       | 52        |
|                          | 160                      |                       | 30,000             | 188                | 16      | 5,100            | 33        | 6,970     | 206       | 47        |
|                          | 140                      |                       | 30,000             | 188                | 16      | 4,700            | 29        | 6,270     | 206       | 41        |
|                          | 120                      |                       | 30,000             | 188                | 16      | 4,290            | 25        | 5,570     | 205       | 35        |
|                          | 100                      |                       | 30,000             | 187                | 16      | 3,900            | 21        | 4,880     | 204       | 29        |
|                          | 80                       |                       | 29,000             | 188                | 16      | 3,500            | 17        | 4,190     | 203       | 24        |
|                          | 60                       |                       | 27,000             | 188                | 14      | 3,100            | 13        | 3,510     | 201       | 18        |
|                          | 40                       |                       | 19,000             | 189                | 10      | 2,670            | 9         | 2,840     | 200       | 12        |
|                          | 20                       |                       | 6,000              | 194                | 3       | 2,150            | 6         | 2,170     | 199       | 6         |
|                          | DRAG INDEX<br>250 COUNTS |                       | 200                | 220 KCAS to M=0.45 | 30,000  | 187              | 15        | 6,100     | 41        | 8,620     |
| 180                      |                          | 30,000                | 187                |                    | 15      | 5,670            | 37        | 7,880     | 205       | 53        |
| 160                      |                          | 30,000                | 187                |                    | 15      | 5,240            | 33        | 7,150     | 204       | 47        |
| 140                      |                          | 30,000                | 186                |                    | 15      | 4,820            | 29        | 6,420     | 203       | 41        |
| 120                      |                          | 30,000                | 186                |                    | 15      | 4,400            | 25        | 5,700     | 202       | 36        |
| 100                      |                          | 30,000                | 185                |                    | 15      | 3,990            | 21        | 4,990     | 201       | 30        |
| 80                       |                          | 29,000                | 186                |                    | 15      | 3,580            | 17        | 4,280     | 200       | 24        |
| 60                       |                          | 27,000                | 186                |                    | 14      | 3,160            | 13        | 3,570     | 199       | 18        |
| 40                       |                          | 18,000                | 188                |                    | 9       | 2,710            | 10        | 2,880     | 198       | 12        |
| 20                       |                          | 6,000                 | 192                |                    | 3       | 2,170            | 6         | 2,190     | 196       | 6         |
| DRAG INDEX<br>300 COUNTS |                          | 200                   | 220 KCAS to M=0.44 |                    | 30,000  | 186              | 15        | 6,280     | 42        | 8,850     |
|                          | 180                      | 30,000                |                    | 185                | 15      | 5,840            | 38        | 8,080     | 202       | 53        |
|                          | 160                      | 30,000                |                    | 185                | 15      | 5,390            | 34        | 7,330     | 201       | 48        |
|                          | 140                      | 30,000                |                    | 184                | 15      | 4,950            | 30        | 6,580     | 201       | 42        |
|                          | 120                      | 30,000                |                    | 184                | 15      | 4,510            | 26        | 5,830     | 199       | 36        |
|                          | 100                      | 30,000                |                    | 183                | 15      | 4,080            | 22        | 5,090     | 198       | 30        |
|                          | 80                       | 29,000                |                    | 184                | 14      | 3,650            | 18        | 4,360     | 197       | 24        |
|                          | 60                       | 26,000                |                    | 184                | 13      | 3,220            | 13        | 3,640     | 196       | 18        |
|                          | 40                       | 19,000                |                    | 186                | 9       | 2,750            | 10        | 2,920     | 195       | 12        |
|                          | 20                       | 6,000                 |                    | 190                | 3       | 2,190            | 6         | 2,210     | 194       | 6         |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED)
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-150. Bingo - Gear Down - Flaps Auto - 26,000 Pounds - F404-GE-400 (Sheet 2 of 2)

**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR UP - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

|                          | CLIMB     |                      | CRUISE |           | DESCEND |           | SEA LEVEL CRUISE |           |           |           |
|--------------------------|-----------|----------------------|--------|-----------|---------|-----------|------------------|-----------|-----------|-----------|
|                          | INBD DIST | MACH OR KCAS         | ALT    | SPEED CAS | DIST    | FUEL REQD | TIME REQD        | FUEL REQD | SPEED CAS | TIME REQD |
|                          | NM        |                      | FEET   | KNOTS     | NM      | LB        | MIN              | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200       | 315 KCAS to M = 0.75 | 33,000 | 275       | 52      | 3,380     | 31               | 4,210     | 271       | 44        |
|                          | 180       |                      | 33,000 | 275       | 52      | 3,230     | 28               | 3,940     | 271       | 40        |
|                          | 160       |                      | 33,000 | 274       | 52      | 3,080     | 25               | 3,660     | 270       | 36        |
|                          | 140       |                      | 31,000 | 273       | 48      | 2,930     | 23               | 3,390     | 270       | 31        |
|                          | 120       |                      | 28,000 | 272       | 43      | 2,770     | 20               | 3,120     | 269       | 27        |
|                          | 100       |                      | 22,000 | 268       | 33      | 2,600     | 18               | 2,840     | 269       | 22        |
|                          | 80        |                      | 18,000 | 266       | 27      | 2,410     | 15               | 2,570     | 269       | 18        |
|                          | 60        |                      | 14,000 | 264       | 21      | 2,210     | 12               | 2,300     | 268       | 13        |
|                          | 40        |                      | 9,000  | 264       | 13      | 2,000     | 8                | 2,040     | 268       | 9         |
| 20                       | 4,000     | 264                  | 6      | 1,760     | 4       | 1,770     | 267              | 4         |           |           |
| DRAG INDEX<br>50 COUNTS  | 200       | 310 KCAS to M = 0.70 | 30,000 | 263       | 41      | 3,680     | 32               | 4,500     | 266       | 45        |
|                          | 180       |                      | 30,000 | 263       | 41      | 3,490     | 29               | 4,200     | 265       | 41        |
|                          | 160       |                      | 30,000 | 262       | 41      | 3,310     | 26               | 3,890     | 265       | 36        |
|                          | 140       |                      | 27,000 | 262       | 37      | 3,130     | 23               | 3,590     | 264       | 32        |
|                          | 120       |                      | 23,000 | 261       | 31      | 2,930     | 21               | 3,290     | 264       | 27        |
|                          | 100       |                      | 22,000 | 260       | 30      | 2,730     | 18               | 2,990     | 263       | 23        |
|                          | 80        |                      | 17,000 | 258       | 23      | 2,520     | 15               | 2,690     | 263       | 18        |
|                          | 60        |                      | 13,000 | 258       | 17      | 2,290     | 12               | 2,390     | 262       | 14        |
|                          | 40        |                      | 9,000  | 257       | 12      | 2,050     | 8                | 2,090     | 262       | 9         |
| 20                       | 3,000     | 257                  | 4      | 1,790     | 4       | 1,800     | 261              | 5         |           |           |
| DRAG INDEX<br>100 COUNTS | 200       | 300 KCAS to M = 0.70 | 23,000 | 254       | 28      | 4,000     | 34               | 4,800     | 260       | 46        |
|                          | 180       |                      | 23,000 | 254       | 28      | 3,780     | 31               | 4,470     | 260       | 42        |
|                          | 160       |                      | 23,000 | 253       | 28      | 3,560     | 27               | 4,130     | 259       | 37        |
|                          | 140       |                      | 22,000 | 253       | 27      | 3,330     | 24               | 3,800     | 258       | 33        |
|                          | 120       |                      | 21,000 | 253       | 26      | 3,100     | 21               | 3,460     | 258       | 28        |
|                          | 100       |                      | 18,000 | 253       | 22      | 2,870     | 18               | 3,130     | 257       | 23        |
|                          | 80        |                      | 17,000 | 252       | 21      | 2,630     | 15               | 2,800     | 257       | 19        |
|                          | 60        |                      | 13,000 | 252       | 16      | 2,370     | 12               | 2,480     | 256       | 14        |
|                          | 40        |                      | 8,000  | 251       | 10      | 2,110     | 8                | 2,150     | 256       | 9         |
| 20                       | 3,000     | 252                  | 4      | 1,820     | 4       | 1,820     | 255              | 5         |           |           |
| DRAG INDEX<br>150 COUNTS | 200       | 290 KCAS to M = 0.70 | 20,000 | 248       | 22      | 4,300     | 36               | 5,110     | 255       | 47        |
|                          | 180       |                      | 20,000 | 248       | 22      | 4,040     | 33               | 4,740     | 255       | 42        |
|                          | 160       |                      | 20,000 | 247       | 22      | 3,780     | 29               | 4,370     | 254       | 38        |
|                          | 140       |                      | 20,000 | 247       | 22      | 3,520     | 25               | 4,000     | 253       | 33        |
|                          | 120       |                      | 19,000 | 247       | 21      | 3,260     | 22               | 3,640     | 252       | 29        |
|                          | 100       |                      | 17,000 | 247       | 19      | 3,000     | 19               | 3,280     | 251       | 24        |
|                          | 80        |                      | 16,000 | 246       | 18      | 2,730     | 15               | 2,920     | 250       | 19        |
|                          | 60        |                      | 13,000 | 246       | 14      | 2,450     | 12               | 2,560     | 250       | 14        |
|                          | 40        |                      | 8,000  | 245       | 9       | 2,160     | 9                | 2,210     | 249       | 10        |
| 20                       | 3,000     | 247                  | 3      | 1,840     | 5       | 1,850     | 248              | 5         |           |           |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-151. Bingo - One Engine Operating - Gear Up - Flaps Auto - 26,000 Pounds - F404-GE-400 (Sheet 1 of 2)**

A1-F18AC-NFM-200

**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR UP - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

|                          | INBD DIST | CLIMB<br>MACH OR KCAS | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------|-----------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |           |                       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |           |                       | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>200 COUNTS | 200       | 275 KCAS to M = 0.70  | 19,000 | 242       | 19      | 4,550            | 38        | 5,410     | 250       | 48        |
|                          | 180       |                       | 19,000 | 241       | 19      | 4,260            | 34        | 5,000     | 250       | 43        |
|                          | 160       |                       | 19,000 | 241       | 19      | 3,970            | 30        | 4,600     | 249       | 39        |
|                          | 140       |                       | 19,000 | 240       | 19      | 3,690            | 26        | 4,210     | 248       | 34        |
|                          | 120       |                       | 18,000 | 240       | 18      | 3,400            | 23        | 3,810     | 247       | 29        |
|                          | 100       |                       | 17,000 | 240       | 17      | 3,120            | 19        | 3,420     | 246       | 24        |
|                          | 80        |                       | 16,000 | 239       | 16      | 2,830            | 16        | 3,030     | 245       | 20        |
|                          | 60        |                       | 13,000 | 239       | 13      | 2,530            | 12        | 2,650     | 245       | 15        |
|                          | 40        |                       | 8,000  | 240       | 8       | 2,210            | 9         | 2,260     | 244       | 10        |
|                          | 20        |                       | 3,000  | 242       | 3       | 1,870            | 5         | 1,880     | 243       | 5         |
| DRAG INDEX<br>250 COUNTS | 200       | 260 KCAS to M = 0.70  | 18,000 | 236       | 17      | 4,820            | 39        | 5,690     | 246       | 49        |
|                          | 180       |                       | 18,000 | 236       | 17      | 4,500            | 35        | 5,260     | 245       | 44        |
|                          | 160       |                       | 18,000 | 235       | 17      | 4,180            | 32        | 4,830     | 244       | 39        |
|                          | 140       |                       | 18,000 | 234       | 17      | 3,860            | 28        | 4,400     | 244       | 35        |
|                          | 120       |                       | 18,000 | 234       | 17      | 3,550            | 24        | 3,980     | 243       | 30        |
|                          | 100       |                       | 18,000 | 233       | 17      | 3,240            | 20        | 3,560     | 242       | 25        |
|                          | 80        |                       | 17,000 | 233       | 16      | 2,920            | 16        | 3,140     | 241       | 20        |
|                          | 60        |                       | 13,000 | 234       | 12      | 2,600            | 13        | 2,730     | 240       | 15        |
|                          | 40        |                       | 9,000  | 235       | 8       | 2,260            | 9         | 2,320     | 239       | 10        |
|                          | 20        |                       | 3,000  | 237       | 3       | 1,900            | 5         | 1,910     | 238       | 5         |
| DRAG INDEX<br>300 COUNTS | 200       | 240 KCAS to M = 0.70  | 17,000 | 232       | 15      | 5,100            | 41        | 5,980     | 241       | 50        |
|                          | 180       |                       | 17,000 | 231       | 15      | 4,740            | 37        | 5,510     | 240       | 45        |
|                          | 160       |                       | 17,000 | 231       | 15      | 4,390            | 33        | 5,060     | 240       | 40        |
|                          | 140       |                       | 17,000 | 230       | 15      | 4,050            | 29        | 4,600     | 239       | 35        |
|                          | 120       |                       | 17,000 | 229       | 15      | 3,700            | 25        | 4,150     | 238       | 30        |
|                          | 100       |                       | 17,000 | 229       | 15      | 3,360            | 21        | 3,700     | 237       | 25        |
|                          | 80        |                       | 17,000 | 228       | 15      | 3,020            | 17        | 3,250     | 236       | 20        |
|                          | 60        |                       | 14,000 | 228       | 12      | 2,680            | 13        | 2,810     | 235       | 15        |
|                          | 40        |                       | 9,000  | 230       | 8       | 2,320            | 9         | 2,370     | 234       | 10        |
|                          | 20        |                       | 3,000  | 232       | 3       | 1,930            | 5         | 1,930     | 233       | 5         |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-151. Bingo - One Engine Operating - Gear Up - Flaps Auto - 26,000 Pounds - F404-GE-400 (Sheet 2 of 2)

**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR UP - FLAPS AUTO  
WEIGHT - 30,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

|                          | CLIMB     |                      | CRUISE |           | DESCEND |           | SEA LEVEL CRUISE |           |           |           |
|--------------------------|-----------|----------------------|--------|-----------|---------|-----------|------------------|-----------|-----------|-----------|
|                          | INBD DIST | MACH OR KCAS         | ALT    | SPEED CAS | DIST    | FUEL REQD | TIME REQD        | FUEL REQD | SPEED CAS | TIME REQD |
|                          | NM        |                      | FEET   | KNOTS     | NM      | LB        | MIN              | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200       | 315 KCAS to M = 0.75 | 30,000 | 295       | 48      | 3,560     | 31               | 4,380     | 287       | 42        |
|                          | 180       |                      | 30,000 | 294       | 48      | 3,390     | 28               | 4,090     | 286       | 38        |
|                          | 160       |                      | 29,000 | 293       | 46      | 3,220     | 26               | 3,800     | 285       | 34        |
|                          | 140       |                      | 28,000 | 293       | 44      | 3,050     | 23               | 3,510     | 285       | 30        |
|                          | 120       |                      | 23,000 | 288       | 36      | 2,870     | 20               | 3,220     | 284       | 25        |
|                          | 100       |                      | 21,000 | 285       | 33      | 2,680     | 17               | 2,930     | 283       | 21        |
|                          | 80        |                      | 18,000 | 284       | 28      | 2,480     | 14               | 2,640     | 283       | 17        |
|                          | 60        |                      | 13,000 | 283       | 20      | 2,260     | 11               | 2,350     | 282       | 13        |
|                          | 40        |                      | 8,000  | 282       | 12      | 2,030     | 8                | 2,070     | 282       | 9         |
|                          | 20        |                      | 3,000  | 281       | 5       | 1,780     | 4                | 1,780     | 281       | 4         |
| DRAG INDEX<br>50 COUNTS  | 200       | 310 KCAS to M = 0.71 | 26,000 | 278       | 37      | 3,890     | 32               | 4,700     | 278       | 43        |
|                          | 180       |                      | 26,000 | 277       | 37      | 3,680     | 29               | 4,370     | 278       | 39        |
|                          | 160       |                      | 26,000 | 277       | 37      | 3,470     | 26               | 4,040     | 277       | 35        |
|                          | 140       |                      | 24,000 | 279       | 34      | 3,260     | 23               | 3,720     | 277       | 30        |
|                          | 120       |                      | 22,000 | 278       | 31      | 3,040     | 20               | 3,400     | 276       | 26        |
|                          | 100       |                      | 19,000 | 277       | 27      | 2,820     | 18               | 3,080     | 276       | 22        |
|                          | 80        |                      | 17,000 | 277       | 24      | 2,590     | 15               | 2,760     | 275       | 17        |
|                          | 60        |                      | 13,000 | 277       | 18      | 2,350     | 11               | 2,440     | 275       | 13        |
|                          | 40        |                      | 9,000  | 276       | 13      | 2,090     | 8                | 2,130     | 274       | 9         |
|                          | 20        |                      | 3,000  | 275       | 4       | 1,810     | 4                | 1,810     | 274       | 4         |
| DRAG INDEX<br>100 COUNTS | 200       | 300 KCAS to M = 0.70 | 21,000 | 272       | 27      | 4,220     | 34               | 5,020     | 274       | 44        |
|                          | 180       |                      | 21,000 | 271       | 27      | 3,970     | 31               | 4,660     | 273       | 40        |
|                          | 160       |                      | 21,000 | 271       | 27      | 3,720     | 27               | 4,300     | 273       | 35        |
|                          | 140       |                      | 21,000 | 271       | 27      | 3,470     | 24               | 3,940     | 272       | 31        |
|                          | 120       |                      | 19,000 | 270       | 24      | 3,220     | 21               | 3,590     | 271       | 27        |
|                          | 100       |                      | 18,000 | 270       | 23      | 2,970     | 18               | 3,240     | 271       | 22        |
|                          | 80        |                      | 16,000 | 270       | 20      | 2,700     | 15               | 2,890     | 270       | 18        |
|                          | 60        |                      | 13,000 | 270       | 17      | 2,430     | 12               | 2,540     | 270       | 13        |
|                          | 40        |                      | 8,000  | 270       | 10      | 2,150     | 8                | 2,190     | 269       | 9         |
|                          | 20        |                      | 3,000  | 269       | 4       | 1,840     | 4                | 1,840     | 269       | 4         |
| DRAG INDEX<br>150 COUNTS | 200       | 290 KCAS to M = 0.70 | 19,000 | 264       | 22      | 4,530     | 35               | 5,340     | 270       | 45        |
|                          | 180       |                      | 19,000 | 264       | 22      | 4,250     | 32               | 4,940     | 269       | 40        |
|                          | 160       |                      | 19,000 | 263       | 22      | 3,960     | 29               | 4,550     | 268       | 36        |
|                          | 140       |                      | 19,000 | 263       | 22      | 3,680     | 25               | 4,170     | 268       | 31        |
|                          | 120       |                      | 18,000 | 263       | 21      | 3,400     | 22               | 3,780     | 267       | 27        |
|                          | 100       |                      | 17,000 | 262       | 20      | 3,110     | 18               | 3,390     | 266       | 23        |
|                          | 80        |                      | 16,000 | 262       | 19      | 2,820     | 15               | 3,010     | 266       | 18        |
|                          | 60        |                      | 12,000 | 263       | 14      | 2,520     | 12               | 2,630     | 265       | 14        |
|                          | 40        |                      | 8,000  | 264       | 9       | 2,200     | 8                | 2,250     | 264       | 9         |
|                          | 20        |                      | 3,000  | 263       | 3       | 1,870     | 4                | 1,880     | 264       | 5         |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-152. Bingo - One Engine Operating - Gear Up - Flaps Auto - 30,000 Pounds - F404-GE-400 (Sheet 1 of 2)**

**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR UP - FLAPS AUTO  
WEIGHT - 30,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

|                                  | INBD<br>DIST | CLIMB<br>MACH<br>OR<br>KCAS | CRUISE |              | DESCEND | SEA LEVEL CRUISE |              |              |              |              |
|----------------------------------|--------------|-----------------------------|--------|--------------|---------|------------------|--------------|--------------|--------------|--------------|
|                                  |              |                             | ALT    | SPEED<br>CAS | DIST    | FUEL<br>REQD     | TIME<br>REQD | FUEL<br>REQD | SPEED<br>CAS | TIME<br>REQD |
|                                  |              |                             | FEET   | KNOTS        | NM      | LB               | MIN          | LB           | KNOTS        | MIN          |
| <b>DRAG INDEX<br/>200 COUNTS</b> | 200          | <b>275 KCAS to M = 0.70</b> | 17,000 | 259          | 18      | 4,860            | 37           | 5,650        | 265          | 45           |
|                                  | 180          |                             | 17,000 | 259          | 18      | 4,530            | 34           | 5,230        | 264          | 41           |
|                                  | 160          |                             | 17,000 | 258          | 18      | 4,210            | 30           | 4,800        | 263          | 37           |
|                                  | 140          |                             | 17,000 | 258          | 18      | 3,890            | 26           | 4,380        | 262          | 32           |
|                                  | 120          |                             | 17,000 | 257          | 18      | 3,570            | 23           | 3,960        | 262          | 28           |
|                                  | 100          |                             | 17,000 | 257          | 18      | 3,250            | 19           | 3,550        | 261          | 23           |
|                                  | 80           |                             | 14,000 | 257          | 18      | 2,930            | 16           | 3,130        | 260          | 18           |
|                                  | 60           |                             | 12,000 | 258          | 13      | 2,600            | 12           | 2,720        | 260          | 14           |
|                                  | 40           |                             | 8,000  | 257          | 9       | 2,260            | 8            | 2,310        | 259          | 9            |
|                                  | 20           |                             | 3,000  | 256          | 3       | 1,890            | 4            | 1,900        | 258          | 5            |
| <b>DRAG INDEX<br/>250 COUNTS</b> | 200          | <b>260 KCAS to M = 0.70</b> | 15,000 | 253          | 15      | 5,190            | 39           | 5,960        | 259          | 46           |
|                                  | 180          |                             | 15,000 | 253          | 15      | 4,830            | 35           | 5,500        | 259          | 42           |
|                                  | 160          |                             | 15,000 | 252          | 15      | 4,470            | 32           | 5,050        | 258          | 37           |
|                                  | 140          |                             | 15,000 | 252          | 15      | 4,110            | 28           | 4,590        | 257          | 33           |
|                                  | 120          |                             | 15,000 | 251          | 15      | 3,750            | 24           | 4,140        | 257          | 28           |
|                                  | 100          |                             | 15,000 | 250          | 15      | 3,400            | 20           | 3,700        | 256          | 23           |
|                                  | 80           |                             | 14,000 | 250          | 14      | 3,040            | 16           | 3,250        | 255          | 19           |
|                                  | 60           |                             | 12,000 | 250          | 12      | 2,690            | 13           | 2,810        | 254          | 14           |
|                                  | 40           |                             | 8,000  | 250          | 8       | 2,320            | 9            | 2,370        | 254          | 9            |
|                                  | 20           |                             | 3,000  | 251          | 3       | 1,920            | 5            | 1,930        | 253          | 5            |
| <b>DRAG INDEX<br/>300 COUNTS</b> | 200          | <b>240 KCAS to M = 0.70</b> | 14,000 | 248          | 13      | 5,520            | 41           | 6,280        | 254          | 47           |
|                                  | 180          |                             | 14,000 | 247          | 13      | 5,120            | 37           | 5,790        | 253          | 43           |
|                                  | 160          |                             | 14,000 | 246          | 13      | 4,730            | 33           | 5,300        | 252          | 38           |
|                                  | 140          |                             | 14,000 | 246          | 13      | 4,330            | 29           | 4,810        | 251          | 33           |
|                                  | 120          |                             | 14,000 | 245          | 13      | 3,940            | 25           | 4,330        | 250          | 29           |
|                                  | 100          |                             | 14,000 | 245          | 13      | 3,550            | 21           | 3,850        | 250          | 24           |
|                                  | 80           |                             | 14,000 | 244          | 13      | 3,170            | 17           | 3,370        | 250          | 19           |
|                                  | 60           |                             | 12,000 | 244          | 11      | 2,780            | 13           | 2,900        | 248          | 15           |
|                                  | 40           |                             | 8,000  | 244          | 7       | 2,380            | 9            | 2,430        | 247          | 10           |
|                                  | 20           |                             | 3,000  | 246          | 3       | 1,960            | 5            | 1,960        | 247          | 5            |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-152. Bingo - One Engine Operating - Gear Up - Flaps Auto - 30,000 Pounds  
F404-GE-400 (Sheet 2 of 2)**

**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR UP - HALF FLAPS  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

|                          | INBD DIST<br>NM | CLIMB<br>MACH OR KCAS | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------------|-----------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |                 |                       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |                 |                       | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200             | 175 KCAS to M = 0.33  | 13,000 | 197       | 7       | 6,680            | 52        | 7,430     | 198       | 61        |
|                          | 180             |                       | 13,000 | 197       | 7       | 6,160            | 47        | 6,790     | 198       | 55        |
|                          | 160             |                       | 13,000 | 197       | 7       | 5,640            | 42        | 6,180     | 197       | 49        |
|                          | 140             |                       | 13,000 | 197       | 7       | 5,140            | 37        | 5,580     | 197       | 43        |
|                          | 120             |                       | 13,000 | 197       | 7       | 4,640            | 32        | 4,980     | 196       | 37        |
|                          | 100             |                       | 13,000 | 197       | 7       | 4,140            | 27        | 4,390     | 196       | 31        |
|                          | 80              |                       | 12,000 | 195       | 7       | 3,640            | 22        | 3,800     | 195       | 25        |
|                          | 60              |                       | 10,000 | 190       | 6       | 3,140            | 17        | 3,220     | 195       | 18        |
|                          | 40              |                       | 7,000  | 189       | 4       | 2,630            | 12        | 2,640     | 194       | 12        |
|                          | 20              |                       | 1,000  | 193       | 1       | 2,070            | 6         | 2,070     | 194       | 6         |
| DRAG INDEX<br>50 COUNTS  | 200             | 175 KCAS to M = 0.32  | 13,000 | 192       | 7       | 6,930            | 54        | 7,680     | 196       | 61        |
|                          | 180             |                       | 13,000 | 193       | 7       | 6,380            | 48        | 7,020     | 195       | 55        |
|                          | 160             |                       | 13,000 | 194       | 7       | 5,840            | 43        | 6,380     | 195       | 49        |
|                          | 140             |                       | 13,000 | 194       | 7       | 5,310            | 38        | 5,750     | 194       | 43        |
|                          | 120             |                       | 13,000 | 195       | 7       | 4,780            | 32        | 5,130     | 194       | 37        |
|                          | 100             |                       | 13,000 | 195       | 7       | 4,250            | 27        | 4,510     | 193       | 31        |
|                          | 80              |                       | 11,000 | 191       | 6       | 3,730            | 22        | 3,900     | 193       | 25        |
|                          | 60              |                       | 10,000 | 188       | 5       | 3,210            | 17        | 3,290     | 192       | 19        |
|                          | 40              |                       | 7,000  | 186       | 4       | 2,680            | 12        | 2,690     | 192       | 13        |
|                          | 20              |                       | 1,000  | 190       | 1       | 2,090            | 6         | 2,090     | 191       | 6         |
| DRAG INDEX<br>100 COUNTS | 200             | 175 KCAS to M = 0.32  | 11,000 | 186       | 6       | 7,270            | 57        | 7,930     | 193       | 62        |
|                          | 180             |                       | 11,000 | 186       | 6       | 6,650            | 51        | 7,250     | 193       | 56        |
|                          | 160             |                       | 11,000 | 186       | 6       | 6,070            | 45        | 6,570     | 193       | 50        |
|                          | 140             |                       | 11,000 | 186       | 6       | 5,490            | 39        | 5,920     | 192       | 44        |
|                          | 120             |                       | 11,000 | 186       | 6       | 4,930            | 34        | 5,270     | 191       | 38        |
|                          | 100             |                       | 11,000 | 186       | 6       | 4,380            | 28        | 4,630     | 191       | 31        |
|                          | 80              |                       | 10,000 | 186       | 5       | 3,830            | 23        | 3,990     | 190       | 25        |
|                          | 60              |                       | 9,000  | 185       | 5       | 3,280            | 18        | 3,360     | 190       | 19        |
|                          | 40              |                       | 7,000  | 184       | 4       | 2,720            | 12        | 2,740     | 189       | 13        |
|                          | 20              |                       | 1,000  | 187       | 1       | 2,120            | 6         | 2,120     | 188       | 6         |
| DRAG INDEX<br>150 COUNTS | 200             | 175 KCAS to M = 0.32  | 10,000 | 184       | 5       | 7,550            | 58        | 8,180     | 191       | 63        |
|                          | 180             |                       | 10,000 | 183       | 5       | 6,860            | 52        | 7,470     | 191       | 57        |
|                          | 160             |                       | 10,000 | 183       | 5       | 6,260            | 46        | 6,760     | 190       | 50        |
|                          | 140             |                       | 10,000 | 183       | 5       | 5,660            | 40        | 6,080     | 190       | 44        |
|                          | 120             |                       | 10,000 | 183       | 5       | 5,070            | 35        | 5,410     | 189       | 38        |
|                          | 100             |                       | 10,000 | 183       | 5       | 4,490            | 29        | 4,740     | 188       | 32        |
|                          | 80              |                       | 10,000 | 183       | 5       | 3,910            | 23        | 4,080     | 187       | 26        |
|                          | 60              |                       | 9,000  | 182       | 4       | 3,340            | 18        | 3,430     | 187       | 19        |
|                          | 40              |                       | 7,000  | 181       | 3       | 2,760            | 12        | 2,780     | 186       | 13        |
|                          | 20              |                       | 1,000  | 184       | 0       | 2,140            | 6         | 2,140     | 185       | 6         |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-153. Bingo - One Engine Operating - Gear Up - Half Flaps - 26,000 Pounds  
F404-GE-400 (Sheet 1 of 2)

A1-F18AC-NFM-200

**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR UP - HALF FLAPS  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

|                          | INBD DIST | CLIMB<br>MACH OR KCAS | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------|-----------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |           |                       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |           |                       | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>200 COUNTS | 200       | 175 KCAS to M = 0.32  | 9,000  | 189       | 4       | 7,880            | 57        | 8,430     | 189       | 64        |
|                          | 180       |                       | 9,000  | 189       | 4       | 7,210            | 52        | 7,690     | 189       | 57        |
|                          | 160       |                       | 9,000  | 191       | 4       | 6,510            | 45        | 6,960     | 188       | 51        |
|                          | 140       |                       | 9,000  | 190       | 4       | 5,870            | 40        | 6,250     | 188       | 45        |
|                          | 120       |                       | 9,000  | 190       | 4       | 5,240            | 34        | 5,550     | 187       | 39        |
|                          | 100       |                       | 9,000  | 190       | 4       | 4,630            | 29        | 4,860     | 187       | 33        |
|                          | 80        |                       | 9,000  | 190       | 4       | 4,020            | 23        | 4,180     | 188       | 26        |
|                          | 60        |                       | 8,000  | 187       | 4       | 3,410            | 18        | 3,510     | 192       | 19        |
|                          | 40        |                       | 6,000  | 180       | 3       | 2,810            | 12        | 2,840     | 193       | 13        |
|                          | 20        |                       | 1,000  | 188       | 0       | 2,160            | 6         | 2,170     | 193       | 6         |
| DRAG INDEX<br>250 COUNTS | 200       | 160 KCAS to M = 0.31  | 9,000  | 188       | 4       | 8,140            | 59        | 8,670     | 187       | 64        |
|                          | 180       |                       | 9,000  | 190       | 4       | 7,380            | 52        | 7,900     | 186       | 58        |
|                          | 160       |                       | 9,000  | 190       | 4       | 6,710            | 46        | 7,150     | 186       | 52        |
|                          | 140       |                       | 9,000  | 190       | 4       | 6,040            | 41        | 6,410     | 186       | 45        |
|                          | 120       |                       | 9,000  | 190       | 4       | 5,390            | 35        | 5,690     | 185       | 39        |
|                          | 100       |                       | 9,000  | 190       | 4       | 4,750            | 29        | 4,970     | 184       | 33        |
|                          | 80        |                       | 9,000  | 190       | 4       | 4,110            | 24        | 4,270     | 181       | 27        |
|                          | 60        |                       | 8,000  | 186       | 4       | 3,490            | 18        | 3,570     | 175       | 21        |
|                          | 40        |                       | 6,000  | 177       | 3       | 2,860            | 13        | 2,880     | 169       | 14        |
|                          | 20        |                       | 1,000  | 167       | 0       | 2,190            | 7         | 2,190     | 165       | 7         |
| DRAG INDEX<br>300 COUNTS | 200       | 160 KCAS to M = 0.31  | 9,000  | 175       | 4       | 8,500            | 64        | 8,890     | 184       | 65        |
|                          | 180       |                       | 9,000  | 168       | 4       | 7,640            | 58        | 8,120     | 187       | 58        |
|                          | 160       |                       | 9,000  | 166       | 4       | 6,890            | 51        | 7,360     | 192       | 50        |
|                          | 140       |                       | 9,000  | 166       | 4       | 6,200            | 45        | 6,610     | 198       | 42        |
|                          | 120       |                       | 9,000  | 168       | 4       | 5,520            | 38        | 5,860     | 188       | 38        |
|                          | 100       |                       | 9,000  | 171       | 4       | 4,850            | 32        | 5,120     | 176       | 34        |
|                          | 80        |                       | 9,000  | 174       | 4       | 4,190            | 25        | 4,380     | 165       | 29        |
|                          | 60        |                       | 8,000  | 175       | 3       | 3,540            | 19        | 3,640     | 165       | 22        |
|                          | 40        |                       | 6,000  | 172       | 3       | 2,890            | 13        | 2,920     | 165       | 15        |
|                          | 20        |                       | 1,000  | 168       | 0       | 2,200            | 7         | 2,200     | 167       | 7         |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-153. Bingo - One Engine Operating - Gear Up - Half Flaps - 26,000 Pounds - F404-GE-400 (Sheet 2 of 2)



**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR DOWN - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

|                          | CLIMB     |                      | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------|----------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          | INBD DIST | MACH OR KCAS         | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          | NM        |                      | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>0 COUNTS   | 200       | 200 KCAS to M = 0.35 | 14,000 | 197       | 8       | 6,400            | 51        | 7,250     | 206       | 58        |
|                          | 180       |                      | 14,000 | 195       | 8       | 5,870            | 46        | 6,650     | 205       | 53        |
|                          | 160       |                      | 14,000 | 195       | 8       | 5,390            | 41        | 5,050     | 204       | 47        |
|                          | 140       |                      | 14,000 | 194       | 8       | 4,910            | 36        | 5,460     | 204       | 41        |
|                          | 120       |                      | 14,000 | 194       | 8       | 4,440            | 31        | 4,880     | 203       | 36        |
|                          | 100       |                      | 14,000 | 193       | 8       | 3,970            | 26        | 4,300     | 202       | 30        |
|                          | 80        |                      | 14,000 | 193       | 8       | 3,510            | 21        | 3,730     | 201       | 24        |
|                          | 60        |                      | 12,000 | 194       | 7       | 3,040            | 16        | 3,170     | 200       | 18        |
|                          | 40        |                      | 8,000  | 191       | 5       | 2,570            | 11        | 2,610     | 200       | 12        |
|                          | 20        |                      | 2,000  | 193       | 1       | 2,050            | 6         | 2,050     | 199       | 6         |
| DRAG INDEX<br>50 COUNTS  | 200       | 200 KCAS to M = 0.34 | 13,000 | 195       | 7       | 6,670            | 52        | 7,500     | 204       | 59        |
|                          | 180       |                      | 13,000 | 194       | 7       | 6,140            | 47        | 6,880     | 203       | 53        |
|                          | 160       |                      | 13,000 | 194       | 7       | 5,600            | 42        | 6,250     | 202       | 48        |
|                          | 140       |                      | 13,000 | 195       | 7       | 5,090            | 36        | 5,640     | 201       | 42        |
|                          | 120       |                      | 13,000 | 196       | 7       | 4,590            | 31        | 5,030     | 200       | 36        |
|                          | 100       |                      | 13,000 | 197       | 7       | 4,100            | 26        | 4,430     | 199       | 30        |
|                          | 80        |                      | 13,000 | 198       | 7       | 3,610            | 21        | 3,830     | 198       | 24        |
|                          | 60        |                      | 12,000 | 195       | 7       | 3,110            | 16        | 3,240     | 198       | 18        |
|                          | 40        |                      | 7,000  | 193       | 4       | 2,610            | 11        | 2,650     | 197       | 12        |
|                          | 20        |                      | 2,000  | 195       | 1       | 2,070            | 6         | 2,070     | 196       | 6         |
| DRAG INDEX<br>100 COUNTS | 200       | 200 KCAS to M = 0.31 | 12,000 | 194       | 7       | 6,960            | 53        | 7,760     | 202       | 60        |
|                          | 180       |                      | 12,000 | 194       | 7       | 6,400            | 48        | 7,110     | 201       | 54        |
|                          | 160       |                      | 12,000 | 195       | 7       | 5,850            | 43        | 6,460     | 200       | 48        |
|                          | 140       |                      | 12,000 | 193       | 7       | 5,300            | 38        | 5,810     | 199       | 42        |
|                          | 120       |                      | 12,000 | 192       | 7       | 4,760            | 33        | 5,180     | 198       | 36        |
|                          | 100       |                      | 12,000 | 190       | 7       | 4,230            | 27        | 4,550     | 197       | 31        |
|                          | 80        |                      | 12,000 | 189       | 7       | 3,710            | 22        | 3,920     | 196       | 25        |
|                          | 60        |                      | 11,000 | 189       | 6       | 3,190            | 17        | 3,310     | 195       | 18        |
|                          | 40        |                      | 7,000  | 190       | 4       | 2,650            | 11        | 2,700     | 194       | 12        |
|                          | 20        |                      | 2,000  | 192       | 1       | 2,090            | 6         | 2,100     | 193       | 6         |
| DRAG INDEX<br>150 COUNTS | 200       | 195 KCAS to M = 0.31 | 11,000 | 193       | 6       | 7,260            | 55        | 8,010     | 200       | 60        |
|                          | 180       |                      | 11,000 | 190       | 6       | 6,640            | 50        | 7,330     | 199       | 54        |
|                          | 160       |                      | 11,000 | 189       | 6       | 6,060            | 44        | 6,650     | 197       | 49        |
|                          | 140       |                      | 11,000 | 188       | 6       | 5,480            | 39        | 5,980     | 196       | 43        |
|                          | 120       |                      | 11,000 | 188       | 6       | 4,920            | 33        | 5,320     | 195       | 37        |
|                          | 100       |                      | 11,000 | 187       | 6       | 4,360            | 28        | 4,670     | 194       | 31        |
|                          | 80        |                      | 11,000 | 186       | 6       | 3,800            | 23        | 4,020     | 193       | 25        |
|                          | 60        |                      | 11,000 | 185       | 6       | 3,260            | 17        | 3,380     | 192       | 19        |
|                          | 40        |                      | 7,000  | 188       | 4       | 2,700            | 12        | 2,740     | 191       | 13        |
|                          | 20        |                      | 2,000  | 189       | 1       | 2,110            | 6         | 2,120     | 190       | 6         |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

**Figure 11-154. Bingo - One Engine Operating - Gear Down - Flaps Auto - 26,000 Pounds - F404-GE-400 (Sheet 1 of 2)**

A1-F18AC-NFM-200

**BINGO**  
**F404-GE-400**  
ONE ENGINE OPERATING  
GEAR DOWN - FLAPS AUTO  
WEIGHT - 26,000 POUNDS  
(WEIGHT = ZERO FUEL WEIGHT)

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962

INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5

FUEL DENSITY: 6.8 LB/GAL

DATE: 16 NOVEMBER 1989

DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

|                          | INBD DIST | CLIMB<br>MACH OR KCAS | CRUISE |           | DESCEND | SEA LEVEL CRUISE |           |           |           |           |
|--------------------------|-----------|-----------------------|--------|-----------|---------|------------------|-----------|-----------|-----------|-----------|
|                          |           |                       | ALT    | SPEED CAS | DIST    | FUEL REQD        | TIME REQD | FUEL REQD | SPEED CAS | TIME REQD |
|                          |           |                       | FEET   | KNOTS     | NM      | LB               | MIN       | LB        | KNOTS     | MIN       |
| DRAG INDEX<br>200 COUNTS | 200       | 195 KCAS to M = 0.31  | 11,000 | 189       | 5       | 7,530            | 56        | 8,270     | 198       | 61        |
|                          | 180       |                       | 11,000 | 187       | 5       | 6,870            | 51        | 7,560     | 197       | 55        |
|                          | 160       |                       | 11,000 | 187       | 5       | 6,260            | 45        | 6,850     | 195       | 49        |
|                          | 140       |                       | 11,000 | 184       | 5       | 5,640            | 40        | 6,160     | 194       | 43        |
|                          | 120       |                       | 11,000 | 183       | 5       | 5,050            | 34        | 5,470     | 192       | 37        |
|                          | 100       |                       | 11,000 | 182       | 5       | 4,470            | 28        | 4,780     | 191       | 31        |
|                          | 80        |                       | 11,000 | 182       | 5       | 3,890            | 23        | 4,110     | 190       | 25        |
|                          | 60        |                       | 9,000  | 184       | 4       | 3,330            | 17        | 3,450     | 188       | 19        |
|                          | 40        |                       | 7,000  | 185       | 3       | 2,740            | 12        | 2,790     | 187       | 13        |
|                          | 20        |                       | 2,000  | 186       | 1       | 2,140            | 6         | 2,140     | 186       | 6         |
| DRAG INDEX<br>250 COUNTS | 200       | 180 KCAS to M = 0.31  | 9,000  | 188       | 4       | 7,880            | 58        | 8,520     | 196       | 61        |
|                          | 180       |                       | 9,000  | 186       | 4       | 7,220            | 53        | 7,780     | 195       | 56        |
|                          | 160       |                       | 9,000  | 185       | 4       | 6,490            | 46        | 7,050     | 193       | 50        |
|                          | 140       |                       | 9,000  | 184       | 4       | 5,850            | 41        | 6,320     | 192       | 44        |
|                          | 120       |                       | 9,000  | 184       | 4       | 5,230            | 35        | 5,610     | 190       | 38        |
|                          | 100       |                       | 9,000  | 183       | 4       | 4,610            | 29        | 4,900     | 188       | 32        |
|                          | 80        |                       | 9,000  | 182       | 4       | 4,000            | 24        | 4,200     | 187       | 26        |
|                          | 60        |                       | 8,000  | 183       | 4       | 3,400            | 18        | 3,510     | 185       | 19        |
|                          | 40        |                       | 6,000  | 184       | 3       | 2,790            | 12        | 2,830     | 184       | 13        |
|                          | 20        |                       | 2,000  | 181       | 1       | 2,160            | 6         | 2,160     | 180       | 7         |
| DRAG INDEX<br>300 COUNTS | 200       | 165 KCAS to M = 0.31  | 8,000  | 188       | 4       | 8,290            | 60        | 8,760     | 194       | 62        |
|                          | 180       |                       | 8,000  | 189       | 4       | 7,530            | 53        | 8,000     | 193       | 56        |
|                          | 160       |                       | 8,000  | 191       | 4       | 6,770            | 46        | 7,240     | 191       | 50        |
|                          | 140       |                       | 8,000  | 191       | 4       | 6,100            | 41        | 6,490     | 190       | 44        |
|                          | 120       |                       | 8,000  | 189       | 4       | 5,440            | 35        | 5,750     | 188       | 38        |
|                          | 100       |                       | 8,000  | 184       | 4       | 4,780            | 30        | 5,020     | 186       | 32        |
|                          | 80        |                       | 8,000  | 179       | 4       | 4,130            | 25        | 4,300     | 183       | 26        |
|                          | 60        |                       | 7,000  | 178       | 3       | 3,490            | 19        | 3,590     | 176       | 20        |
|                          | 40        |                       | 4,000  | 180       | 2       | 2,850            | 13        | 2,890     | 169       | 14        |
|                          | 20        |                       | 1,000  | 169       | 0       | 2,190            | 7         | 2,190     | 165       | 7         |

DATA BASED ON:

1. INITIAL ALTITUDE IS SEA LEVEL.
2. MILITARY THRUST CLIMB TO INDICATED ALTITUDE.
3. 250 KCAS IDLE THRUST DESCENT TO SEA LEVEL (SPEEDBRAKE RETRACTED).
4. FUEL REQUIRED INCLUDES 1500 POUNDS RESERVE FUEL.
5. NO WIND. SEE HEADWIND EFFECTS CHART, FIGURE 11-145.

Figure 11-154. Bingo - One Engine Operating - Gear Down - Flaps Auto - 26,000 Pounds - F404-GE-400 (Sheet 2 of 2)

**PART 5 - ENDURANCE F404-GE-400**

**TABLE OF CONTENTS**

**CHARTS**

Maximum Endurance ..... 11-232  
 Maximum Endurance -  
 One Engine Operating ..... 11-235


**MAXIMUM ENDURANCE CHARTS**

Maximum endurance charts (figures 11-155 and 11-156) are provided for both two-engine and single engine operation. Included are separate charts for maximum endurance altitude, Mach number and airspeed, fuel flow, and fuel required for various drag indexes at all gross weights and altitudes from sea level to 40,000 feet.

**USE**

**MAXIMUM ENDURANCE ALTITUDE** - Enter the chart with the effective gross weight and project up to the appropriate drag index curve, then horizontally left to the temperature baseline and parallel the appropriate temperature deviation guideline to the correct temperature deviation. Project horizontally left to read maximum endurance altitude.

**SAMPLE MAXIMUM ENDURANCE ALTITUDE**

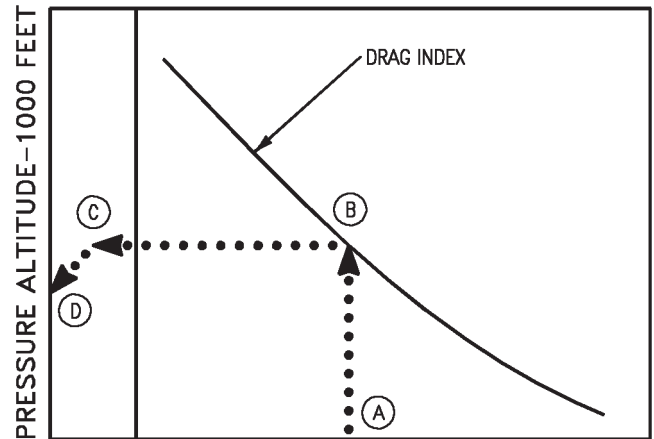

TEMPERATURE GROSS WEIGHT-1000 POUNDS  
DEVIATION

18AC-NFM-20-(260-1)-CATI-21

**Sample Problem**


- A. Effective gross weight 38,000 Lb.
- B. Drag index 50
- C. Temperature deviation from standard day +10°C
- D. Maximum endurance altitude 30,800 Ft.

**MACH NUMBER AND AIRSPEED** - Enter the chart with the average gross weight and follow the nearest guideline down to the desired bank angle. From this point, project vertically down to determine effective gross weight. With the effective gross weight, project vertically (up or down) to intersect the optimum endurance at the appropriate drag index line or desired altitude, then horizontally right to the appropriate drag index curve. From the point, project vertically up to read maximum endurance Mach number. To find calibrated airspeed, project vertically up from the Mach number to the endurance altitude, then horizontally left to find the maximum corresponding endurance calibrated airspeed.

**Sample Problem**

|                           |            |
|---------------------------|------------|
| A. Average gross weight   | 30,000 Lb. |
| B. Bank angle             | 20°        |
| C. Effective gross weight | 32,000 Lb. |
| D. Drag index             | 50         |
| E. Endurance altitude     | 35,000 Ft. |
| F. Drag Index             | 50         |
| G. Mach number            | 0.663      |
| H. Endurance altitude     | 35,000 Ft. |
| I. Calibrated airspeed    | 220 Kt.    |

**SAMPLE MACH NUMBER AND AIRSPEED WITH EFFECTIVE GROSS WEIGHT**

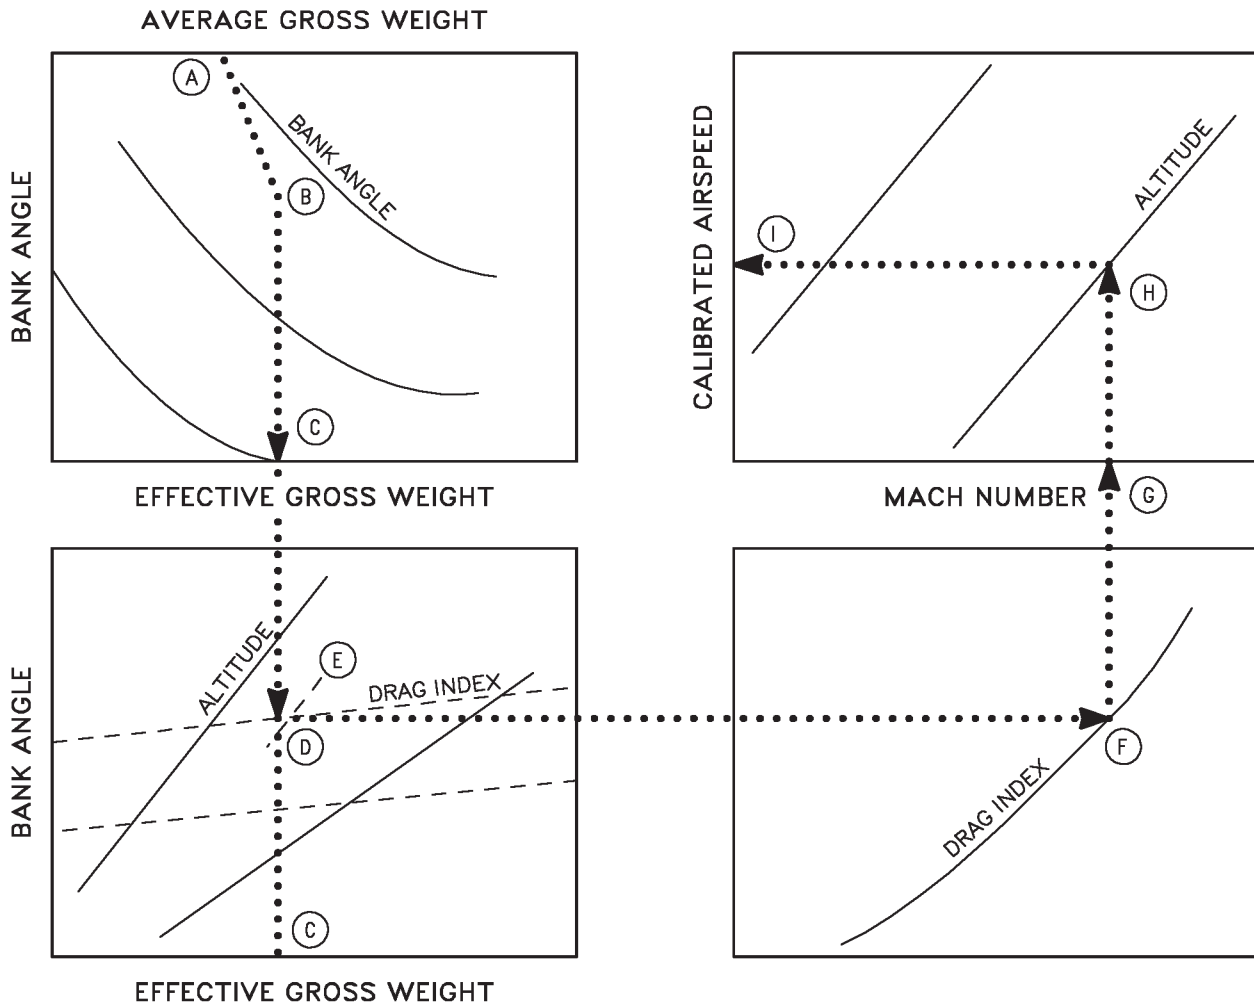


FUEL FLOW AND FUEL REQUIRED - Enter the chart with the effective gross weight and project vertically up to intersect the desired altitude, then horizontally right to the appropriate drag index curve. From this point, project vertically down to the appropriate altitude, then horizontally left to the temperature baseline and parallel the appropriate temperature deviation guideline to the correct temperature deviation. From this point, project horizontally left to read fuel flow in pounds per hour. To find fuel required, continue to project horizontally left to intersect the desired endurance time, then vertically down to read fuel required.

**Sample Problem**

|   |            |
|---|------------|
| A. Effective gross weight                     | 32,000 Lb. |
| B. Endurance altitude                         | 35,000 Ft. |
| C. Drag index                                 | 100        |
| D. Endurance altitude                         | 35,000 Ft. |
| E. Temperature deviation<br>from standard day | -10°C      |
| F. Fuel flow                                  | 3,550 PPH  |
| G. Endurance time                             | 100 Min    |
| H. Fuel required                              | 5,920 Lb.  |

**SAMPLE FUEL FLOW AND FUEL REQUIRED**

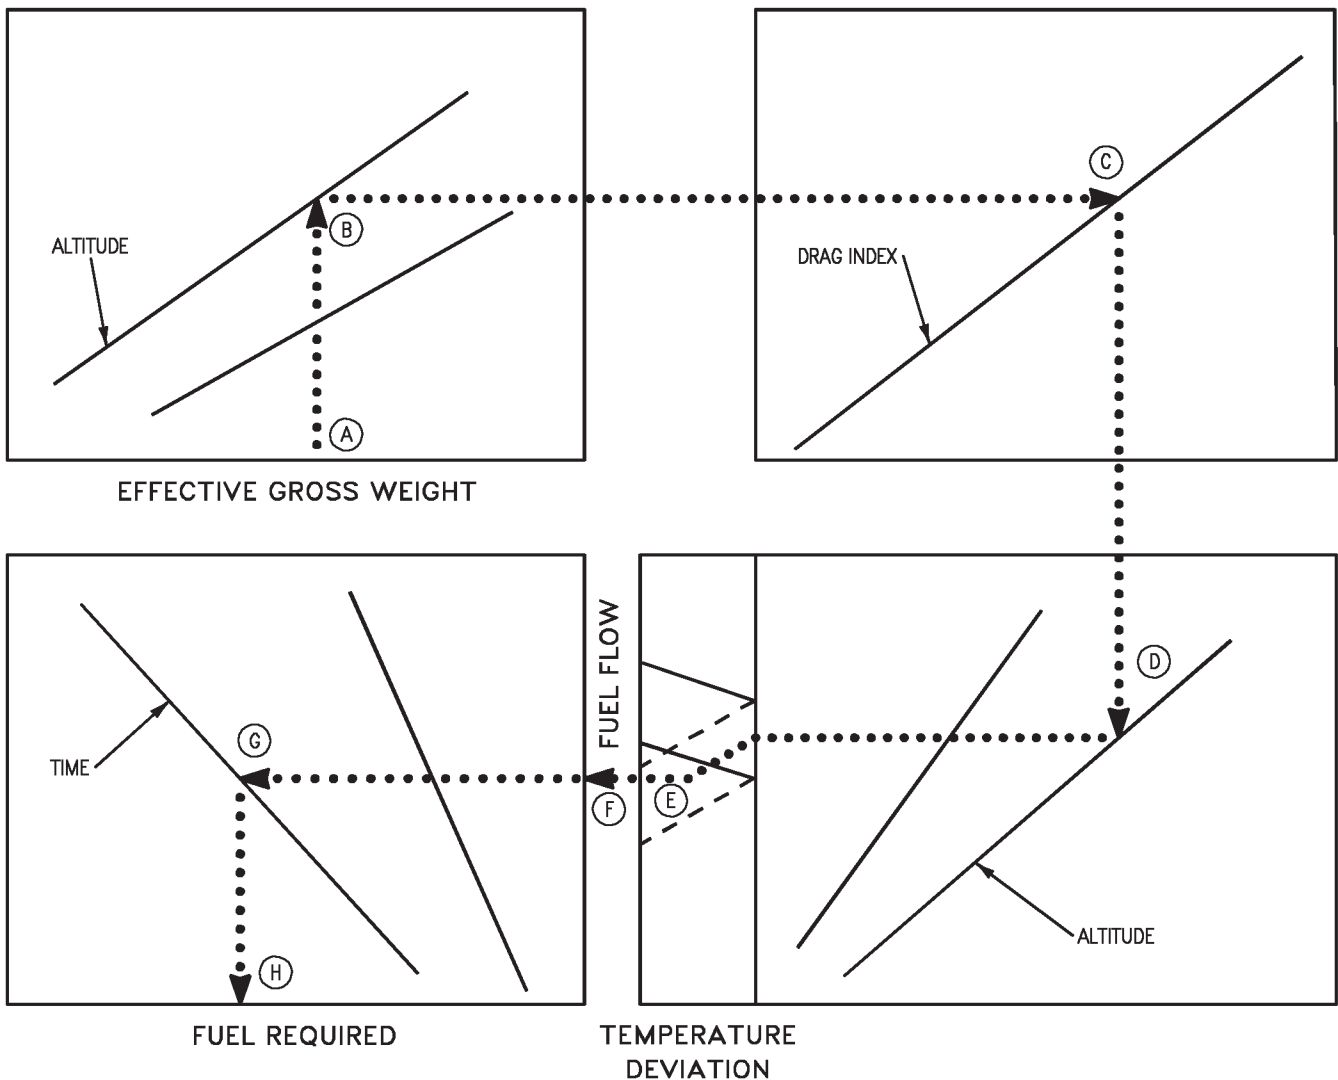

18AC-NFM-20-(282-1)11-CATI

# MAXIMUM ENDURANCE


F404-GE-400  
ALTITUDE  
WITH EFFECTIVE GROSS WEIGHT

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -13 |
| 25,000               | -35 | -31 |
| 30,000               | -44 | -47 |
| 35,000               | -54 | -65 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

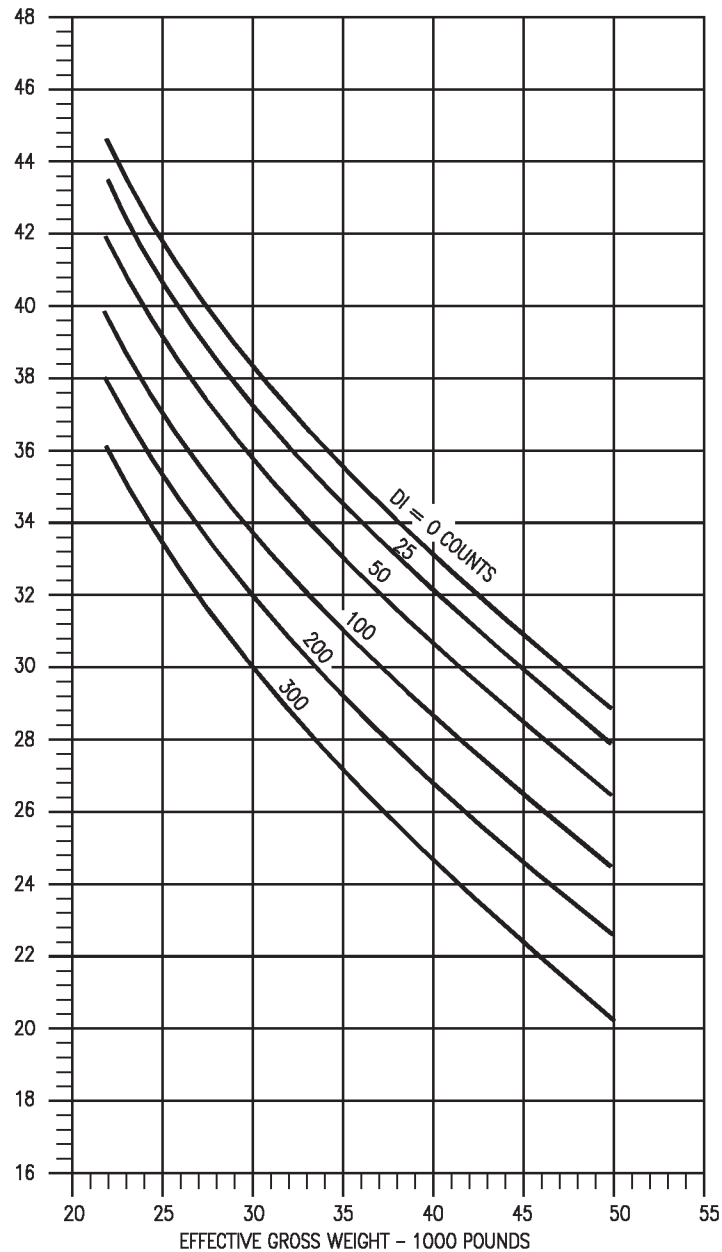
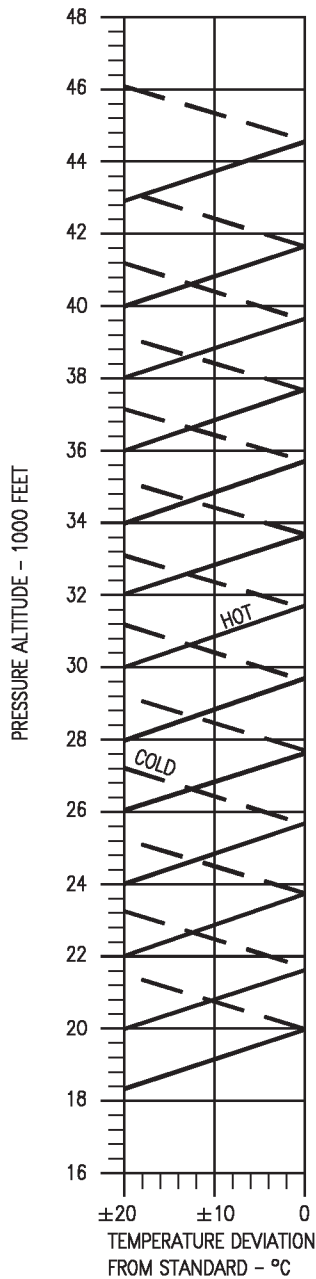


Figure 11-155. Maximum Endurance - F404-GE-400  
(Sheet 1 of 3)

18AC-NFM-20-(263-1)12-CAT1

# MAXIMUM ENDURANCE


F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

MACH NUMBER AND AIRSPEED  
WITH EFFECTIVE GROSS WEIGHT

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

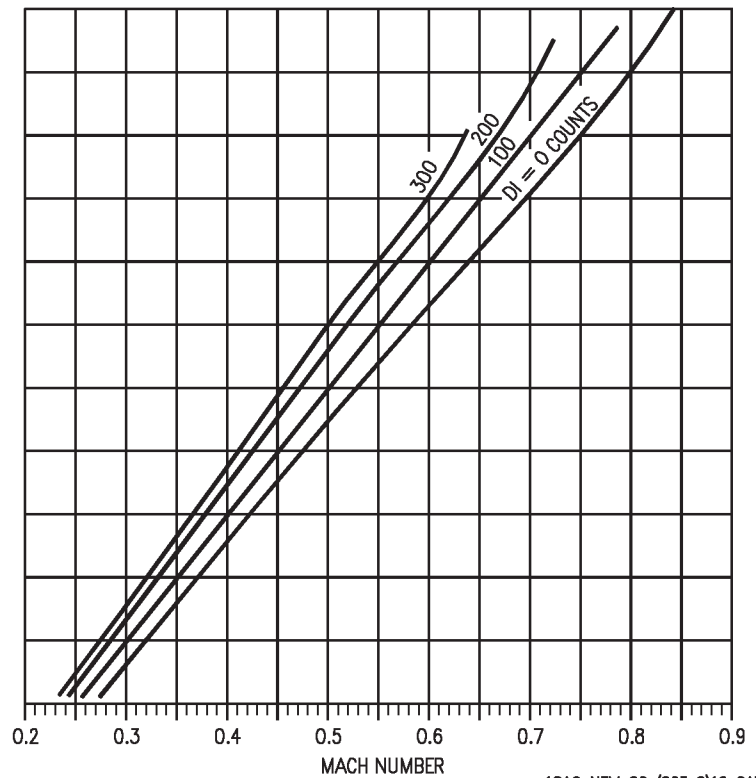
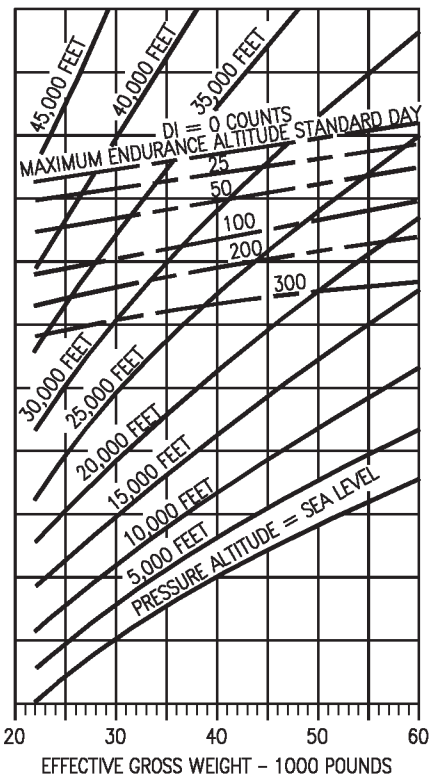
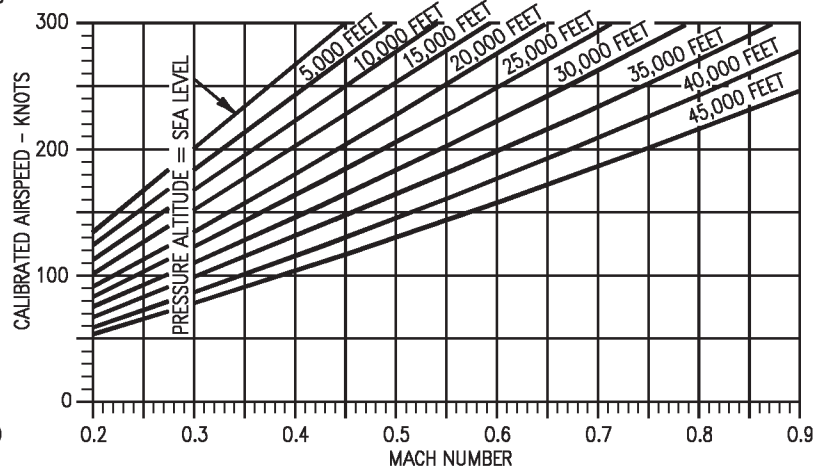
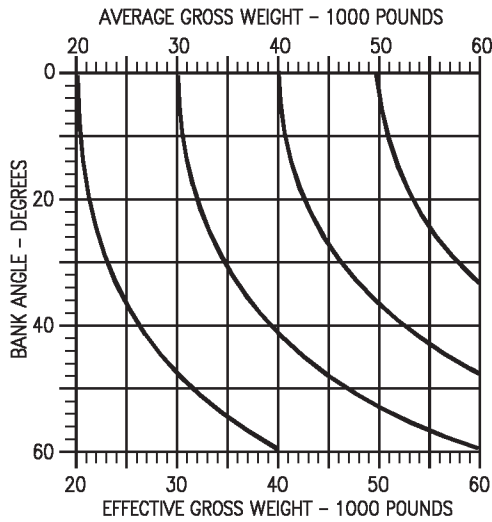


Figure 11-155. Maximum Endurance - F404-GE-400  
(Sheet 2 of 3)

18AC-NFM-20-(263-2)12-CATI

# MAXIMUM ENDURANCE

F404-GE-400


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

FUEL FLOW AND FUEL REQUIRED  
WITH EFFECTIVE GROSS WEIGHT

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL





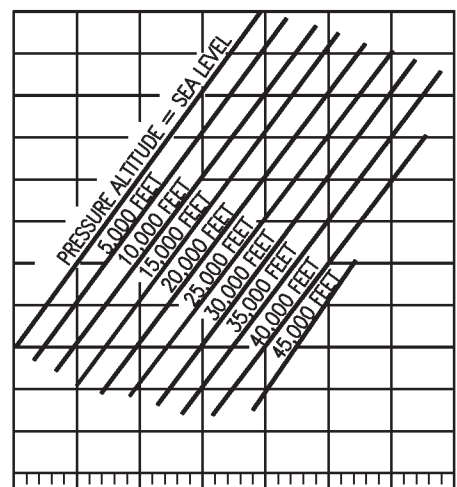


Figure 11-155. Maximum Endurance - F404-GE-400  
(Sheet 3 of 3)

18AC-NFM-20-(263-3)12-CAT1

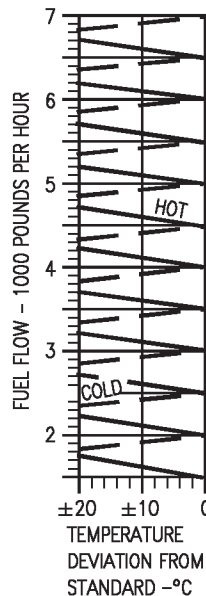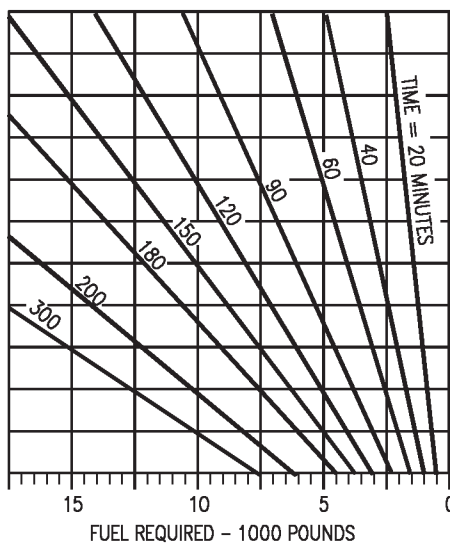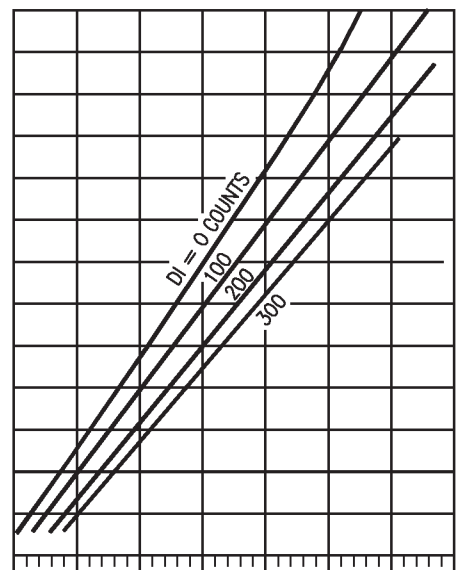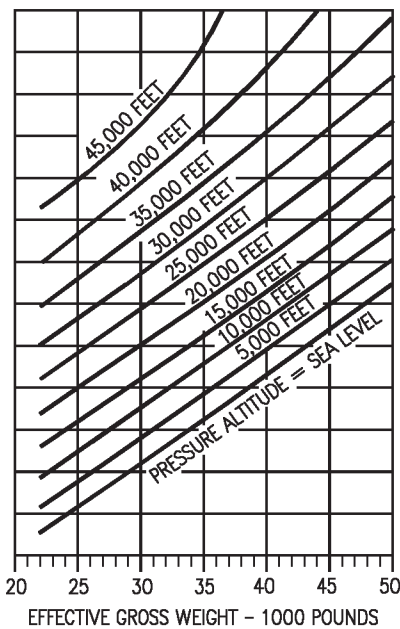

# MAXIMUM ENDURANCE


F404-GE-400  
ONE ENGINE OPERATING  
ALTITUDE  
WITH EFFECTIVE GROSS WEIGHT

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

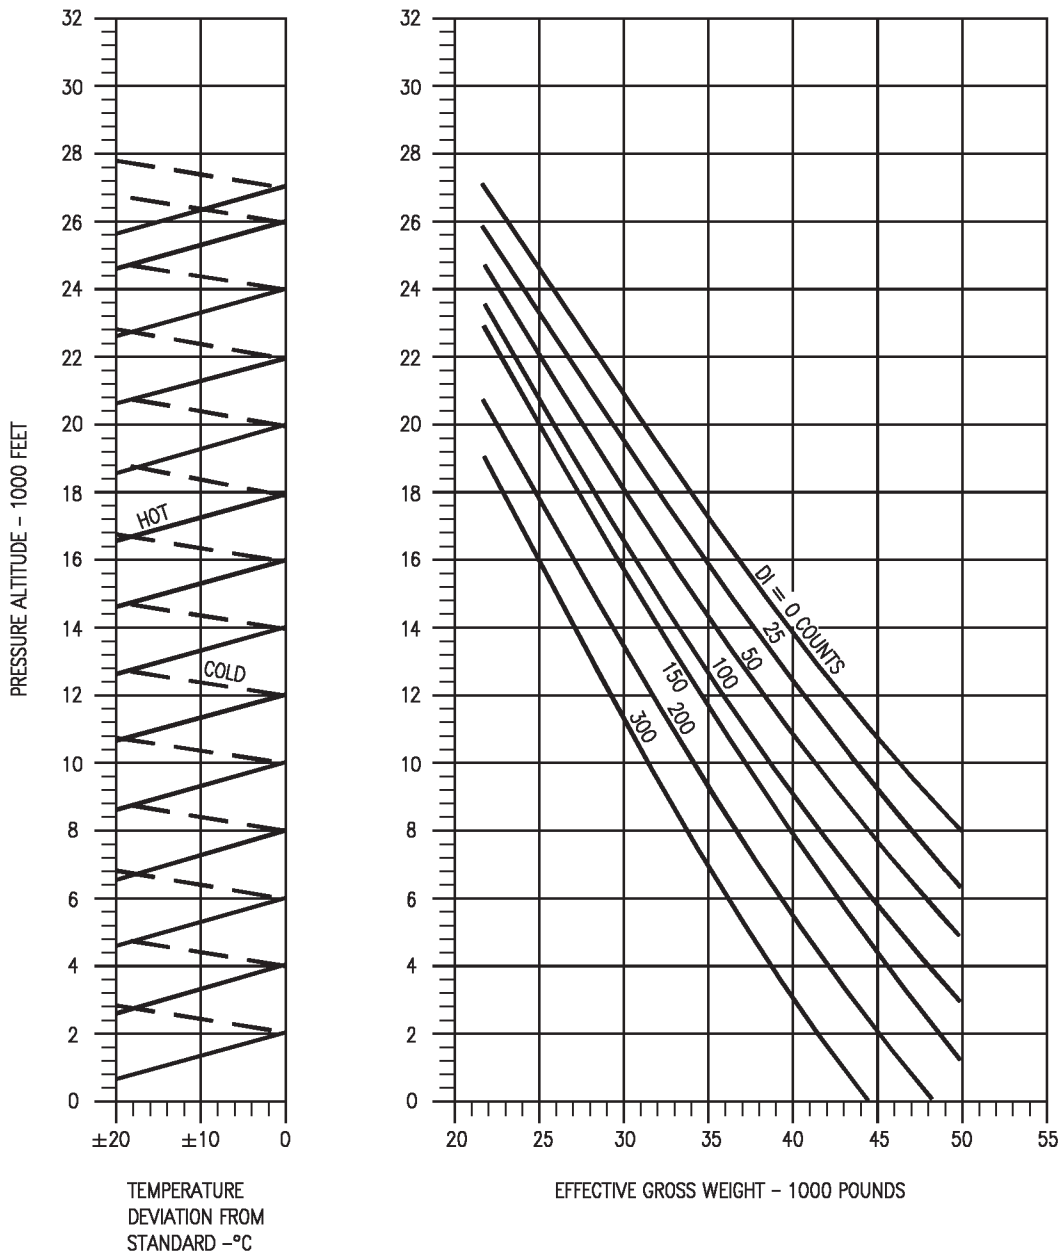


Figure 11-156. Maximum Endurance - One Engine Operating - F404-GE-400  
(Sheet 1 of 3)

18AC-NFM-20-(264-1)11-CAT1

# MAXIMUM ENDURANCE

F404-GE-400


ONE ENGINE OPERATING  
MACH NUMBER AND AIRSPEED  
WITH EFFECTIVE GROSS WEIGHT

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

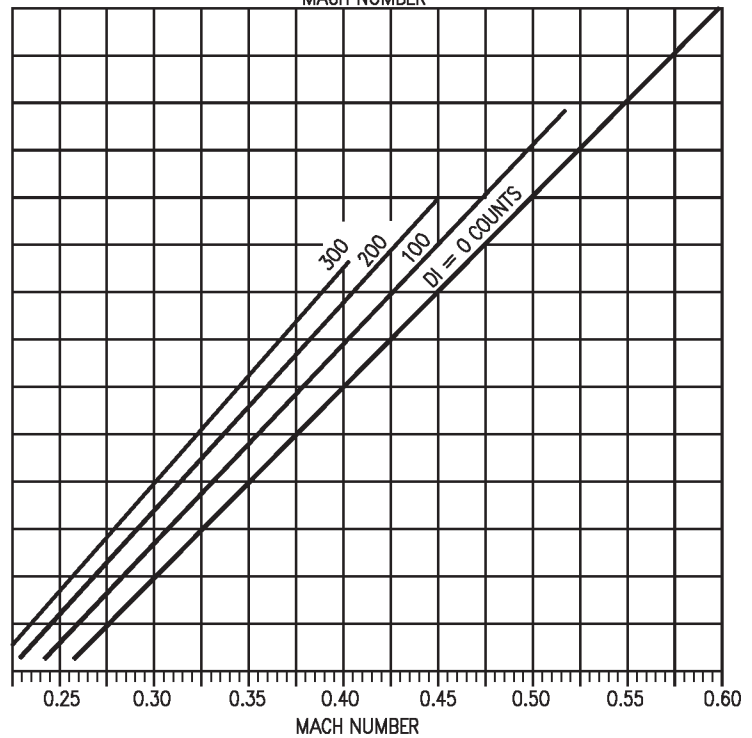
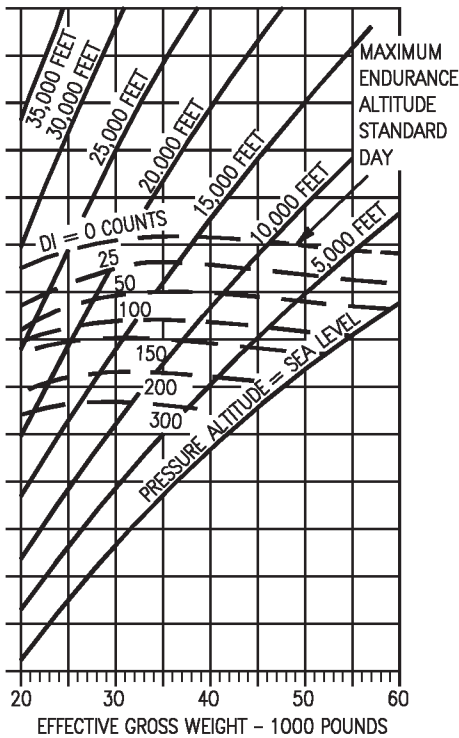
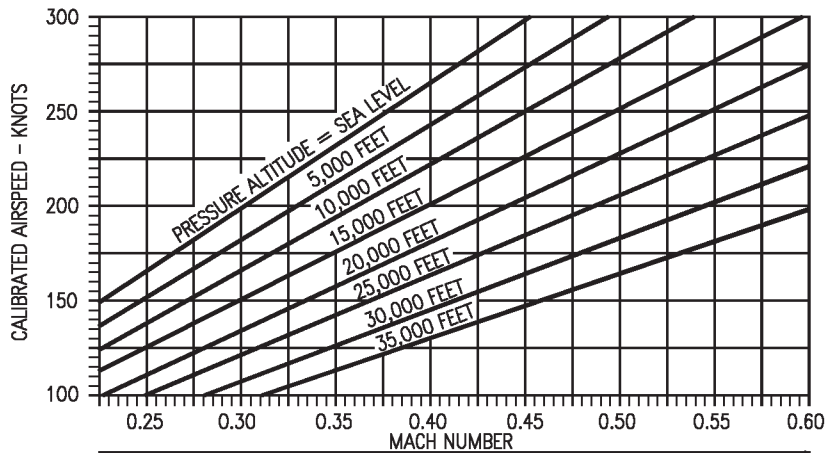
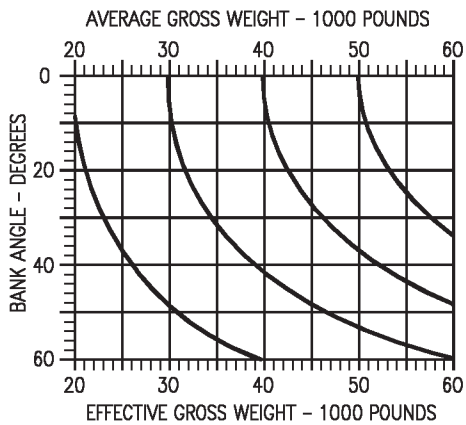


Figure 11-156. Maximum Endurance - One Engine Operating - F404-GE-400  
(Sheet 2 of 3)

# MAXIMUM ENDURANCE

F404-GE-400


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

ONE ENGINE OPERATING  
FUEL FLOW AND FUEL REQUIRED  
WITH EFFECTIVE GROSS WEIGHT

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

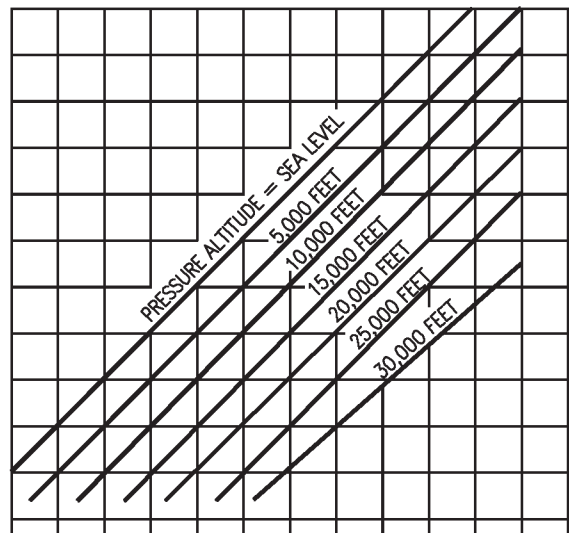
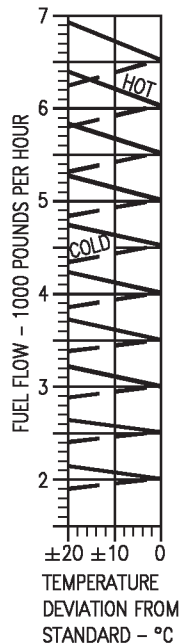
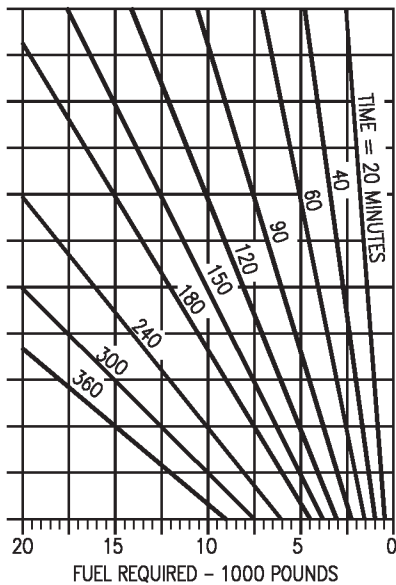
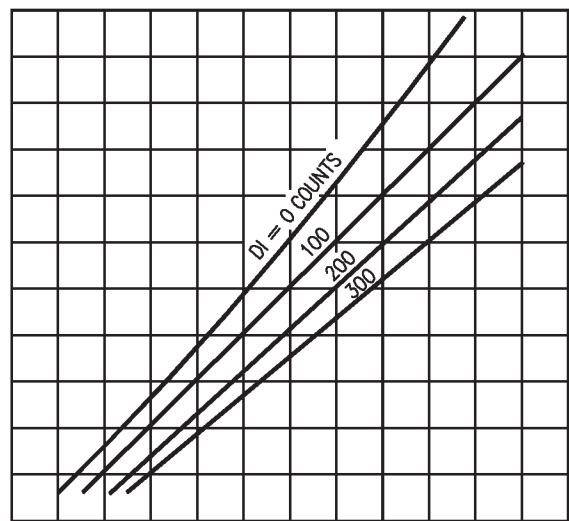
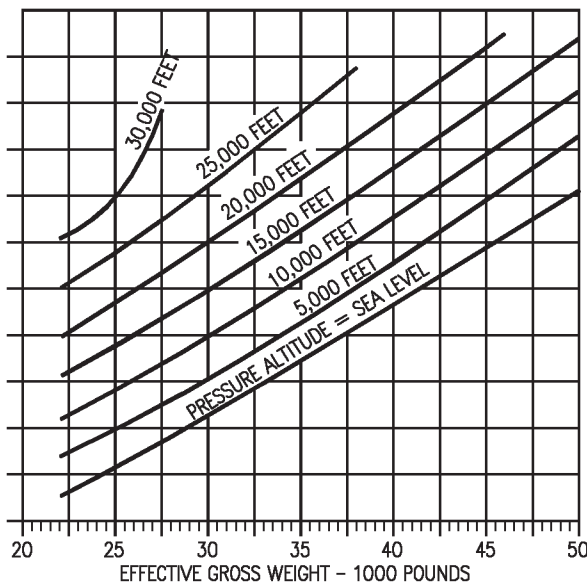


Figure 11-156. Maximum Endurance - One Engine Operating - F404-GE-400  
(Sheet 3 of 3)

18AC-NFM-20-(264-3)12-CAT1

**PART 6 - INFLIGHT REFUELING F404-GE-400**

To be supplied.

**PART 7 - DESCENT F404-GE-400**

**TABLE OF CONTENTS**

**Charts**

|   |        |
|---|--------|
| Normal Descent .....                                  | 11-242 |
| Normal Descent -<br>One Engine Operating .....        | 11-246 |
| Maximum Range Descent .....                           | 11-250 |
| Maximum Range Descent -<br>One Engine Operating ..... | 11-254 |


**NORMAL DESCENT CHARTS**

These charts (figures 11-157 and 11-158) provide speed, time, fuel required, and distance data for a normal descent with speed brake retracted. Included are separate charts for two-engine and single engine operation at various drag indexes. A descent speed of 250 KCAS is used. When cruise speed is below 250 KCAS, descend at the cruise Mach until 250 KCAS is reached. Optimum cruise altitudes are also depicted on the time, fuel, and distance charts.

**USE**

**DESCENT SPEED** - Enter the chart with the pressure altitude at start of descent and project horizontally right to the 250 KCAS curve, then vertically down to read the corresponding descent Mach number. If the cruise speed before descent is below 250 KCAS, maintain and descend at the cruise Mach until 250 KCAS is reached.

**SAMPLE  
NORMAL DESCENT SPEED**

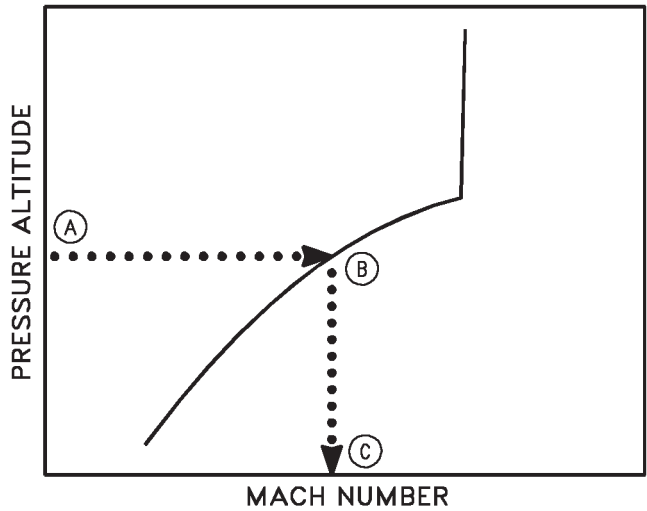

**Sample Problem**


- |                         |            |
|-------------------------|------------|
| A. Pressure altitude    | 35,000 Ft. |
| B. Normal descent speed | 250 KCAS   |
| C. Descent Mach number  | 0.74       |

TIME, FUEL, AND DISTANCE REQUIRED - Presentation of these charts are identical; therefore, they are used in the same manner. Enter the appropriate chart with the initial gross weight at start of descent and project horizontally right to intersect the pressure altitude at the start of descent. From this point, project vertically down to the appropriate drag index curve, then horizontally left to the temperature baseline and follow the appropriate temperature deviation guideline to the appropriate temperature deviation. From this point project horizontally left to read time, fuel, and distance required during descent.

**Sample Problem**

- |   |            |
|---|------------|
| A. Initial gross weight                       | 34,000 Lb. |
| B. Pressure altitude                          | 35,000 Ft. |
| C. Drag index                                 | 50         |
| D. Temperature deviation<br>from standard day | +10° C     |
| E. Time                                       | 11.1 Min.  |
| F. Fuel required                              | 292 Lb.    |
| G. Distance                                   | 61 NM      |

**SAMPLE NORMAL DESCENT  
TIME-FUEL-DISTANCE**

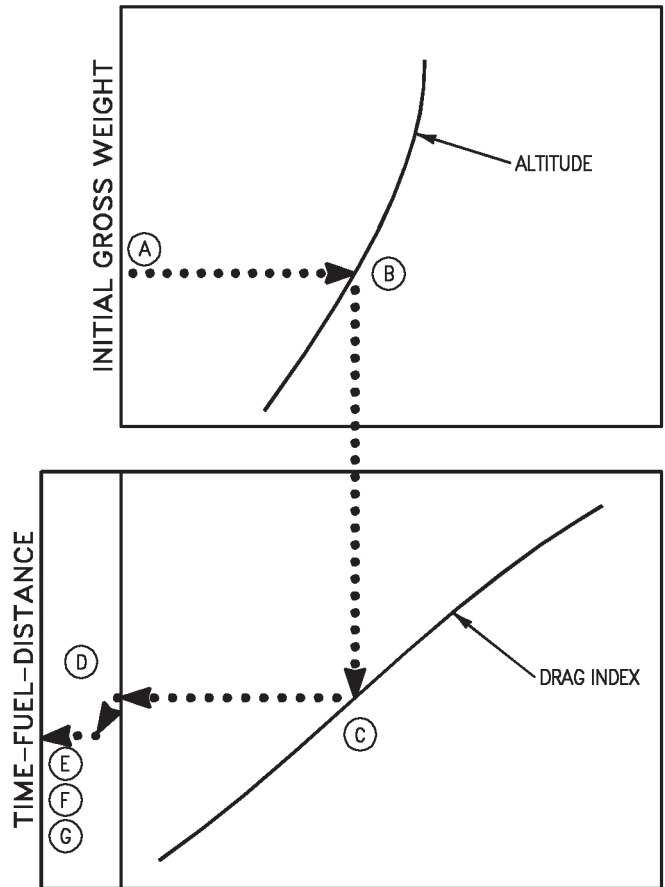

18AC-NFM-20-(286-1)-CATI-33

## MAXIMUM RANGE DESCENT CHARTS

These charts (figures 11-159 thru 11-160) provide speed, time, fuel required, and distance data for a maximum range descent at idle thrust with speed-brake retracted. Included are separate charts for two-engine and single engine operation at various drag indexes. When cruise airspeed is below maximum descent airspeed, descend at the cruise Mach until the maximum range descent airspeed is reached. Optimum cruise altitudes are also depicted on the time, fuel, and distance charts.

### USE


#### DESCENT SPEED

Enter the chart with the initial descent gross weight and project horizontally right to the appropriate drag index curve and then vertically down to read the corresponding descent calibrated airspeed. If the cruise airspeed before descent is below the descent airspeed, maintain and descend at the cruise Mach number until the descent airspeed is reached.

#### Sample Problem

- A. Initial Descent Gross Weight 35,000 Lb.
- B. Drag Index 200
- C. Maximum Range Descent Calibrated Airspeed 210 KCAS

### SAMPLE MAX RANGE DESCENT SPEED

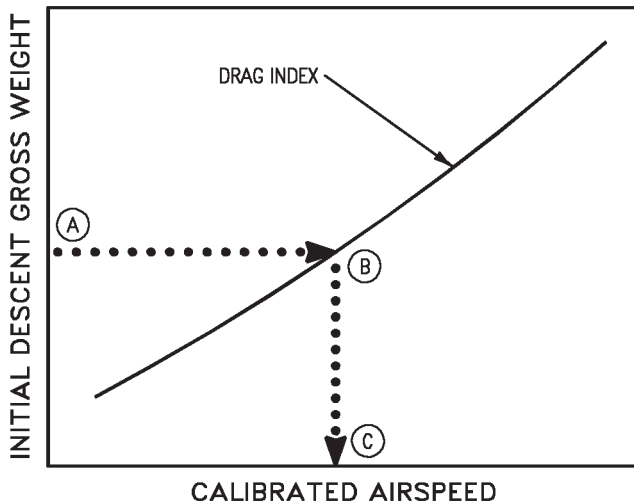

18AC-NFM-20-(306-1)-CATI-22


## TIME, FUEL, AND DISTANCE REQUIRED

Presentation of these charts are identical; therefore, they are used in the same manner. Enter the appropriate chart with the initial gross weight at start of descent and project horizontally right to intersect the pressure altitude at the start of descent. From this point, project vertically down to the appropriate drag index curve, then horizontally left to read time, fuel, and distance required during descent.

#### Sample Problem

- A. Initial Gross Weight 35,000 Lb.
- B. Pressure Altitude 30,000 Ft.
- C. Drag Index 100
- D. Time 10.5 Min.
- E. Fuel required 285 Lb.
- F. Distance 48 NM

### SAMPLE MAX RANGE DESCENT TIME-FUEL-DISTANCE

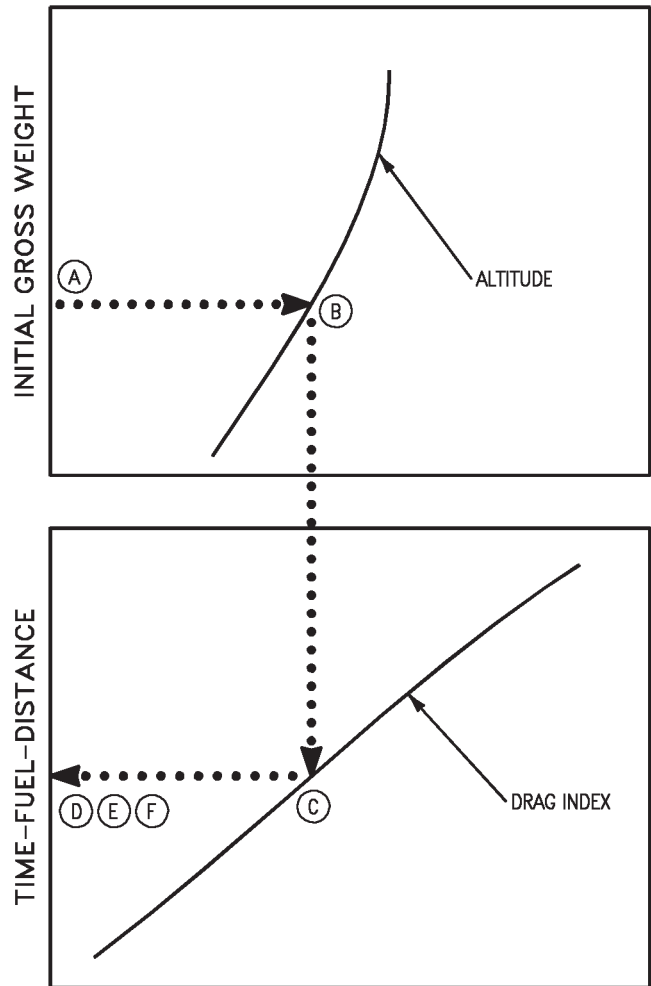

18AC-NFM-20-(307-1)-CATI-37

# NORMAL DESCENT


F404-GE-400

DESCENT SPEED  
SPEEDBRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

AIRCRAFT CONFIGURATION  
ALL DRAG INDEXES  
ALL GROSS WEIGHTS

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

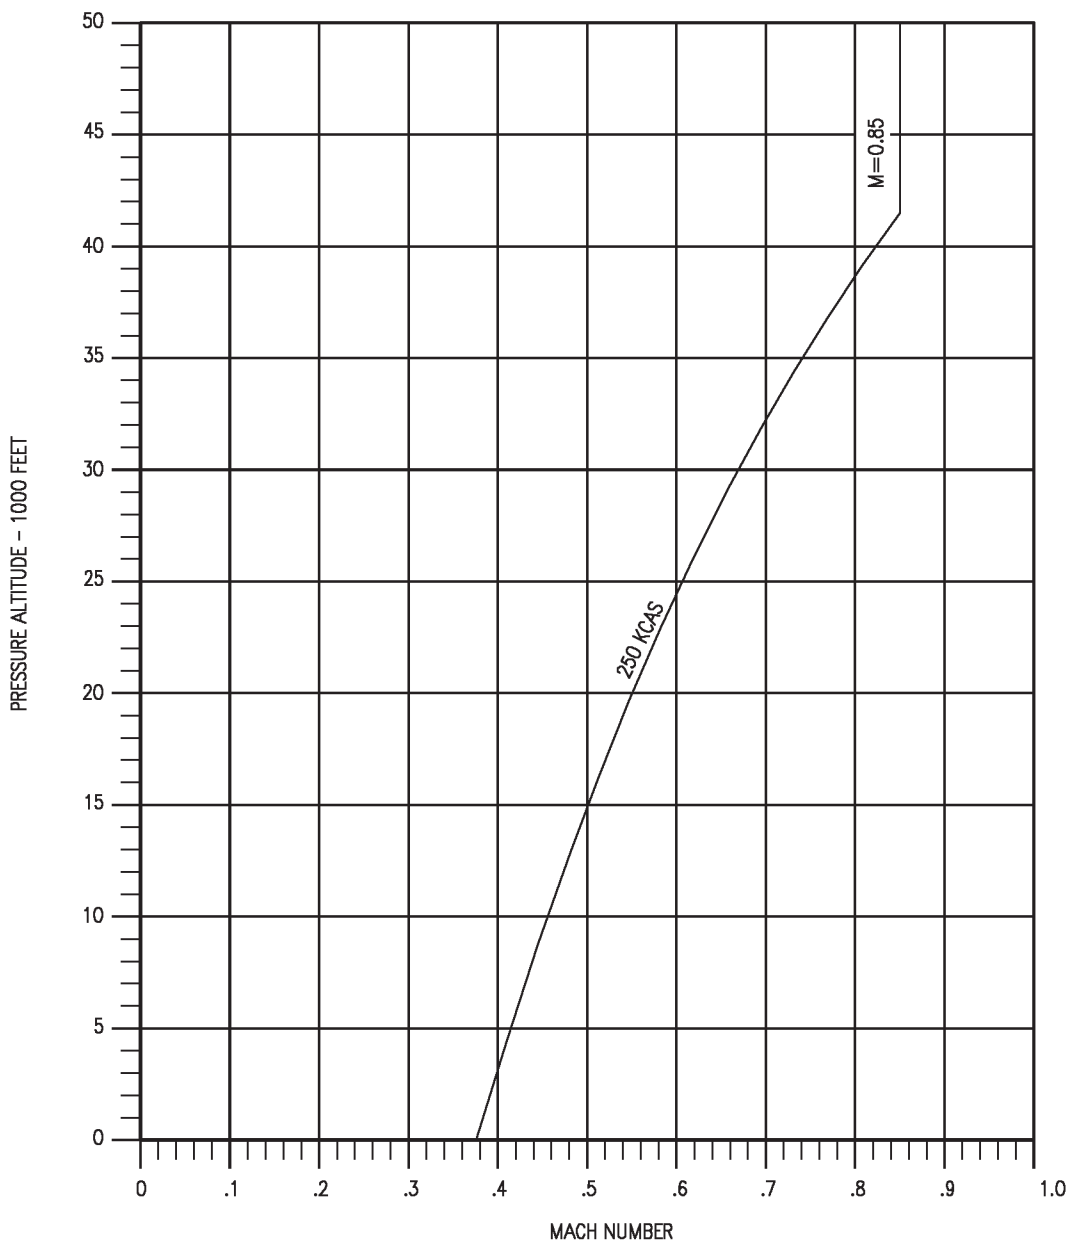


Figure 11-157. Normal Descent - F404-GE-400  
(Sheet 1 of 4)

18AC-NFM-20-(267-1)12-CATI



# NORMAL DESCENT

F404-GE-400


TIME REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

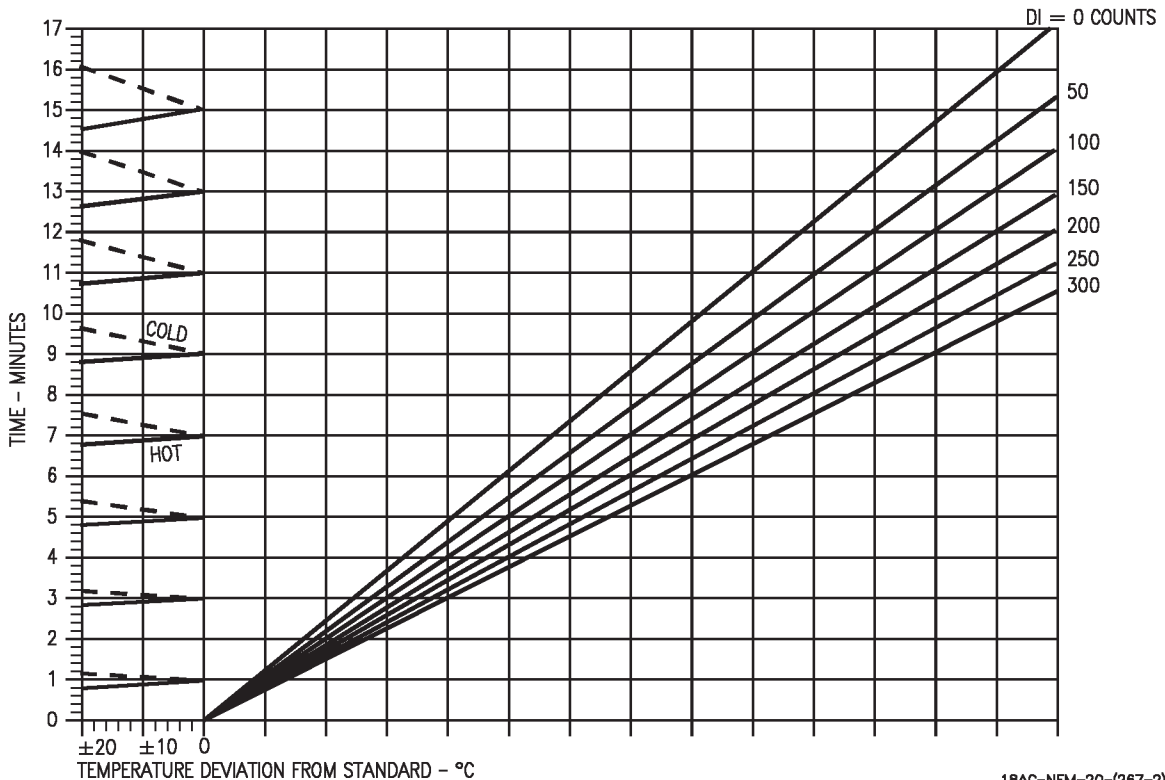
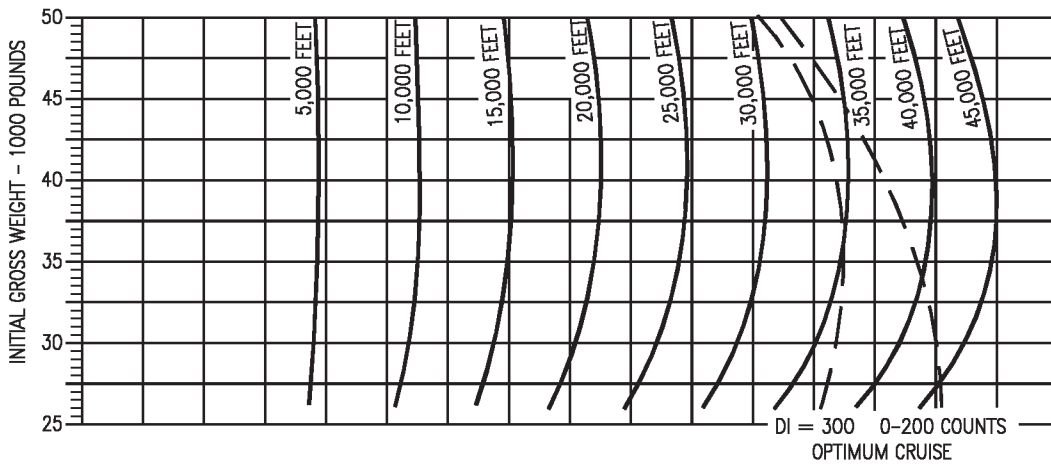


Figure 11-157. Normal Descent - F404-GE-400  
(Sheet 2 of 4)

18AC-NFM-20-(267-2)12-CAT1

# NORMAL DESCENT

F404-GE-400


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

FUEL REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

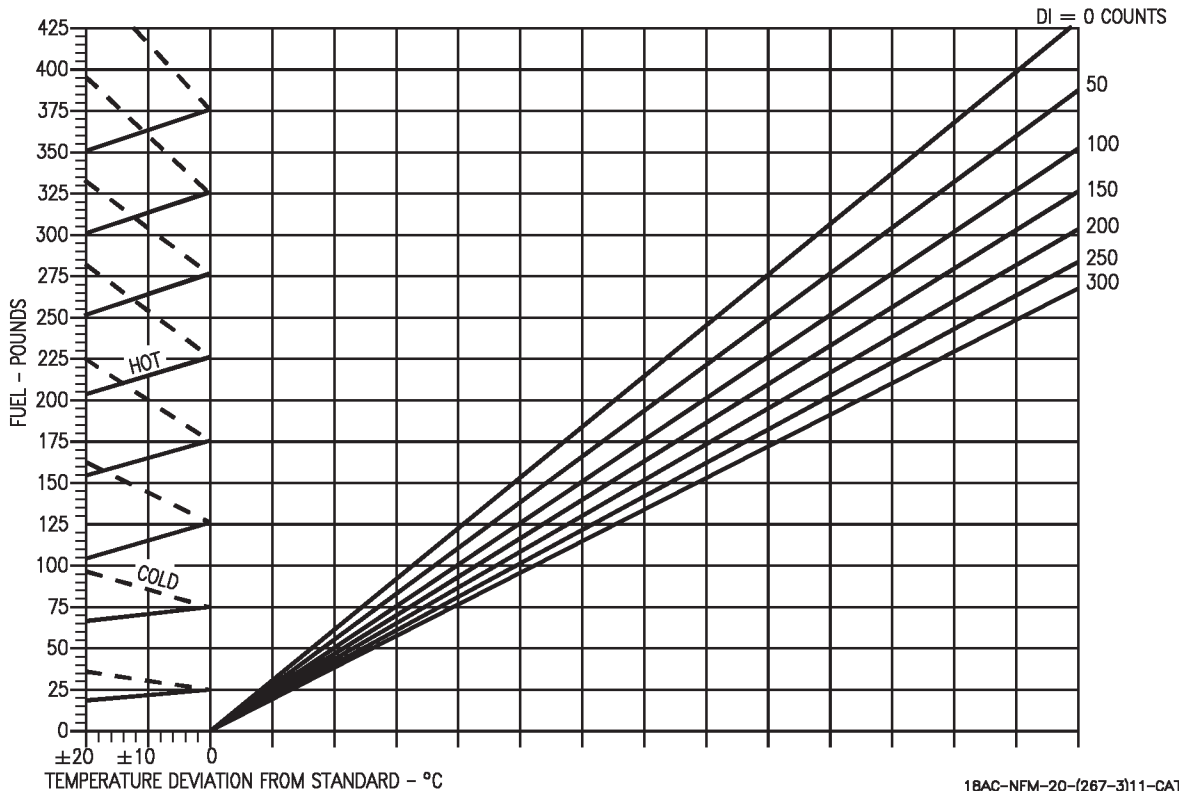
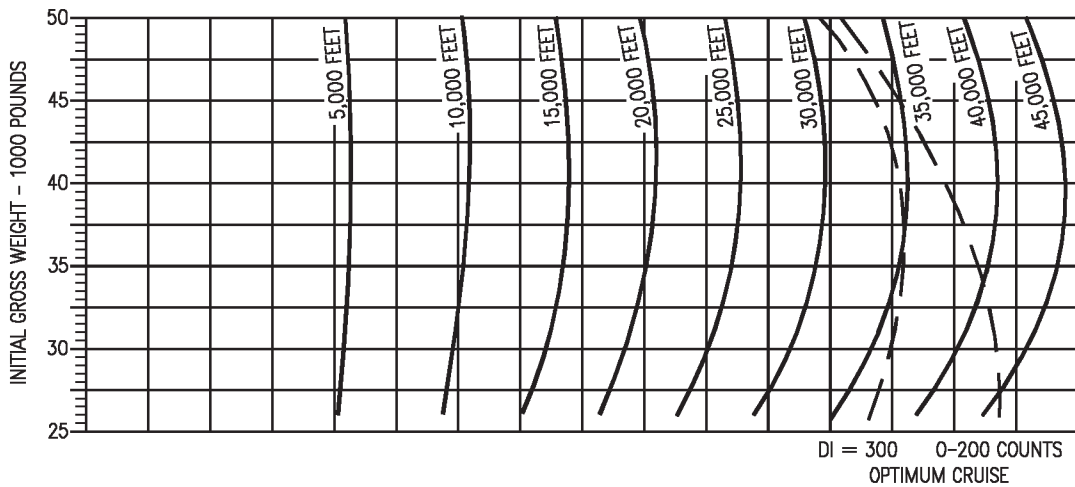


Figure 11-157. Normal Descent - F404-GE-400  
(Sheet 3 of 4)

18AC-NFM-20-(267-3)11-CAT1

# NORMAL DESCENT

F404-GE-400


DISTANCE REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -13 |
| 25,000               | -35 | -31 |
| 30,000               | -44 | -47 |
| 35,000               | -54 | -65 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

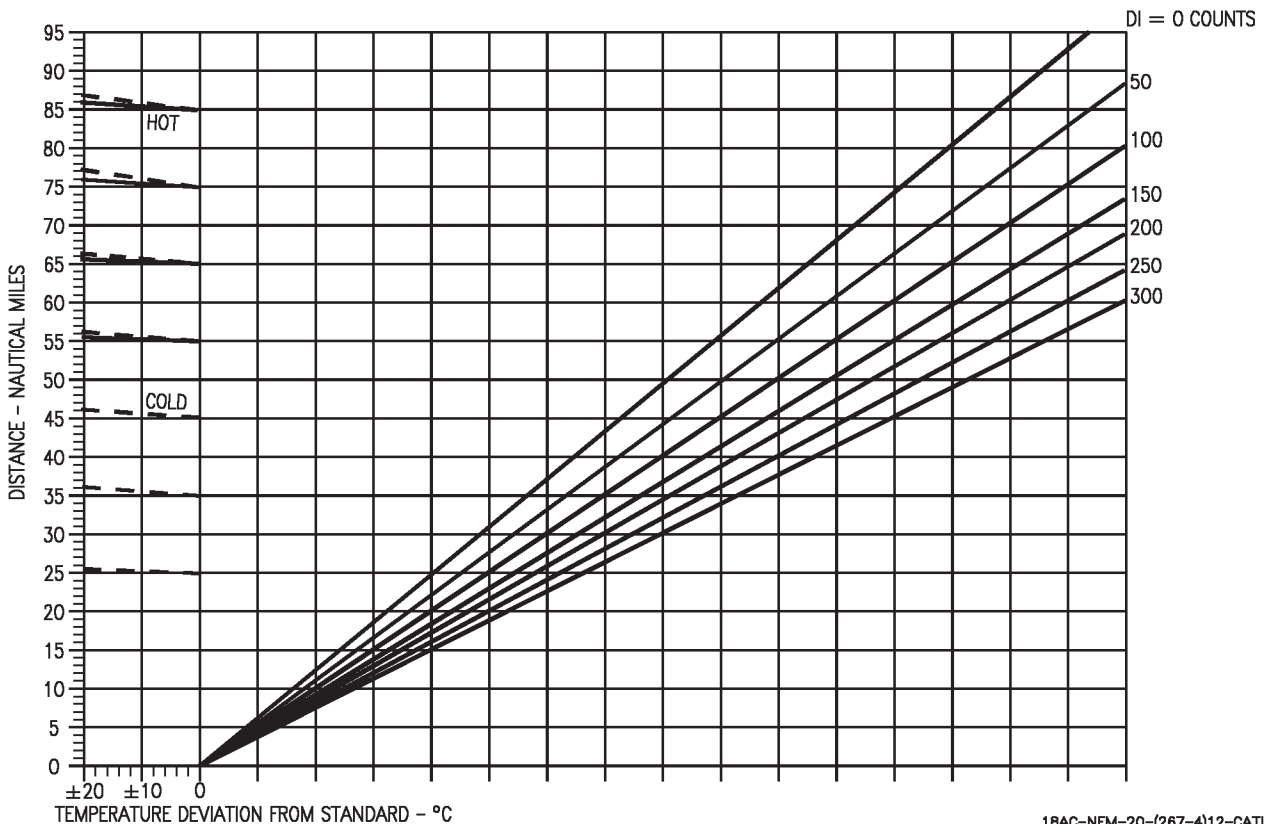
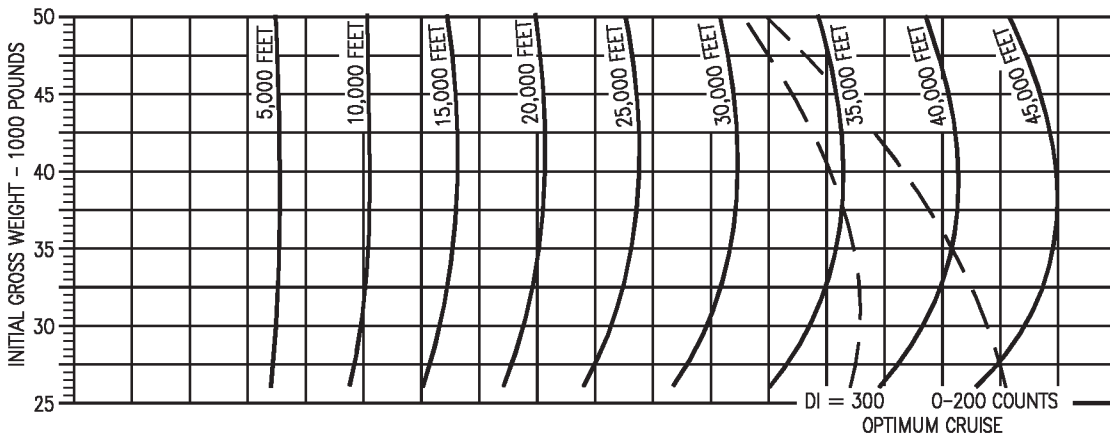


Figure 11-157. Normal Descent - F404-GE-400  
(Sheet 4 of 4)


18AC-NFM-20-(267-4)12-CATI

# NORMAL DESCENT

F404-GE-400  
ONE ENGINE OPERATING  
DESCENT SPEED  
SPEEDBRAKE RETRACTED  
IDLE THRUST

AIRCRAFT CONFIGURATION  
ALL DRAG INDEXES  
ALL GROSS WEIGHTS

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

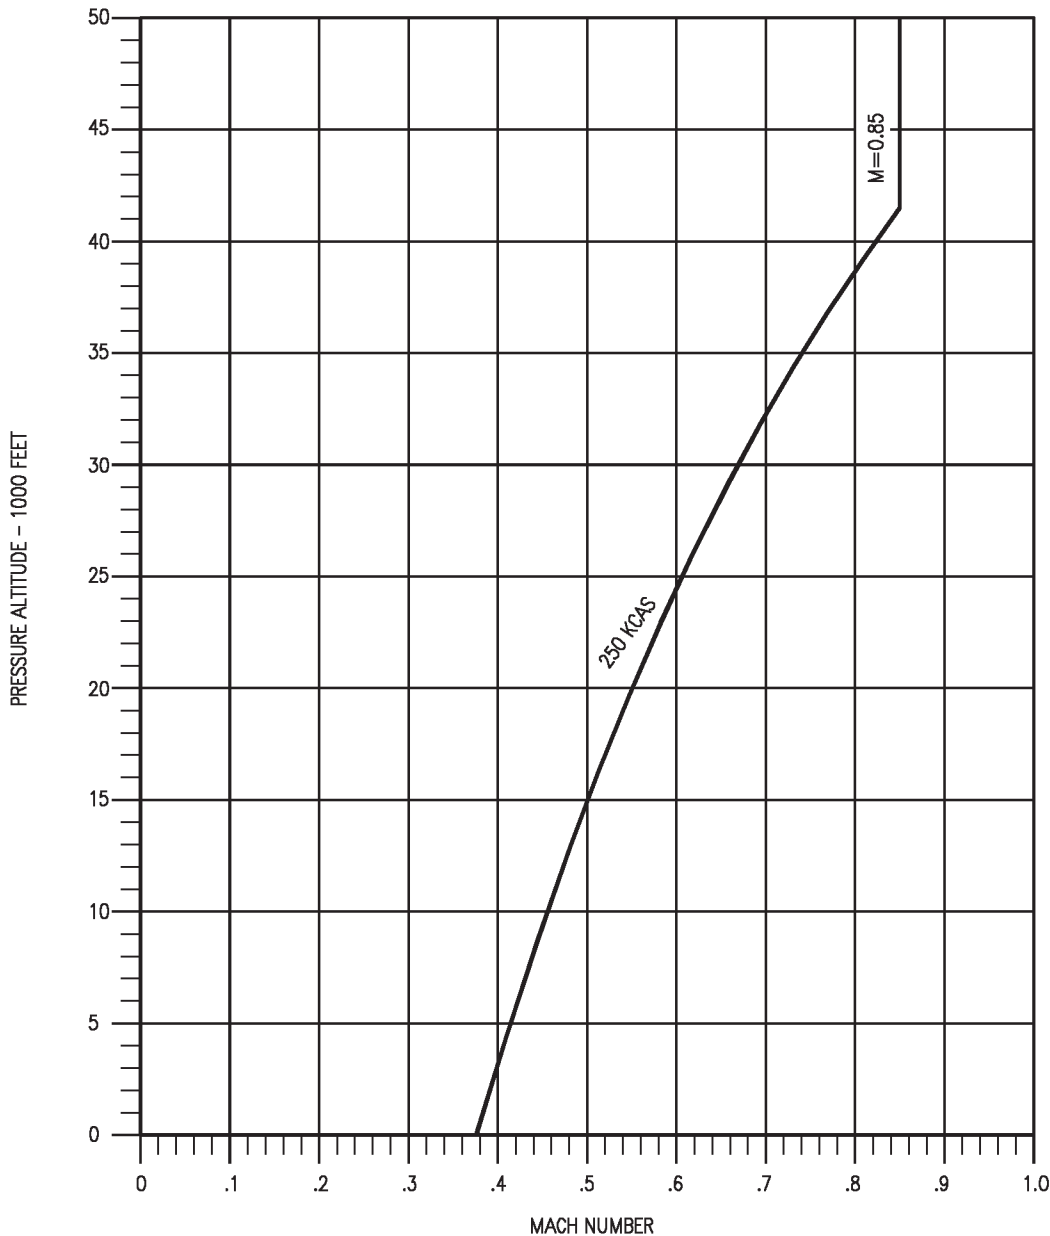


Figure 11-158. Normal Descent - One Engine Operating - F404-GE-400  
(Sheet 1 of 4)

18AC-NFM-20-(268-1)12-CATI

# NORMAL DESCENT


F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

ONE ENGINE OPERATING  
TIME REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

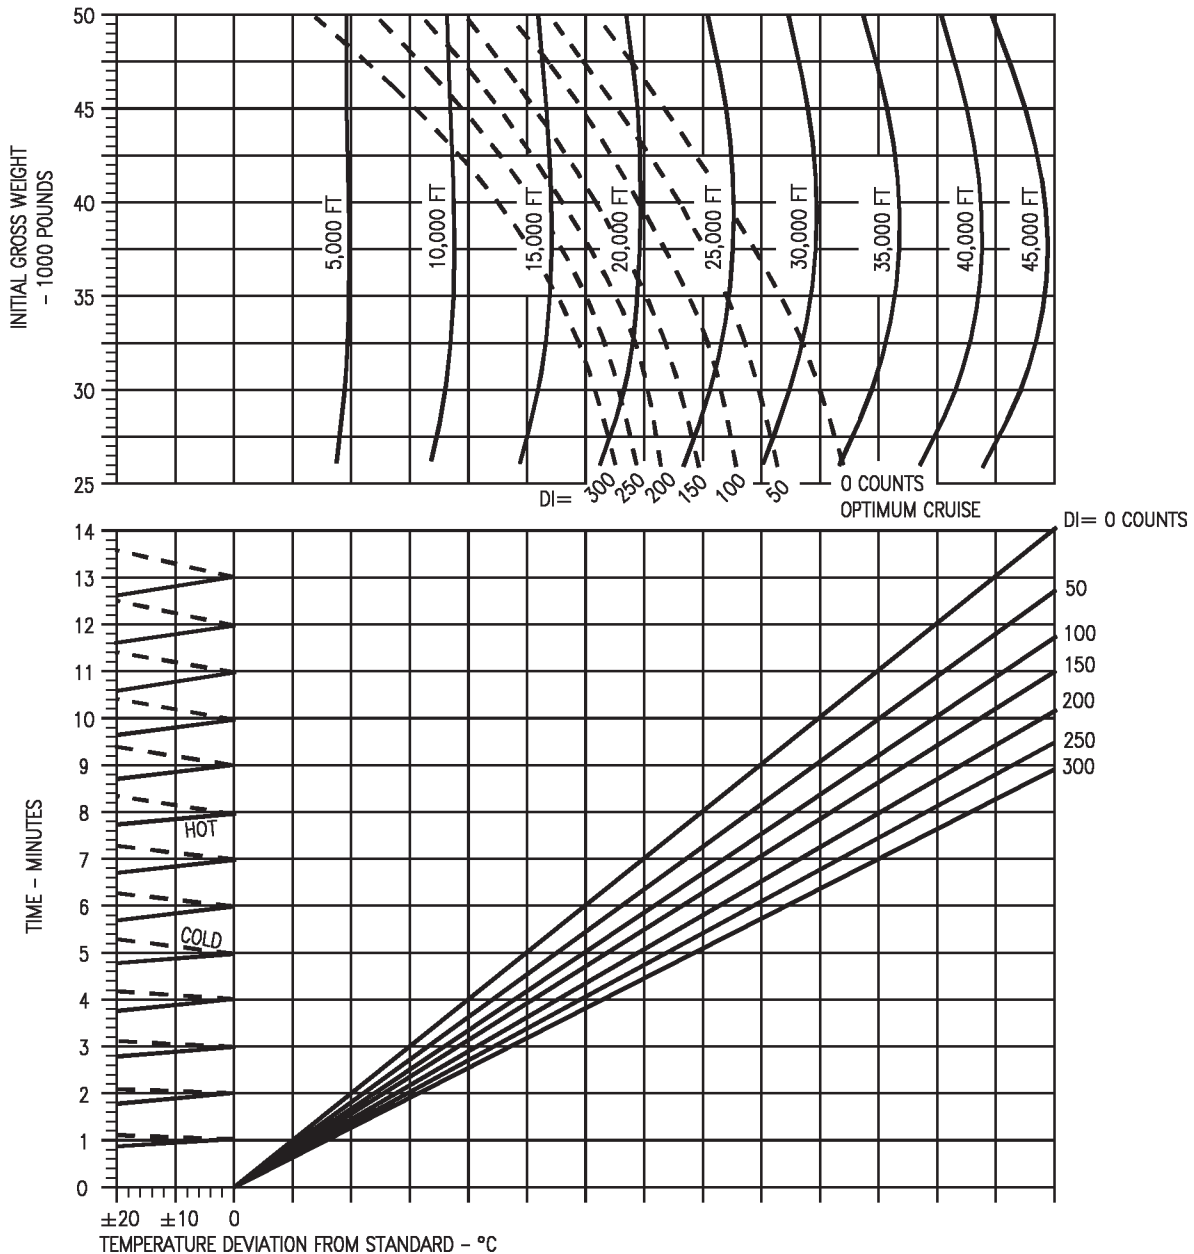


Figure 11-158. Normal Descent - One Engine Operating - F404-GE-400  
(Sheet 2 of 4)

18AC-NFM-20-(268-2)12-CATI

# NORMAL DESCENT


F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

ONE ENGINE OPERATING  
FUEL REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

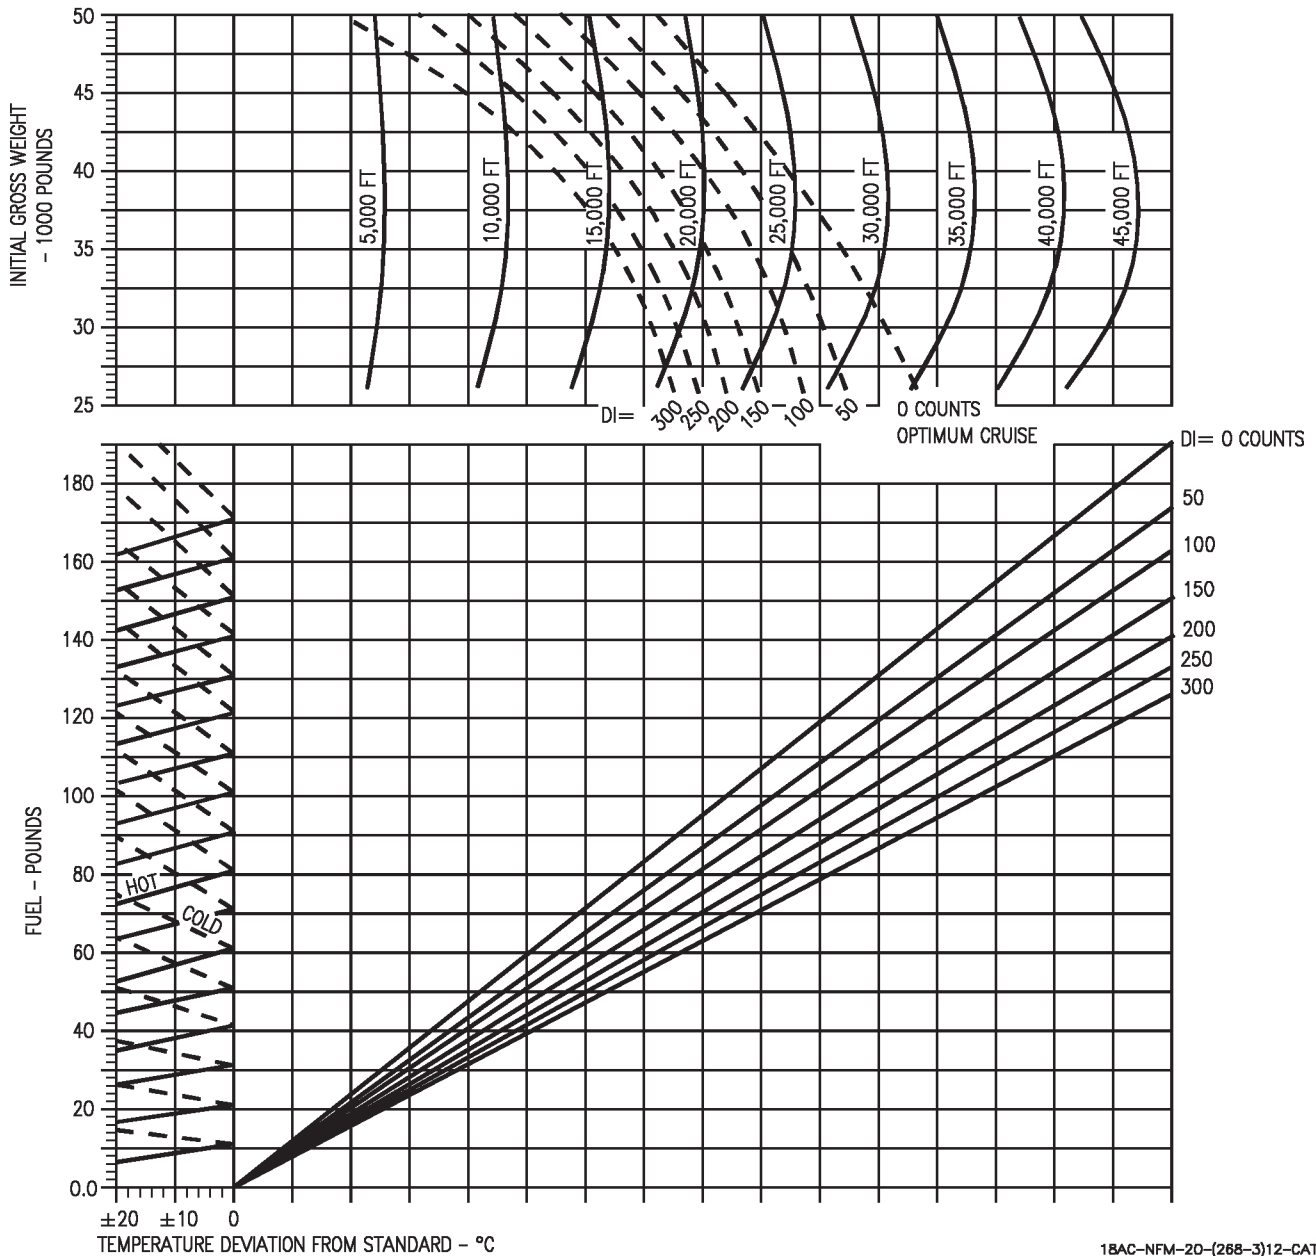


Figure 11-158. Normal Descent - One Engine Operating - F404-GE-400  
(Sheet 3 of 4)

18AC-NFM-20-(268-3)12-CATI

# NORMAL DESCENT

F404-GE-400


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

ONE ENGINE OPERATING  
DISTANCE REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -13 |
| 25,000               | -35 | -31 |
| 30,000               | -44 | -47 |
| 35,000               | -54 | -65 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

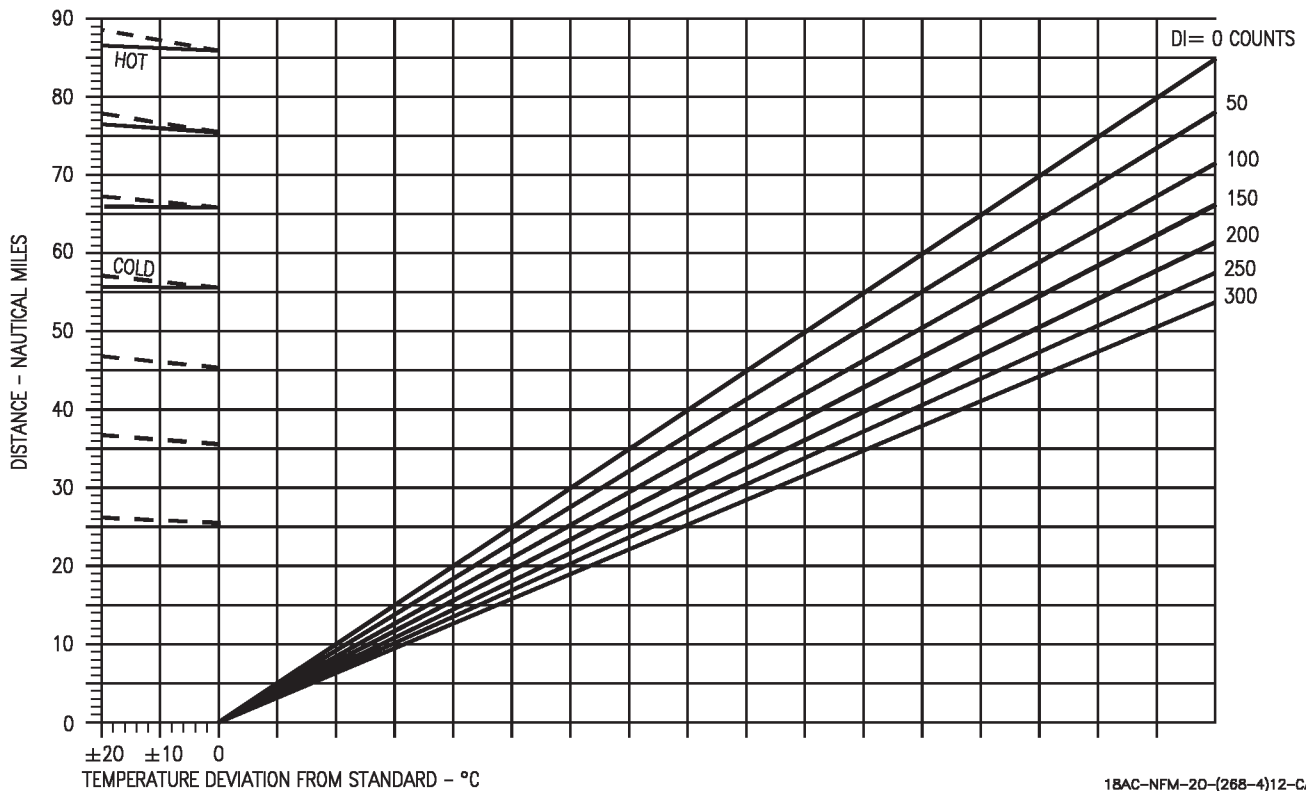
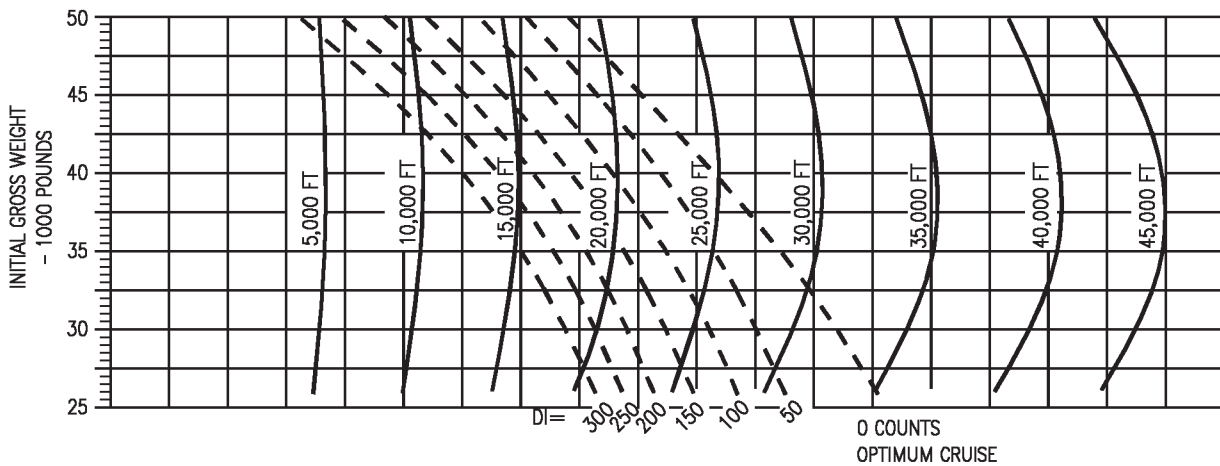


Figure 11-158. Normal Descent - One Engine Operating - F404-GE-400  
(Sheet 4 of 4)

18AC-NFM-20-(268-4)12-CATI


# MAXIMUM RANGE DESCENT

F404-GE-400  
DESCENT SPEED  
SPEEDBRAKE RETRACTED  
IDLE THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES


REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

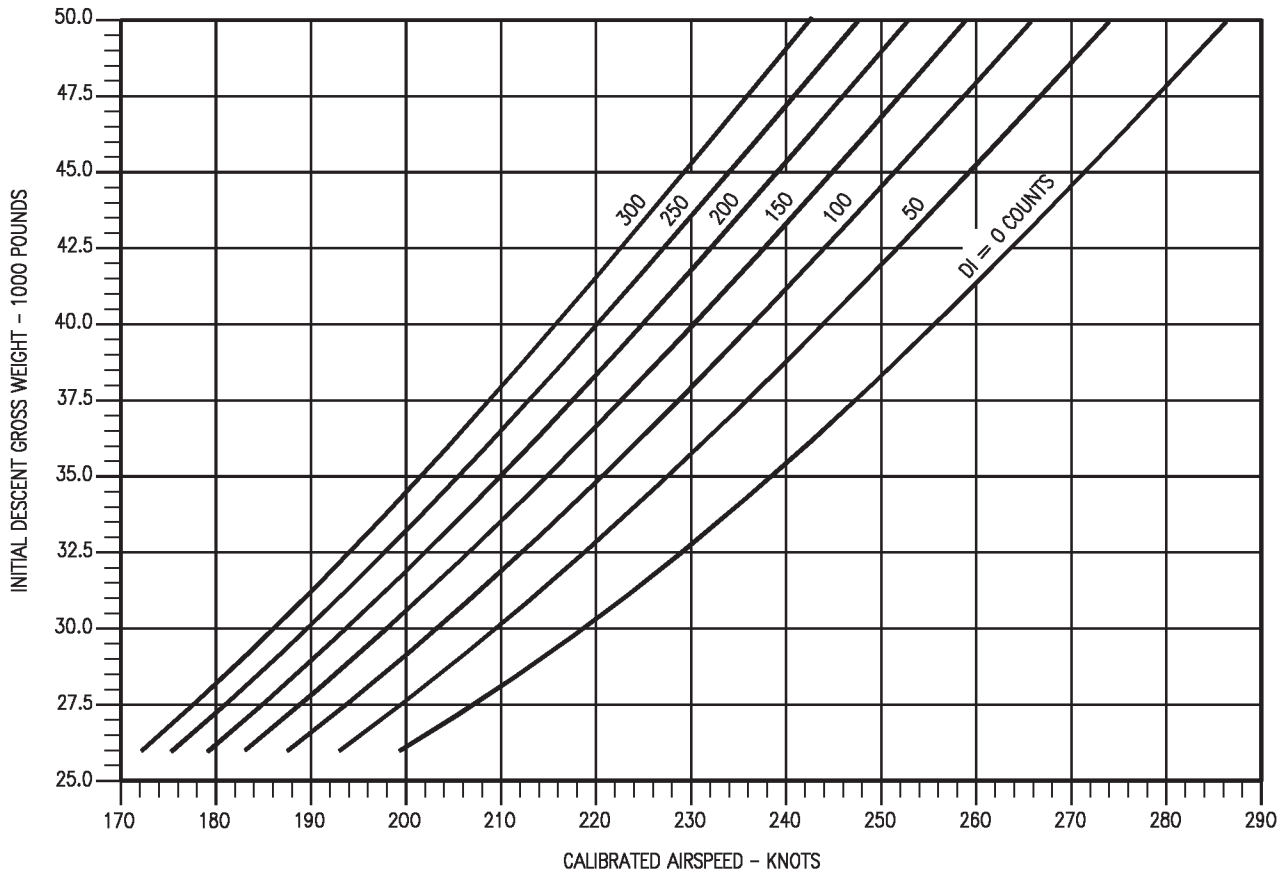

18AC-NFM-20-(301-1)12-CATI

Figure 11-159. Maximum Range Descent - F404-GE-400  
(Sheet 1 of 4)



# MAXIMUM RANGE DESCENT


F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

TIME REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

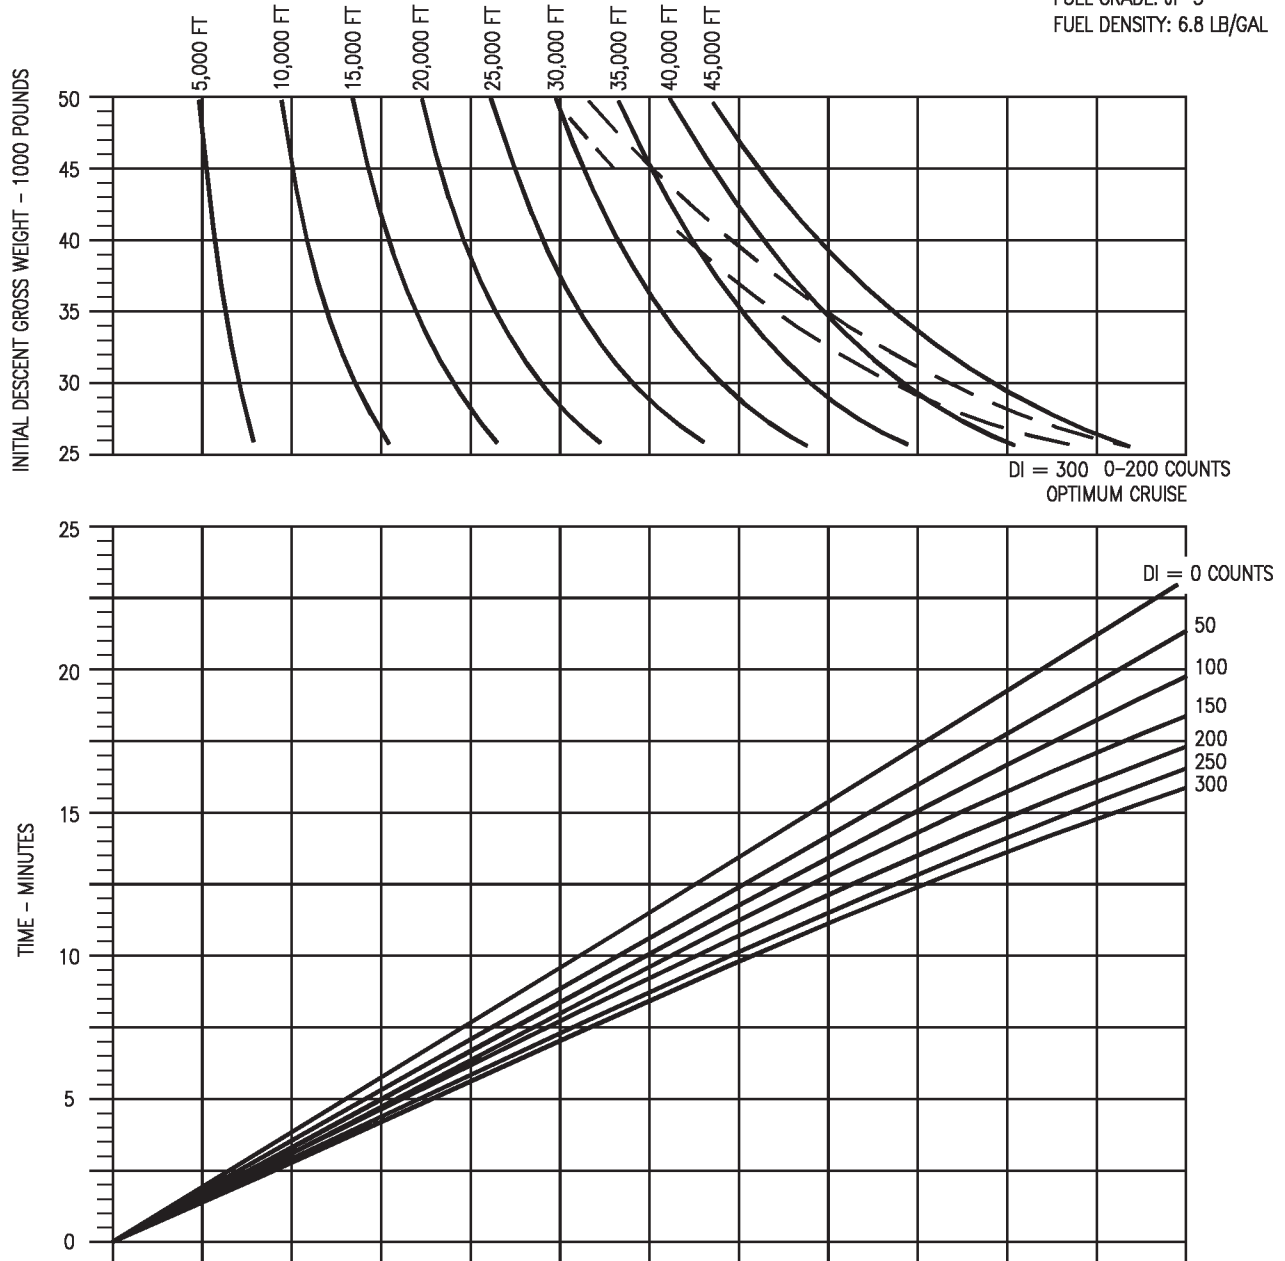


Figure 11-159. Maximum Range Descent - F404-GE-400  
(Sheet 2 of 4)

18AC-NFM-20-(301-2)12-CAT1


# MAXIMUM RANGE DESCENT

F404-GE-400

FUEL REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST


AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

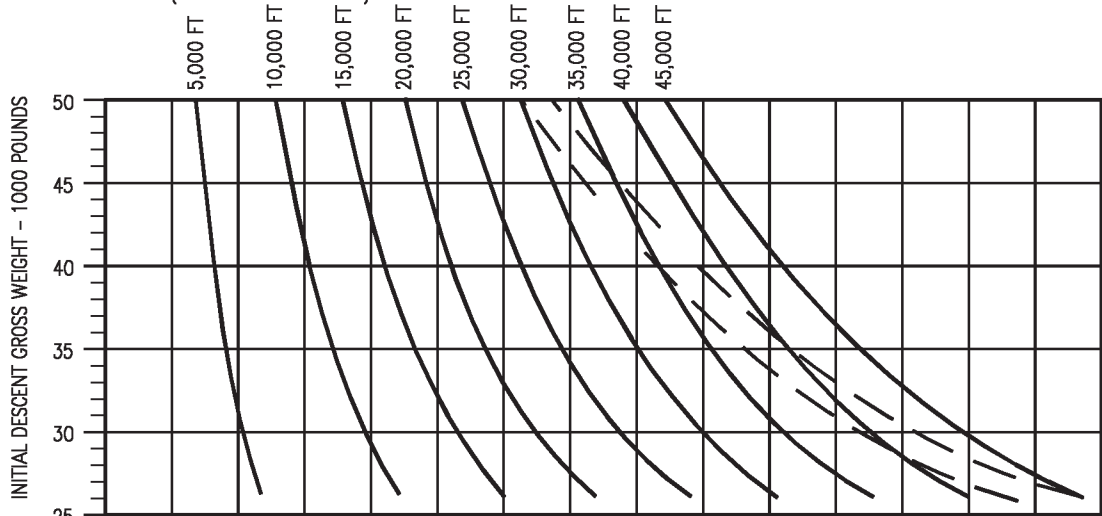

DI = 300 0-200 COUNTS  
OPTIMUM CRUISE

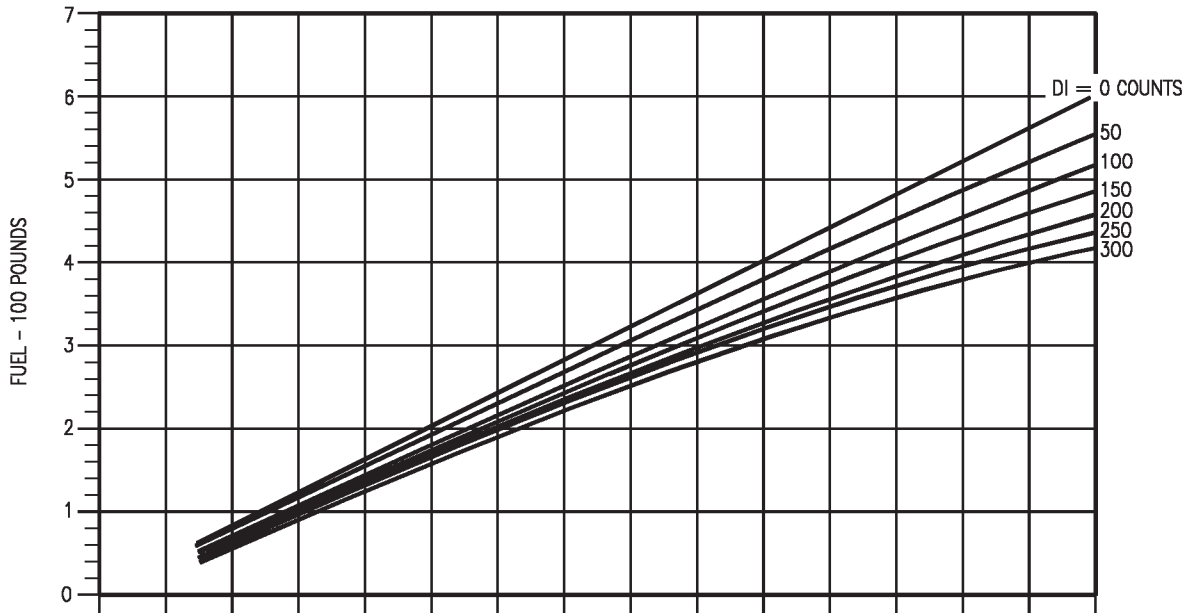


Figure 11-159. Maximum Range Descent - F404-GE-400  
(Sheet 3 of 4)


# MAXIMUM RANGE DESCENT

F404-GE-400

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

DISTANCE REQUIRED TO DESCEND  
SPEEDBRAKE RETRACTED  
IDLE THRUST

GUIDE



REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

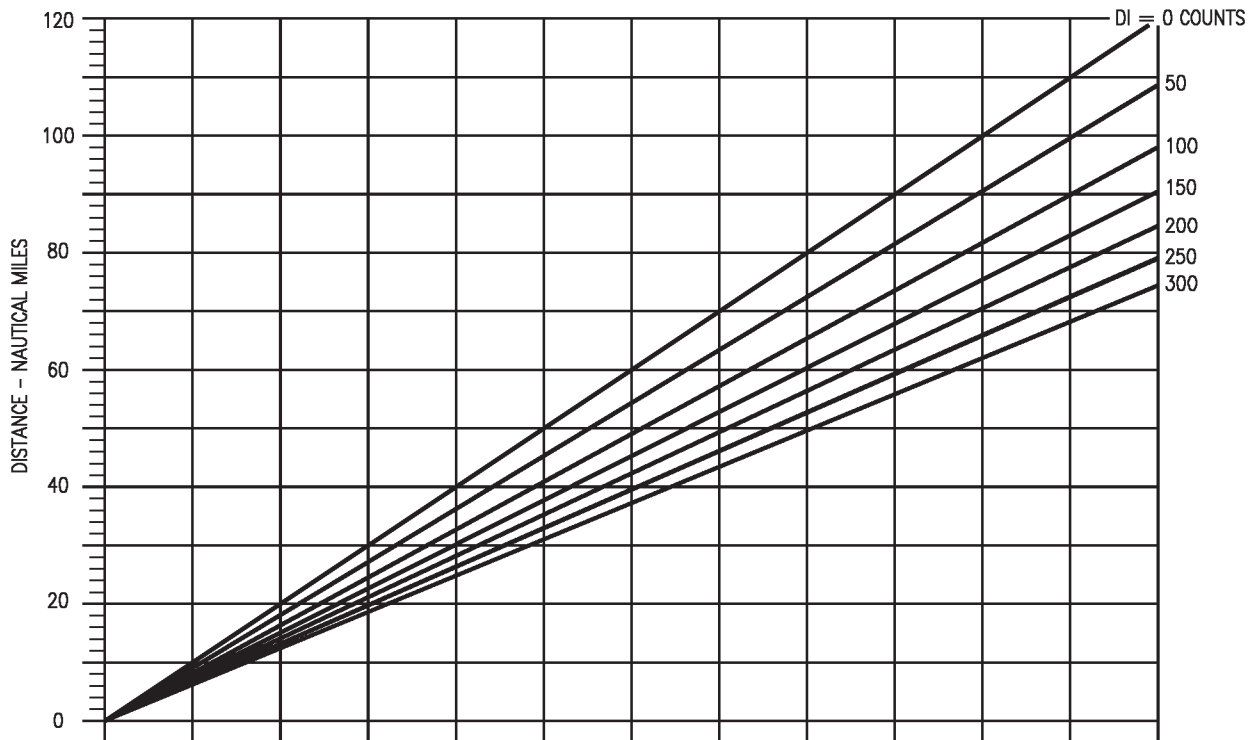
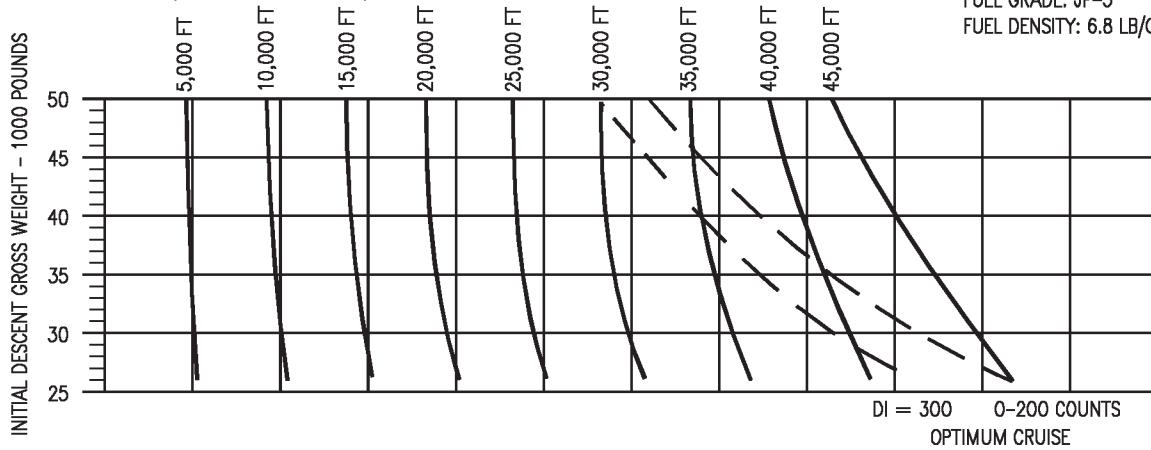


Figure 11-159. Maximum Range Descent - F404-GE-400  
(Sheet 4 of 4)

18AC-NFM-20-(301-4)12-CAT1


# MAXIMUM RANGE DESCENT

F404-GE-400

ONE ENGINE OPERATING  
DESCENT SPEED  
SPEEDBRAKE RETRACTED  
IDLE THRUST

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

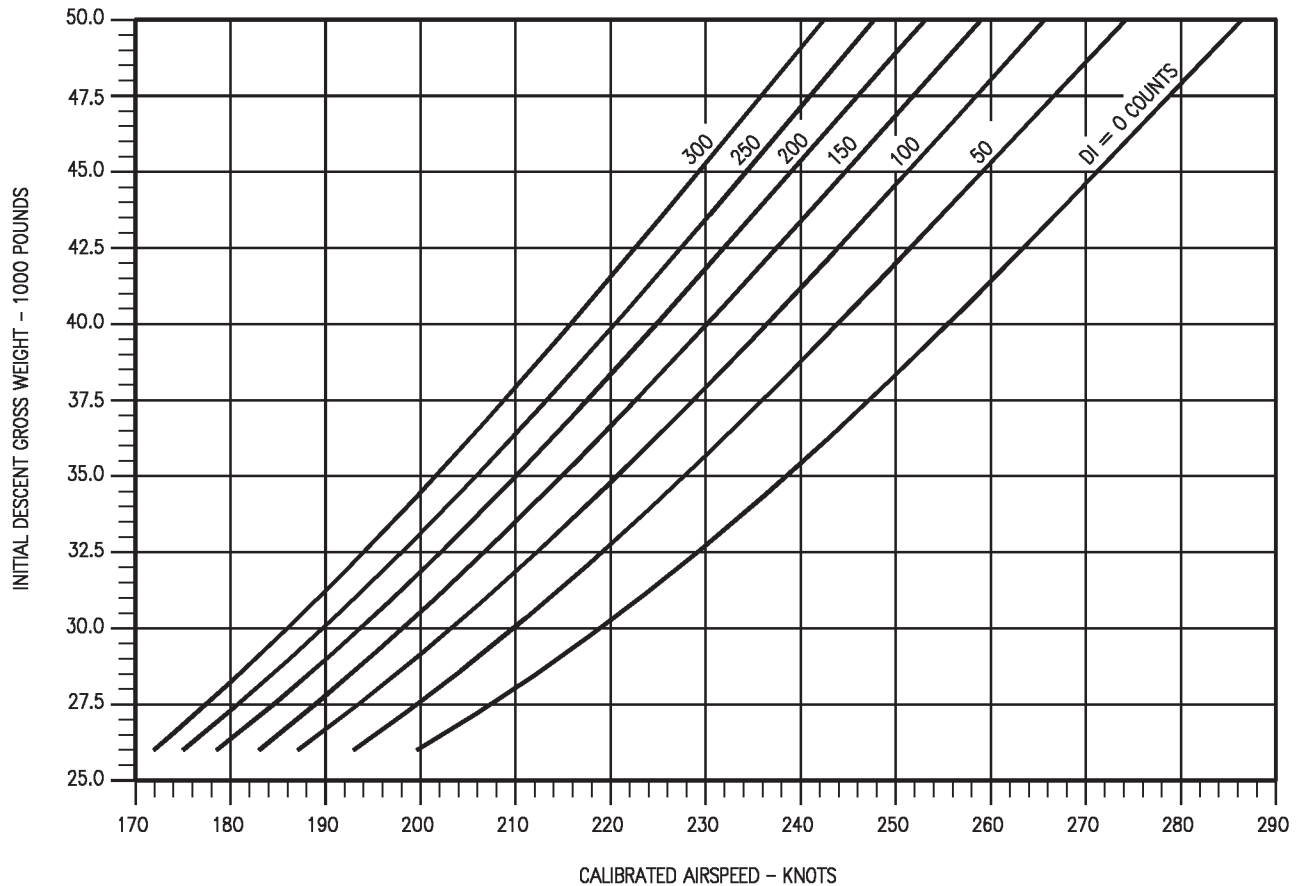



Figure 11-160. Maximum Range Descent - One Engine Operating - F404-GE-400  
(Sheet 1 of 4)

18AC-NFM-20-(302-1)12-CATI

# MAXIMUM RANGE DESCENT

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
ONE ENGINE OPERATING  
TIME REQUIRED TO DESCEND  
SPEED BRAKE RETRACTED  
IDLE THRUST



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

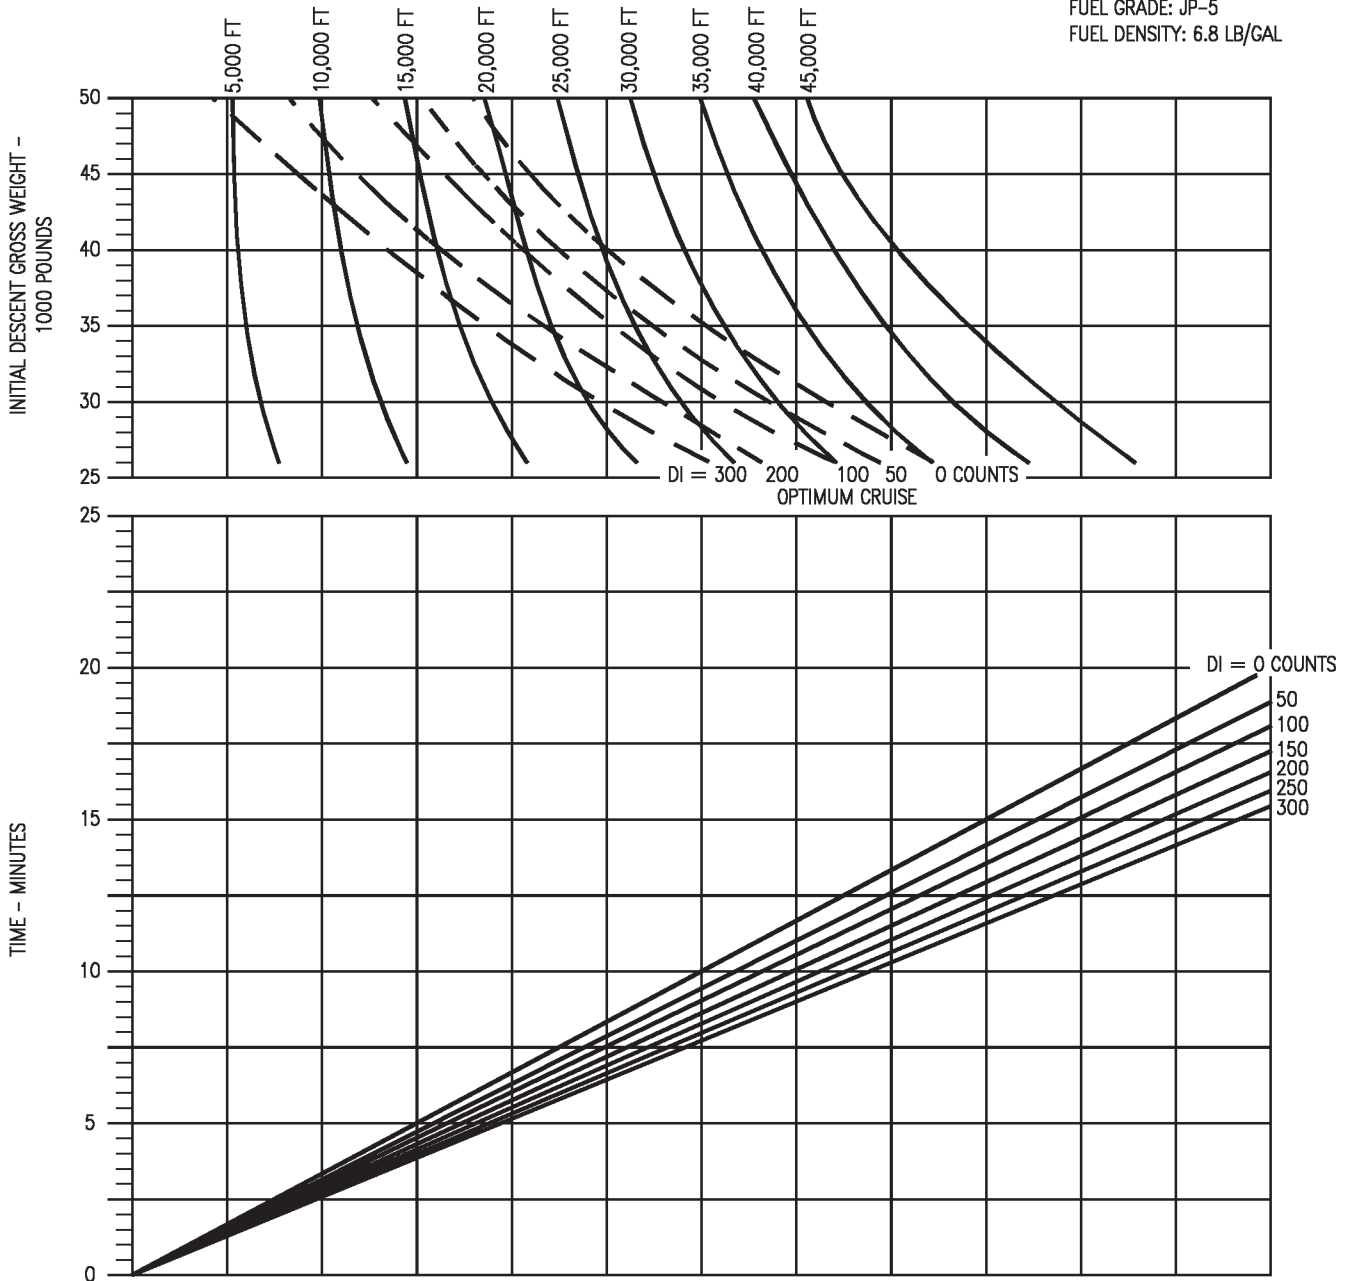


Figure 11-160. Maximum Range Descent - One Engine Operating - F404-GE-400  
(Sheet 2 of 4)

18AC-NFM-20-(302-2)12-CATI


# MAXIMUM RANGE DESCENT

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES


F404-GE-400  
ONE ENGINE OPERATING  
FUEL REQUIRED TO DESCEND  
SPEED BRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

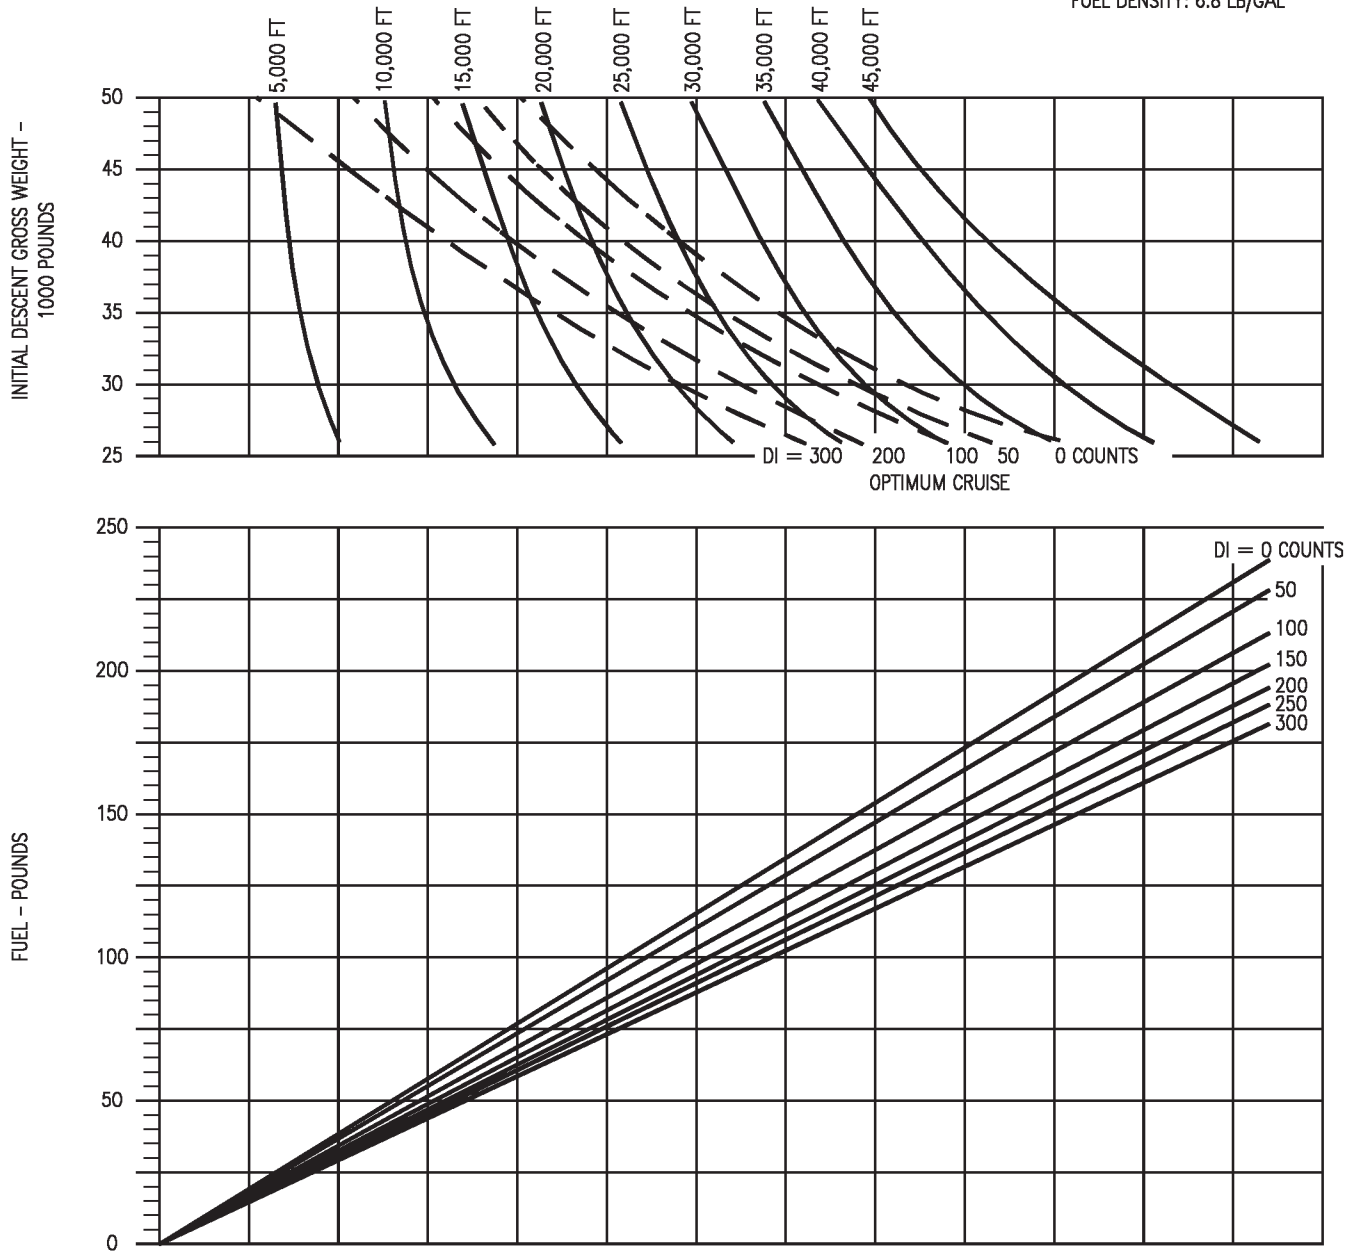

18AC-NFM-20-(302-3)12-CATI


Figure 11-160. Maximum Range Descent - One Engine Operating - F404-GE-400  
(Sheet 3 of 4)

# MAXIMUM RANGE DESCENT

AIRCRAFT CONFIGURATION  
VARIOUS DRAG INDEXES

F404-GE-400  
ONE ENGINE OPERATING  
DISTANCE REQUIRED TO DESCEND  
SPEED BRAKE RETRACTED  
IDLE THRUST

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962  
INOPERATIVE ENGINE WINDMILLING



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

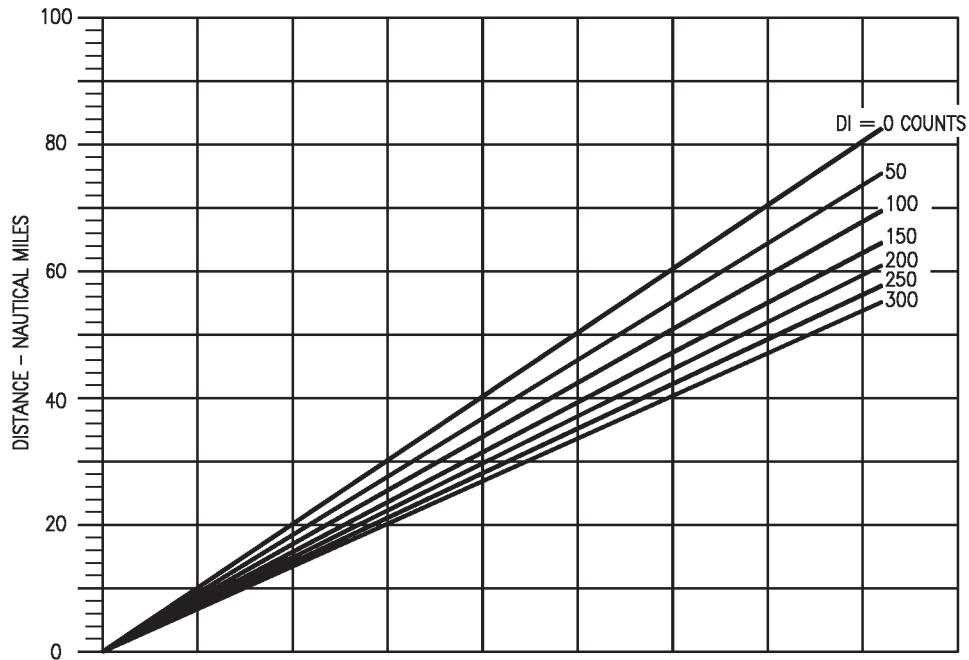
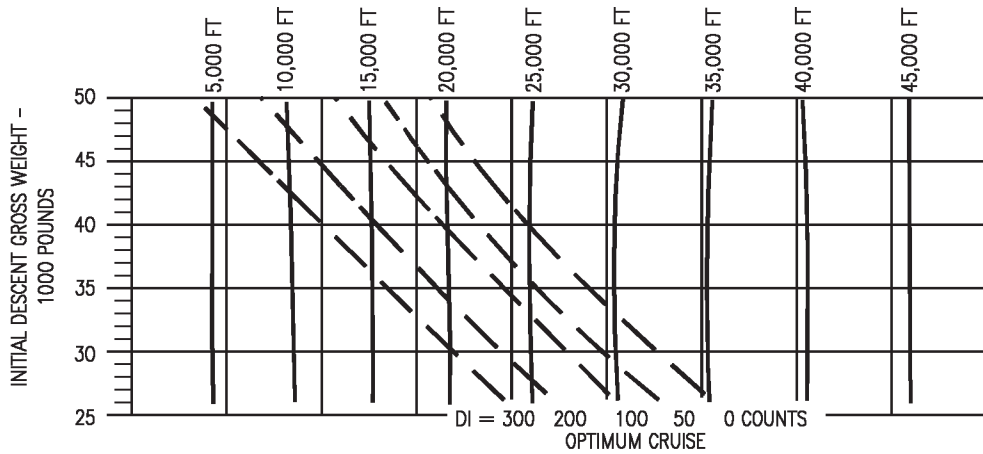


Figure 11-160. Maximum Range Descent - One Engine Operating - F404-GE-400  
(Sheet 4 of 4)

18AC-NFM-20-(302-4)12-CATI

**PART 8 - LANDING F404-GE-400**

**TABLE OF CONTENTS**

**Charts**

|                             |        |
|-----------------------------|--------|
| Landing Approach Speed..... | 11-260 |
| Landing Distance.....       | 11-261 |


**LANDING APPROACH SPEED CHART**

The landing approach speed chart (figure 11-161) provides recommended approach speeds for various gross weights and landing configurations. The chart contains two curves for normal landing configurations (full and half flaps at 8.1° AOA), in addition to three curves for landing configurations with various flight control failures.

**USE**

Enter the chart at the estimated landing gross weight and project vertically up to the appropriate flap deflection curve. From this point, project horizontally left to read recommended approach speed.

**SAMPLE LANDING APPROACH SPEED**

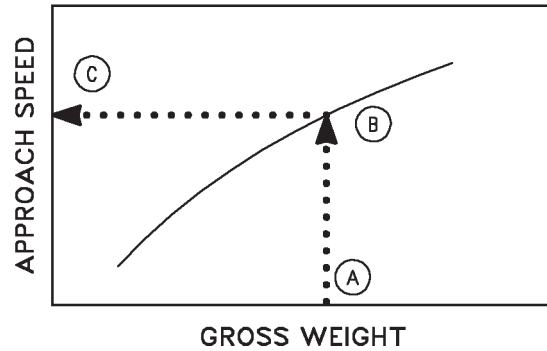

18AC-NFM-20-(20-1)11-CAT1

**Sample Problem**

Configuration: Full flaps, 8.1° AOA

- A. Estimated landing gross weight      32,000 Lb.
- B. Full flaps, AOA curve                      8.1°
- C. Recommended approach speed          135 Kt.



## LANDING DISTANCE CHART

This chart (figure 11-162) provides landing roll distance information for a dry hard runway and for various gross weights on a wet runway. The data are for a normal landing using full anti-skid braking. Variables of temperature, pressure altitude, gross weight and effective wind are taken into consideration.


### USE

Enter the chart with the prevailing density ratio and project horizontally right to intersect the appropriate gross weight curve. From this point, project vertically down to the wind baseline. Parallel the nearest guideline down to the effective headwind or tailwind. From this point project vertically down to read flap setting (half or full). Then project horizontally to read the landing ground roll for dry or wet runway. Increase landing ground rolls by 1.2% for each knot that the approach speed exceeds that shown (25% CG, no stores) on the landing approach speed chart. To determine total distance required from a height of 50 feet, add 720 feet for a  $-4^\circ$  glide slope with no flare, add 820 feet for a  $-3.5^\circ$  glide slope with no flare, or add 1200 feet with flare.

### Sample Problem

|  |            |       |       |       |
|--|------------|-------|-------|-------|
| A. Density ratio                           | 0.98       |       |       |       |
| B. Gross weight                            | 32,000 Lb. |       |       |       |
| C. Wind baseline                           |            |       |       |       |
| D. Effective headwind                      | 10 Kt.     |       |       |       |
| E. Flaps                                   | Half       |       | Full  |       |
| F. Runway condition                        | Dry        | Wet   | Dry   | Wet   |
| G. Landing distance (Ft.)                  | 4,100      | 6,700 | 2,700 | 4,400 |
| G. Total Distance to clear 50 Ft. Obstacle | 4,820      | 7,420 | 3,420 | 5,120 |
| (no flare, $-4^\circ$ glide slope)         | (G + 720)  |       |       |       |

## SAMPLE LANDING DISTANCE

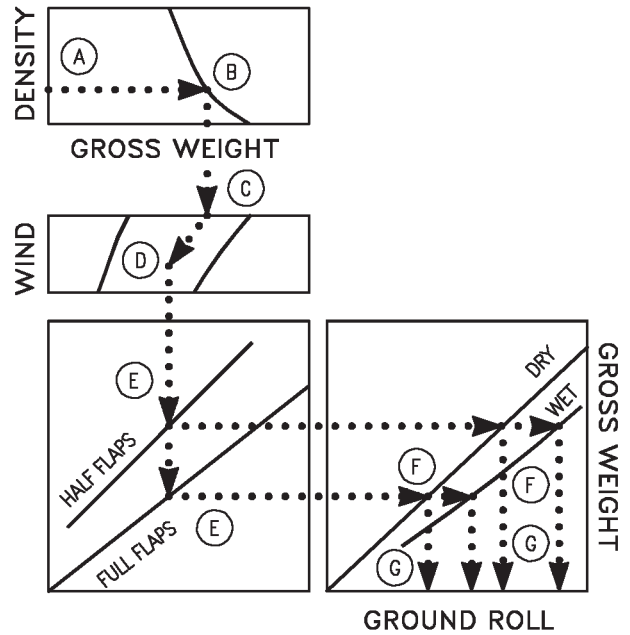

18AC-NFM-20-(21-1)12-CATI

# LANDING APPROACH SPEED

F404-GE-400


AIRCRAFT CONFIGURATION  
FLAPS AS NOTED  
GEAR DOWN  
SPEEDBRAKE IN

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: DECEMBER 1986  
DATA BASIS: FLIGHT TEST

**NOTE**

CG AT 25% MAC. APPROACH SPEED INCREASES 1 KNOT FOR EACH 2% THE CG IS FORWARD OF 25% MAC AND DECREASES 1 KNOT FOR EACH 2% THE CG IS AFT OF 25% MAC. INCREASE APPROACH SPEED BY 2 KNOTS IF WINGTIP AIM-9'S ARE OFF. INCREASE APPROACH SPEED BY 2 KNOTS IF EXTERNAL STORES ARE ON.



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

MAIN GEAR TIRE LIMITATION 210 KNOTS GROUND SPEED  
NOSE GEAR TIRE LIMITATION 190 KNOTS GROUND SPEED

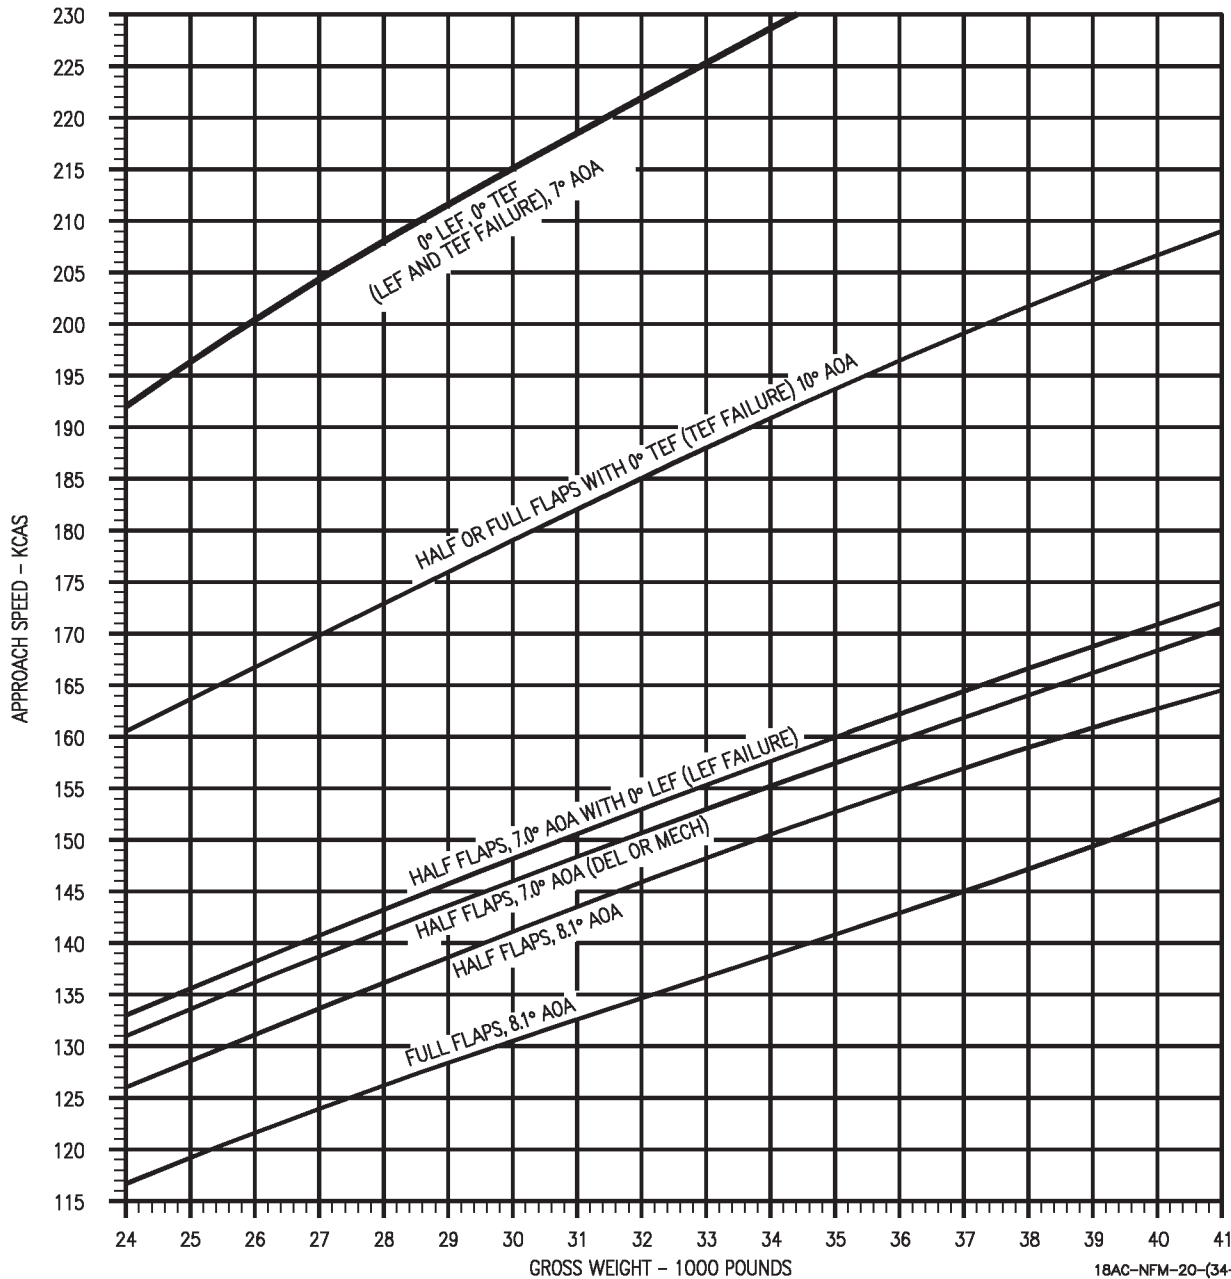


Figure 11-161. Landing Approach Speed - F404-GE-400

18AC-NFM-20-(34-1)12-CATI

# LANDING DISTANCE

F404-GE-400  
IDLE THRUST

AIRCRAFT CONFIGURATION  
T.E. FLAPS 45°  
GEAR DOWN


REMARKS  
ENGINE(S): (2)F404-GE-400

DATE: 15 JANUARY 1993  
DATA BASIS: FLIGHT TEST  
(ESTIMATED ON FLIGHT TEST)

- NOTE
- LANDING GROUND ROLLS SHOWN CORRESPOND TO APPROACH SPEEDS FOR FULL FLAPS AND 8.1° AOA AS SHOWN ON THE LANDING APPROACH SPEED CHART. INCREASE LANDING GROUND ROLLS BY 1.2% FOR EACH KNOT THAT THE APPROACH SPEED EXCEEDS THAT SHOWN (25% CG, NO STORES) ON THE LANDING APPROACH SPEED CHART.

- FOR TOTAL LANDING DISTANCE OVER A 50 FOOT OBSTACLE ADD THE FOLLOWING DISTANCE TO THE GROUND ROLL:

- NO FLARE, -4° GLIDE SLOPE: ADD 720 FEET
- NO FLARE, -3.5° GLIDE SLOPE: ADD 820 FEET
- WITH FLARE: ADD 1200 FEET



FUEL GRADE:JP-5  
FUEL DENSITY:6.8 LB/GAL

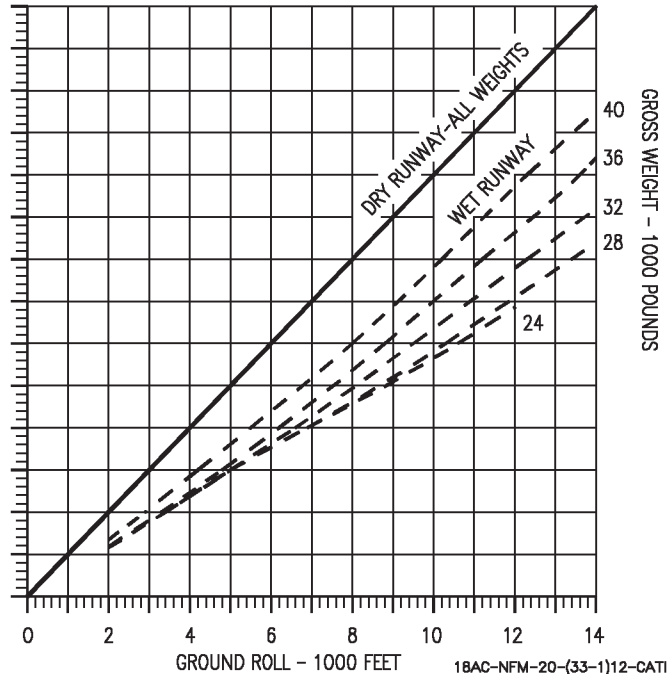
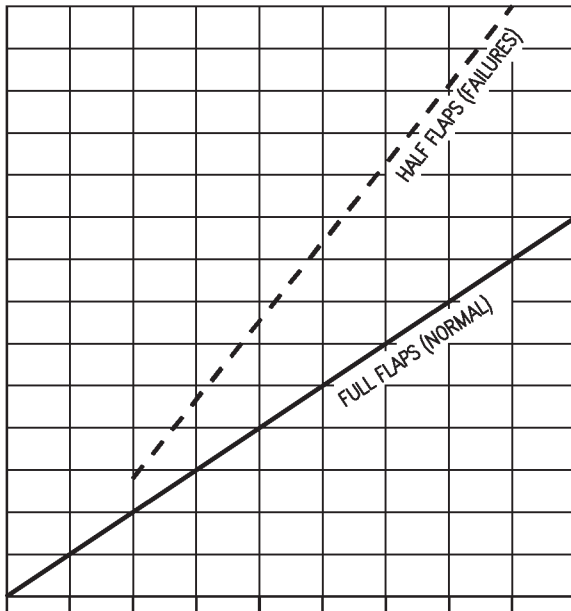
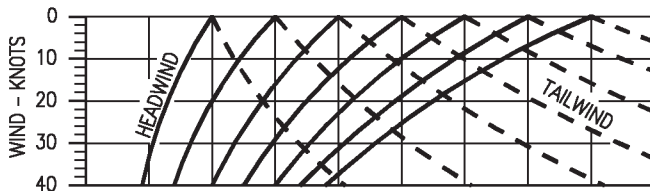
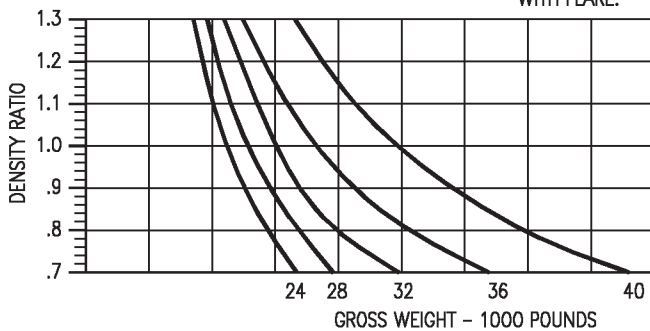


Figure 11-162. Landing Distance - F404-GE-400

18AC-NFM-20-(33-1)12-CATI



**PART 9 - MISSION PLANNING F404-GE-400**

**TABLE OF CONTENTS**

**Charts**

|                                |        |
|--------------------------------|--------|
| Turn Capabilities.....         | 11-265 |
| Dive Recovery .....            | 11-266 |
| Level Flight Envelope.....     | 11-274 |
| Low Altitude Acceleration..... | 11-275 |
| Maximum Thrust Acceleration -  |        |
| Low Altitude .....             | 11-285 |
| Medium Altitude .....          | 11-290 |
| High Altitude .....            | 11-297 |

**SAMPLE TURN CAPABILITIES**

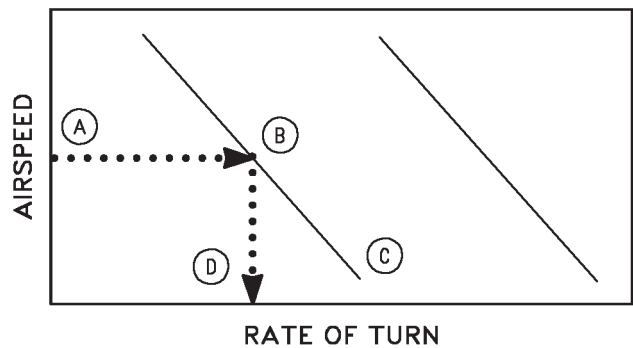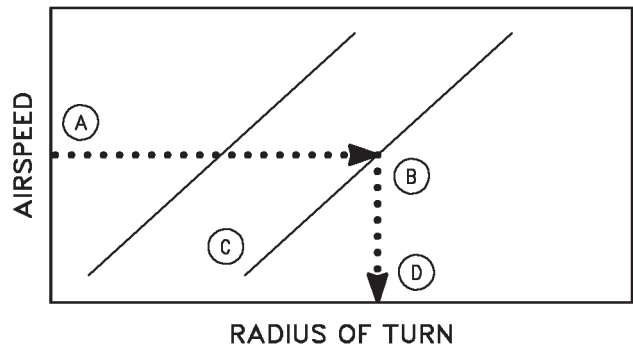

18AC-NFM-20-(24B-1)11-CATI

**TURN CAPABILITIES CHART**

This chart (figure 11-163) presents the radius of turn and the rate of turn for a constant altitude, constant speed turn. Turn data is available for various speeds and bank angles. Load factor is also included for each bank angle.

**USE**

Enter the radius of turn plot with the true airspeed. Proceed horizontally to the right to the desired bank angle. Note the load factor, then proceed vertically downward and read the radius of turn. Enter the rate of turn plot with the true airspeed. Proceed horizontally to the right to the bank angle, note the load factor and then proceed vertically downward to read the rate of turn.

**Sample Problem**

Radius of Turn

- |                   |          |
|-------------------|----------|
| A. True airspeed  | 420 Kt.  |
| B. Bank angle     | 60°      |
| C. Load factor    | 2.0 G    |
| D. Radius of Turn | 9000 Ft. |

Rate of Turn

- |                  |          |
|------------------|----------|
| A. True airspeed | 420 Kt.  |
| B. Bank angle    | 60°      |
| C. Load factor   | 2.0 G    |
| D. Rate of turn  | 4.5°/sec |


### DIVE RECOVERY CHARTS

Subsonic dive recovery charts (figure 11-164) for two-engine operation are provided for the fighter escort configuration ((2)AIM-9 + (2)AIM-7) at a gross weight of 36,000 pounds and with the speedbrake retracted. Data is included for both military power and idle power settings. Two sets of dive recovery data are presented. The first set of charts show pull-ups limited by maximum lift or 4.0G, whichever occurs first, with entry rates of 4.0G and 2.0G per second. The second set of charts show pull-ups limited by maximum lift or 7.0G, whichever occurs first, with entry rate of 7.0G and 3.5G per second.

#### USE

Enter the chart with the altitude at the start of the pull-out and project horizontally right to intersect true Mach number or calibrated airspeed at the start of the pull-out. From this point project vertically down to intersect the dive angle at start of the pull-out then horizontally left to read altitude lost during pull-out.

### SAMPLE DIVE RECOVERY

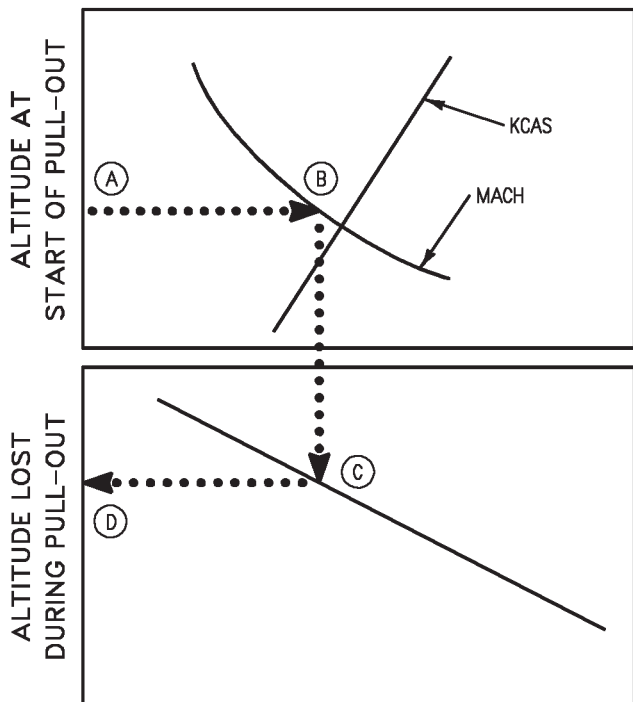

18AC-NFM-20-(303-1)-CATI-24

#### Sample Problem

Military Power, 3.5G per second

A. Altitude at start of pull-out 15,000 Ft.

- B. Mach number at start of pull-out 0.70
- C. Dive angle at start of pull-out 75°
- D. Altitude lost during pull-out 2,900 Ft.


### LEVEL FLIGHT ENVELOPE CHART

This chart (figure 11-165) presents the aircraft level flight speed envelope for various configurations at combat gross weights equal to 60% total fuel. Parameters of the envelopes extend from the lift limit to  $V_{max}$  throughout the altitude range. Both maximum and military thrust flight envelopes are present.

#### USE

Enter the appropriate chart with the desired combat altitude. Proceed horizontally to intersect the applicable configuration power curve. From this point, proceed vertically downward to read the maximum attainable Mach number in level flight.

### SAMPLE LEVEL FLIGHT ENVELOPE

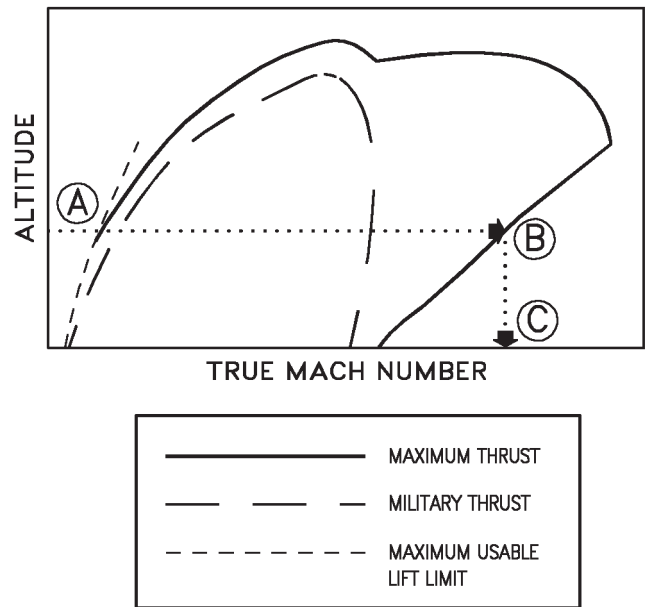

18AC-NFM-20-(477-1)12-CATI

#### Sample Problem

- A. Combat Altitude 36,000 Ft.
- B. Configuration Line: (2) AIM-9 + (2) AIM-7
- C. Maximum attainable Mach number 1.60

## LOW ALTITUDE ACCELERATION

These charts (figure 11-166 thru 11-175) present time and fuel required to accelerate from 360 KIAS to desired KIAS up thru 550 KIAS at altitudes of Sea Level, 2,000, 4,000, and 6,000 feet. Separate charts are provided for both maximum and military thrust for gross weights of 26,000, 30,000, 34,000, 38,000, and 42,000 pounds. The time and fuel values are calculated for U.S. Standard Day conditions; however, correction factors are given for nonstandard temperatures.


### MAXIMUM THRUST ACCELERATION CHARTS

These charts (figure 11-176 thru figure 11-180) show the relationship of time, distance, and fuel required for level flight, maximum thrust accelerations. The Maximum Endurance Mach number (MAX END) for a given gross weight is provided across the bottom of the charts. This data is presented for various altitudes and configurations.

#### USE

Enter the applicable chart with the aircraft gross weight. Proceed vertically upward to the initial Mach number. Project from this point both horizontally to the left and note the time and distance; and proceed upwards parallel to the vertical guide lines to the Mach number desired at the end of the acceleration. Project from this point both horizontally to the left and note the time and distance; and vertically downwards and note gross weight. Subtract the time, distance, and gross weight corresponding to the initial Mach number from the time, distance and gross weight corresponding to the desired Mach number to determine the time, distance, and fuel required for acceleration.

## SAMPLE MAXIMUM THRUST ACCELERATION

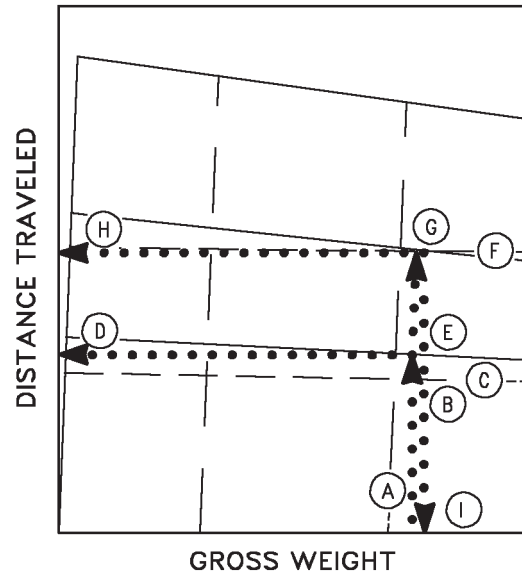

1BAC-NFM-20 -(317-1)01-CATI

#### Sample Problem

Configuration: (2)AIM-9 + (2)AIM-7; 10,000 Feet,

|  |            |
|--|------------|
| A. Gross weight                                  | 38,000 Lb. |
| B. Initial Mach number                           | 0.7        |
| C. Time  | 0.4 Min.   |
| D. Distance                                      | 2.8 NM     |
| E. Parallel guidelines                           | 0.95       |
| F. Desired Mach number                           | 0.95       |
| G. Time corresponding to new Mach number         | 1.2 Min.   |
| H. Distance corresponding to new Mach number     | 9.3 NM     |
| I. Gross weight corresponding to new Mach number | 37,750 Lb. |
| J. Time required for acceleration (G-C)          | 0.8 Min.   |
| K. Distance required for acceleration (H-D)      | 6.5 NM     |
| L. Fuel required for acceleration (A-I)          | 250 Lb.    |

# TURN CAPABILITIES

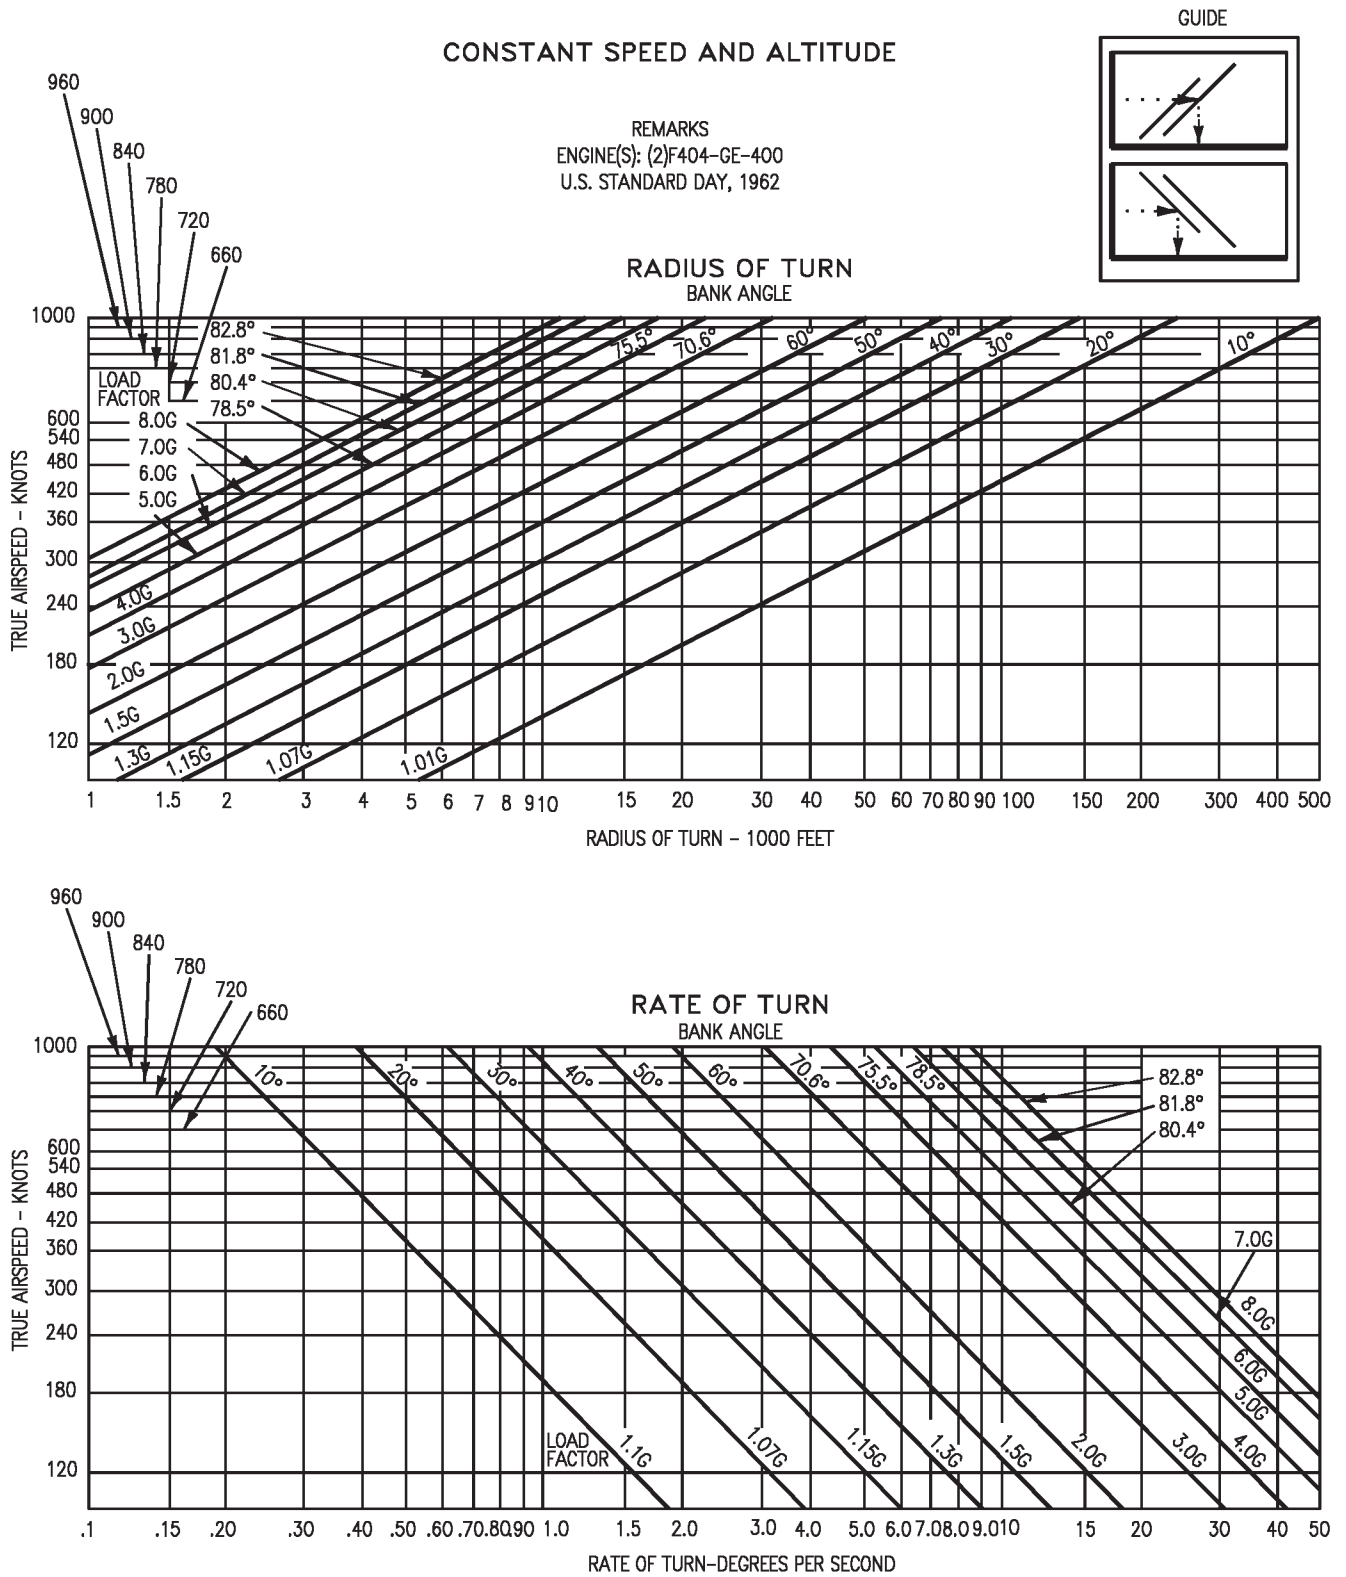


Figure 11-163. Turn Capabilities

18AC-NFM-20-(109-1)11-CAT1

# DIVE RECOVERY

F404-GE-400

4.0G PULL-OUT

SUBSONIC-SPEEDBRAKE RETRACTED

MILITARY POWER

REMARKS

ENGINE(S): (2)F404-GE-400

U.S. STANDARD DAY, 1962


AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

**NOTE**

PULL-OUT BASED ON 4.0G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 4.0G WHICHEVER OCCURS FIRST.

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

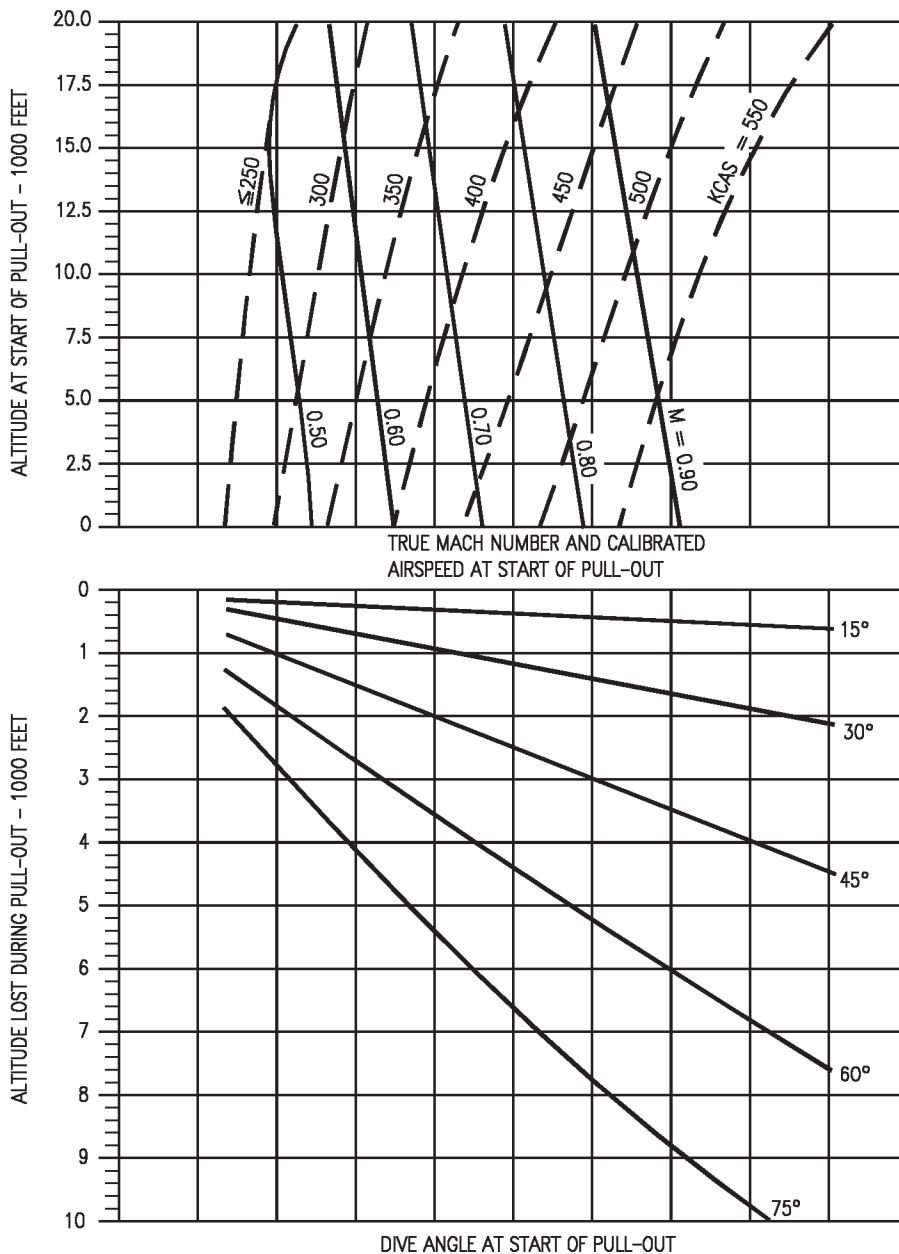


Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 1 of 8)

18AC-NFM-20-(304-1)12-CAT1



# DIVE RECOVERY

F404-GE-400


AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

4.0G PULL-OUT  
SUBSONIC-SPEEDBRAKE RETRACTED  
MILITARY POWER

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

NOTE  
PULL-OUT BASED ON 2.0G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 4.0G WHICHEVER OCCURS FIRST.

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

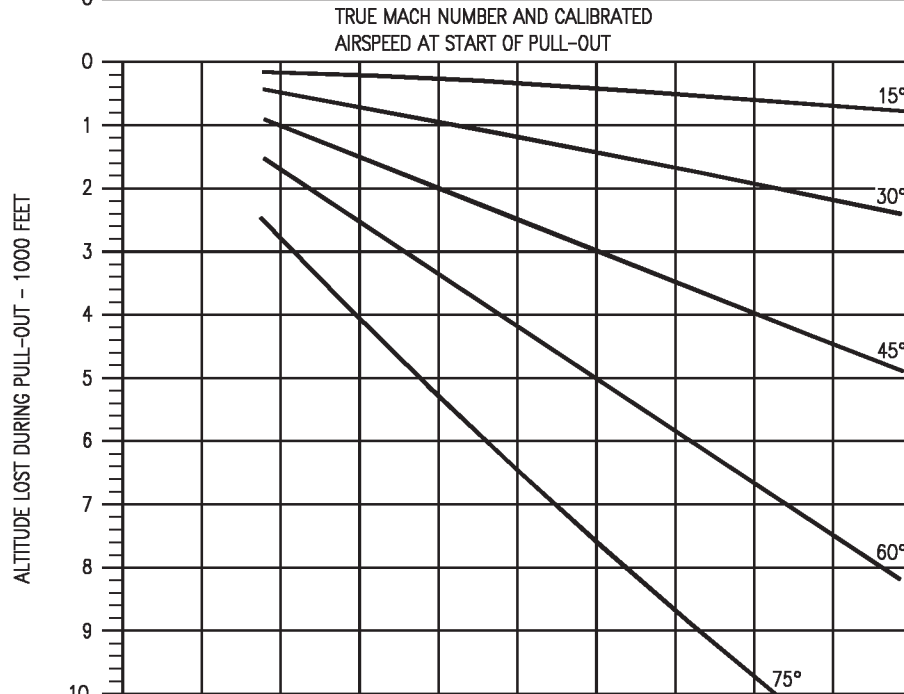
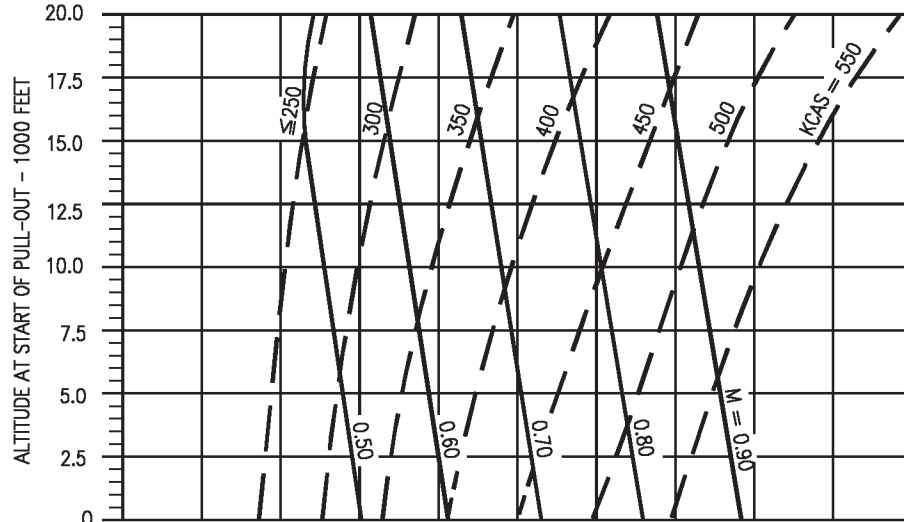


Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 2 of 8)

18AC-NFM-20-(304-2)12-CATI

# DIVE RECOVERY


AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

F404-GE-400  
4.0G PULL-OUT  
SUBSONIC-SPEEDBRAKE RETRACTED  
IDLE POWER

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE  
PULL-OUT BASED ON 4.0G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 4.0G WHICHEVER OCCURS FIRST.



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

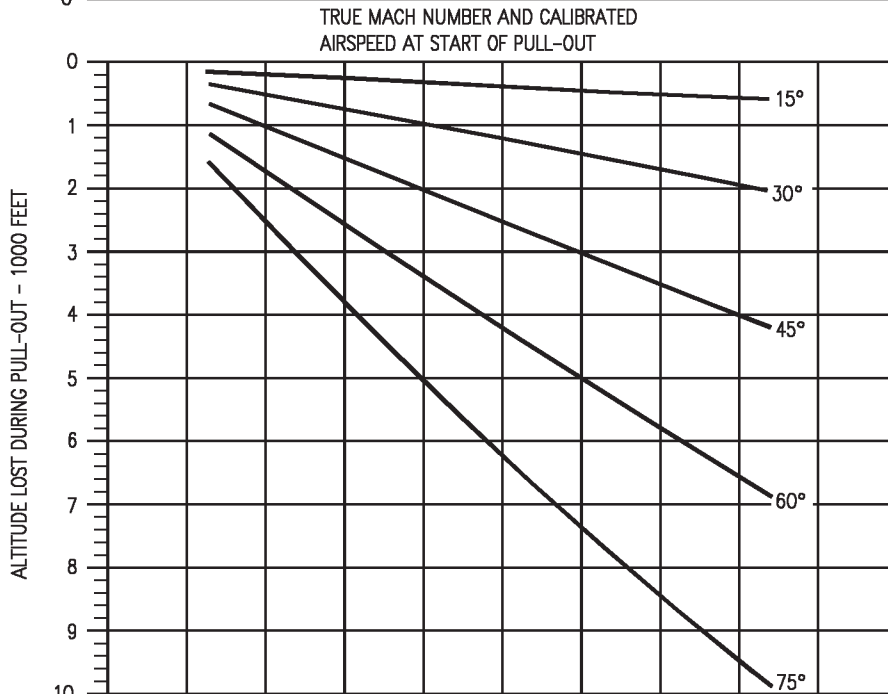
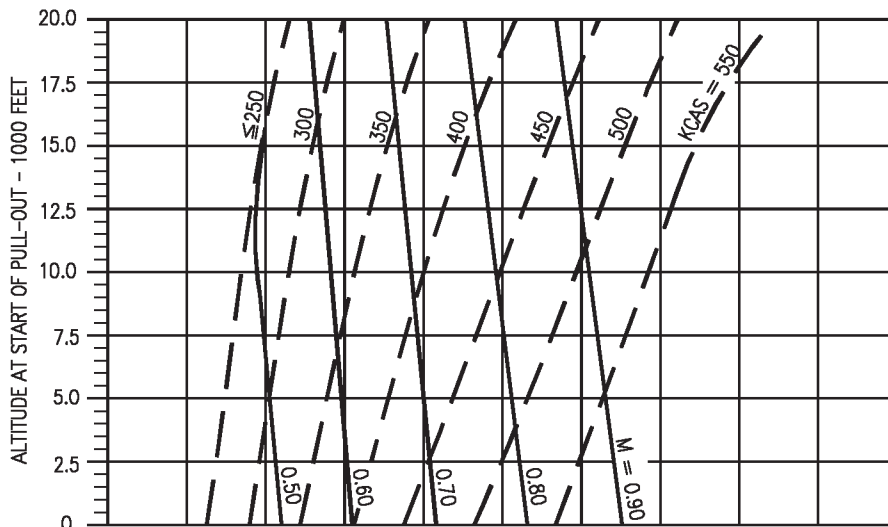


Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 3 of 8)

# DIVE RECOVERY

F404-GE-400

4.0G PULL-OUT  
SUBSONIC-SPEEDBRAKE RETRACTED  
IDLE POWER


AIRCRAFT CONFIGURATION  
(2) AIM-9 +(2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE  
PULL-OUT BASED ON 2.0G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 4.0G WHICHEVER OCCURS FIRST.

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

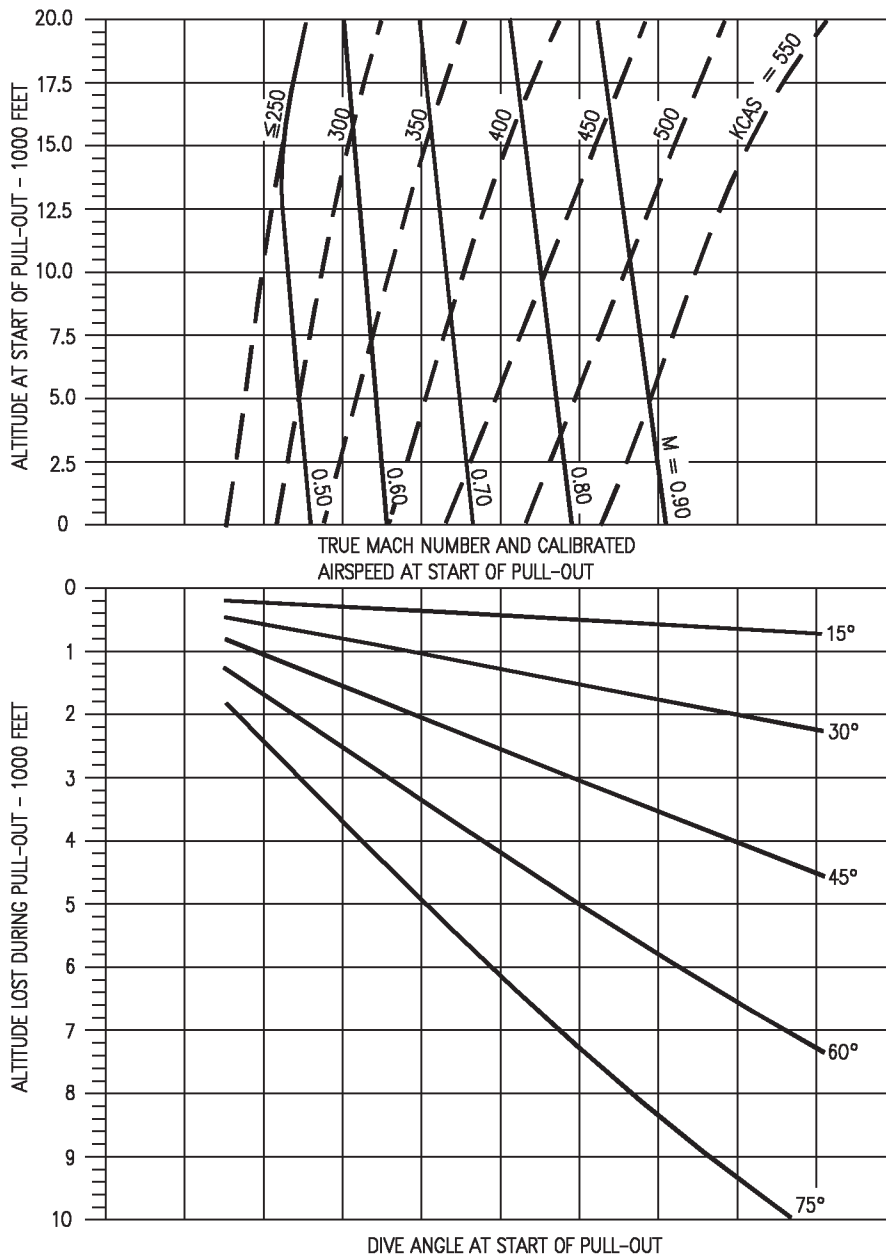


Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 4 of 8)

18AC-NFM-20-(304-4)12-CAT1

# DIVE RECOVERY

F404-GE-400

7.0G PULL-OUT

SUBSONIC-SPEEDBRAKE RETRACTED

MILITARY POWER


AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962


DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE  
PULL-OUT BASED ON 7.0G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 7.0G WHICHEVER OCCURS FIRST.


GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

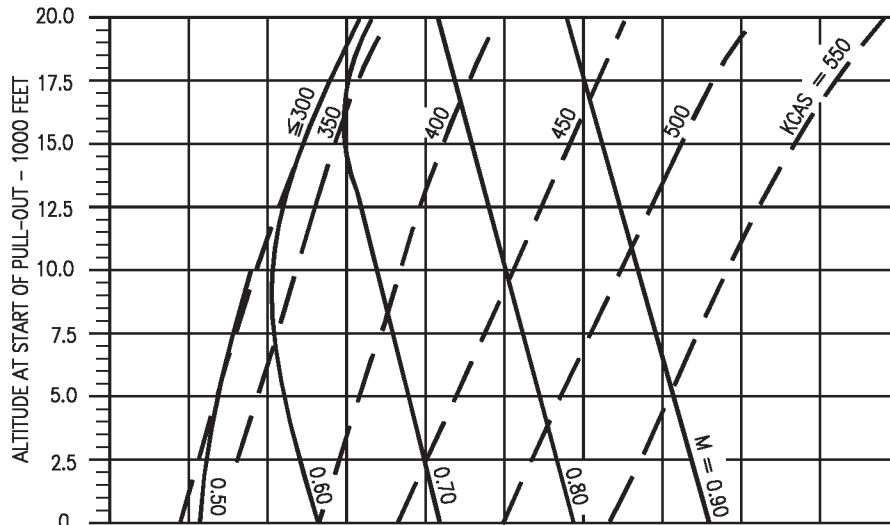

TRUE MACH NUMBER AND CALIBRATED  
AIRSPEED AT START OF PULL-OUT

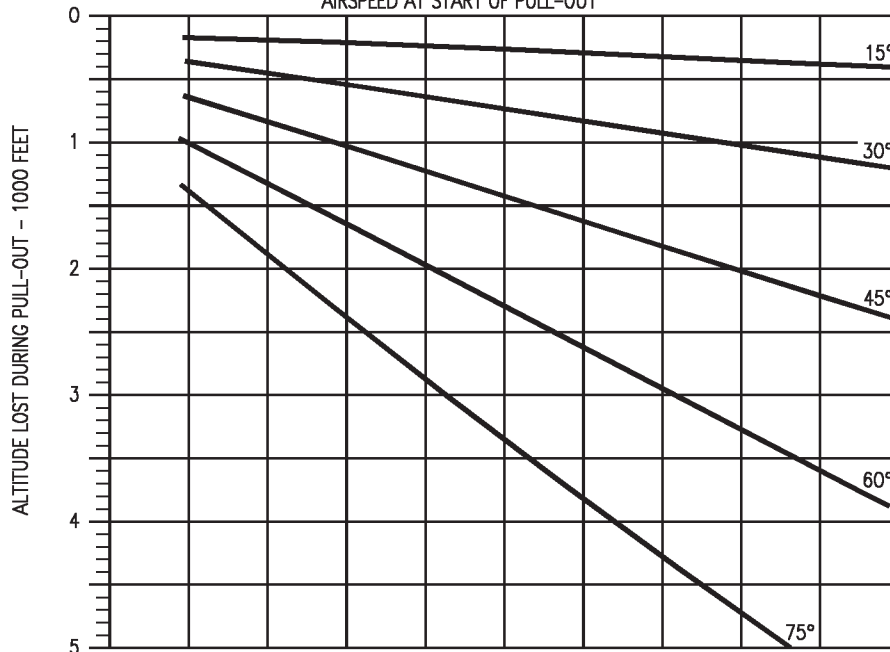

DIVE ANGLE AT START OF PULL-OUT

Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 5 of 8)

18AC-NFM-20-(304-5)12-CATI

# DIVE RECOVERY

F404-GE-400

7.0G PULL-OUT

SUBSONIC-SPEEDBRAKE RETRACTED


MILITARY POWER

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE  
PULL-OUT BASED ON 3.5G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 7.0G WHICHEVER OCCURS FIRST.



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

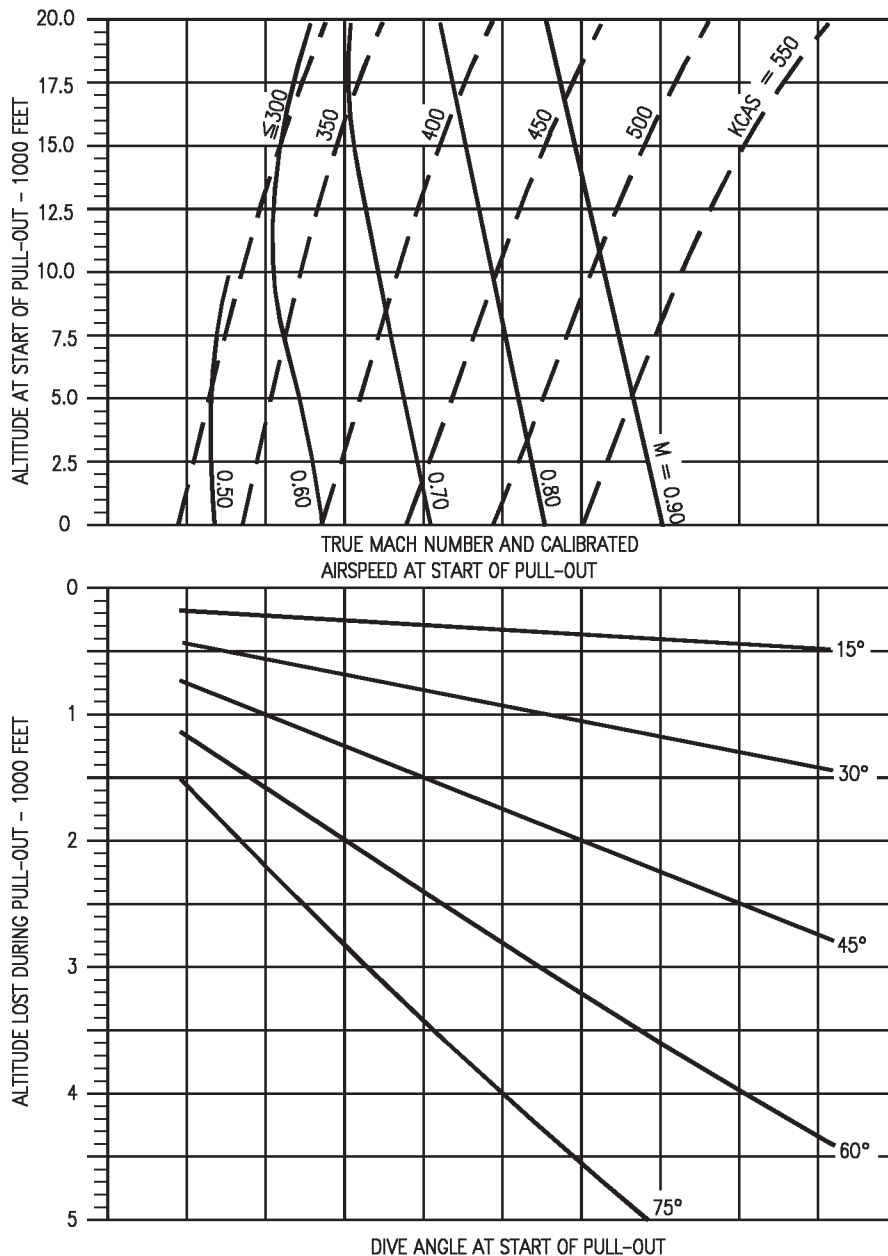


Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 6 of 8)

18AC-NFM-20-(304-6)12-CAT1

# DIVE RECOVERY


F404-GE-400  
7.0G PULL-OUT  
SUBSONIC-SPEEDBRAKE RETRACTED  
IDLE POWER

AIRCRAFT CONFIGURATION  
(2) AIM-9 +(2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE  
PULL-OUT BASED ON 7.0G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 7.0G WHICHEVER OCCURS FIRST.



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

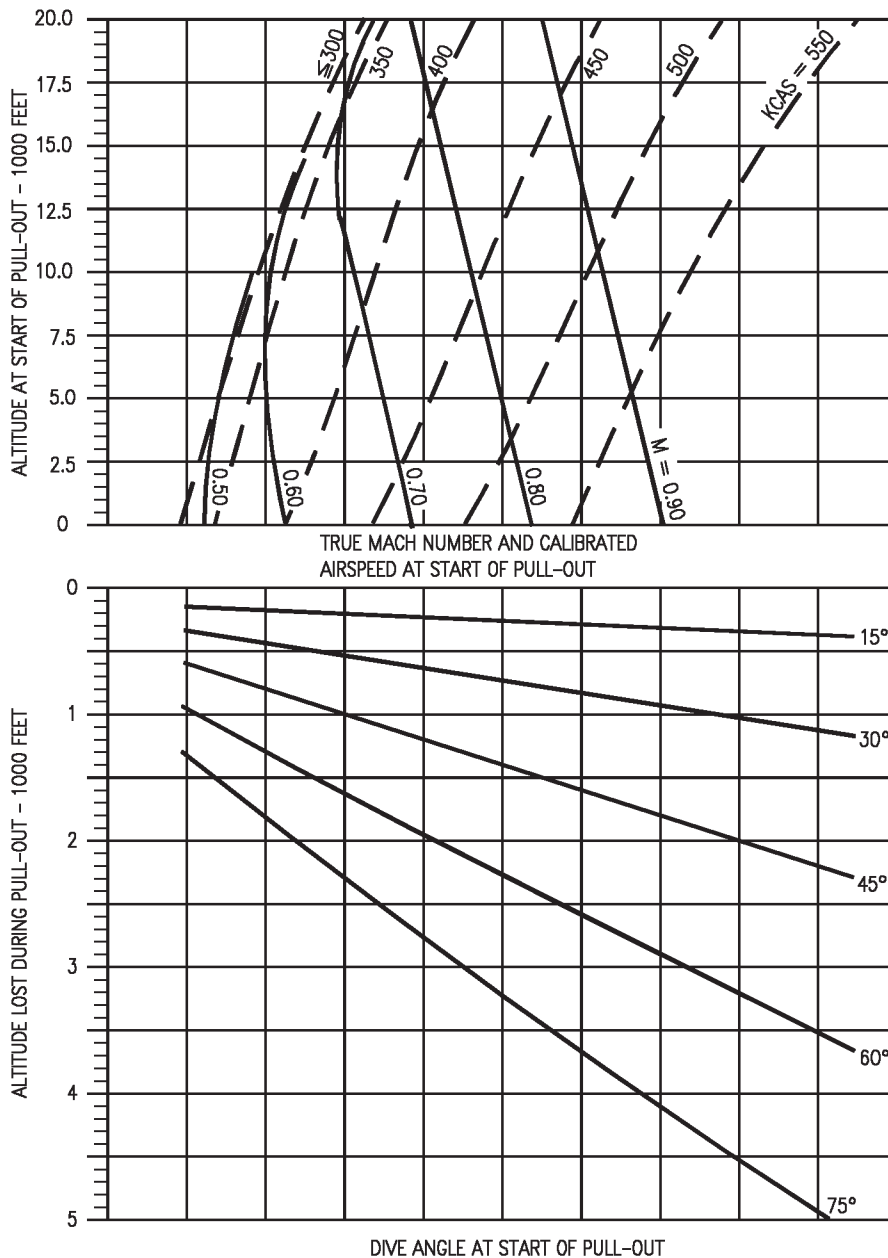


Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 7 of 8)

18AC-NFM-20-(304-7)12-CATI

# DIVE RECOVERY

F404-GE-400

7.0G PULL-OUT

SUBSONIC-SPEEDBRAKE RETRACTED


IDLE POWER

AIRCRAFT CONFIGURATION  
(2) AIM-9 +(2) AIM-7 MISSILES  
G.W. = 36,000 POUNDS

REMARKS  
ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

NOTE  
PULL-OUT BASED ON 3.5G PER SECOND  
ACCELERATION BUILDUP TO MAXIMUM LIFT/STABILATOR  
LIMIT OR 7.0G WHICHEVER OCCURS FIRST.



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

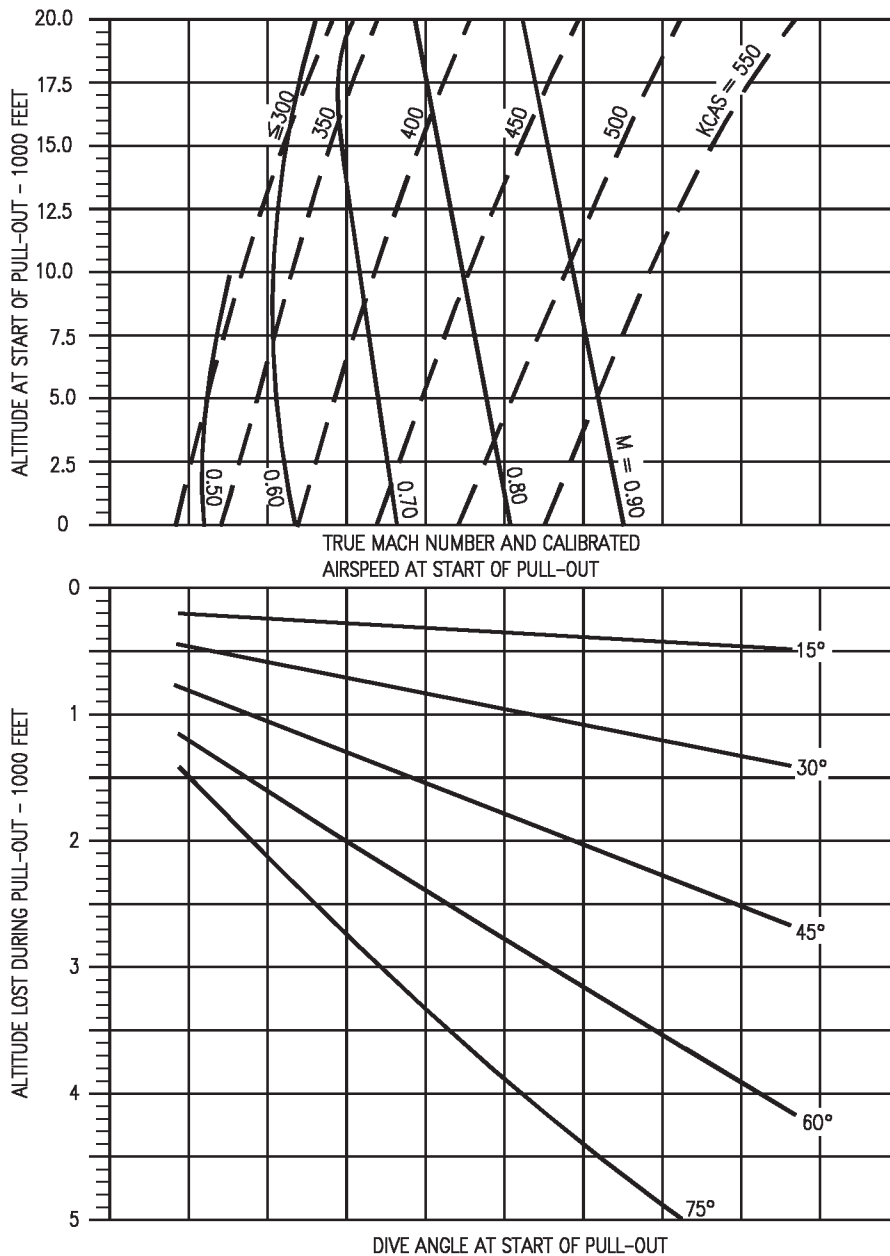


Figure 11-164. Dive Recovery - F404-GE-400  
(Sheet 8 of 8)


18AC-NFM-20-(304-8)12-CATI

# LEVEL FLIGHT ENVELOPE

F404-GE-400  
COMBAT GROSS WEIGHTS

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

GUIDE



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| CURVE NO. | CONFIGURATION                                    | GROSS WEIGHT |
|-----------|--|--------------|
| 1         | (2) AIM-9 + (2) AIM-7                            | 32,499 lb    |
| 2         | (2) AIM-9 + (2) AIM-7<br>+ (1) Q TANK            | 34,187 lb    |
| 3         | (4) AIM-9 + (2) AIM-7<br>+ (1) FLIR              | 34,102 lb    |
| 4         | (4) AIM-9 + (2) AIM-7<br>+ (1) FLIR + (1) Q TANK | 35,790 lb    |

| LEGEND |                           |
|--------|---------------------------|
|        | MAXIMUM THRUST            |
|        | MILITARY THRUST           |
|        | MAXIMUM USABLE LIFT LIMIT |

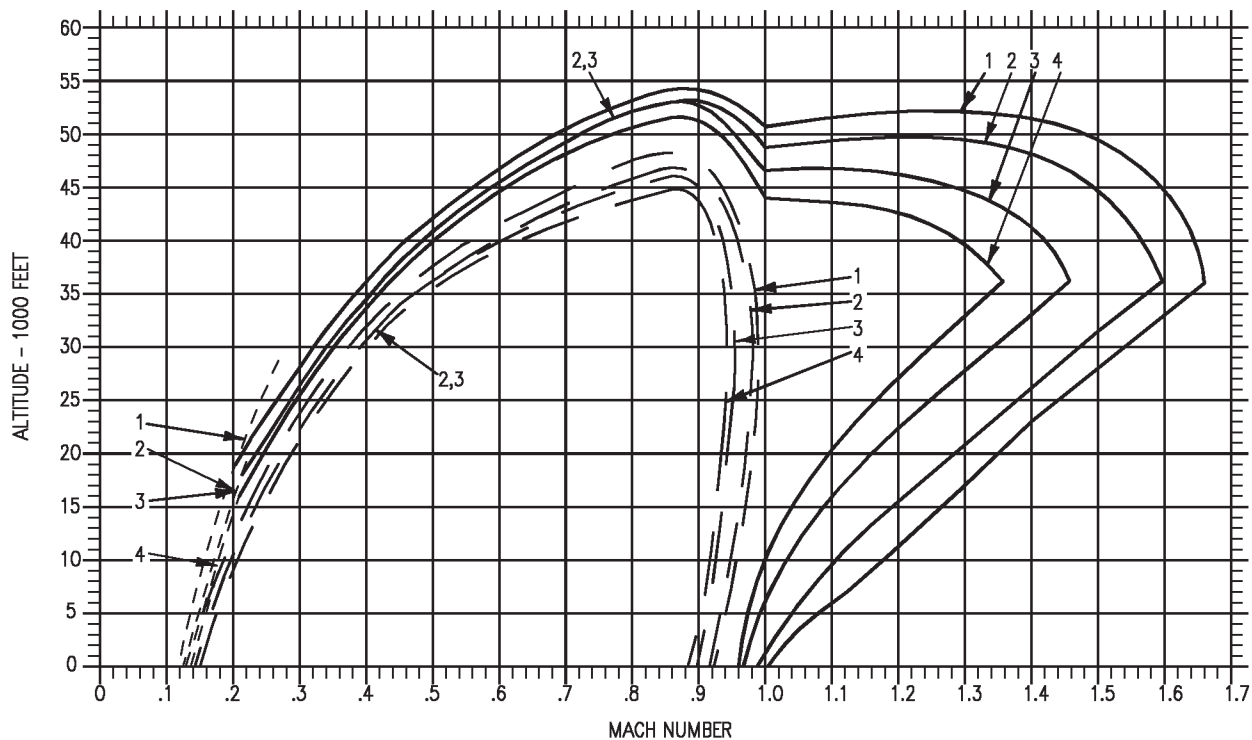


Figure 11-165. Level Flight Envelope - F404-GE-400

18AC-NFM-20-(474-1)12-CAT1



**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MAXIMUM THRUST  
GROSS WEIGHT = 26,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |     |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|-----|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |     |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |     |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     | 0/0 |
|                     | 420             | 3/61  | 3/62   | 3/64   | 3/65   | 3/66   | 3/69   | 4/72   | 4/75   | 4/79   | 1.14/1.10               | .89/.92 |     |
|                     | 480             | 6/126   | 6/129  | 6/133  | 7/136  | 7/139  | 7/147  | 8/155  | 8/165  | 9/175  | 1.16/1.11               | .88/.92 |     |
|                     | 520             | 8/172   | 8/177  | 9/182  | 9/187  | 9/193  | 10/206 | 11/221 | 11/238 | 12/259 | 1.17/1.13               | .91/.92 |     |
|                     | 550             | 10/209  | 10/216 | 11/223 | 11/231 | 11/239 | 12/258 | 13/282 | 15/312 | 17/352 | 1.19/1.14               | .92/.93 |     |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 3/62  | 3/63   | 3/64   | 3/66   | 3/67   | 4/70   | 4/73   | 4/77   | 4/81   | 1.14/1.10               | .89/.92 |     |
|                     | 480             | 6/128   | 7/131  | 7/135  | 7/138  | 7/142  | 8/150  | 8/159  | 9/169  | 9/181  | 1.16/1.11               | .89/.92 |     |
|                     | 520             | 9/175   | 9/180  | 9/185  | 10/191 | 10/198 | 11/211 | 11/228 | 12/247 | 13/271 | 1.18/1.13               | .89/.92 |     |
|                     | 550             | 10/212  | 11/220 | 11/228 | 12/236 | 12/246 | 13/268 | 14/295 | 16/332 | 19/387 | 1.22/1.18               | .89/.91 |     |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 3/63  | 3/64   | 4/65   | 4/67   | 4/68   | 4/71   | 4/75   | 4/78   | 4/83   | 1.15/1.09               | .89/.91 |     |
|                     | 480             | 7/130   | 7/134  | 7/137  | 7/141  | 8/145  | 8/154  | 9/164  | 9/175  | 10/189 | 1.17/1.11               | .88/.91 |     |
|                     | 520             | 9/177   | 9/183  | 10/189 | 10/195 | 10/202 | 11/217 | 12/236 | 13/259 | 15/287 | 1.19/1.14               | .87/.91 |     |
|                     | 550             | 11/215  | 11/224 | 12/233 | 12/243 | 13/254 | 14/281 | 16/319 | 19/379 | —      | 1.21/1.16               | .86/.89 |     |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 4/65  | 4/66   | 4/68   | 4/69   | 4/71   | 4/74   | 4/78   | 5/82   | 5/87   | 1.15/1.10               | .88/.91 |     |
|                     | 480             | 7/133   | 8/137  | 8/141  | 8/145  | 8/149  | 9/159  | 9/170  | 10/183 | 11/198 | 1.17/1.12               | .87/.91 |     |
|                     | 520             | 10/181  | 10/187 | 10/194 | 11/201 | 11/209 | 12/227 | 13/249 | 15/278 | 17/318 | 1.23/1.18               | .85/.89 |     |
|                     | 550             | 12/220  | 12/230 | 13/241 | 13/253 | 14/268 | 16/308 | 20/388 | —      | —      | 1.20/1.15               | .84/.87 |     |

Figure 11-166. Low Altitude Acceleration - Maximum Thrust - 26,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MILITARY THRUST  
GROSS WEIGHT = 26,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 6/32  | 6/33   | 6/35   | 7/36   | 7/38   | 8/41   | 8/45   | 9/51   | 11/57  | 1.22/1.15               | .86/.89 |
|                     | 480             | 12/69   | 13/73  | 14/77  | 15/81  | 15/86  | 18/98  | 21/115 | 25/140 | 33/187 | 1.23/1.16               | .84/.87 |
|                     | 520             | 17/98   | 18/104 | 20/111 | 21/119 | 23/130 | 28/158 | 38/216 | —      | —      | 1.23/1.16               | .84/.88 |
|                     | 550             | 22/122  | 23/132 | 26/144 | 28/160 | 32/180 | —      | —      | —      | —      | 1.19/1.16               | .84/.88 |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 6/33  | 7/34   | 7/36   | 7/37   | 7/39   | 8/43   | 9/48   | 10/54  | 12/61  | 1.23/1.16               | .85/.90 |
|                     | 480             | 13/71   | 14/75  | 15/79  | 16/84  | 17/90  | 19/103 | 23/123 | 29/154 | 43/235 | 1.24/1.16               | .79/.82 |
|                     | 520             | 19/101  | 20/108 | 21/116 | 23/125 | 25/137 | 32/172 | —      | —      | —      | 1.25/1.17               | .84/.88 |
|                     | 550             | 23/126  | 25/137 | 28/152 | 31/171 | 36/199 | —      | —      | —      | —      | 1.25/1.17               | .84/.88 |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 7/34  | 7/35   | 7/37   | 8/39   | 8/40   | 9/45   | 10/50  | 11/57  | 13/66  | 1.25/1.17               | .84/.89 |
|                     | 480             | 14/74   | 15/78  | 16/82  | 17/88  | 18/94  | 21/110 | 26/134 | 34/179 | —      | 1.26/1.18               | .83/.87 |
|                     | 520             | 20/104  | 21/111 | 23/120 | 25/132 | 28/146 | 36/193 | —      | —      | —      | 1.27/1.19               | .83/.87 |
|                     | 550             | 25/130  | 27/144 | 30/162 | 36/193 | —      | —      | —      | —      | —      | 1.28/1.20               | .83/.87 |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 7/36  | 8/37   | 8/39   | 8/41   | 9/43   | 10/48  | 11/54  | 13/62  | 15/73  | 1.27/1.19               | .83/.88 |
|                     | 480             | 15/76   | 16/81  | 17/86  | 18/92  | 20/100 | 24/118 | 30/149 | 43/218 | -      | 1.28/1.19               | .83/.88 |
|                     | 520             | 21/108  | 23/117 | 25/127 | 28/141 | 31/160 | —      | —      | —      | —      | 1.29/1.20               | .82/.87 |
|                     | 550             | 27/137  | 30/156 | 36/188 | —      | —      | —      | —      | —      | —      | 1.31/1.22               | .82/.86 |

Figure 11-167. Low Altitude Acceleration - Military Thrust - 26,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MAXIMUM THRUST  
GROSS WEIGHT = 30,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/71  | 4/72   | 4/73   | 4/75   | 4/76   | 4/80   | 4/83   | 4/87   | 5/91   | 1.14/1.10               | .89/.92 |
|                     | 480             | 7/146   | 7/150  | 7/153  | 8/157  | 8/161  | 8/169  | 9/179  | 9/190  | 10/202 | 1.16/1.11               | .88/.92 |
|                     | 520             | 10/199  | 10/204 | 10/210 | 10/216 | 11/223 | 11/238 | 12/254 | 13/274 | 14/298 | 1.17/1.13               | .91/.92 |
|                     | 550             | 11/241  | 12/249 | 12/257 | 13/266 | 13/276 | 14/298 | 15/325 | 17/358 | 19/403 | 1.19/1.14               | .92/.93 |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/72  | 4/73   | 4/74   | 4/76   | 4/78   | 4/81   | 4/85   | 5/89   | 5/93   | 1.14/1.10               | .89/.92 |
|                     | 480             | 7/148   | 8/152  | 8/155  | 8/159  | 8/164  | 9/173  | 9/183  | 10/195 | 11/209 | 1.16/1.11               | .89/.92 |
|                     | 520             | 10/202  | 10/208 | 11/214 | 11/221 | 11/228 | 12/244 | 13/262 | 14/285 | 15/312 | 1.18/1.13               | .89/.92 |
|                     | 550             | 12/245  | 12/254 | 13/263 | 13/273 | 14/283 | 15/308 | 17/340 | 19/381 | 21/442 | 1.22/1.18               | .89/.91 |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/72  | 4/74   | 4/75   | 4/77   | 4/79   | 4/82   | 5/86   | 5/91   | 5/95   | 1.15/1.09               | .89/.91 |
|                     | 480             | 8/151   | 8/154  | 8/159  | 9/163  | 9/167  | 9/177  | 10/189 | 11/202 | 11/217 | 1.17/1.11               | .88/.91 |
|                     | 520             | 11/205  | 11/211 | 11/218 | 12/225 | 12/233 | 13/251 | 14/272 | 15/297 | 17/329 | 1.19/1.14               | .87/.91 |
|                     | 550             | 13/249  | 13/258 | 14/269 | 15/280 | 15/293 | 16/324 | 18/366 | 22/431 | —      | 1.21/1.16               | .86/.89 |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/75  | 4/76   | 4/78   | 5/80   | 5/82   | 5/86   | 5/90   | 5/95   | 6/100  | 1.15/1.10               | .88/.91 |
|                     | 480             | 8/154   | 9/158  | 9/162  | 9/167  | 9/172  | 10/183 | 11/196 | 12/210 | 12/227 | 1.17/1.12               | .87/.91 |
|                     | 520             | 11/210  | 12/217 | 12/224 | 12/232 | 13/241 | 14/261 | 15/287 | 17/319 | 19/363 | 1.23/1.18               | .85/.89 |
|                     | 550             | 13/254  | 14/256 | 15/278 | 15/292 | 16/309 | 19/353 | 23/436 | —      | —      | 1.20/1.15               | .84/.87 |

Figure 11-168. Low Altitude Acceleration - Maximum Thrust - 30,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MILITARY THRUST  
GROSS WEIGHT = 30,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 7/37  | 7/39   | 7/40   | 8/42   | 8/44   | 9/48   | 10/53  | 11/59  | 12/66  | 1.22/1.15               | .86/.89 |
|                     | 480             | 14/80   | 15/84  | 16/89  | 17/94  | 18/99  | 20/113 | 24/132 | 29/161 | 38/213 | 1.23/1.16               | .84/.87 |
|                     | 520             | 20/113  | 21/120 | 23/128 | 25/138 | 27/149 | 32/182 | 44/247 | —      | —      | 1.23/1.16               | .84/.88 |
|                     | 550             | 25/141  | 27/153 | 29/166 | 33/184 | 37/208 | —      | —      | —      | —      | 1.19/1.16               | .84/.88 |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 7/38  | 8/40   | 8/41   | 8/43   | 9/45   | 9/50   | 10/55  | 12/62  | 13/71  | 1.23/1.16               | .85/.90 |
|                     | 480             | 15/83   | 16/87  | 17/92  | 18/97  | 19/103 | 22/119 | 26/141 | 33/179 | —      | 1.24/1.16               | .79/.82 |
|                     | 520             | 21/117  | 23/124 | 25/134 | 27/145 | 29/158 | 36/198 | —      | —      | —      | 1.25/1.17               | .84/.88 |
|                     | 550             | 27/146  | 29/159 | 32/175 | 36/197 | 42/229 | —      | —      | —      | —      | 1.25/1.17               | .84/.88 |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 8/39  | 8/41   | 8/43   | 9/45   | 9/47   | 10/52  | 11/58  | 13/66  | 15/76  | 1.25/1.17               | .84/.89 |
|                     | 480             | 16/85   | 17/90  | 18/95  | 20/102 | 21/109 | 24/127 | 29/154 | 39/204 | —      | 1.26/1.18               | .83/.87 |
|                     | 520             | 23/120  | 24/129 | 26/139 | 29/152 | 32/168 | 42/221 | —      | —      | —      | 1.27/1.19               | .83/.87 |
|                     | 550             | 28/151  | 31/166 | 35/187 | 41/222 | —      | —      | —      | —      | —      | 1.28/1.20               | .83/.87 |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 8/41  | 9/43   | 9/45   | 10/47  | 10/50  | 11/55  | 13/62  | 15/72  | 17/84  | 1.27/1.19               | .83/.88 |
|                     | 480             | 18/88   | 19/94  | 20/100 | 21/107 | 23/115 | 27/136 | 34/170 | 48/245 | —      | 1.28/1.20               | .83/.88 |
|                     | 520             | 25/125  | 27/135 | 29/147 | 32/163 | 36/184 | —      | —      | —      | —      | 1.29/1.20               | .82/.87 |
|                     | 550             | 31/158  | 35/180 | 42/215 | —      | —      | —      | —      | —      | —      | 1.31/1.22               | .82/.86 |

Figure 11-169. Low Altitude Acceleration - Military Thrust - 30,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MAXIMUM THRUST  
GROSS WEIGHT = 34,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/80  | 4/82   | 4/83   | 4/85   | 4/87   | 5/90   | 5/94   | 5/98   | 5/103  | 1.14/1.10               | .89/.92 |
|                     | 480             | 8/166   | 8/170  | 8/174  | 9/178  | 9/183  | 9/192  | 10/203 | 10/215 | 11/229 | 1.16/1.11               | .88/.92 |
|                     | 520             | 11/226  | 11/232 | 11/239 | 12/246 | 12/253 | 13/269 | 14/288 | 15/310 | 16/337 | 1.17/1.13               | .91/.92 |
|                     | 550             | 13/274  | 13/283 | 14/292 | 14/302 | 15/313 | 16/337 | 17/367 | 19/405 | 21/454 | 1.19/1.14               | .92/.93 |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/81  | 4/83   | 4/85   | 4/86   | 5/88   | 5/92   | 5/96   | 5/101  | 5/106  | 1.14/1.10               | .89/.92 |
|                     | 480             | 9/168   | 9/172  | 9/177  | 9/181  | 9/186  | 10/196 | 10/208 | 11/221 | 12/236 | 1.16/1.11               | .89/.92 |
|                     | 520             | 11/230  | 12/236 | 12/243 | 12/251 | 13/259 | 14/276 | 15/297 | 16/322 | 17/352 | 1.18/1.13               | .89/.92 |
|                     | 550             | 14/278  | 14/288 | 15/298 | 15/309 | 16/321 | 17/349 | 19/384 | 21/430 | 24/496 | 1.22/1.18               | .89/.91 |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/82  | 5/84   | 5/86   | 5/88   | 5/89   | 5/94   | 5/98   | 6/103  | 6/108  | 1.15/1.09               | .89/.91 |
|                     | 480             | 9/171   | 9/175  | 9/180  | 10/185 | 10/190 | 11/201 | 11/214 | 12/229 | 13/246 | 1.17/1.11               | .88/.91 |
|                     | 520             | 12/233  | 12/240 | 13/247 | 13/256 | 14/264 | 15/284 | 13/250 | 17/336 | 19/371 | 1.19/1.14               | .87/.91 |
|                     | 550             | 14/283  | 15/293 | 16/305 | 16/317 | 17/332 | 19/366 | 21/412 | 24/482 | —      | 1.21/1.16               | .86/.89 |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 5/85  | 5/87   | 5/89   | 5/91   | 5/93   | 5/97   | 6/102  | 6/108  | 6/114  | 1.15/1.10               | .88/.91 |
|                     | 480             | 10/175  | 10/179 | 10/184 | 10/190 | 11/195 | 11/208 | 12/222 | 13/238 | 14/257 | 1.17/1.12               | .87/.91 |
|                     | 520             | 13/238  | 13/246 | 14/254 | 14/263 | 15/273 | 16/296 | 17/324 | 19/359 | 22/407 | 1.23/1.18               | .85/.89 |
|                     | 550             | 15/289  | 16/301 | 17/315 | 17/331 | 18/349 | 21/397 | 25/483 | —      | —      | 1.20/1.15               | .84/.87 |

Figure 11-170. Low Altitude Acceleration - Maximum Thrust - 34,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MILITARY THRUST  
GROSS WEIGHT = 34,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |     |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|-----|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |     |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |     |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     | 0/0 |
|                     | 420             | 8/43  | 8/44   | 8/46   | 9/48   | 9/50   | 10/54  | 11/60  | 12/67  | 14/75  | 1.22/1.15               | .86/.89 |     |
|                     | 480             | 16/91   | 17/96  | 18/101 | 19/107 | 20/113 | 23/129 | 27/150 | 33/182 | 43/242 | 1.23/1.16               | .84/.87 |     |
|                     | 520             | 23/128  | 24/136 | 26/146 | 28/157 | 30/170 | 37/206 | 49/277 | —      | —      | 1.23/1.16               | .84/.88 |     |
|                     | 550             | 29/161  | 31/174 | 33/189 | 37/209 | 42/235 | —      | —      | —      | —      | 1.19/1.16               | .84/.88 |     |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 8/44  | 9/45   | 9/47   | 9/49   | 10/51  | 11/57  | 12/63  | 13/70  | 15/81  | 1.23/1.16               | .85/.90 |     |
|                     | 480             | 18/94   | 18/99  | 19/104 | 21/111 | 22/118 | 25/135 | 30/160 | 37/202 | —      | 1.24/1.16               | .79/.82 |     |
|                     | 520             | 24/133  | 26/141 | 28/152 | 30/164 | 33/179 | 41/224 | —      | —      | —      | 1.25/1.17               | .84/.88 |     |
|                     | 550             | 30/166  | 33/180 | 36/199 | 41/223 | 47/258 | —      | —      | —      | —      | 1.25/1.17               | .84/.88 |     |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 9/45  | 9/47   | 10/49  | 10/51  | 11/53  | 12/59  | 13/66  | 15/75  | 17/86  | 1.25/1.17               | .84/.89 |     |
|                     | 480             | 19/97   | 20/102 | 21/109 | 22/115 | 24/123 | 28/144 | 34/175 | 44/230 | —      | 1.26/1.18               | .83/.87 |     |
|                     | 520             | 26/137  | 28/146 | 30/158 | 33/172 | 36/190 | 47/249 | —      | —      | —      | 1.27/1.19               | .83/.87 |     |
|                     | 550             | 32/172  | 36/189 | 40/212 | 47/250 | —      | —      | —      | —      | —      | 1.28/1.20               | .83/.87 |     |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 10/47   | 10/49  | 11/51  | 11/54  | 12/57  | 13/63  | 15/71  | 17/82  | 20/96  | 1.27/1.19               | .83/.88 |     |
|                     | 480             | 20/101  | 21/107 | 23/114 | 24/121 | 26/131 | 31/155 | 38/193 | 54/273 | —      | 1.28/1.20               | .83/.88 |     |
|                     | 520             | 28/142  | 30/153 | 33/167 | 36/185 | 41/208 | —      | —      | —      | —      | 1.29/1.20               | .82/.87 |     |
|                     | 550             | 35/180  | 39/204 | 47/243 | —      | —      | —      | —      | —      | —      | 1.31/1.22               | .82/.86 |     |

Figure 11-171. Low Altitude Acceleration - Military Thrust - 34,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MAXIMUM THRUST  
GROSS WEIGHT = 38,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 4/90  | 5/92   | 5/94   | 5/95   | 5/97   | 5/101  | 5/106  | 6/110  | 6/116  | 1.14/1.10               | .89/.92 |
|                     | 480             | 9/186   | 9/190  | 9/195  | 10/199 | 10/204 | 10/215 | 11/227 | 12/241 | 12/256 | 1.16/1.11               | .88/.92 |
|                     | 520             | 12/253  | 12/260 | 13/267 | 13/275 | 14/283 | 14/301 | 15/322 | 17/347 | 18/376 | 1.17/1.13               | .91/.92 |
|                     | 550             | 15/307  | 15/317 | 15/327 | 16/338 | 17/350 | 18/377 | 19/410 | 21/451 | 24/505 | 1.19/1.14               | .92/.93 |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 5/91  | 5/93   | 5/95   | 5/97   | 5/99   | 5/103  | 6/108  | 6/113  | 6/119  | 1.14/1.10               | .89/.92 |
|                     | 480             | 10/188  | 10/193 | 10/198 | 10/203 | 11/208 | 11/220 | 12/233 | 12/247 | 13/264 | 1.16/1.11               | .89/.92 |
|                     | 520             | 13/257  | 13/264 | 14/272 | 14/280 | 14/289 | 15/309 | 16/332 | 18/360 | 19/393 | 1.18/1.13               | .89/.92 |
|                     | 550             | 15/312  | 16/322 | 17/334 | 17/346 | 18/359 | 19/390 | 21/428 | 23/478 | 27/549 | 1.22/1.18               | .89/.91 |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 5/92  | 5/94   | 5/96   | 5/98   | 5/100  | 6/105  | 6/110  | 6/115  | 7/122  | 1.15/1.09               | .89/.91 |
|                     | 480             | 10/192  | 10/197 | 11/202 | 11/207 | 11/213 | 12/225 | 13/239 | 13/256 | 14/274 | 1.17/1.11               | .88/.91 |
|                     | 520             | 13/261  | 14/269 | 14/277 | 15/286 | 15/296 | 16/317 | 18/343 | 19/374 | 21/413 | 1.19/1.14               | .87/.91 |
|                     | 550             | 16/317  | 17/328 | 17/341 | 18/355 | 19/371 | 21/408 | 23/458 | 27/531 | —      | 1.21/1.16               | .86/.89 |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 5/95  | 6/97   | 6/100  | 6/102  | 6/104  | 6/109  | 6/115  | 7/121  | 7/127  | 1.15/1.10               | .88/.91 |
|                     | 480             | 11/196  | 11/201 | 11/207 | 12/213 | 12/219 | 13/232 | 14/248 | 15/266 | 16/287 | 1.17/1.12               | .87/.91 |
|                     | 520             | 14/267  | 15/275 | 15/285 | 16/295 | 16/306 | 18/331 | 19/361 | 21/400 | 24/451 | 1.23/1.18               | .85/.89 |
|                     | 550             | 17/323  | 18/337 | 19/352 | 19/369 | 21/389 | 23/441 | 28/529 | —      | —      | 1.20/1.15               | .84/.87 |

Figure 11-172. Low Altitude Acceleration - Maximum Thrust - 38,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MILITARY THRUST  
GROSS WEIGHT = 38,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |     |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|-----|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |     |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |     |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     | 0/0 |
|                     | 420             | 9/48  | 9/50   | 9/52   | 10/54  | 10/56  | 11/61  | 12/67  | 14/75  | 16/85  | 1.22/1.15               | .86/.89 |     |
|                     | 480             | 18/103  | 19/108 | 20/113 | 22/120 | 23/127 | 26/144 | 30/168 | 37/204 | 48/270 | 1.23/1.16               | .84/.87 |     |
|                     | 520             | 26/144  | 27/153 | 29/163 | 31/176 | 34/190 | 41/230 | 54/308 | —      | —      | 1.23/1.16               | .84/.88 |     |
|                     | 550             | 32/180  | 34/195 | 37/212 | 41/234 | 46/263 | —      | —      | —      | —      | 1.19/1.16               | .84/.88 |     |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 9/49  | 10/51  | 10/53  | 11/55  | 11/58  | 12/64  | 13/71  | 15/80  | 17/91  | 1.23/1.16               | .85/.90 |     |
|                     | 480             | 20/105  | 21/111 | 22/117 | 23/124 | 25/132 | 28/152 | 33/180 | 42/225 | —      | 1.24/1.16               | .79/.82 |     |
|                     | 520             | 27/149  | 29/159 | 31/170 | 34/184 | 37/201 | 46/250 | —      | —      | —      | 1.25/1.17               | .84/.88 |     |
|                     | 550             | 34/186  | 37/202 | 41/223 | 45/249 | 47/255 | —      | —      | —      | —      | 1.25/1.17               | .84/.88 |     |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 10/50   | 10/53  | 11/55  | 11/57  | 12/60  | 13/66  | 15/74  | 17/84  | 19/98  | 1.25/1.17               | .84/.89 |     |
|                     | 480             | 21/109  | 22/115 | 23/122 | 25/130 | 27/139 | 31/161 | 38/195 | 49/256 | —      | 1.26/1.18               | .83/.87 |     |
|                     | 520             | 29/153  | 31/164 | 34/177 | 37/193 | 40/213 | 52/277 | —      | —      | —      | 1.27/1.19               | .83/.87 |     |
|                     | 550             | 36/193  | 40/212 | 45/237 | 52/278 | —      | —      | —      | —      | —      | 1.28/1.20               | .83/.87 |     |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 11/53   | 11/55  | 12/58  | 12/61  | 13/64  | 15/71  | 16/80  | 19/92  | 22/109 | 1.27/1.19               | .83/.88 |     |
|                     | 480             | 23/113  | 24/120 | 25/128 | 27/136 | 29/147 | 35/173 | 43/216 | 60/301 | —      | 1.28/1.20               | .83/.88 |     |
|                     | 520             | 31/159  | 34/172 | 37/188 | 41/207 | 46/233 | —      | —      | —      | —      | 1.29/1.20               | .82/.87 |     |
|                     | 550             | 39/203  | 44/288 | 52/270 | —      | —      | —      | —      | —      | —      | 1.31/1.22               | .82/.86 |     |

Figure 11-173. Low Altitude Acceleration - Military Thrust - 38,000 Pounds - F404-GE-400



**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MAXIMUM THRUST  
GROSS WEIGHT = 42,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 5/100   | 5/102  | 5/104  | 5/106  | 5/108  | 6/112  | 6/117  | 6/123  | 6/129  | 1.14/1.10               | .89/.92 |
|                     | 480             | 10/206  | 10/211 | 10/216 | 11/221 | 11/227 | 12/238 | 12/252 | 13/267 | 14/284 | 1.16/1.11               | .88/.92 |
|                     | 520             | 13/280  | 14/288 | 14/296 | 15/304 | 15/313 | 16/333 | 17/357 | 18/384 | 20/416 | 1.17/1.13               | .91/.92 |
|                     | 550             | 16/340  | 17/351 | 17/362 | 18/374 | 18/387 | 20/417 | 21/453 | 23/498 | 26/556 | 1.19/1.14               | .92/.93 |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 5/101   | 5/103  | 5/105  | 6/107  | 6/110  | 6/114  | 6/120  | 7/125  | 7/132  | 1.14/1.10               | .89/.92 |
|                     | 480             | 11/209  | 11/214 | 11/219 | 11/225 | 12/231 | 12/243 | 13/258 | 14/274 | 15/292 | 1.16/1.11               | .89/.92 |
|                     | 520             | 14/285  | 15/293 | 15/302 | 15/311 | 16/320 | 17/342 | 18/367 | 20/397 | 21/434 | 1.18/1.13               | .89/.92 |
|                     | 550             | 17/346  | 18/357 | 18/369 | 19/383 | 20/397 | 21/431 | 23/473 | 26/527 | 29/602 | 1.22/1.18               | .89/.91 |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 6/102   | 6/105  | 6/107  | 6/109  | 6/111  | 6/117  | 7/122  | 7/128  | 7/135  | 1.15/1.09               | .89/.91 |
|                     | 480             | 11/213  | 11/218 | 12/224 | 12/230 | 12/236 | 13/250 | 14/265 | 15/283 | 16/304 | 1.17/1.11               | .88/.91 |
|                     | 520             | 15/289  | 15/298 | 16/307 | 16/317 | 17/327 | 18/351 | 20/379 | 21/413 | 23/456 | 1.19/1.14               | .87/.91 |
|                     | 550             | 18/351  | 19/364 | 19/377 | 20/393 | 21/410 | 23/450 | 25/504 | 29/581 | —      | 1.21/1.16               | .86/.89 |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |
|                     | 420             | 6/106   | 6/108  | 6/111  | 6/113  | 7/116  | 7/121  | 7/127  | 8/134  | 8/142  | 1.15/1.10               | .88/.91 |
|                     | 480             | 12/217  | 12/223 | 13/229 | 13/236 | 13/242 | 14/257 | 15/275 | 16/294 | 17/318 | 1.17/1.12               | .87/.91 |
|                     | 520             | 16/296  | 16/305 | 17/315 | 18/326 | 18/338 | 20/366 | 21/399 | 24/440 | 26/495 | 1.23/1.18               | .85/.89 |
|                     | 550             | 19/358  | 20/373 | 21/390 | 22/408 | 23/430 | 25/485 | 30/574 | —      | —      | 1.20/1.15               | .84/.87 |

Figure 11-174. Low Altitude Acceleration - Maximum Thrust - 42,000 Pounds - F404-GE-400

**LOW ALTITUDE ACCELERATION**  
**F404-GE-400**  
MILITARY THRUST  
GROSS WEIGHT = 42,000 POUNDS

REMARKS

DATE: 16 NOVEMBER 1989  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

ENGINE(S): (2)F404-GE-400  
U.S. STANDARD DAY, 1962

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

|                     | SPEED<br>(KIAS) | TIME TO ACCELERATE (SEC) / FUEL TO ACCELERATE (LBS) |        |        |        |        |        |        |        |        | TEMP. EFFECT<br>FACTORS |         |     |
|---------------------|-----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|---------|-----|
|                     |                 | DRAG INDEX  |        |        |        |        |        |        |        |        | +10°C                   | -10°C   |     |
|                     |                 | 0   | 25     | 50     | 75     | 100    | 150    | 200    | 250    | 300    |                         |         |     |
| SEA LEVEL<br>(15°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     | 0/0 |
|                     | 420             | 10/53   | 10/55  | 11/57  | 11/60  | 11/62  | 13/68  | 14/75  | 15/84  | 17/95  | 1.22/1.15               | .86/.89 |     |
|                     | 480             | 21/114  | 22/120 | 23/126 | 24/133 | 25/141 | 29/160 | 34/187 | 41/226 | 53/298 | 1.23/1.16               | .84/.87 |     |
|                     | 520             | 29/160  | 30/170 | 32/182 | 35/195 | 37/211 | 45/255 | 60/339 | —      | —      | 1.23/1.16               | .84/.88 |     |
|                     | 550             | 36/200  | 38/216 | 42/235 | 46/259 | 51/291 | —      | —      | —      | —      | 1.19/1.16               | .84/.88 |     |
| 2000 FEET<br>(11°C) | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 10/55   | 11/57  | 11/59  | 12/62  | 12/65  | 14/71  | 15/79  | 17/89  | 19/102 | 1.23/1.16               | .85/.90 |     |
|                     | 480             | 22/117  | 23/123 | 24/130 | 26/138 | 27/147 | 31/169 | 37/200 | 46/249 | —      | 1.24/1.16               | .79/.82 |     |
|                     | 520             | 30/165  | 32/176 | 35/189 | 38/204 | 41/223 | 51/277 | —      | —      | —      | 1.25/1.17               | .84/.88 |     |
|                     | 550             | 38/207  | 41/225 | 45/247 | 50/276 | 58/320 | —      | —      | —      | —      | 1.25/1.17               | .84/.88 |     |
| 4000 FEET<br>(7°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 11/56   | 12/59  | 12/61  | 13/64  | 13/67  | 15/74  | 16/83  | 19/95  | 22/110 | 1.25/1.17               | .84/.89 |     |
|                     | 480             | 23/121  | 25/128 | 26/136 | 28/144 | 30/154 | 35/180 | 42/217 | 54/282 | —      | 1.26/1.18               | .83/.87 |     |
|                     | 520             | 32/170  | 35/183 | 37/197 | 41/214 | 45/236 | 58/305 | —      | —      | —      | 1.27/1.19               | .83/.87 |     |
|                     | 550             | 40/214  | 44/235 | 49/263 | 57/306 | —      | —      | —      | —      | —      | 1.28/1.20               | .83/.87 |     |
| 6000 FEET<br>(3°C)  | 360             | 0/0   | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0    | 0/0                     | 0/0     |     |
|                     | 420             | 12/59   | 13/62  | 13/65  | 14/68  | 15/71  | 16/79  | 18/90  | 21/103 | 25/122 | 1.27/1.19               | .83/.88 |     |
|                     | 480             | 25/126  | 27/133 | 28/142 | 30/152 | 33/163 | 38/193 | 48/239 | 65/330 | —      | 1.28/1.20               | .83/.88 |     |
|                     | 520             | 35/177  | 38/191 | 41/208 | 45/230 | 50/257 | —      | —      | —      | —      | 1.29/1.20               | .82/.87 |     |
|                     | 550             | 44/225  | 49/253 | 58/301 | —      | —      | —      | —      | —      | —      | 1.31/1.22               | .82/.86 |     |

Figure 11-175. Low Altitude Acceleration - Military Thrust - 42,000 Pounds - F404-GE-400


# MAXIMUM THRUST ACCELERATION

F404-GE-400  
10,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

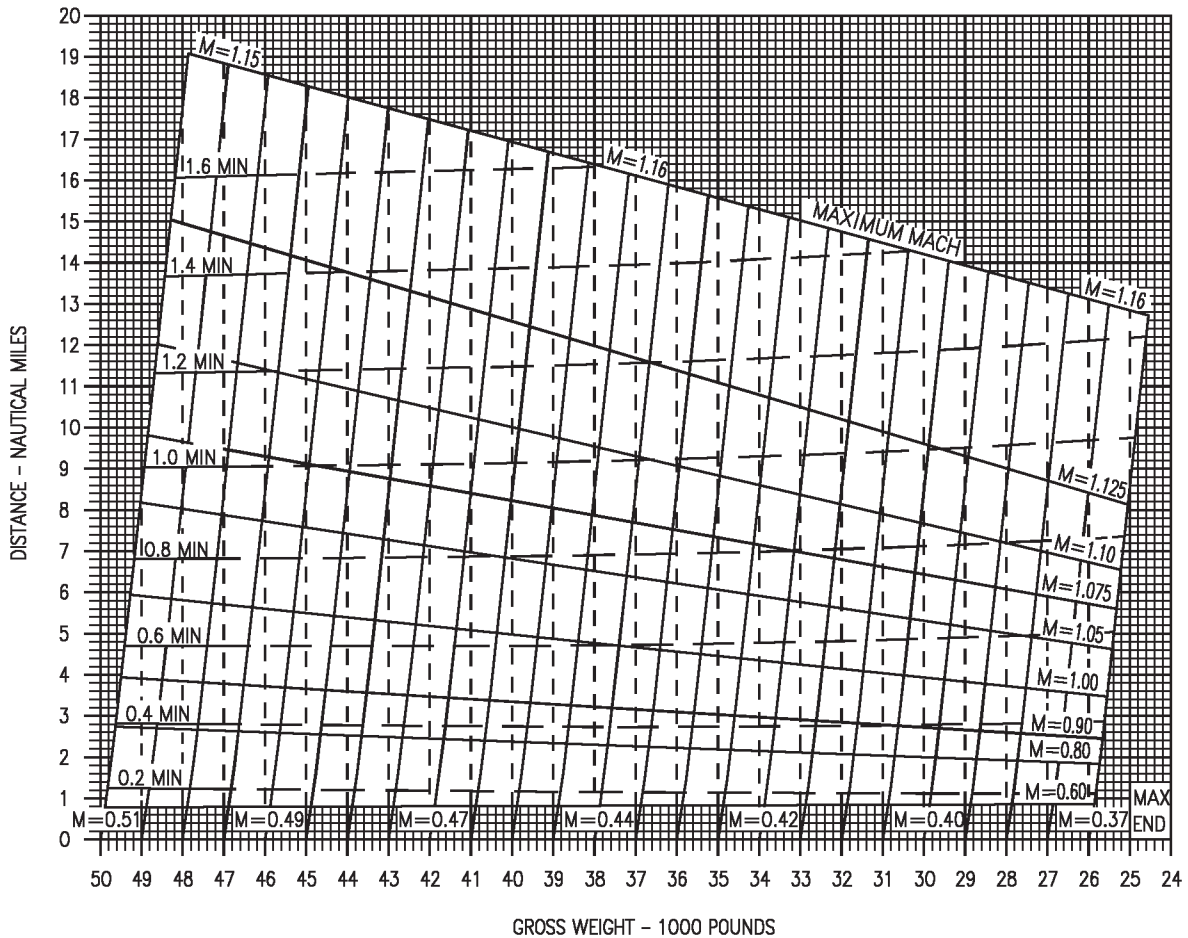


Figure 11-176. Maximum Thrust Acceleration - 10,000 Feet - F404-GE-400

18AC-NFM-20-(317-2)12-CATI


# MAXIMUM THRUST ACCELERATION

F404-GE-400  
30,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

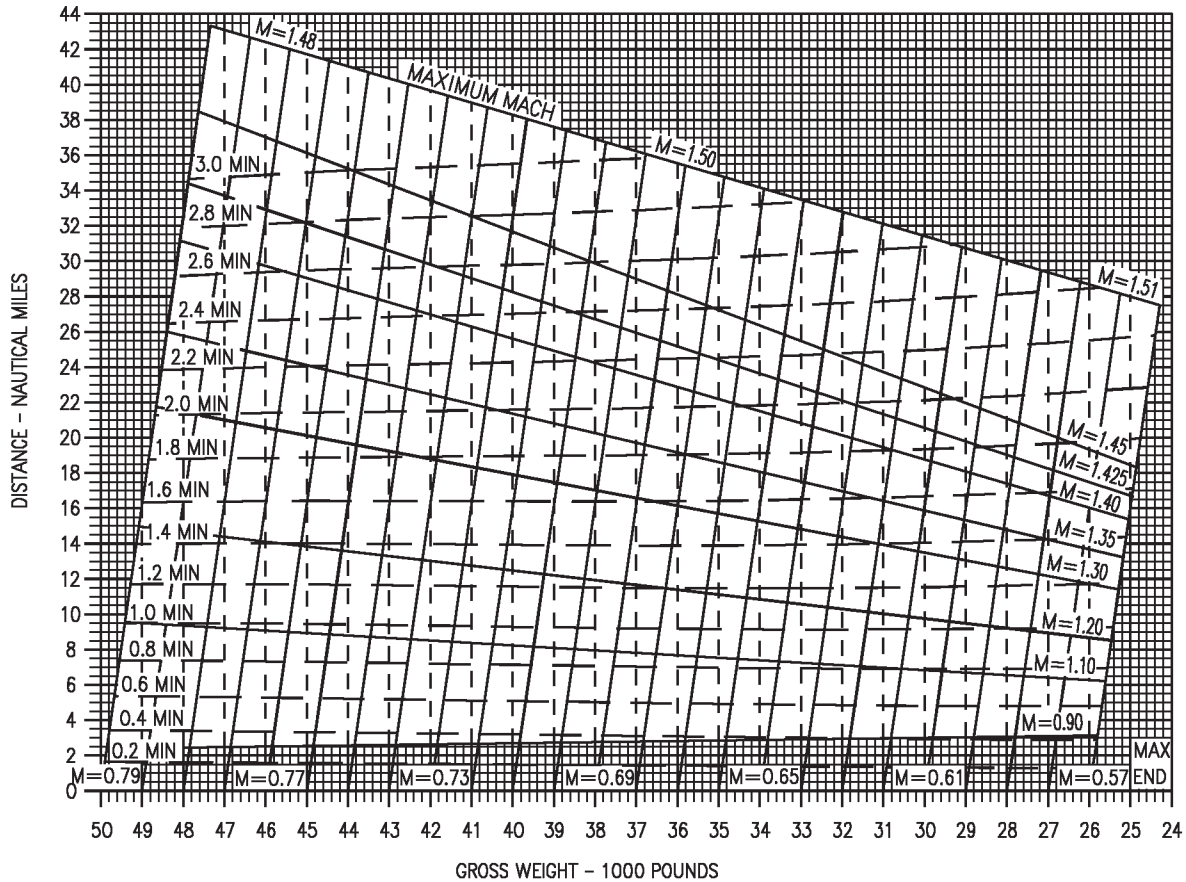


Figure 11-177. Maximum Thrust Acceleration - 30,000 Feet - F404-GE-400  
(Sheet 1 of 4)


# MAXIMUM THRUST ACCELERATION

F404-GE-400  
30,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7  
+  $\zeta$  TANK

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

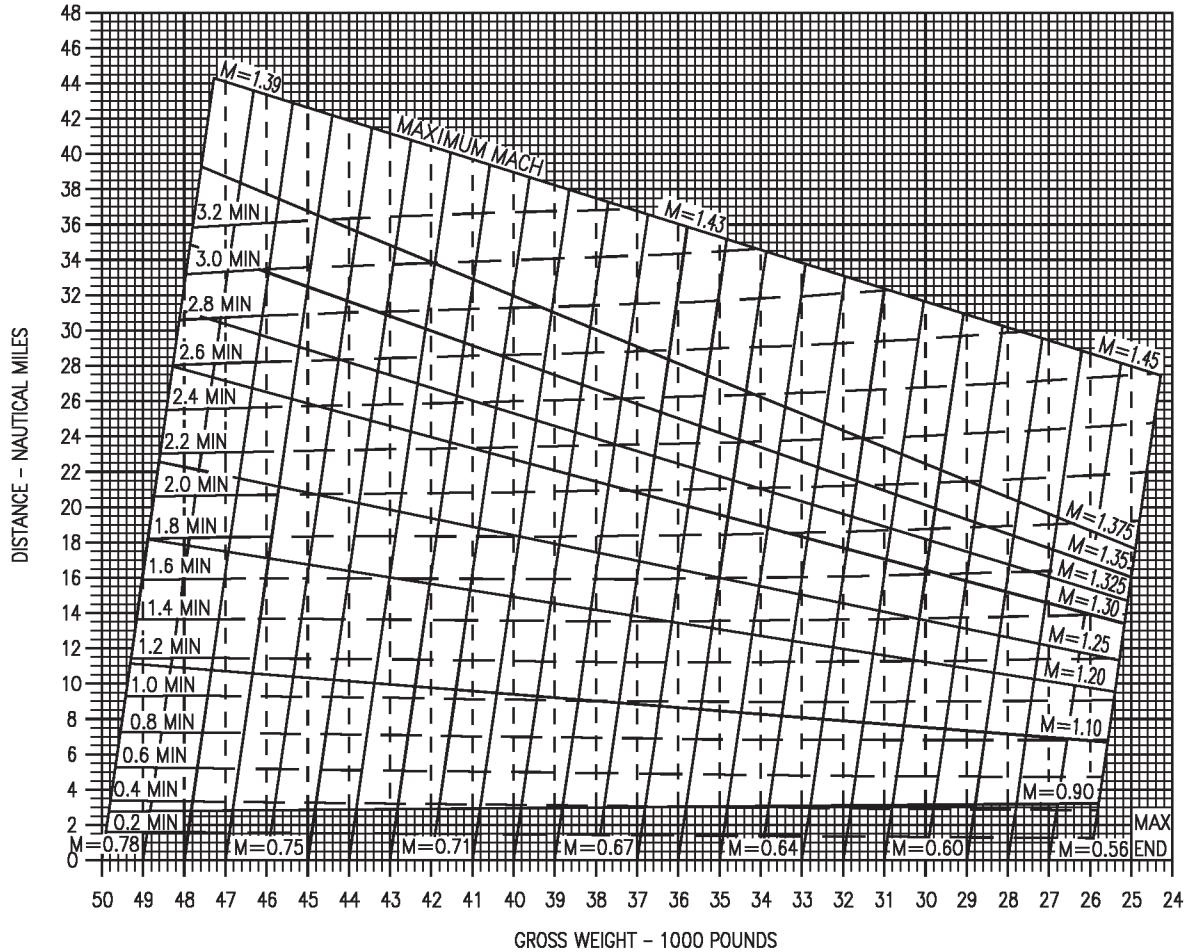


Figure 11-177. Maximum Thrust Acceleration - 30,000 Feet - F404-GE-400  
(Sheet 2 of 4)

18AC-NFM-20-(317-7)12-CAT1


# MAXIMUM THRUST ACCELERATION

F404-GE-400  
30,000 FEET

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ FLJR

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

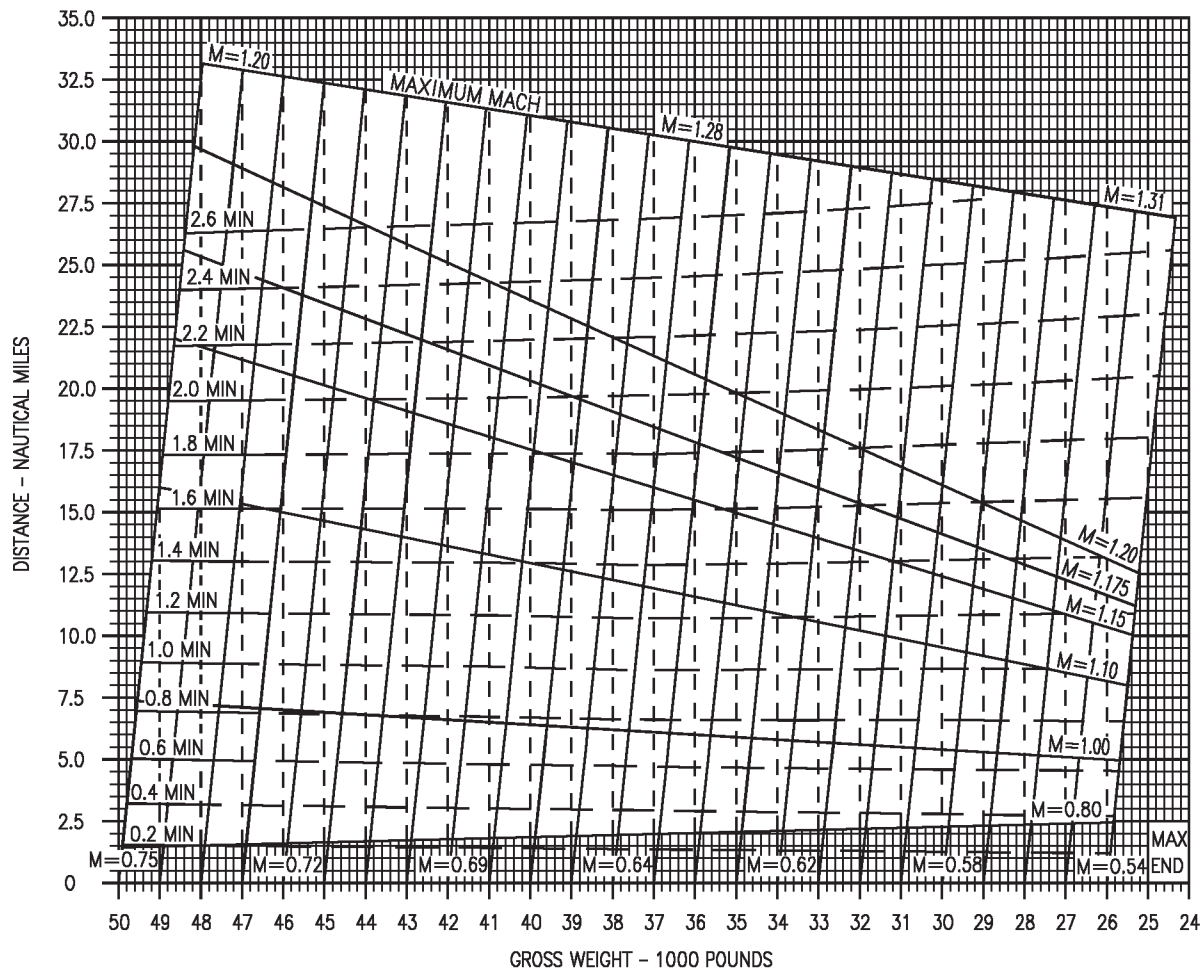


Figure 11-177. Maximum Thrust Acceleration - 30,000 Feet - F404-GE-400  
(Sheet 3 of 4)

# MAXIMUM THRUST ACCELERATION


F404-GE-400  
30,000 FEET

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+  $\text{C}$  TANK + FLIR

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

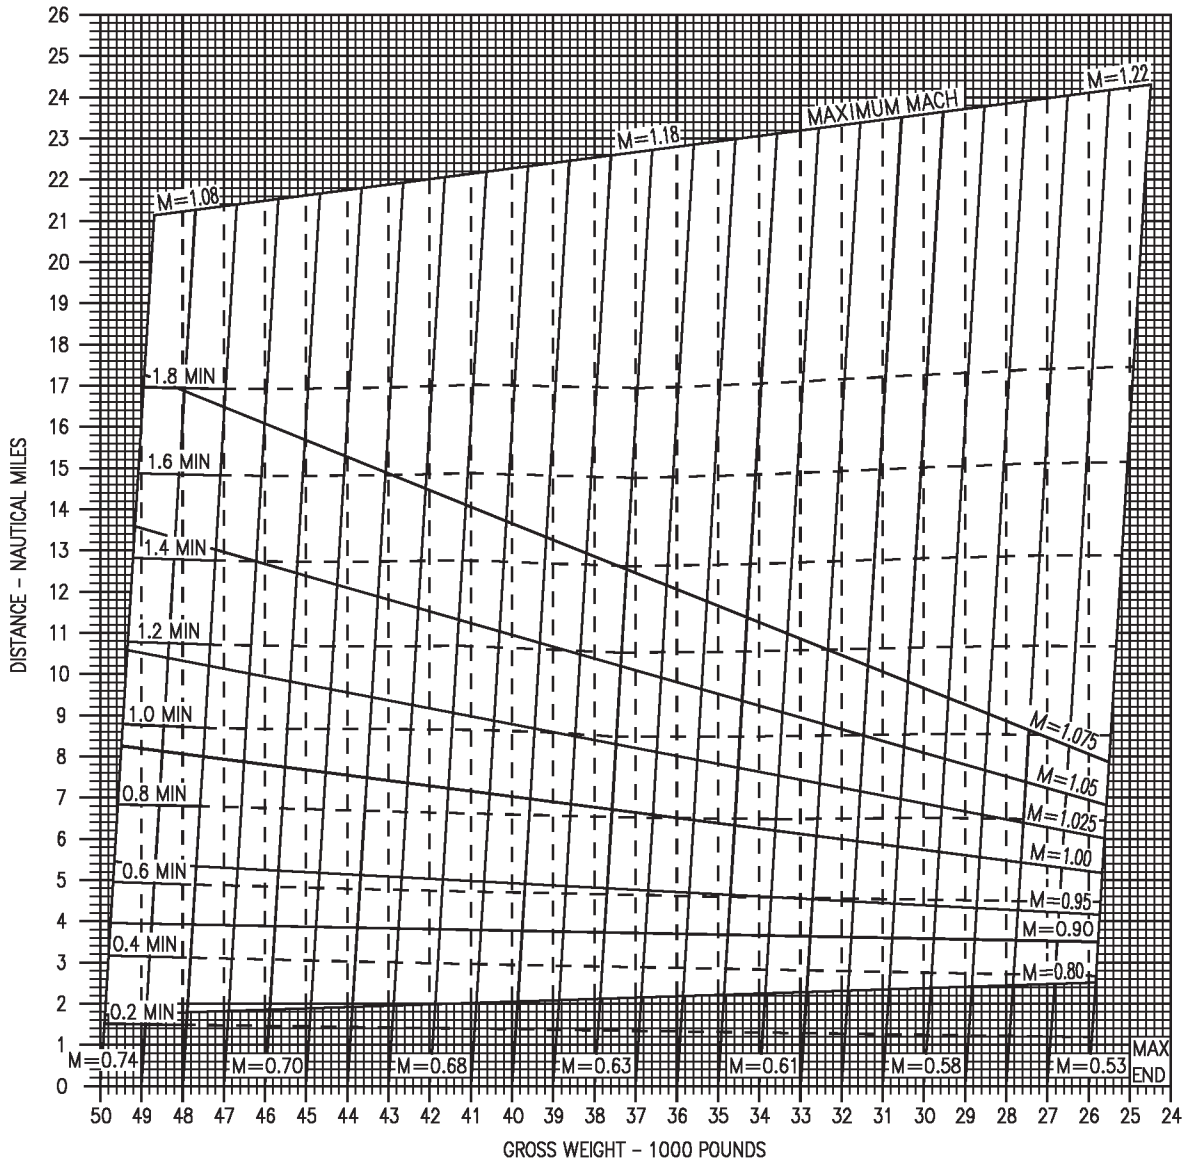


Figure 11-177. Maximum Thrust Acceleration - 30,000 Feet - F404-GE-400  
(Sheet 4 of 4)

18AC-NFM-20-(317-13)12-CAT1




# MAXIMUM THRUST ACCELERATION

F404-GE-400  
35,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

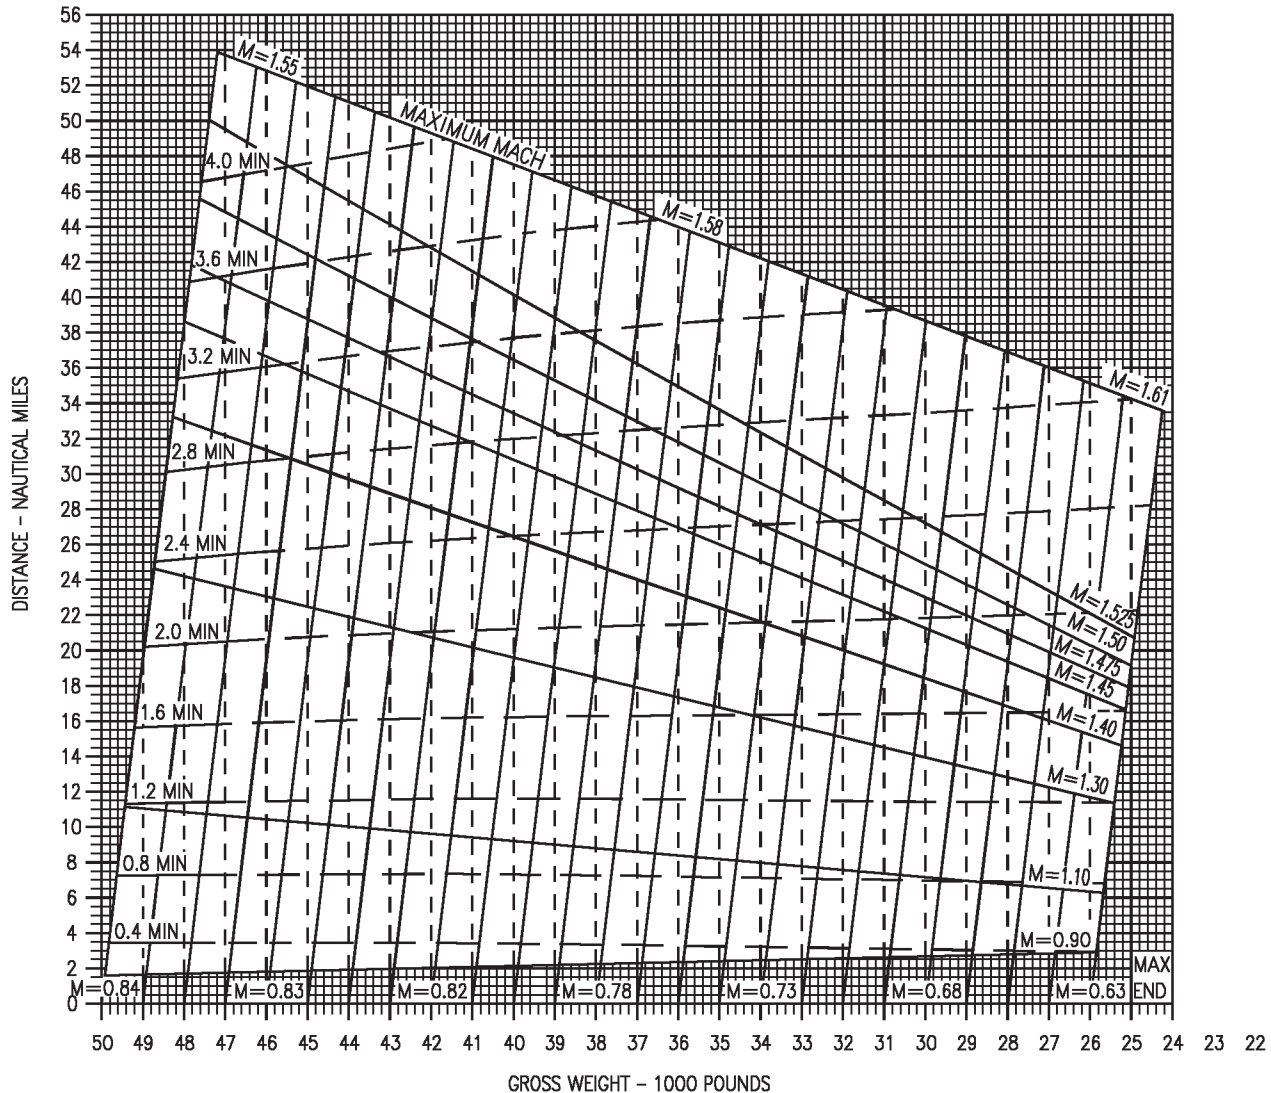


Figure 11-178. Maximum Thrust Acceleration - 35,000 Feet - F404-GE-400  
(Sheet 1 of 4)

18AC-NFM-20-(317-4)12-CAT1



# MAXIMUM THRUST ACCELERATION


F404-GE-400  
35,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7  
+  $\zeta$  TANK

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

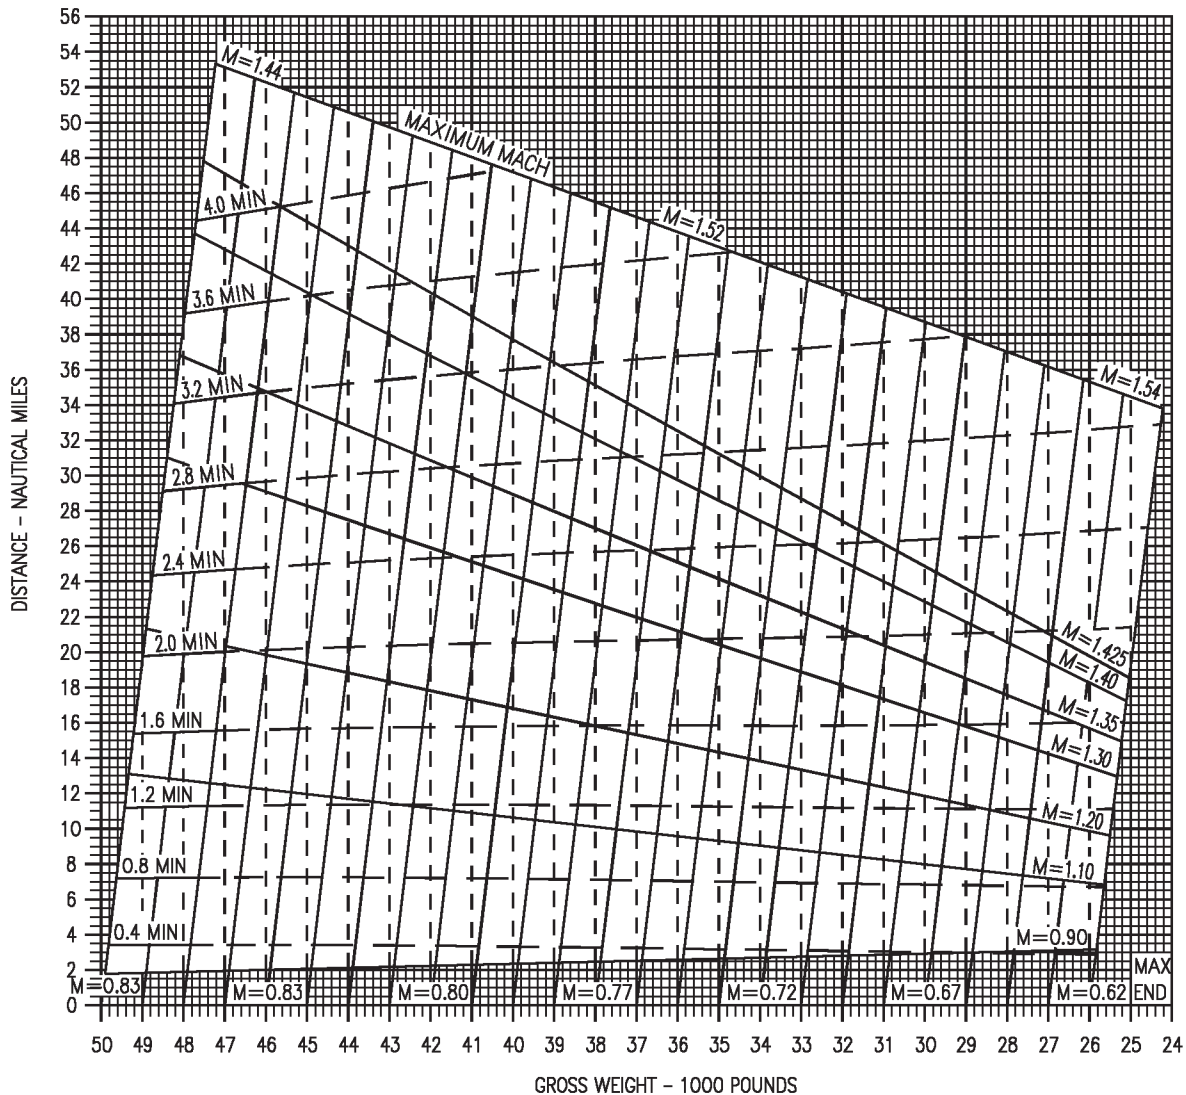


Figure 11-178. Maximum Thrust Acceleration - 35,000 Feet - F404-GE-400  
(Sheet 2 of 4)

18AC-NFM-20-(317-8)12-CAT1


# MAXIMUM THRUST ACCELERATION

F404-GE-400  
35,000 FEET

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ FLIR


REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

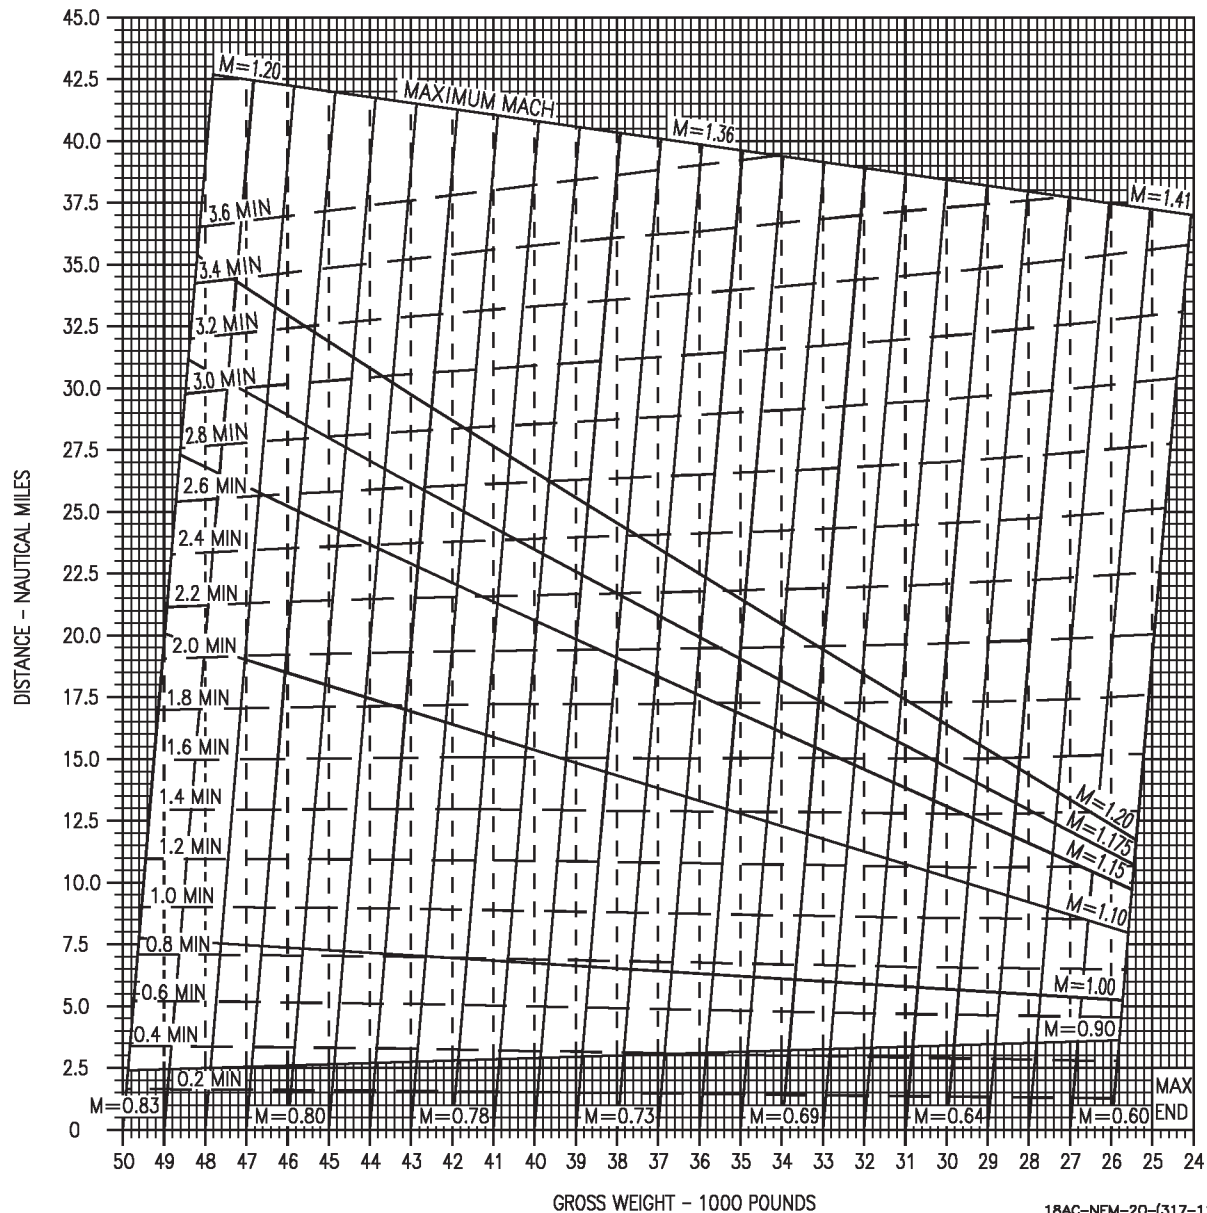

18AC-NFM-20-(317-11)12-CATI

Figure 11-178. Maximum Thrust Acceleration - 35,000 Feet - F404-GE-400  
(Sheet 3 of 4)

# MAXIMUM THRUST ACCELERATION


F404-GE-400  
35,000 FEET

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ C TANK + FLIR

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

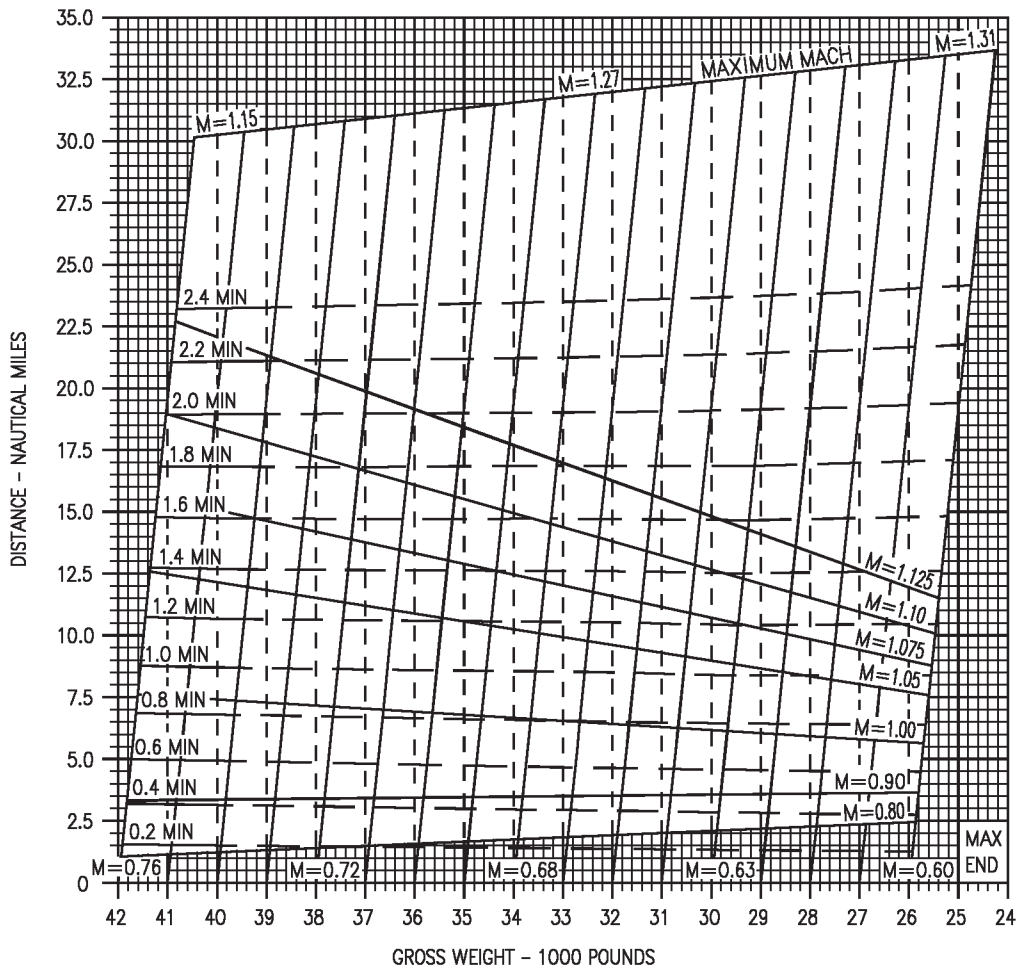


Figure 11-178. Maximum Thrust Acceleration - 35,000 Feet - F404-GE-400  
(Sheet 4 of 4)

18AC-NFM-20-(317-14)12-CAT1

# MAXIMUM THRUST ACCELERATION


F404-GE-400  
40,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |

GUIDE



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

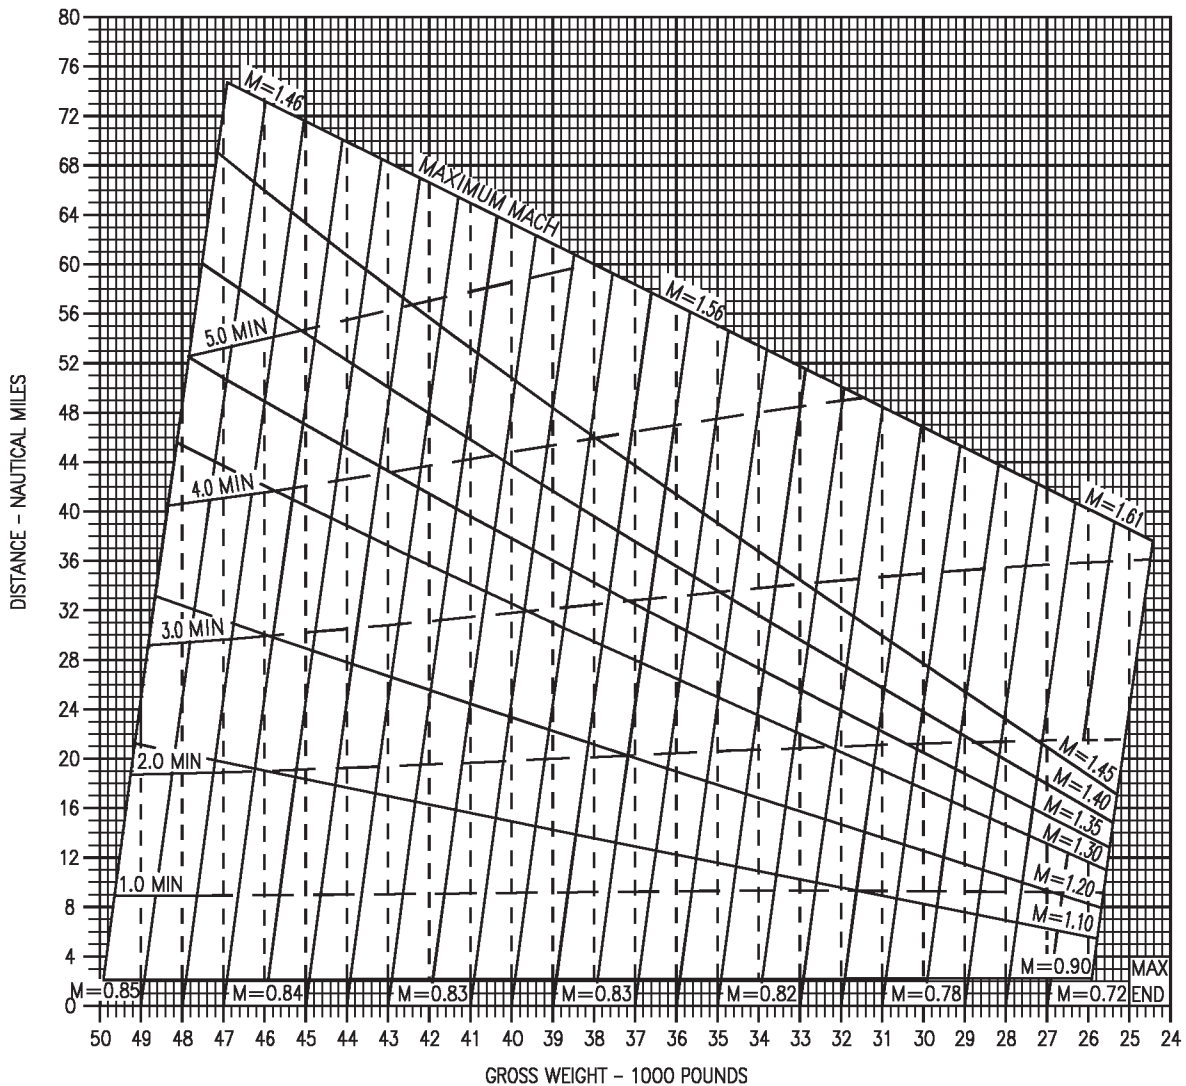


Figure 11-179. Maximum Thrust Acceleration - 40,000 Feet - F404-GE-400  
(Sheet 1 of 3)

18AC-NFM-20-(317-5)12-CAT1


# MAXIMUM THRUST ACCELERATION

F404-GE-400  
40,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7  
+  $\zeta$  TANK

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 12  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

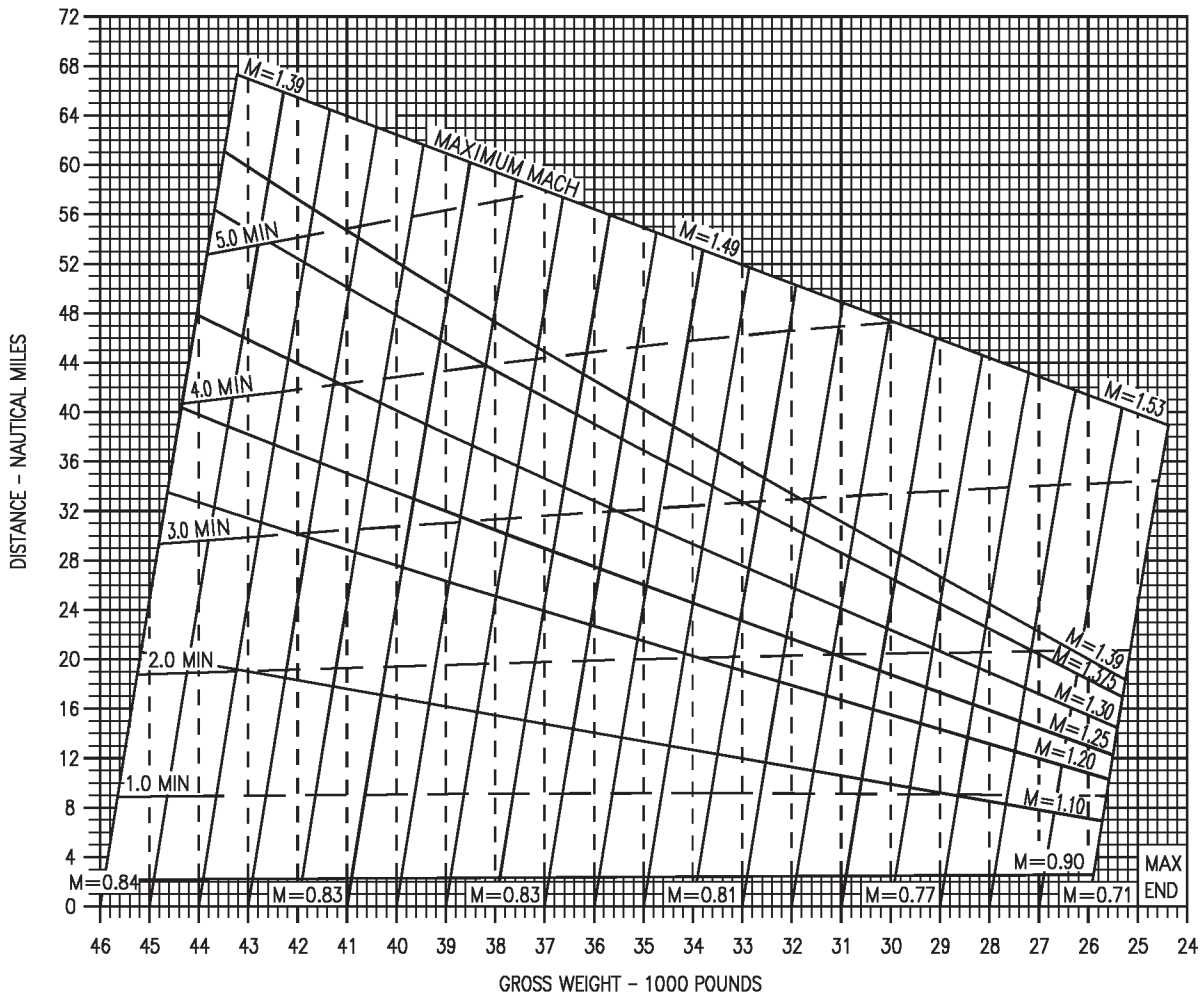


Figure 11-179. Maximum Thrust Acceleration - 40,000 Feet - F404-GE-400  
(Sheet 2 of 3)

18AC-NFM-20-(317-9)12-CAT1

# MAXIMUM THRUST ACCELERATION


F404-GE-400  
40,000 FEET

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

AIRCRAFT CONFIGURATION  
(4) AIM-9 + (2) AIM-7  
+ FLIR

DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 5   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

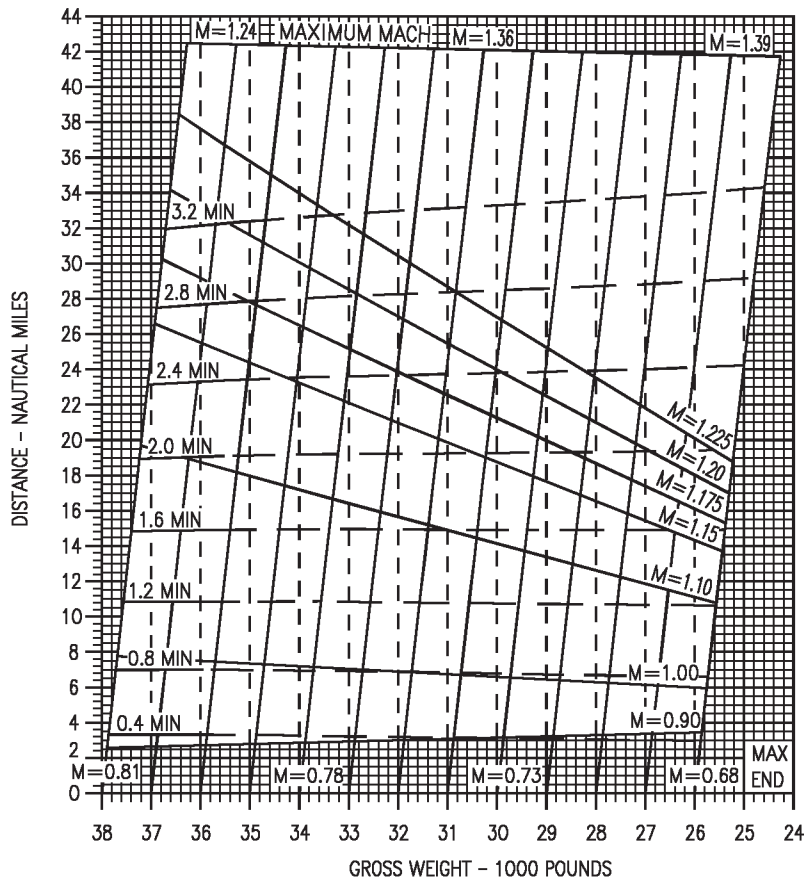


Figure 11-179. Maximum Thrust Acceleration - 40,000 Feet - F404-GE-400  
(Sheet 3 of 3)


# MAXIMUM THRUST ACCELERATION

F404-GE-400  
45,000 FEET

AIRCRAFT CONFIGURATION  
(2) AIM-9 + (2) AIM-7

REMARKS  
ENGINE(S): (2) F404-GE-400  
U.S. STANDARD DAY, 1962

| STANDARD TEMPERATURE |     |     |
|----------------------|-----|-----|
| ALT                  | °C  | °F  |
| SL                   | 15  | 59  |
| 5,000                | 5   | 41  |
| 10,000               | -5  | 23  |
| 15,000               | -15 | 6   |
| 20,000               | -25 | -12 |
| 25,000               | -35 | -30 |
| 30,000               | -44 | -48 |
| 35,000               | -54 | -66 |
| 40,000               | -57 | -70 |
| 70,000               | -57 | -70 |



DATE: 15 JULY 1986  
DATA BASIS: ESTIMATED (BASED ON FLIGHT TEST)

FUEL GRADE: JP-5  
FUEL DENSITY: 6.8 LB/GAL

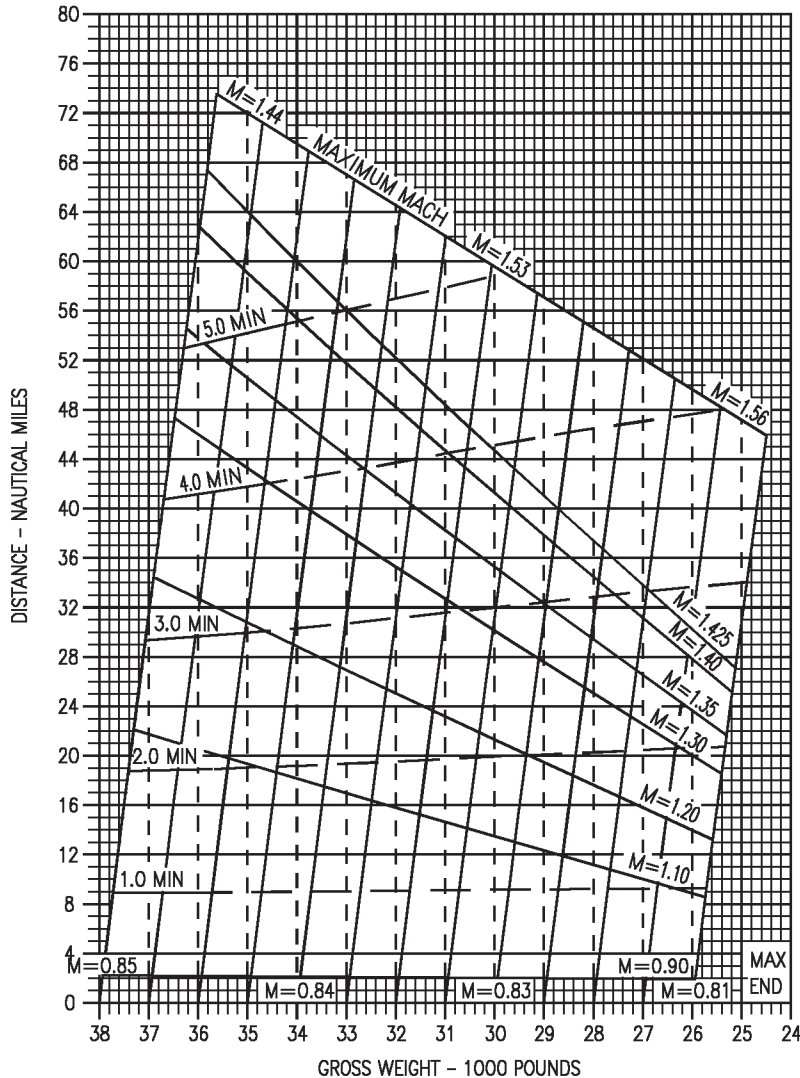


Figure 11-180. Maximum Thrust Acceleration - 45,000 Feet - F404-GE-400

18AC-NFM-20-(317-6)12-CAT1

**PART 10 - EMERGENCY OPERATION F404-GE-400**

To be supplied



# ALPHABETICAL INDEX

## NOTE

- All text & illustrations numbers in this alphabetical index refer to page numbers, illustration page numbers are shown in parentheses.

### A

AIRSPPEED..... v  
 Airspeed Conversion.....(11-15)  
 AIRSPEED CONVERSION CHARTS ..... 11-4  
 Airspeed Position Error Correction .....(11-17)  
 AIRSPEED POSITION ERROR CORRECTION  
 CHARTS..... 11-5  
 Altimeter Position Error Correction .....(11-19)  
 ALTIMETER POSITION ERROR CORRECTION  
 CHART ..... 11-5  
 Angle of Attack Conversion .....(11-22)  
 ANGLE OF ATTACK CONVERSION  
 CHART ..... 11-6  
 APPLICABLE PUBLICATIONS..... ii  
 Automatic Distribution (with updates) ..... ii

### B

Bingo - Gear Down - Flaps Auto - 26,000 Pounds -  
 F404-GE-400 .....(11-219)  
 Bingo - Gear Up - Flaps Auto - 26,000 Pounds -  
 F404-GE-400 .....(11-211)  
 Bingo - Gear Up - Flaps Auto - 30,000 Pounds  
 -F404-GE-400 .....(11-213)  
 Bingo - Gear Up - Half Flaps - 26,000 Pounds -  
 F404-GE-400 .....(11-215)  
 Bingo - Gear Up - Half Flaps - 30,000 Pounds -  
 F404-GE-400 .....(11-217)  
 Bingo - One Engine Operating - Gear Down - Flaps  
 Auto - 26,000 Pounds - F404-GE-400 ... (11-227)  
 Bingo - One Engine Operating - Gear Up - Flaps  
 Auto - 26,000 Pounds - F404-GE-400 ... (11-221)  
 Bingo - One Engine Operating - Gear Up - Flaps  
 Auto - 30,000 Pounds -F404-GE-400 .... (11-223)  
 Bingo - One Engine Operating - Gear Up - Half  
 Flaps - 26,000 Pounds - F404-GE-400 ....(11-225)  
 BINGO CHARTS ..... 11-90

### C

CHANGE RECOMMENDATIONS..... iii  
 CHANGE SYMBOLS ..... v  
 CLIMB CHARTS - 350 KCAS ..... 11-40  
 CLIMB PERFORMANCE CHARTS..... 11-38  
 Combat Fuel Flow - Stabilized Level Flight - 34,000  
 Pounds - F404-GE-400.....(11-204)

COMBAT FUEL FLOW CHARTS ..... 11-87  
 Combat Specific Range - Stabilized Level Flight -  
 34,000 Pounds - F404-GE-400 .....(11-200)  
 COMBAT SPECIFIC RANGE CHARTS..... 11-87  
 Constant Altitude/Long Range Cruise.....(11-208)  
 CONSTANT ALTITUDE/LONG RANGE CRUISE  
 (SPEED-TIME-FUEL) CHART..... 11-88  
 CONSTANT ALTITUDE/LONG RANGE CRUISE  
 (TRUE AIRSPEED AND FUEL FLOW)  
 CHART ..... 11-89

### D

Density Ratio .....(11-29)  
 DENSITY RATIO CHART ..... 11-23  
 Distance To Climb - Military Thrust - 350 KCAS -  
 F404-GE-400 .....(11-53)  
 Dive Recovery - F404-GE-400 .....(11-266)  
 DIVE RECOVERY CHARTS ..... 11-263  
 DRAG INDEX SYSTEM..... 11-3

### F

Fuel to Climb - Military Thrust - 350 KCAS -  
 F404-GE-400 .....(11-52)

### G

GLOSSARY OF TERMS ..... 11-2

### H

HOW TO GET COPIES..... ii  
 Headwind Effects on Bingo Fuel -  
 Cruise at Best Altitude ..... (11-210A)  
 Headwind Effects on Bingo Fuel -  
 Cruise at Sea Level..... (11-210B)  
 HEADWIND EFFECTS ON BINGO FUEL .11-90A

### I

Instantaneous Rate of Climb - Maximum Thrust -  
 F404-GE-400 .....(11-64)  
 Instantaneous Rate of Climb - Military Thrust -  
 F404-GE-400 .....(11-58)  
 INSTANTANEOUS RATE OF CLIMB  
 CHARTS..... 11-41

# A1-F18AC-NFM-200

Interference Code Number To Interference Drag  
Index Number Conversion .....(11-12)  
INTRODUCTION ..... 11-2

## L

Landing Approach Speed - F404-GE-400 ... (11-260)  
LANDING APPROACH SPEED CHART... 11-258  
Landing Distance - F404-GE-400 .....(11-261)  
LANDING DISTANCE CHART ..... 11-259  
Level Flight Envelope - F404-GE-400 .....(11-274)  
LEVEL FLIGHT ENVELOPE CHART..... 11-263  
Low Altitude Acceleration - Maximum Thrust -  
26,000 Pounds - F404-GE-400 .....(11-275)  
Low Altitude Acceleration - Maximum Thrust -  
30,000 Pounds - F404-GE-400 .. (11-277) (11-279)  
Low Altitude Acceleration - Maximum Thrust -  
38,000 Pounds - F404-GE-400 .....(11-281)  
Low Altitude Acceleration - Maximum Thrust -  
42,000 Pounds - F404-GE-400 .....(11-283)  
Low Altitude Acceleration - Military Thrust -  
34,000 Pounds - F404-GE-400 .....(11-280)  
Low Altitude Acceleration - Military Thrust -  
26,000 Pounds - F404-GE-400 .....(11-276)  
Low Altitude Acceleration - Military Thrust -  
30,000 Pounds - F404-GE-400 .....(11-278)  
Low Altitude Acceleration - Military Thrust -  
38,000 Pounds - F404-GE-400 .....(11-282)  
Low Altitude Acceleration - Military Thrust -  
42,000 Pounds - F404-GE-400 .....(11-284)  
LOW ALTITUDE ACCELERATION  
CHARTS..... 11-264

## M

MANUAL DEVELOPMENT ..... v  
Maximum Abort Speed - Maximum Thrust -  
F404-GE-400 .....(11-32)  
Maximum Abort Speed - Military Thrust -  
F404-GE-400 .....(11-33)  
MAXIMUM ABORT SPEED CHARTS..... 11-25  
Maximum Endurance - F404-GE-400 .....(11-232)  
Maximum Endurance - One Engine Operating -  
F404-GE-400 .....(11-235)  
MAXIMUM ENDURANCE CHARTS ..... 11-229  
Maximum Range Descent -  
F404-GE-400 .....(11-250)  
Maximum Range Descent - One Engine Operating -  
F404-GE-400 .....(11-254)  
MAXIMUM RANGE DESCENT CHARTS . 11-241  
Maximum Thrust Acceleration - 10,000 Feet -  
F404-GE-400 .....(11-285)  
Maximum Thrust Acceleration - 30,000 Feet -  
F404-GE-400 .....(11-286)  
Maximum Thrust Acceleration - 35,000 Feet -

F404-GE-400 .....(11-290)  
Maximum Thrust Acceleration - 40,000 Feet -  
F404-GE-400 .....(11-294)  
Maximum Thrust Acceleration - 45,000 Feet -  
F404-GE-400 .....(11-297)  
MAXIMUM THRUST ACCELERATION  
CHARTS..... 11-264 11-264  
Military Thrust Climb - F404-GE-400.....(11-45)  
Military Thrust Climb - One Engine Operating -  
F404-GE-400 ..... (11-65) (11-65)  
Minimum Go Speed - Maximum Thrust -  
F404-GE-400 .....(11-30)  
Minimum Go Speed - Military Thrust -  
F404-GE-400 .....(11-31)  
MINIMUM GO SPEED CHARTS..... 11-24

## N

NATOPS FLIGHT MANUAL INTERIM  
CHANGES ..... v  
Normal Descent - F404-GE-400.....(11-242)  
Normal Descent - One Engine Operating -  
F404-GE-400 .....(11-246)  
NORMAL DESCENT CHARTS..... 11-239

## O

One Time Orders..... ii  
Optimum Cruise - F404-GE-400 .....(11-91)  
Optimum Cruise - One Engine Operating -  
F404-GE-400 .....(11-93)  
OPTIMUM CRUISE CHARTS..... 11-85

## P

Peak Rate of Climb - Maximum Thrust -  
F404-GE-400 .....(11-59)  
Peak Rate of Climb - Military Thrust -  
F404-GE-400 .....(11-54)  
PEAK RATE OF CLIMB CHARTS ..... 11-41

## R

Rangewind Correction .....(11-210)  
RANGEWIND CORRECTION CHART ..... 11-90

## S

Sample Drag Computation .....(11-7)  
SCOPE ..... ii  
Single Engine Rate of Climb - Takeoff  
Configuration - F404-GE-400.....(11-75)  
SINGLE ENGINE RATE OF CLIMB - TAKEOFF  
CONFIGURATION CHARTS..... 11-43  
Specific Range - 10,000 Feet - 26,000 Pounds -  
F404-GE-400 .....(11-108)



## A1-F18AC-NFM-200

|  |          |  |          |
|--|----------|--|----------|
| Specific Range - 5,000 Feet - 38,000 Pounds -<br>F404-GE-400 .....                         | (11-104) | Specific Range - One Engine Operating - 25,000<br>Feet - 38,000 Pounds - F404-GE-400 ..... | (11-197) |
| Specific Range - 5,000 Feet - 42,000 Pounds -<br>F404-GE-400 .....                         | (11-105) | Specific Range - One Engine Operating - 30,000<br>Feet - 26,000 Pounds - F404-GE-400 ..... | (11-198) |
| Specific Range - 5,000 Feet - 46,000 Pounds -<br>F404-GE-400 .....                         | (11-106) | Specific Range - One Engine Operating - 30,000<br>Feet - 30,000 Pounds - F404-GE-400 ..... | (11-199) |
| Specific Range - 5,000 Feet - 50,000 Pounds -<br>F404-GE-400 .....                         | (11-107) | Specific Range - One Engine Operating - 5,000 Feet<br>- 26,000 Pounds - F404-GE-400 .....  | (11-167) |
| Specific Range - One Engine Operating - 10,000<br>Feet - 26,000 Pounds - F404-GE-400 ..... | (11-174) | Specific Range - One Engine Operating - 5,000 Feet<br>- 30,000 Pounds - F404-GE-400 .....  | (11-168) |
| Specific Range - One Engine Operating - 10,000<br>Feet - 30,000 Pounds - F404-GE-400 ..... | (11-175) | Specific Range - One Engine Operating - 5,000 Feet<br>- 34,000 Pounds - F404-GE-400 .....  | (11-169) |
| Specific Range - One Engine Operating - 10,000<br>Feet - 34,000 Pounds - F404-GE-400 ..... | (11-176) | Specific Range - One Engine Operating - 5,000 Feet<br>- 38,000 Pounds - F404-GE-400 .....  | (11-170) |
| Specific Range - One Engine Operating - 10,000<br>Feet - 38,000 Pounds - F404-GE-400 ..... | (11-177) | Specific Range - One Engine Operating - 5,000 Feet<br>- 42,000 Pounds - F404-GE-400 .....  | (11-171) |
| Specific Range - One Engine Operating - 10,000<br>Feet - 42,000 Pounds - F404-GE-400 ..... | (11-178) | Specific Range - One Engine Operating - 5,000 Feet<br>- 46,000 Pounds - F404-GE-400 .....  | (11-172) |
| Specific Range - One Engine Operating - 10,000<br>Feet - 46,000 Pounds - F404-GE-400 ..... | (11-179) | Specific Range - One Engine Operating - 5,000 Feet<br>- 50,000 Pounds - F404-GE-400 .....  | (11-173) |
| Specific Range - One Engine Operating - 10,000<br>Feet - 50,000 Pounds - F404-GE-400 ..... | (11-180) | Specific Range - One Engine Operating - Sea Level<br>- 26,000 Pounds - F404-GE-400 .....   | (11-160) |
| Specific Range - One Engine Operating - 15,000<br>Feet - 26,000 Pounds - F404-GE-400 ..... | (11-181) | Specific Range - One Engine Operating - Sea Level<br>- 30,000 Pounds - F404-GE-400 .....   | (11-161) |
| Specific Range - One Engine Operating - 15,000<br>Feet - 30,000 Pounds - F404-GE-400 ..... | (11-182) | Specific Range - One Engine Operating - Sea Level<br>- 34,000 Pounds - F404-GE-400 .....   | (11-162) |
| Specific Range - One Engine Operating - 15,000<br>Feet - 34,000 Pounds - F404-GE-400 ..... | (11-183) | Specific Range - One Engine Operating - Sea Level<br>- 38,000 Pounds - F404-GE-400 .....   | (11-163) |
| Specific Range - One Engine Operating - 15,000<br>Feet - 38,000 Pounds - F404-GE-400 ..... | (11-184) | Specific Range - One Engine Operating - Sea Level<br>- 42,000 Pounds - F404-GE-400 .....   | (11-164) |
| Specific Range - One Engine Operating - 15,000<br>Feet - 42,000 Pounds - F404-GE-400 ..... | (11-185) | Specific Range - One Engine Operating - Sea Level<br>- 46,000 Pounds - F404-GE-400 .....   | (11-165) |
| Specific Range - One Engine Operating - 15,000<br>Feet - 46,000 Pounds - F404-GE-400 ..... | (11-186) | Specific Range - One Engine Operating - Sea Level<br>- 50,000 Pounds - F404-GE-400 .....   | (11-166) |
| Specific Range - One Engine Operating - 15,000<br>Feet - 50,000 Pounds - F404-GE-400 ..... | (11-187) | Specific Range - Sea Level - 26,000 Pounds -<br>F404-GE-400 .....                          | (11-94)  |
| Specific Range - One Engine Operating - 20,000<br>Feet - 26,000 Pounds - F404-GE-400 ..... | (11-188) | Specific Range - Sea Level - 30,000 Pounds -<br>F404-GE-400 .....                          | (11-95)  |
| Specific Range - One Engine Operating - 20,000<br>Feet - 30,000 Pounds - F404-GE-400 ..... | (11-189) | Specific Range - Sea Level - 34,000 Pounds -<br>F404-GE-400 .....                          | (11-96)  |
| Specific Range - One Engine Operating - 20,000<br>Feet - 34,000 Pounds - F404-GE-400 ..... | (11-190) | Specific Range - Sea Level - 38,000 Pounds -<br>F404-GE-400 .....                          | (11-97)  |
| Specific Range - One Engine Operating - 20,000<br>Feet - 38,000 Pounds - F404-GE-400 ..... | (11-191) | Specific Range - Sea Level - 42,000 Pounds -<br>F404-GE-400 .....                          | (11-98)  |
| Specific Range - One Engine Operating - 20,000<br>Feet - 42,000 Pounds - F404-GE-400 ..... | (11-192) | Specific Range - Sea Level - 46,000 Pounds -<br>F404-GE-400 .....                          | (11-99)  |
| Specific Range - One Engine Operating - 20,000<br>Feet - 46,000 Pounds - F404-GE-400 ..... | (11-193) | Specific Range - Sea Level - 50,000 Pounds -<br>F404-GE-400 .....                          | (11-100) |
| Specific Range - One Engine Operating - 25,000<br>Feet - 26,000 Pounds - F404-GE-400 ..... | (11-194) | SPECIFIC RANGE CHARTS .....  | 11-86    |
| Specific Range - One Engine Operating - 25,000<br>Feet - 30,000 Pounds - F404-GE-400 ..... | (11-195) | Stall Speeds - F404-GE-400 .....   | (11-21)  |
| Specific Range - One Engine Operating - 25,000<br>Feet - 34,000 Pounds - F404-GE-400 ..... | (11-196) | STALL SPEEDS CHART .....   | 11-6     |
|  |          | Standard Atmosphere Table .....  | (11-13)  |
|  |          | Summary of Store Drag Index Numbers .....  | (11-8)   |

## A1-F18AC-NFM-200

|  |         |
|--|---------|
| Supersonic Maximum Thrust Climb -<br>F404-GE-400 ..... | (11-71) |
| SUPERSONIC MAXIMUM THRUST CLIMB<br>CHARTS.....         | 11-42   |

### T

|  |          |
|--|----------|
| Takeoff Allowances and Acceleration to Climb<br>Speed - F404-GE-400 .....      | (11-44)  |
| TAKEOFF ALLOWANCES CHART .....   | 11-38    |
| Takeoff Distance - Maximum Thrust -<br>F404-GE-400 .....                       | (11-34)  |
| Takeoff Distance - Military Thrust -<br>F404-GE-400 .....                      | (11-35)  |
| TAKEOFF DISTANCE CHARTS .....  | 11-26    |
| Takeoff Ground Roll Correction for CG - Maximum<br>Thrust - F404-GE-400 .....  | (11-36)  |
| Takeoff Ground Roll Correction for CG - Military<br>Thrust - F404-GE-400 ..... | (11-37)  |
| TAKEOFF GROUND ROLL CORRECTION FOR<br>CG CHARTS .....                          | 11-27    |
| Temperature Conversion.....  | (11-14)  |
| Time to Climb - Military Thrust - 350 KCAS -<br>F404-GE-400 .....              | (11-51)  |
| TURN CAPABILITIES CHART.....   | 11-262   |
| Turn Capabilities .....  | (11-265) |

### U

|                           |    |
|---------------------------|----|
| UPDATING THE MANUAL ..... | ii |
|---------------------------|----|

### W

|                                    |         |
|------------------------------------|---------|
| WARNING, CAUTIONS, AND NOTES ..... | v       |
| Wind Components .....              | (11-28) |
| WIND COMPONENTS CHART .....        | 11-23   |
| WORDING.....                       | v       |

### Y

|                           |   |
|---------------------------|---|
| YOUR RESPONSIBILITY ..... | v |
|---------------------------|---|

